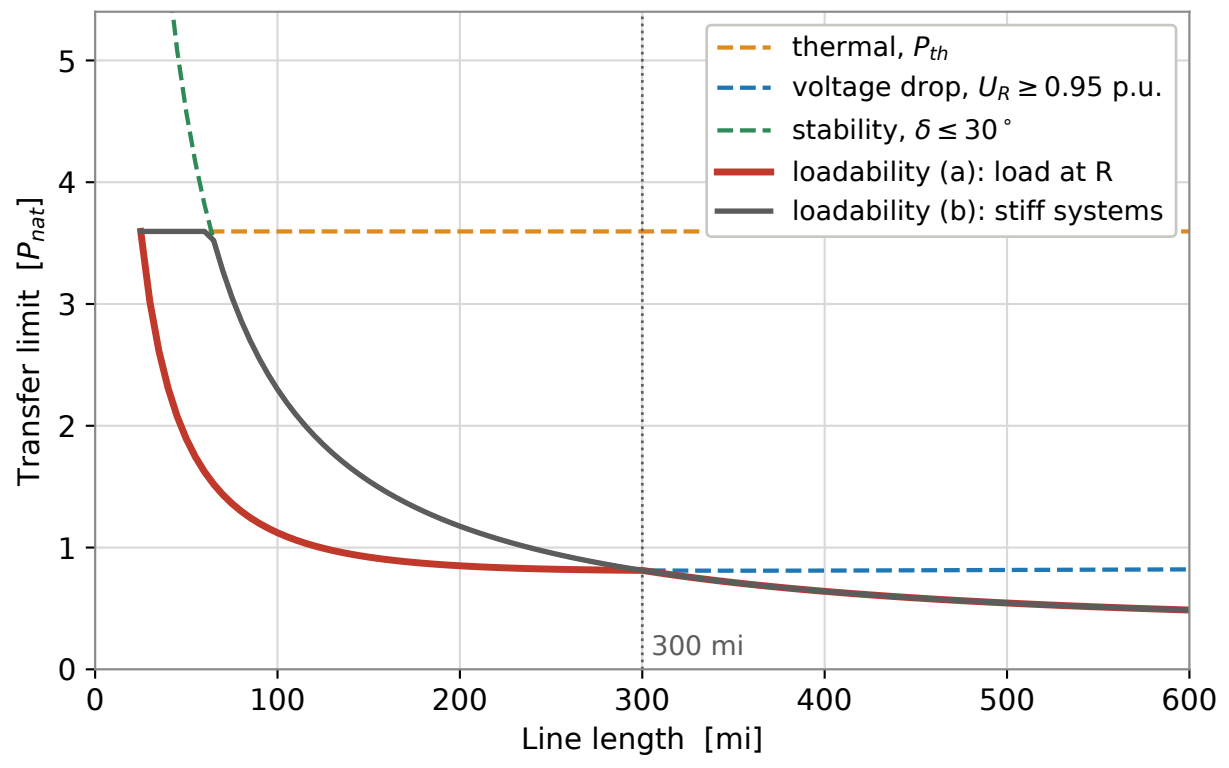
thermal, P_{th}
voltage drop, $U_R \geq 0.95$ p.u.
stability, $\delta \leq 30^\circ$
loadability (a): load at R
loadability (b): stiff systems
300 mi
Transfer limit [P_{nat}]
Line length [mi]
0
1
2
3
4
5
0
100
200
300
400
500
600