

AMERICAN TERAWATT


FERVO

Electrical Connections




American Terawatt | July 15, 2026

1GW - Symmetrical Monopole (SMP)

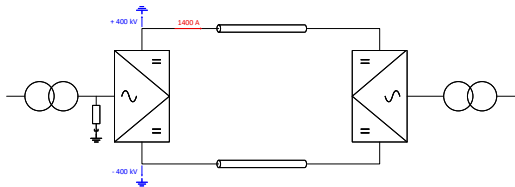


- **Topology** - SMP with $\pm 400kV$
- **DC Line** - Two symmetrical conductors

3GW - Dual Symmetrical Monopole (DSMP)

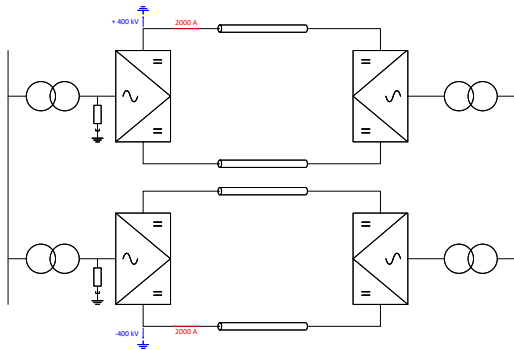

- **Topology** - DSMP with $\pm 400\text{kV}$
- **DC Line** - Four symmetrical conductors

3GW - Bipole (BIP)

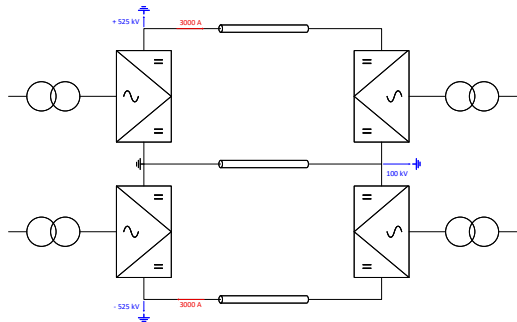

■ Topology - Bipole with $\pm 525kV$

■ DC Line

- Two high voltage conductors (HV) and one dedicated metallic return conductor (DMR).
- In case of cable applications, parallel cables are required due to high current rating.
- The voltage rating of the DMR depends on the conductor design and must be refined once the DC line parameters are available.
- For conductor optimization a lower current rating of the DMR can be applied.

Link overview

Connection	Topology	Rating
Fennec-Stratos	SMP	1000 MW
Kit-Corsac	DSMP or BIP	3000 MW
Marble-Corsac	SMP	1000 MW
Swift Blanford	DSMP or BIP	3000 MW