

THE ORDNANCE CATALOG

(Ordnance Provision System)

GROUP G.

ORDNANCE DEPARTMENT,

Washington, March 30, 1928.

Standard Nomenclature List No. G-13

TANK, MK. VIII

(gam) PARTS

For full information relative to Standard Nomenclature Lists, the procedure followed and the principles employed in their compilation, together with the purposes and uses thereof see Introduction to The Ordnance Catalog.

CONTENTS

Drawing		Page
	List of Plates-----	I
	Major Item-----	307
Class 31 Div. 37	Parts-----	2
	Notes-----	307
	Use of Prices-----	311

LIST OF PLATES

Plate No.		
1.	Tank, Mark VIII—Right side view-----	277
2.	Tank, Mark VIII—Longitudinal sectioned view-----	(Face p. 277)
3.	Tank, Mark VIII—Rear view-----	278
4.	Tank, Mark VIII—Top view-----	278
5.	Air pressure pump—Assembled views-----	279
6.	Control system—Assembled views-----	280
7.	Tank, Mark VIII—Assembled view-----	281
8.	Gasoline tanks with pressure system—Assembled view-----	282
9.	Main turret—Assembled view-----	282
10.	Tank, Mark VIII—Front view-----	283
11.	Schematic wiring diagram-----	283
12.	Engine control rods—Assembled view-----	284
13.	Camshaft—Assembled view-----	285
14.	Liberty Engine—Longitudinal section-----	286
15.	Liberty Engine—Distributor end, assembled view-----	287
16.	Generator drive shaft—Parts-----	288
17.	Water Pump—Parts-----	289
18.	Connecting rods—Assembled view and parts-----	290
19.	Fan bevel gear drive—Parts-----	291
20.	Fan bevel box—Assembled view-----	292
21.	Clutch—Assembled view-----	293
22.	Transmission—Right half, sectional view-----	294
23.	Bevel pinion drive—Assembled view-----	295

S. N. L. No. G-13.

Plate No.	Page
24. Radiator cooling system—Assembled-----	296
25. Roller pinion and track drive—Assembled view-----	297
26. Track link—Assembled view-----	298
27. Track driving wheel—Assembled view-----	299
28. Track adjusting wheel—Assembled views-----	300
29. Track Roller, with flanges—Assembled view-----	301
30. High speed brake band—Assembled view-----	302
31. Track brake band—Assembled view-----	303
32. Low speed brake band—Assembled view-----	304
33. Oil pump—Parts-----	305
34. Liberty Engine, transverse section—Assembled view-----	306
ø Tank, Mk. VIII-----	Unit price \$45, 052. 24

**STANDARD
NOMENCLATURE LIST
No. G-13**

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
X					B101910A	PARTS ADAPTER, ½"-14 pipe thread, with ½"-14 male pipe thread end. (For tube SH981A (2); tube SH981B (2); tube SH981C (2); tube SH984A (2); tube SH984B (2); tube SH984C (2); tube SH984D (2).)	14	\$0.40 P
X					B101972A	ADAPTER, ½"-24 S. A. E., with ⅝"-27 male pipe thread end. (For tube C8012 (1); tube C8013 (1); tube C8015 (1); tube C8016 (1).)	6	.09 P
X					B101972B	ADAPTER, 9/16"-24 S. A. E., with ⅝"-18 male pipe thread end. (For tube SH981E (2); tube SH981F (2); tube SH981G (2); tube C8011 (2); tube SH984E (2); tube SH984F (2).)	18	.25 P
X				T-A12-6		ADAPTER, ⅝"-18 U. S. F. and 1"-16 U. S. F. male thread (Titeflex type). (For tube SH207A (2); tube SH207B (2).)	4	.55 P
				A16309		ADAPTER, elbow, 7/16"-22-NPS with ⅝"-27-NPT (brass). (For tubes B101982A, B, C, D, and E (1).)	6	.12 P
X						AMMETER, (Delco type)	1	5.00
(gy) X					994	AMMETER (Bijur Co. type)	1	5.00
*				M2023B	367	ANGLE, back plate connecting, front, left	(1)	1.60
*				M2023A	367	ANGLE, back plate connecting, front, right	(1)	1.60
*				M2022B	367	ANGLE, back plate connecting, rear, left	(1)	1.80
*				M2022A	367	ANGLE, back plate connecting, rear, right	(1)	1.80
*				M2024	307	ANGLE, back plate to cover connecting	(1)	4.75
*				M2025	307	ANGLE, back plate to floor connecting	(1)	3.35
*				M2107B	328	ANGLE, bottom sloping plate, bottom, left	(1)	1.35
*				M2107A	328	ANGLE, bottom sloping plate, bottom, right	(1)	1.35
*				M2105B	328	ANGLE, bottom sloping and side vertical plate, left	(1)	.75
*				M2105A	328	ANGLE, bottom sloping and side vertical plate, right	(1)	.75
*				M2141B	354	ANGLE, bulkhead, side, left	(1)	4.75
*				M2141A	354	ANGLE, bulkhead, side, right	(1)	4.75
*				M2142A	354	ANGLE, bulkhead plate vertical stiffening, left	(1)	4.75
*				M2142B	354	ANGLE, bulkhead plate vertical stiffening, right	(1)	4.75
*				M1896	535	ANGLE, bulkhead to roof behind bulkhead connecting	(1)	2.95
*				M1895	535	ANGLE, bulkhead to roof connecting	(1)	6.30

M2031	333	ANGLE, chain casing bracket, left	(2)	.92
M2032	333	ANGLE, chain casing bracket, right	(2)	.92
M2415B	421	ANGLE, driver's turret side bottom, left	(1)	3.50
M2415A	421	ANGLE, driver's turret side bottom, right	(1)	3.50
SH978C		ANGLE, (engine) oil tank supporting	1	1.25
		ANGLE, engine room back plate to floor connecting	2	1.79
M1943	518	ANGLE, floor, front (at bulkhead)	(1)	7.85
M1942A	518	ANGLE, floor rear (at bulkhead)	(1)	7.85
M1942B	518	ANGLE, drive chain casing hull back plate	(1)	7.85
M1592	231	ANGLE, driver's turret vertical, left	2	1.79
M2419B	416	ANGLE, driver's turret vertical, right	(1)	.92
M2419A	416	ANGLE, driver's turret vertical, left	(1)	.92
M2026B	307	ANGLE, floor plate to hull connecting, left	(1)	3.50
M2026A	307	ANGLE, floor plate to hull connecting, right	(1)	3.50
M2040B	341	ANGLE, front diaphragm, left	(1)	1.05
M2040A	341	ANGLE, front diaphragm, right	(1)	1.05
M1921B	530	ANGLE, front mud chute, side, left	(1)	1.70
M1921A	530	ANGLE, front mud chute, side, right	(1)	1.70
M2060B	341	ANGLE, front mud chute back plate, left	(1)	1.50
M2060A	341	ANGLE, front mud chute back plate, right	(1)	1.50
M2063B	341	ANGLE, front mud chute bottom plate, left	(1)	1.50
M2063A	341	ANGLE, front mud chute bottom plate, right	(1)	1.50
M2061B	332	ANGLE, front mud chute side plate, left	(2)	1.90
M2062B	332	ANGLE, front mud chute side plate, left	(1)	1.63
M2061A	332	ANGLE, front mud chute side plate, right	(2)	1.90
M2062A	332	ANGLE, front mud chute side plate, right	(1)	1.63
M1950	519	ANGLE, front sloping plate to floor	(1)	7.50
M1893B	535	ANGLE, front sloping plate to roof plate connecting, left	(1)	2.75
M1893A	535	ANGLE, front sloping plate to roof plate connecting, right	(1)	2.75
M1999B	306	ANGLE, front wing, left (outer left or inner right)	2	8.65
M1999A	306	ANGLE, front wing, right (outer right or inner left)	2	8.65
M2007B	321	ANGLE, longitudinal side, left	(1)	22.60
M2008B	312	ANGLE, longitudinal side, lower, left	(1)	22.60
M2008A	312	ANGLE, longitudinal side, lower, right	(1)	22.60
M2007A	321	ANGLE, longitudinal side, right	(1)	22.60
M2417	416	ANGLE, main turret front center plate, top	(1)	1.53
M2418B	417	ANGLE, main turret front wing plate, top, left	(1)	.59
M2418A	417	ANGLE, main turret front wing plate, top, right	(1)	.59
M2408	421	ANGLE, main turret left side, top	(1)	3.79
M2381	422	ANGLE, main turret rear bottom	(1)	2.85

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
						PARTS—Continued		
*				M2379	420	ANGLE, main turret rear top, left side	(1)	\$0.90
*				M2378	420	ANGLE, main turret rear top, right side	(1)	.90
*				M2384	422	ANGLE, main turret right top, rear	(1)	3.79
*				M2390B	421	ANGLE, main turret side bottom, left	(1)	8.69
*				M2390A	421	ANGLE, main turret side bottom, right	(1)	8.69
*				M2383B	422	ANGLE, main turret side top, front, left	(1)	1.03
*				M2383A	422	ANGLE, main turret side top, front, right	(1)	1.03
*				M2395	422	ANGLE, main turret vertical, front	(2)	1.48
*				M2397	422	ANGLE, main turret vertical, rear, left side	(1)	1.28
*				M2396	422	ANGLE, main turret vertical, rear, right side	(1)	1.28
*				M2371	437	ANGLE, outlook turret bottom, side	(2)	.82
*					SH279B	ANGLE, radiator cooling fan, outlet, bottom side	(1)	.75
*					SH279C	ANGLE, radiator cooling fan, outlet, outside	(1)	.85
*					SH279A	ANGLE, radiator cooling fan, outlet, rear side	(1)	.85
*				M2045B	332	ANGLE, rear outside wing plate to engine room back plate vertical, left	(1)	1.08
*				M2045A	332	ANGLE, rear outside wing plate to engine room back plate vertical, right	(1)	1.08
*				M2044B	336	ANGLE, removable plate to engine room vertical, left	(1)	3.72
*				M2044A	336	ANGLE, removable plate to engine room vertical, right	(1)	3.72
%gkX				M2176	364	ANGLE, roller inner skirting plate, length 6% ⁸	2	.50
%gkX				M2175	364	ANGLE, roller inner skirting plate, length 32% ⁸	2	1.35
%X	6	2		M2078	332	ANGLE, roller support, No. 1	4	.75
%X	7	2		M2079	334	ANGLE, roller support, No. 2	4	.75
%X	8	2		M2080	332	ANGLE, roller support, No. 3	4	.75
%X	9	2		M2081B	331	ANGLE, roller support, No. 4, left (outer left or inner right)	2	1.85
%X				M2081A	331	ANGLE, roller support, No. 4, right (outer right or inner left)	2	1.85
%gkX	10	2		M2082B	331	ANGLE, roller support, No. 5, left (outer)	1	1.75
%gkX				M2082A	331	ANGLE, roller support, No. 5, right (outer)	1	1.75
%X	11	2		M2083B	331	ANGLE, roller support, No. 6, left (outer left or inner right)	2	1.45
%X				M2083A	331	ANGLE, roller support, No. 6, right (outer right or inner left)	2	1.45
%X	12	2		M2084B	331	ANGLE, roller support, No. 7, left (outer left or inner right)	2	1.45

%X	13		331	M2084A	ANGLE, roller support, No. 7, right (outer right or inner left)	2	1.45
%X		2	331	M2085	ANGLE, roller support, No. 8	4	.75
*			525	M1913	ANGLE, roof (at back plate)	(1)	7.85
*			535	M1897B	ANGLE, roof, left (behind front mud chute)	(1)	1.54
*			535	M1897A	ANGLE, roof, right (behind front mud chute)	(1)	1.54
&			289	M788	ANGLE, seat support plate	2	.88
%X			327	M2087	ANGLE, side plate splash	2	.98
*			328	M2102B	ANGLE, side sloping plate, top, left	(1)	1.45
*			328	M2102A	ANGLE, side sloping plate, top, right	(1)	1.45
*			328	M2103B	ANGLE, side sloping plate to hull, left	(1)	.90
*			328	M2103A	ANGLE, side sloping plate to hull, right	(1)	.90
*			307	M1972B	ANGLE, side to engine room back plate vertical, left	(1)	3.05
*			307	M1972A	ANGLE, side to engine room back plate vertical, right	(1)	3.05
*			341	M2030A	ANGLE, side to roof connecting, left	(1)	3.08
*			323	M2019B	ANGLE, side to roof connecting, right	(1)	37.25
*			341	M2030B	ANGLE, side to roof connecting, right	(1)	3.08
*			367	M2015B	ANGLE, sloping plate connecting, inside, left	(1)	37.25
*			367	M2015A	ANGLE, sloping plate connecting, inside, right	(1)	2.50
*			367	M2016B	ANGLE, sloping plate connecting, outside, left	(1)	2.70
*			367	M2016A	ANGLE, sloping plate connecting, outside, right	(1)	2.70
%X			327	M2090B	ANGLE, splash, front of side door, left	1	1.08
%X			327	M2090A	ANGLE, splash, front of side door, right	1	1.08
%X			332	M2072	ANGLE, splash, front sloping plate	3	1.18
%X			327	M2091B	ANGLE, splash, rear of side door, left	1	1.55
%X			327	M2091A	ANGLE, splash, rear of side door, right	1	1.55
%X			327	M2088	ANGLE, splash, sponson, front	2	1.15
%X			327	M2089	ANGLE, splash, sponson, rear	2	5.50
%X			483	M2794B	ANGLE, sponson bottom plate splash, left	1	6.50
%X			483	M2794A	ANGLE, sponson bottom plate splash, right	1	6.50
*			482	M2778	ANGLE, sponson, left side (below gun shield)	(1)	4.50
*			484	M2805	ANGLE, sponson left wing plate cleat, left (lower front)	(1)	.88
*			478	M2808	ANGLE, sponson left wing plate cleat, lower rear	(1)	.52
*			484	M2806	ANGLE, sponson left wing plate cleat, right (upper front)	(1)	.88
*			478	M2807	ANGLE, sponson left wing plate cleat, upper rear	(1)	.52
*			482	M2777	ANGLE, sponson, right side (below gun shield)	(1)	4.50
*			487	M2804	ANGLE, sponson right wing plate cleat, left (lower)	(1)	.88
*			487	M2803	ANGLE, sponson right wing plate cleat, right (upper)	(1)	.88
*			483	M2793	ANGLE, sponson roof plate splash	(2)	4.75

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
						PARTS—Continued		
%X				M2792B	488	ANGLE, sponson splash, back, left	1	3.92
%X				M2792A	488	ANGLE, sponson splash, back, right	1	3.92
%X					SH485B	ANGLE, sponson splash (bottom edge of gun shield)	2	2.58
%X	7			M2791B	483	ANGLE, sponson splash, front, left	1	1.49
%X	7			M2791A	483	ANGLE, sponson splash, front, right	1	1.49
%X				M2790B	476	ANGLE, sponson splash, left (at hinge)	1	3.60
%X				M2790A	476	ANGLE, sponson splash, right (at hinge)	1	3.60
&				M785	220	ANGLE, spring anchor	1	1.32
*				M2101B	339	ANGLE, top bottom and side sloping plate, left	(1)	2.98
*				M2101A	339	ANGLE, top bottom and side sloping plate, right	(1)	2.98
*				M2104B	328	ANGLE, top sloping plate and side vertical plate, left	(1)	.90
*				M2104A	328	ANGLE, top sloping plate and side vertical plate, right	(1)	.90
*				M2106B	328	ANGLE, top sloping plate, top, left	(1)	1.70
*				M2106A	328	ANGLE, top sloping plate, top, right	(1)	1.70
*				M2027B	377	ANGLE, top to hull connecting, left	(1)	3.98
*				M2027A	377	ANGLE, top to hull connecting, right	(1)	3.98
*	7			M2005A	322	ANGLE, track, bottom, left (inner left or outer right)	2	45.25
*	7			M2005B	322	ANGLE, track, bottom, right (outer left or inner right)	2	45.25
				M2004B	306	ANGLE, track, rear, left	2	7.50
				M2004A	306	ANGLE, track, rear, right	2	7.50
*				M2020B	320	ANGLE, track, top, left	(1)	35.00
*				M2020A	320	ANGLE, track, top, right	(1)	35.00
				M2118	378	ANGLE, unditching gear, side, left	1	14.00
				M2119	378	ANGLE, unditching gear, side, right	1	14.00
*				M3789B	510	ANGLE, 6-pdr. gun pedestal back plate, left	(1)	2.97
*				M3795B	270	ANGLE, 6-pdr. gun pedestal back plate, left, length 16 $\frac{1}{2}$ "	(1)	.98
*				M3790B	270	ANGLE, 6-pdr. gun pedestal back plate, left, length 18 $\frac{1}{2}$ "	(1)	.98
*				M3789A	510	ANGLE, 6-pdr. gun pedestal back plate, right	(1)	2.97
*				M3795A	270	ANGLE, 6-pdr. gun pedestal back plate, right, length 16 $\frac{1}{2}$ "	(1)	.98
*				M3790A	270	ANGLE, 6-pdr. gun pedestal back plate, right, length 18 $\frac{1}{2}$ "	(1)	.98

* *	M3791B	508	ANGLE, 6-pdr. gun pedestal, corner, left	(1)	1.14
* *	M3791A	508	ANGLE, 6-pdr. gun pedestal, corner, right	(1)	1.14
* *	M3794B	511	ANGLE, 6-pdr. gun pedestal front plate, left (lower)	(1)	1.72
* *	M3794A	511	ANGLE, 6-pdr. gun pedestal front plate, right (lower)	(1)	1.72
* *	M3793	270	ANGLE, 6-pdr. gun pedestal front plate, left (upper)	(1)	1.78
* *	M3792	270	ANGLE, 6-pdr. gun pedestal front plate, right (upper)	(1)	1.78
* *	M3796B	508	ANGLE, 6-pdr. gun pedestal side plate, left	(1)	.90
* *	M3799B	511	ANGLE, 6-pdr. gun pedestal side plate, left	(1)	.60
* *	M3797B	511	ANGLE, 6-pdr. gun pedestal side plate, left	(1)	.98
* *	M3796A	508	ANGLE, 6-pdr. gun pedestal side plate, right	(1)	.98
* *	M3799A	511	ANGLE, 6-pdr. gun pedestal side plate, right	(1)	.60
* *	M3797A	511	ANGLE, 6-pdr. gun pedestal side plate, right	(1)	.98
* *	M3800	508	ANGLE, 6-pdr. gun pedestal top plate, left	(1)	4.32
* *	M3788	508	ANGLE, 6-pdr. gun pedestal top plate, right	(1)	4.32
X	SH523A		ANGLE, 24" fan supporting (radiator cooling fan)	1	1.35
(b)& (b)& &	D13779 D13737 D13829		ARM, distributor contact (curved), assembly	(2)	.78 P
			ARM, distributor contact, assembly	(4)	.78 P
			ARM, generator brush, assembly	(4)	.12 P
			(Composed of:		
			*one D29821 generator brush ARM (4)		.04 P
			*one D30386 generator brush arm CLIP (4)		.03 P
			*one D29820 generator brush arm HUB (4)		.03 P
			two D23298 RIVET, button head, brass, .078" x .144")		
& (b)& (b)& (b)& %X %X	SH142E D30056 D30053 D30054		ARM, governor	1	2.29
			ARM, ignition switch handle contact, left (lower) assembly	(2)	.02 P
			ARM, ignition switch handle contact, left (upper) assembly	(2)	.02 P
			ARM, ignition switch handle contact, right, assembly	(2)	.02 P
			ARM, jockey pulley	2	.90
			ARM, semaphore, assembly	(2)	3.92
			(Composed of:		
			one X259 semaphore ARM,		
			*one X260 semaphore arm DJSK		1.40
			four — RIVET, countersunk head, 3/16" x 9/16")		
%X & &	X259 SH966C SH966B		ARM, semaphore	2	2.48
			ARM, throttle control rocker, long	1	.75
			ARM, throttle control rocker, short	1	.65
			ARMATURE, generator	1	11.40 P
	D13754				

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&			D13886			PARTS—Continued ARMATURE, voltage regulator, assembly (Composed of: *one D30192 voltage regulator armature CONTACT (1) *one D30144 voltage regulator armature PLATE (1).) AXLE, carburetor float weight AXLE, jockey pulley, assembly (Composed of: *one SH234L jockey pulley AXLE (1) one — NUT, crown, U. S. Std., ½", one — PIN, split, ⅛" x 1".) AXLE, jockey pulley arm, assembly (Composed of: *one SH234K jockey pulley arm AXLE (1) two — NUT, crown, U. S. Std., ½", two — PIN, split, ⅛" x 1".) BALL, steel, ¼". (For retainer SH998C (30).) BALL, steel, 1". (For governor (4).) BALL, 7½" ball mount BAND, clutch throwout stop, assembly (Composed of: one M4160 clutch throwout stop anchor PLATE, *one M4158 clutch throwout stop BAND (1) one M4159 clutch throwout stop LINING, three — RIVET, button head, ¼" x ¾", six — RIVET, button head, ¼" x 1", fourteen — RIVET, countersunk head, copper, 3/16" x ½".) BAND, high speed brake, long, assembly (Composed of: *one M359 high speed brake BAND, long (2) *one MX109 high speed brake LINING, long (2)	(1)	\$0.12 P .06 P .06 P .03 .82 .78
& %X			13388		LQ536A		4 (1)	
%X							(1)	1.36 1.28
(mh)& (mh)& %X %X					SH171A		30 4 5 (1)	.01 P .10 P 51.65 3.12
%X	7	30			954 			

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
%X						PARTS—Continued BAND, low speed brake, upper half, left, assembly—Continued. (Composed of: *one MX108 low speed brake LINING (4) sixteen — RIVET, countersunk head, $\frac{3}{8}$ " x $1\frac{1}{8}$ ", sixteen — RIVET, countersunk head, copper, $\frac{1}{4}$ " x $1\frac{1}{8}$ ", six — RIVET, countersunk head, copper, $\frac{1}{4}$ " x $1\frac{3}{8}$ ".)		\$2.75
						BAND, low speed brake, upper half, right, assembly (Composed of: *one M344 low speed brake BAND (4) one MX48 low speed brake band EAR, one — low speed brake band BRACKET, assembly, *one MX108 low speed brake LINING (4) sixteen — RIVET, countersunk head, $\frac{3}{8}$ " x $1\frac{1}{8}$ ", sixteen — RIVET, countersunk head, copper, $\frac{1}{4}$ " x $1\frac{1}{8}$ ", six — RIVET, countersunk head, copper, $\frac{1}{4}$ " x $1\frac{3}{8}$ ".)	(1)	8.43
						BAND, track brake, lower half, left, assembly (Composed of: *one M349 track brake BAND (4) one MX47 track brake band BRACKET, one MX46 track brake band EAR, one MX87 track brake band stop LUG, *one MX107 track brake LINING (4) three — RIVET, countersunk head, $\frac{1}{4}$ " x $1\frac{3}{16}$ ", thirteen — RIVET, countersunk head, $\frac{3}{8}$ " x $1\frac{1}{8}$ ", eighteen — RIVET, countersunk head, copper, $\frac{1}{4}$ " x $1\frac{1}{8}$ ", five — RIVET, countersunk head, copper, $\frac{1}{4}$ " x $1\frac{3}{8}$ ".)	(1)	7.62
%X						BAND, track brake, lower half, right, assembly (Composed of: *one M349 track brake BAND (4) one — track brake band BRACKET, assembly,		2.25
								2.40
								6.71
%X								2.25

%X	1	31	689	one MX46 track brake band EAR, one MX87 track brake band stop LUG, *one MX107 track brake LINING (4) three — RIVET, countersunk head, $\frac{1}{4}$ " x 1 $\frac{3}{16}$ ", thirteen — RIVET, countersunk head, $\frac{3}{8}$ " x 1 $\frac{1}{8}$ ", eighteen — RIVET, countersunk head, copper, $\frac{1}{4}$ " x 1 $\frac{1}{8}$ ", five — RIVET, countersunk head, copper, $\frac{1}{4}$ " x 1 $\frac{3}{8}$ ". BAND, track brake, upper half, left, assembly (Composed of: *one M349 track brake BAND (4) one — track brake band BRACKET, assembly, one MX46 track brake band EAR, *one MX107 track brake LINING (4) thirteen — RIVET, countersunk head, $\frac{3}{8}$ " x 1 $\frac{3}{8}$ ", eighteen — RIVET, countersunk head, copper, $\frac{1}{4}$ " x 1 $\frac{1}{8}$ ", five — RIVET, countersunk head, copper, $\frac{1}{4}$ " x 1 $\frac{3}{8}$ ".) BAND, track brake, upper half, right, assembly (Composed of: *one M349 track brake BAND (4) one MX47 track brake band BRACKET, one MX46 track brake band EAR, *one MX107 track brake LINING (4) thirteen — RIVET, countersunk head, $\frac{3}{8}$ " x 1 $\frac{3}{8}$ ", eighteen — RIVET, countersunk head, copper, $\frac{1}{4}$ " x 1 $\frac{1}{8}$ ", five — RIVET, countersunk head, copper, $\frac{1}{4}$ " x 1 $\frac{3}{8}$ ".) BAR, drive sprocket chain side, inside BAR, drive sprocket chain side, outside BAR, fan and radiator air duct front side plate (steel, 1" x $\frac{1}{8}$ " x 20 $\frac{1}{2}$ ") BAR, fan and radiator air duct upper front plate (steel, 1" x $\frac{1}{8}$ " x 17 $\frac{1}{2}$ ") BAR, forward ammunition storage stop No. 1, left (length 19 13/16") BAR, forward ammunition storage stop No. 1, right (length 19 13/16") BAR, forward ammunition storage stop No. 2, (length 20 $\frac{1}{2}$ ") BAR, forward ammunition storage stop No. 3, (length 20 $\frac{1}{2}$ ") BAR, forward ammunition storage stop No. 4, (length 26 25/32") BAR, forward ammunition storage stop No. 5, (length 23 7/16") BAR, pyrene refill bracket, $\frac{1}{2}$ " x 28 $\frac{1}{2}$ " (front) BAR, pyrene refill bracket, $\frac{3}{4}$ " x 28 $\frac{1}{2}$ " (bottom) BAR, pyrene refill bracket, $\frac{3}{4}$ " x 28 $\frac{1}{2}$ " (rear) BAR, rear shell storage stop, length 21 3/16"	(1)	2.40
%X			691			6.60
%X			689			2.25
%X			691			2.40
%X			689			7.17
%X			691			2.25
%X			689			2.40
%X			SH40AC			2.00
%X			SH40AB			1.50
*			SH203B			1 .50
*			SH203A			1 .40
%X		M3069B	450			1 .58
%X		M3069A	450			1 .58
%X		M3070	449			2 .58
%X		M3073	449			2 .58
%X		M3072	449			2 .48
%X		M3071	449			2 .48
*			B5933			1 .56
*			B5934			1 .72
*			B5935			1 .85
%X		M3022	552			2 .50

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
%X & %X %X %X %X &				M3030 M342 M3803B M3803A M3805 M3804	552 686 266 266 266 266	PARTS—Continued	4 2 1 1 2 2 (2)	\$0.50 3.78 .50 .50 .50 .30 9.30
						BAR, rear shell storage stop, length 25½"		
						BAR, transmission brake band stop		
						BAR, 6-pdr. gun pedestal shell holder stop, left (rear lower)		
						BAR, 6-pdr. gun pedestal shell holder stop, right (rear lower)		
						BAR, 6-pdr. gun pedestal stop, length 14¾" (side)		
&		55		SH903A		BAR, 6-pdr. gun pedestal stop, length 27½" (rear upper)		9.03 20.97 P
						BARREL, carburetor butterfly, assembly		
						(Composed of: two LQ515A carburetor altitude air valve stop SCREW, one — carburetor altitude VALVE, assembly, two LQ523A carburetor BUTTERFLY, *one LQ564A carburetor butterfly BARREL (2)		
						*two LQ560A carburetor butterfly barrel screw BUSHING (4)		
						one — carburetor butterfly SHAFT, long, assembly, one — carburetor butterfly SHAFT, short, assembly, one LQ519A carburetor butterfly shaft WASHER, one LQ539A carburetor gear SECTOR, one LQ540A carburetor gear sector adjusting SCREW, one LQ508A carburetor (gear sector adjusting screw clamping) SCREW, two LQ558A carburetor gear sector set SCREW, six LQ551A carburetor priming plug SCREW.)		
						BASE, air pressure pump		
&		5				BASE, distributor adapter, with cup, assembly	1 (2)	9.03 20.97 P
						(Composed of: one D29788 distributor adapter BASE, two D28929 distributor ball bearing WASHER, one D13733 distributor CAM, assembly, one D30008 distributor cam KEY, one D29579 distributor cam oil RETAINER, felt, one D29571 distributor cam oil RETAINER, steel,		

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
& & %X					SH571A SH579B	PARTS—Continued		
						BATTEN, platform ammunition storage, right	1	\$0.55
						BATTEN, removable platform ammunition storage	2	.42
%X						BATTERY, ignition (Willard storage type, SYR-13), assembly	(1)	24.00 P
						(Composed of:		
						one W-X899 ignition battery CASE, assembly,		
						three W-O-260 ignition battery CONNECTOR, top,		
						twenty-four W-J46 ignition battery INSULATOR (rubber),		
						one — ignition battery JAR (hard rubber),		
						four W-C153 ignition battery jar COVER,		
						four — ignition battery jar cover PLATE, bottom, assembly,		
						four W-E690 ignition battery PLATE, negative, assembly,		
						four W-E689 ignition battery PLATE, positive, assembly,		
%X						four — ignition battery vent PLUG, assembly,		
						Approx. ½ — COMPOUND, sealing, lb.,		
						Approx. 1 pt. — ELECTROLYTE, 1.255 S. G., qt.)		
						BATTERY, starting and lighting (Willard type STR-4), assembly	(2)	18.00 P
						(Composed of:		
						one W-P-24 starting and lighting battery CABLE, negative terminal,		
						assembly,		
						one W-P-23 starting and lighting battery CABLE, positive terminal,		
						assembly,		
						one W-X854 starting and lighting battery CASE, assembly,		
%X						two W-O-270 starting and lighting battery CONNECTOR, top,		
						six W-K103 starting and lighting battery holddown BLOCK,		
						three W-B173 starting and lighting battery JAR (hard rubber),		
						three W-C154 starting and lighting battery jar COVER (hard rubber),		
						three W-AF179 starting and lighting battery jar SPACER (rectangular		
						5½" x 7½" x 1/16"),		
						three W-E712 starting and lighting battery PLATE, negative, assembly,		
						three W-E711 starting and lighting battery PLATE, positive, assembly,		

[illegible]

TANK, MARK VIII

Note symbol	Ident- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
(c)&			SKF1308 or equal			BEARING, ball, radial, dia. 3.5433", bore 1.5748", height .9055". (For housing SH282B (2).)	2	\$11.98 P
(c)&			Curney 306 or equal			BEARING, ball, thrust, dia. 2.8347", bore 1.1811", height .9449". (For governor (1).)	1	8.50 P
(c)&			SKF1109F or equal			BEARING, ball, thrust dia., 2.87", bore 1.7717", height .79". (For governor (1).)	1	9.50 P
(c)&			Fafnir 1821 or equal			BEARING, ball, thrust, dia. 6.1024", bore 4.1339", height 1.5748". (For gear M258A (1).)	2	30.84 P
&	8480	13				BEARING, cam shaft, No. 1, assembly	(2)	3.02
						(Composed of: *one LQ10A cam shaft BEARING, lower half, No. 1 (2)		1.49
			B8111			*one LQ11A cam shaft BEARING, upper half, No. 1 (2)		1.49
			B8112			four LQ27A SCREW, special, No. 8 x 1/2".)		
&	8481	13				BEARING, cam shaft, No. 2, assembly	(2)	1.38
						(Composed of: *one LQ13A cam shaft BEARING, lower half, No. 2 (2)		.67
			B8113			*one LQ14A cam shaft BEARING, upper half, No. 2 (2)		.67
			B8114			four LQ27A SCREW, special, No. 8 x 1/2".)		
&	8482	13				BEARING, cam shaft, No. 3, assembly	(2)	1.52
						(Composed of: *one LQ17A cam shaft BEARING, lower half, No. 3 (2)		.74
			B8116			*one LQ16A cam shaft BEARING, upper half, No. 3 (2)		.74
			B8115			four LQ27A SCREW, special, No. 8 x 1/2".)		
&	8483	13				BEARING, cam shaft, No. 4, assembly	(2)	1.18
						(Composed of: *one LQ20A cam shaft BEARING, lower half, No. 4 (2)		.57
			B8118			*one LQ19A cam shaft BEARING, upper half, No. 4 (2)		.57
			B8117			four LQ27A SCREW, special, No. 8 x 1/2".)		
&	8484	13				BEARING, cam shaft, No. 5, assembly	(2)	1.12
						(Composed of: *one LQ23A cam shaft BEARING, lower half, No. 5 (2)		.54

&	12485	B8119			*one LQ22A cam shaft BEARING, upper half, No. 5 (2) four LQ27A SCREW, special, No. 8 x $\frac{1}{8}$" BEARING, cam shaft, No. 6, assembly (Composed of:	(2)	.54
		13					
&		B12249 B12248			*one LQ26A cam shaft BEARING, lower half, No. 6 (2) *one LQ25A cam shaft BEARING, upper half, No. 6 (2) four LQ27A SCREW, special, No. 8 x $\frac{1}{8}$" BEARING, cam shaft, flywheel end, assembly (Composed of:	(2)	.72 .72 1.42
&	12250	177			one LQ28A cam shaft BEARING, flywheel end, one LQ32A cam shaft bearing end GASKET, one LQ29A cam shaft end PLATE, four LQ30A SCREW, special, No. 10 x $\frac{5}{16}$" *one LQ31A WIRE, lock, W & M Ga. No. 18 x 8" BEARING, cam shaft, flywheel end BEARING, clutch BEARING, connecting rod crank shaft, lower half BEARING, connecting rod crank shaft, upper half BEARING, crank shaft, lower half, long BEARING, crank shaft, lower half, short BEARING, crank shaft, upper half, long BEARING, crank shaft, upper half, short BEARING, distance recorder drive pinion shaft BEARING, driver's seat BEARING, engine room sliding door catch BEARING, flywheel thrust BEARING, generator ball BEARING, generator drive shaft, lower, with container, assembly (Composed of:	2	.01 .54
		13 33 21					
(gaa)&	13235	B13461			BEARING, connecting rod crank shaft, lower half BEARING, connecting rod crank shaft, upper half BEARING, crank shaft, lower half, long BEARING, crank shaft, lower half, short BEARING, crank shaft, upper half, long BEARING, crank shaft, upper half, short BEARING, distance recorder drive pinion shaft BEARING, driver's seat BEARING, engine room sliding door catch BEARING, flywheel thrust BEARING, generator ball BEARING, generator drive shaft, lower, with container, assembly (Composed of:	6	1.70 1.70
	13457	B13460 B13418					
&		B13459			BEARING, crank shaft, lower half, short BEARING, crank shaft, upper half, long BEARING, crank shaft, upper half, short BEARING, distance recorder drive pinion shaft BEARING, driver's seat BEARING, engine room sliding door catch BEARING, flywheel thrust BEARING, generator ball BEARING, generator drive shaft, lower, with container, assembly (Composed of:	1	2.10 1.16
		B13417 B13435 S375					
(gy)&					*one HB206 or equal BEARING, ball, radial, dia. 2.4410", bore 1.1811", height .6299" (2) *one LQ398A generator driving shaft lower ball bearing CON- TAINER (1) BEARING, roller, (Timken type), assembly (Composed of:	1	.38 1.16
&		B12048			BEARING, engine room sliding door catch BEARING, flywheel thrust BEARING, generator ball BEARING, generator drive shaft, lower, with container, assembly (Composed of:	2	.83 2
		D13732					
&	8148	16			BEARING, crank shaft, lower half, long BEARING, crank shaft, lower half, short BEARING, crank shaft, upper half, long BEARING, crank shaft, upper half, short BEARING, distance recorder drive pinion shaft BEARING, driver's seat BEARING, engine room sliding door catch BEARING, flywheel thrust BEARING, generator ball BEARING, generator drive shaft, lower, with container, assembly (Composed of:	(1)	2.10 8.65
(c)&		B1847			*one HB206 or equal BEARING, ball, radial, dia. 2.4410", bore 1.1811", height .6299" (2) *one LQ398A generator driving shaft lower ball bearing CON- TAINER (1) BEARING, roller, (Timken type), assembly (Composed of:	(4)	7.30 1.35 2.90
	3	20					
		Timken 316-312 or equal.			one 316 roller bearing CONE, one 312 roller bearing CUP. For fan bevel gear box (4).)		

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
(c)&	54 7	22 23	Timken 6454-6420 or equal.			PARTS—Continued BEARING, roller, (Timken type), assembly (Composed of: one 6454 roller bearing CONE, one 6420 roller bearing CUP. For transmission bevel pinion shaft (2).) BEARING, shaft, inner. (For track driving wheel shaft (1).) BEARING, shaft, inner. (For track roller pinion shaft (1).) BEARING, shaft, outer. (For track driving shaft track roller pinion (1).) BEARING, tachometer drive shaft BEARING, transmission vertical shifter shaft BELT, air pressure pump (link V type, 54" long, 5/8" wide, 28° angle) BELT, fan, endless BELT, transmission mechanical lubricator (link V type, 60" long, 5/8" wide, 28° angle) BELTING, leather, 3" single ply, 3" wide, ft. (one piece 32 11/16" long required for cover SH233B) BLADE, inlet louvre BLADE, outlet louvre BLADE, radiator cooling fan BLOCK, (fan bevel gear) filler BLOCK, forward ammunition storage, left BLOCK, forward ammunition storage, right BLOCK, forward ammunition storage shell, left BLOCK, forward ammunition storage shell, right BLOCK, gun support, front, left BLOCK, gun support, front, right BLOCK, gun support, rear, left BLOCK, gun support, rear, right	(2)	\$11.90 P
&				M1406	54		2	12.00
&				M1546	54		2	12.00
&	7	27		M1407	54		4	12.00
&			D13830				1	.83 P
&	15	23		M306	714		2	1.89
%X	22				SH900G		1	5.35 P
%X					SH233E		1	10.00 P
%X					SH103E		1	5.75 P
(mh)&							—	.60 P
%X	2	4		M987	501		34	4.00
%X				M994	504		28	6.00
&					SH278A		64	.22
%X					SH146C		1	1.32
X				M3065B	450		1	2.00
X				M3065A	450		1	2.00
X				M3064B	450		1	2.65
X				M3064A	450		1	2.65
%X					SH396B		1	.85
%X					SH396A		1	.85
%X					SH396D		1	.75
%X					SH396C		1	.75

&				BLOCK, semaphore bottom bearing, assembly (Composed of: *one X262 semaphore bottom bearing BLOCK (1) two — NUT, plain, U. S. Std., hexagon, 5/16".)	(1)	1.50
&				BLOCK, semaphore bottom bearing, grooved, assembly (Composed of: *one X263 semaphore bottom bearing BLOCK, grooved (1) two — NUT, plain, U. S. Std., hexagon, 5/16".)	(1)	1.46
&	X256			BLOCK, semaphore top bearing	2	.74
&		W-K103		BLOCK, starting and lighting battery holddown	12	.05 P
*	M3806B			BLOCK, 6-pdr. gun pedestal shell, left	(1)	1.50
*	M3806A			BLOCK, 6-pdr. gun pedestal shell, right	(1)	1.50
%X			SH980A	BOARD, instrument	1	.98
%X				BOARD, intensifier, assembly (Composed of: one SH1021B intensifier BOARD, lower, one SH1021A intensifier BOARD, upper, four SH1021D intensifier board SPACER, intensifier high tension CABLE, length 9½", with intensifier assembly, intensifier high tension CABLE, length 11", with intensifier assembly, intensifier high tension CABLE, length 12½", with intensifier assembly, four — BOLT, stove, round head, ¼" x 1 7/16", with stove bolt nut and washer.)	(1)	3.00
&			SH1021B	BOARD, intensifier, lower	4	.12 P
&			SH1021A	BOARD, intensifier, upper	4	.12 P
%X	M2441		425	BOARD, map. (For officer (1); driver's (1).)	2	.88
&			SH994B	BOARD, switch	1	1.25
&		25		BODY, carburetor, assembly (Composed of: two LQ513A carburetor air intake dowel PIN, two LQ552A carburetor bail hook PIN, two LQ553A carburetor bail hook pin taper PIN, *one LQ565A carburetor BODY (2) two LQ524A carburetor body PLUG, two — carburetor cap JET, assembly, two LQ559A carburetor cap jet LOCK,	(2)	26.50
			13366			14.05

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&						PARTS—Continued BODY, carburetor, assembly—Continued. (Composed of: two (LQ525A) carburetor channel SCREW, assembly, two LQ528A carburetor CHOKE, No. 36 (army), two (LQ529A) carburetor compensating JET, assembly, one LQ530A carburetor, compensating jet and needle valve seat fiber WASHER, two (LQ526A) carburetor float cover clamp BOLT, assembly, two (LQ533A) carburetor float cover clamp bolt PIN, assembly, one (LQ537A) carburetor gasoline PLUG, assembly, four (LQ541A) carburetor internal body PLUG, assembly, two — carburetor main JET, assembly, one — carburetor needle valve SEAT, assembly, one — PIN, split, 1/16" x 3/8", *two — Q512B WIRE, lock, soft iron, W. & M. Ga. No. 18 x 5" (4) *one LQ512A WIRE, lock, soft iron, W. & M. Ga. No. 18 x 8" (2).)		
	%X		264			BODY, oil pump, lower half, assembly (Composed of: *one LQ427A oil pump BODY, lower half (1) one LQ432A oil pump driving shaft BUSHING, lower, one LQ428A oil pump lower half body PLUG, one LQ163A DOWEL, 3/16" x 3/4")	(1)	\$0.01 .01 3.69
	%X		D8190-33			Body, oil pump, upper half, assembly (Composed of: *one LQ400A oil pump BODY, upper half (1) one LQ442A oil pump driving shaft BUSHING, upper, *two LQ441A oil pump upper half body PLUG one LQ458A oil pump upper screen NUT, one LQ459A oil pump upper screen nut LOCK.)	(1)	4.77
&		33	C8189			BODY, transmission mechanical lubricator suction screen	6	4.12 .05
					SH101K			.06

& &	2 12071	7 17	SH951C	BODY, triple combination tap BODY, water pump, assembly (Composed of: *one LQ144A water pump BODY (1) eight (1Q88A) STUD, 1/4" x 1 3/16", threaded U. S. Std. 7/16" and S. A. E. 9/16", assembly, eight LQ113A WASHER, special, 1/4".)	1 (1)	7.22 6.48
				BOLT, battery shelf support holding down, length 8 3/8", assembly (Composed of: *one SH996G battery shelf support holding down BOLT, length 8 3/8" (2) one SH996D battery shelf support holding down bolt NUT, one — WASHER, plain, 5/16".)	(2)	5.76
%X		C14332		Bolt, battery shelf support holding down, length 12 1/4", assembly (Composed of: *one SH996C battery shelf support holding down BOLT, length 12 1/4" one SH996D battery shelf support holding down bolt NUT, one — WASHER, plain, 5/16".)	(4)	.24
				BOLT, cam shaft, assembly (Composed of: *one LQ40A cam shaft BOLT (14) one LQ41A NUT, special, S. A. E., 1/4", one — PIN, split, 1/16" x 1/2".)	(14)	.05
%X	178	13		BOLT, cam shaft housing, assembly (Composed of: *one LQ50A cam shaft housing BOLT one LQ51A NUT, special, S. A. E., 5/16", one — PIN, split, 1/16" x 5/8", two LQ52A WASHER, special, 5/16".)	(36)	.24
				BOLT, carburetor float cover clamp, assembly (Composed of: *one LQ526A carburetor float cover clamp BOLT one LQ585A carburetor float cover wing NUT, BOLT, carburetor throttle control shaft bracket, assembly (Composed of: *one LQ114A carburetor throttle control shaft bracket BOLT (2) one LQ89A NUT, special, S. A. E., 1/4", one — PIN, split, 1/16" x 1/2", one LQ113A WASHER, special, 1/4".)	(2)	.05
&		13383		BOLT, carburetor float cover clamp, assembly (Composed of: *one LQ526A carburetor float cover clamp BOLT one LQ585A carburetor float cover wing NUT, BOLT, carburetor throttle control shaft bracket, assembly (Composed of: *one LQ114A carburetor throttle control shaft bracket BOLT (2) one LQ89A NUT, special, S. A. E., 1/4", one — PIN, split, 1/16" x 1/2", one LQ113A WASHER, special, 1/4".)	(4)	.25
				BOLT, carburetor float cover clamp, assembly (Composed of: *one LQ526A carburetor float cover clamp BOLT one LQ585A carburetor float cover wing NUT, BOLT, carburetor throttle control shaft bracket, assembly (Composed of: *one LQ114A carburetor throttle control shaft bracket BOLT (2) one LQ89A NUT, special, S. A. E., 1/4", one — PIN, split, 1/16" x 1/2", one LQ113A WASHER, special, 1/4".)	(2)	.15
%X		B211		BOLT, carburetor float cover clamp, assembly (Composed of: *one LQ526A carburetor float cover clamp BOLT one LQ585A carburetor float cover wing NUT, BOLT, carburetor throttle control shaft bracket, assembly (Composed of: *one LQ114A carburetor throttle control shaft bracket BOLT (2) one LQ89A NUT, special, S. A. E., 1/4", one — PIN, split, 1/16" x 1/2", one LQ113A WASHER, special, 1/4".)	(2)	.09
				BOLT, carburetor float cover clamp, assembly (Composed of: *one LQ526A carburetor float cover clamp BOLT one LQ585A carburetor float cover wing NUT, BOLT, carburetor throttle control shaft bracket, assembly (Composed of: *one LQ114A carburetor throttle control shaft bracket BOLT (2) one LQ89A NUT, special, S. A. E., 1/4", one — PIN, split, 1/16" x 1/2", one LQ113A WASHER, special, 1/4".)	(2)	.05

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
%X						PARTS—Continued BOLT, carburetor throttle shaft yoke end, assembly (Composed of: one LQ514A carburetor altitude air valve and yoke end bolt NUT, *one LQ555A carburetor throttle shaft yoke end BOLT (4) one LQ556A carburetor throttle shaft yoke end bolt WASHER, one — PIN, split, 1/16" x 1/2".) BOLT, carburetor to intake header, assembly (Composed of: one LQ421A carburetor to intake header bolt HEAD, *one LQ422A carburetor to intake header bolt SHANK one — PIN, steel, 1/8" x 3/8".) BOLT, carriage, 1/4" x 1 9/16", with nut and lock washer. (For holder SH550H (1); case M3020 (2).) BOLT, carriage, 3/8" x 1 1/2", with nut. (For support SH992D (4).) BOLT, carriage, 3/8" x 1 1/2", with nut and plain washer. (For block SH396D (1); block SH396C (1).) BOLT, connecting forked end rod, assembly (Composed of: *one LQ125A connecting forked end rod BOLT (24) one LQ126A connecting forked end rod bolt NUT, one — PIN, split, 1/16" x 1/2".) BOLT, connecting plain end rod, assembly (Composed of: *one LQ133A connecting plain end rod BOLT (12) one LQ134A connecting plain end rod bolt NUT, one — PIN, split, 3/32" x 3/4".) BOLT, crank case upper to lower, assembly (Composed of: *one LQ243A crank case upper to lower BOLT (50) one LQ244A crank case upper to lower bolt NUT,	(4)	\$0.16
%X			13414					.08
%X			8398				(2)	.42
%(sh)R								.38
%(sh)R							(86)	.02 P
%(sh)R							4	.02 P
&	12550	18					2	.02 P
			12550				(24)	.21
%X	13422	18					(12)	.25
			13422					.20
%X							(50)	.14
								.05

%X	165	15			two LQ113A WASHER, special, ¼", BOLT, crank case upper to lower, long, assembly (Composed of: *one LQ246A crank case upper to lower BOLT, long (2) one LQ198A NUT, special, ¾", one — PIN, split, 3/32" x ⅝", two LQ166A WASHER, special, ⅜") BOLT, crank case upper to lower, short, assembly (Composed of: *one LQ245A crank case upper to lower BOLT, short (2) one LQ198A NUT, special, ¾", one — PIN, split, 3/32" x ⅝", two LQ166A WASHER, special, ⅜") BOLT, crank shaft gear, assembly (Composed of: *one LQ262A BOLT, special (6) one LQ51A NUT, special, S. A. E., 5/16", one — PIN, split, 1/16" x ⅝", BOLT, foot brake bridle, assembly (Composed of: *one M767 foot brake bridle BOLT (1) one M768 NUT, special, ⅞", one — PIN, split, 3/16" x 1½") BOLT, generator drive shaft end housing binding BOLT, high and low speed control lever, assembly (Composed of: *one M776 high and low speed control lever BOLT (2) one M768 NUT, special, ⅞", one — PIN, split, 3/16" x 1", For high and low speed control lever, left (1); right (1.) BOLT, ignition switch and voltage regulator binding, assembly (Composed of: *one D30369 ignition switch and voltage regulator binding BOLT (2) one D30360 ignition switch and voltage regulator binding bolt NUT, one D30385 ignition switch and voltage regulator binding bolt retaining WASHER, one D20495 WASHER, lock, .195" x .393" x .046".)	(2)	.29
%X		B165				(2)	.20
%X		B187				(2)	.59
&		B6270				(6)	.50
%X			217			(1)	.132
%X		D29848				4	1.13 P
%X			224			(2)	.85
%X		D30369				(2)	.78
%X						(2)	.19 P
							.15

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&	15	22			679	PARTS—Continued BOLT, large planet pinion ring, assembly (Composed of: *one M318 large planet pinion ring BOLT (6) one — NUT, castle, S. A. E., $\frac{7}{8}$ ", one — PIN, split, $\frac{1}{8}$ " x $1\frac{3}{4}$ ".)	(6)	\$0.54
						BOLT, lower crank case bearing, long, assembly (Composed of: *one LQ189A lower crank case bearing BOLT, long (14) two — LQ192A lower crank case bearing bolt NUT, two — PIN, split, $3/32$ " x $\frac{7}{8}$ ", one LQ471A WASHER, special, I. D. $33/64$ ", O. D. $15/16$ ", $1/16$ " thick, one LQ191A WASHER, special, I. D. $33/64$ ", O. D. $1\frac{1}{16}$ ", $\frac{1}{8}$ " thick.)	(14)	1.90
						BOLT, lower crank case bearing, short, assembly (Composed of: *one LQ190A lower crank case bearing BOLT, short (2) two LQ192A lower crank case bearing bolt NUT, two — PIN, split, $3/32$ " x $\frac{7}{8}$ ", one LQ471A WASHER, special, I. D. $33/64$ ", O. D. $15/16$ ", $1/16$ " thick, one LQ191A WASHER, special, I. D. $33/64$ ", O. D. $1\frac{1}{16}$ ", $\frac{1}{8}$ " thick.)	(2)	1.80
%X	—	33	B118		423	BOLT, main turret flap ring, assembly (Composed of: one M2391 main turret flap RING, *one M2392 main turret flap ring BOLT (2).)	(2)	.40
						BOLT, oil pump upper half body, assembly (Composed of: *one LQ443A oil pump upper half body BOLT (S. A. E., hexagon, $\frac{1}{4}$ " x $15/16$ " (4) one LQ89A NUT, special, S. A. E., $\frac{1}{4}$ ", one — PIN, split, $1/16$ " x $\frac{1}{2}$ ", two LQ113A WASHER, special, $\frac{1}{4}$ ".)	(4)	.28 .10 .05

%X							BOLT, outlet louvre, assembly (Composed of: *one SH501B outlet louvre BOLT (1/2" x 1 3/8", head 3/16" thick) (1) one — NUT, plain, U. S. Std., hexagon, 1/2", one — WASHER, lock, 1/2".)	(1)	.06
%X					1X90	633	BOLT, peep hole cover plate (1/2" x 1 5/16", head 5/16" thick) BOLT, peep hole cover plate operating, assembly (Composed of: *one 6X90 peep hole cover plate operating BOLT (20) one 7X90 peep hole cover plate operating bolt PEG.)	40 (20)	.03 .30
%X						633	BOLT, removable platform ammunition storage support, assembly (Composed of: *one SH550A removable platform ammunition storage support BOLT (2) one — NUT, plain, U. S. Std., hexagon, 3/8", one — NUT, plain, U. S. Std., hexagon, 1/2", one — WASHER, lock, 1/2".)	(2)	.25 .25
%(sh)R &	116	15 & 19	712				BOLT, S. A. E., 3/8" x 2 1/4", with plain nut and lock washer. (For bracket B6205 (8).) BOLT, S. A. E., drilled, 1/4" x 15/16", threaded 9/16", assembly (Composed of: *one LQ164A BOLT, S. A. E., drilled 1/4" x 15/16", threaded 9/16" one LQ89A NUT, special, S. A. E., 1/4", one — PIN, split, 1/16" x 1/2", two LQ113A WASHER, special, 1/4". For water pump bevel driver housing, assembly (2); oil pump (10); distributor, assembly (10).)	(8) (22)	.02 P .10
%X							BOLT, S. A. E., drilled, 1/4" x 1 1/8", assembly (Composed of: *one LQ112A BOLT, S. A. E., drilled, 1/4" x 1 1/8" (3) one LQ89A NUT, special, S. A. E., 1/4", one — PIN, split, 1/16" x 1/2", one LQ113A WASHER, special, 1/4". For lever LQ111A (1); securing crank case upper half drain tube, assembly (2).)	(3)	.09
%X	117	15					BOLT, small planet pinion ring, assembly (Composed of: *one M317 small planet ring BOLT (6) one — NUT, castle, S. A. E., 5/8", one — PIN, split, 1/8" x 1 1/4".)	(6)	.34
&	30	22			679			(6)	.30

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
%X						PARTS—Continued BOLT, sponson roller bracket, assembly (Composed of: one SH470D sponson roller bracket bolt NUT, *one — BOLT, U. S. Std., hexagon head, 3/4" x 3 3/8" (2) one — WASHER, lock, 3/4") BOLT, stove, flat head, 3/16" x 1", with stove bolt nut and lock washer. (For brace SH920F (1).) BOLT, stove, round head, 3/16" x 5/8", with stove bolt nut and lock washer. (For hand pressure pump (3).) BOLT, stove, round head, 1/4" x 7/16", with stove bolt nut and lock washer. (Through boards SH1021A and SH1021B (4).) BOLT, stove, round head, 1/4" x 1/2", with stove bolt nut and lock washer. (For clamp SH1021G (8).) BOLT, stove, round head, 1/4" x 5/8", with stove bolt nut and lock washer. (For clamp SH984K (2).) BOLT, stove, round head, 1/4" x 3/4", with two stove bolt nuts and lock washers. (For angle SH152C (2); angle SH152D (2).) BOLT, stove, round head, 1/4" x 3/4", with stove bolt nut and lock washer. (For bands SH153K and SH153H (3); band SH153M (1); clip SH153T (1).) BOLT, stove, round head, 1/4" x 7/8", with stove bolt nut and lock washer. (For clamp SH984G (1).) BOLT, stove, round head, 1/4" x 1", with stove bolt nut and lock washer. (For band SH153N (1); clamp SH1021G (2).) BOLT, stove, round head, 1/4" x 1 1/4", with stove bolt nut and lock washer. (For clamp SH920B (1); clamp B101480A (1); clamp B101480P (1); clamp B101480Z (1); instrument board (4).) BOLT, stove, round head, 1/4" x 2", with stove bolt nut and lock washer and plain washer. (For switch SH567A (2).) BOLT, tap, 3/8" x 2", threaded 7/8". (For gear SH586B (3).) BOLT, tap, 1/2" x 2 1/2", threaded 1 3/4", assembly	(2)	\$0.15
%(sh)R							(1)	.10
%(sh)R							(3)	.01 P
%(sh)R							(16)	.01 P
%(sh)R							(8)	.01 P
%(sh)R							(2)	.01 P
%(sh)R							(8)	.01 P
%(sh)R							(2)	.01 P
%(sh)R							(17)	.01 P
%(sh)R				16			(21)	.01 P
%(sh)R							(2)	.01 P
%(gac)X					SH586F		3	.01 P
%(gac)X							(2)	.03 P

				(Composed of: *one SH586G BOLT, tap, ½" x 2½", threaded 1¾" one — NUT, plain, U. S. Std., hexagon, ½", one — WASHER, lock, ½", For gear SH586C (2).)		.01 P
%gacX	SH380B			BOLT, tap, ⅝" x 15/16", threaded ⅝". (For bracket SH380A (2).)	2	.02 P
%gacX	SH505B			BOLT, tap, ⅝" x 1", threaded ¾". (For channel M990 (9).)	9	.02 P
%gacX	SH503A			BOLT, tap, ⅝" x 1¼", threaded ⅞". (For piece M992 (6); plate M991 (7); plate M1908 (17); piece M985 (7).)	37	.02 P
%gacX	SH303C			BOLT, tap, ⅝" x 1¼", threaded 1". (For plate SH303A (4).)	4	.02 P
%gacX	SH380C			BOLT, tap, ⅝" x 1½", threaded 1". (For channel M2110 (11); channel M2111 (11); channel M990 (1).)	23	.02 P
%gacX	SH499B			BOLT, tap, ⅝" x 1¾", threaded 1". (For frame M982 (17); frame M983 (17); channel M990 (1); plate M989 (10).)	45	.02 P
%gacX	SH303B			BOLT, tap, ¾" x 1¼", threaded 1". (For plate M1991 (14); strap (left) M2001 (10); strap (right) M2001 (8); plate M2077 (14).)	46	.03 P
%X	112			BOLT, transmission bevel gear case cover to case, assembly (Composed of: *one MX8 transmission bevel gear case cover to case BOLT one — NUT, castle, S. A. E., ⅝", one — PIN, split, 3/32" x 1" BOLT, transmission frame holding, assembly (Composed of: *one M388 transmission frame holding BOLT (2) one — NUT, plain, S. A. E., hexagon, ¾", one — WASHER, lock, ¾") BOLT, transmission gear case to brake, assembly (Composed of: *one MX26 transmission gear case to brake BOLT (32) one — NUT, castle, S. A. E., 7/16", one — PIN, split, 3/32" x ⅞") BOLT, transmission mechanical lubricator yoke, assembly (Composed of: *one SH101Q transmission mechanical lubricator yoke BOLT (6) one — NUT, plain, S. A. E., hexagon, ¼", one — WASHER, lock, ¼") BOLT, transmission pinion shaft packing gland, assembly (Composed of: *one MX22 transmission pinion shaft packing gland BOLT (4) two — NUT, plain, S. A. E., hexagon, ⅝")	(14)	.08 P
%X						.04
%X					(2)	.10 P
%X						.05
%X					(32)	.08 P
%X	712					.04
%X					(6)	.03 P
%X						.01
%X					(4)	.09
%X	712					.07

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&					712	PARTS—Continued BOLT, transmission sprocket bearing bracket to channel, assembly (Composed of: *one MX1 transmission sprocket bearing bracket to channel BOLT (20) one — NUT, castle, S. A. E., $\frac{3}{4}$ ", one — PIN, split, $\frac{1}{8}$ " x $1\frac{1}{2}$ ".)	(20)	\$0.14
						BOLT, transmission vertical shifter shaft bearing to bevel gear case, assembly (Composed of: *one MX11 transmission vertical shifter shaft bearing to bevel gear case BOLT (2) one — NUT, castle, S. A. E., $\frac{1}{2}$ ", one — PIN, split, $3/32$ " x $1\frac{1}{2}$ ".)	(2)	.08
						BOLT, trunnion, assembly (Composed of: *one M3128 trunnion BOLT (6) one — NUT, plain, U. S. Std., hexagon, $\frac{3}{4}$ ".)	(6)	.22
%X					428	BOLT, U, exhaust pipe, assembly (Composed of: *one SH402L exhaust pipe U BOLT (4) two — NUT, plain, U. S. Std., hexagon, $\frac{3}{8}$ ", two — WASHER, lock, $\frac{3}{8}$ ".)	(4)	.41
%X						BOLT, U. S. Std., countersunk head, $3/16$ " x $9/16$ ", with round nut. (For ignition battery case (6).) BOLT, U. S. Std., countersunk head, $\frac{1}{4}$ " x $\frac{7}{8}$ ", with round nut. (For starting and lighting battery case X854 (6).) BOLT, U. S. Std., countersunk head, $\frac{3}{8}$ " x $\frac{7}{8}$ ", with plain nut. (For bracket M2432 (2).) BOLT, U. S. Std., countersunk head, $\frac{3}{8}$ " x $1\frac{1}{2}$ ", with plain nut and lock washer. (For bracket SH967A (3).) BOLT, U. S. Std., countersunk head, $\frac{3}{8}$ " x $1\frac{1}{2}$ ", with plain nut and lock washer. (For radiator (13).)	(6) (12) (2) (3) (13)	.01 P .01 P .01 P .01 P .01 P

% (sh) R	BOLT, U. S. Std., countersunk head, 5/8" x 1 3/4", with plain nut and lock washer. (For guide M2114 (1).)	(1)	.03 P
% (sh) R	BOLT, U. S. Std., hexagon head, 3/16" x 5/8", with plain nut. (For bracket M2432 (4).)	(4)	.01 P
% (sh) R	BOLT, U. S. Std., hexagon head, 1/4" x 1 1/2". (For tachometer support SH585B (4).)	(4)	.01 P
% (sh) R	BOLT, U. S. Std., hexagon head, 1/4" x 3/8", with plain nut and lock washer. (For cap SH950L (20).)	(20)	.01 P
% (sh) R	BOLT, U. S. Std., hexagon head, 1/4" x 3/4", with plain nut and lock washer. (For clamp SH920D (1).)	(2)	.01 P
% (sh) R	BOLT, U. S. Std., hexagon head, 1/4" x 7/8", with plain nut and lock washer. (For officer's chest fastening strap SH569P (2).)	(4)	.01 P
% (sh) R	BOLT, U. S. Std., hexagon head, 1/4" x 7/8". (For collar SH993C (1).)	(1)	.01 P
% (sh) R	BOLT, U. S. Std., hexagon head, 1/4" x 1", with plain nut and lock washer. (For cap SH950L (4).)	(4)	.01 P
% (sh) R	BOLT, U. S. Std., hexagon head, 1/4" x 1 3/8", with plain nut, plain washer and lock washer. (For board SH994G (4).)	(4)	.01 P
% (sh) R	BOLT, U. S. Std., hexagon head, 1/4" x 1 1/2", with plain nut and lock washer. (For box SH961A (10).)	(10)	.01 P
& (sh) R	BOLT, U. S. Std., hexagon head, 1/4" x 1 9/16", with plain nut and lock washer. (For governor lever (1).)	(1)	.01 P
& (sh) R	BOLT, U. S. Std., hexagon head, 1/4" x 1 5/8", with plain nut. (For sprocket X269 (1).) sprocket X270 (1).)	(2)	.01 P
& (sh) R	BOLT, U. S. Std., hexagon head, 5/16" x 3/4", with plain nut and lock washer. (For plate SH611A (6).) plate SH611B (6).)	(12)	.01 P
% (sh) R	BOLT, U. S. Std., hexagon head, 5/16" x 7/8", with plain nut and lock washer. (For duct M1054 (10).)	(10)	.01 P
& (sh) R	BOLT, U. S. Std., hexagon head, 5/16" x 1", with plain nut and lock washer. (For plate SH611A (15).) plate SH611B (15).) plate SH485C (6).)	(36)	.01 P
& (sh) R	BOLT, U. S. Std., hexagon head, 5/16" x 1 1/4", with plain nut and lock washer. (For plate SH611A (6).) plate SH611B (6).)	(12)	.01 P
% (sh) R	BOLT, U. S. Std., hexagon head, 3/8" x 3/4". (For rest 5X30 (2).) plate M1033 (9).)	(49)	.01 P
% (sh) R	BOLT, U. S. Std., hexagon head, 3/8" x 3/4", with plain nut and lock washer. (For plate M1034 (4).) plate M1035A (5).) foot SH280A (2).) foot SH280B (2).) foot SH280C (2).) foot SH280D (2).) housing SH276A (13).)	(30)	.01 P
% (sh) R	BOLT, U. S. Std., hexagon head, 3/8" x 7/8", with plain nut and lock washer. (For brace SH958K (2).)	(2)	.01 P
% (sh) R	BOLT, U. S. Std., hexagon head, 3/8" x 1", with plain nut and lock washer. (For cleat M2186 (1).) housing SH282B (6).)	(12)	.01 P

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
% (sh)R						BOLT, U. S. Std., hexagon head, 3/8" x 1 1/16", with plain nut and lock washer. (For cap SH168E (2).)	(2)	\$0.01 P
% (sh)R						BOLT, U. S. Std., hexagon head, 3/8" x 1 1/8", with plain nut and lock washer. (For housing SH145A (5).)	(5)	.01 P
% (sh)R						BOLT, U. S. Std., hexagon head, 3/8" x 1 1/8". (For cap SH137B (4).)	(4)	.01 P
% (sh)R						BOLT, U. S. Std., hexagon head, 3/8" x 1 1/4", with plain nut and lock washer. (For base SH903A (4).)	(4)	.01 P
% (sh)R						BOLT, U. S. Std., hexagon head, 3/8" x 1 5/16", with plain nut and lock washer. (For support SH168G (1).)	(1)	.01 P
& (sh)R						BOLT, U. S. Std., hexagon head, 3/8" x 1 3/8", with plain nut and lock washer. (For header M879 (15); header M878 (28).)	(43)	.01 P
% (sh)R						BOLT, U. S. Std., hexagon head, 3/8" x 1 1/2", with plain nut and lock washer. (For header M879 (8); header M878 (8); bracket SH966E (2); support B181 (2); support C69 (3).)	(23)	.01 P
% (sh)R						BOLT, U. S. Std., hexagon head, 3/8" x 1 3/8", with plain nut and lock washer. (For through (2) supports SH972A (3).)	(3)	.01 P
% (sh)R						BOLT, U. S. Std., hexagon head, 3/8" x 2", with plain nut and lock washer. (For support M179 (6); support M178 (6).)	(12)	.01 P
% (sh)R						BOLT, U. S. Std., hexagon head, 3/8" x 2 1/4", with plain nut and lock washer. (For through (2) caps SH959E (1); quadrant M779 (2).)	(5)	.01 P
% (sh)R						BOLT, U. S. Std., hexagon head, 3/8" x 2 3/4", with plain nut and lock washer. (For starting motor bracket SH137A (2); through two caps SH959D (3).)	(5)	.01 P
% (sh)R						BOLT, U. S. Std., hexagon head, 3/8" x 3 1/2", with plain nut. (For post M4022 (1).)	(1)	.01 P
% (sh)R						BOLT, U. S. Std., hexagon head, 3/8" x 3 1/2", with plain nut and lock washer. (For bracket SH137A (2).)	(2)	.01 P
% (sh)R						BOLT, U. S. Std., hexagon head, 7/16" x 1", with plain nut and lock washer. (For plate M2134B (5); plate M2134A (5).)	(10)	.01 P
% (sh)R						BOLT, U. S. Std., hexagon head, 7/16" x 1 1/8", with plain nut and lock washer. (For securing rear shell storage (16).)	(16)	.01 P

TANK, MARK VIII

Note symbol	Identification No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
%(sh)R						BOLT, U. S. Std., hexagon head, 1/2" x 3 1/2", with plain nut and lock washer. (For gate M751 (1); gate M752 (1).)	(2)	\$0.02 P
%(sh)R						BOLT, U. S. Std., hexagon head, 1/2" x 3 9/16", with plain nut and lock washer. (For through (2) brackets M3032 (1).)	(3)	.02 P
%(sh)R						BOLT, U. S. Std., hexagon head, 1/2" x 6 3/4", with plain nut and lock washer. (For gate M751 (1); gate M752 (1).)	(2)	.04 P
%(sh)R						BOLT, U. S. Std., hexagon head, 1/2" x 7 1/4", with plain nut and lock washer. (For gate M751 (1); gate M752 (1).)	(2)	.04 P
%(sh)R						BOLT, U. S. Std., hexagon head, 5/8" x 1". (For plate M2801 (3).)	(3)	.03 P
%(sh)R						BOLT, U. S. Std., hexagon head, 5/8" x 1 3/8", with plain nut and lock washer. (For foot SH573B (2); foot SH573A (2); support SH574D (4).)	(8)	.03 P
%(sh)R						BOLT, U. S. Std., hexagon head, 5/8" x 1 1/2", with plain nut and lock washer. (For angle SH573M (2); angle M2793 (6); bracket M891 (1).)	(22)	.03 P
%(sh)R						BOLT, U. S. Std., hexagon head, 5/8" x 1 1/2". (For angle M2794B (6); angle M2794A (6).)	(12)	.03 P
%(sh)R						BOLT, U. S. Std., hexagon head, 5/8" x 1 9/16", with plain nut and lock washer. (For angle M2794A (5); angle M2794B (5).)	(10)	.03 P
%(sh)R						OLT, U. S. Std., hexagon head, 5/8" x 1 11/16", with plain nut and lock washer. (For angle M2794B (2); angle M2794A (2); angle M2793 (2).)	(8)	.03 P
%(sh)R						OLT, U. S. Std., hexagon head, 5/8" x 1 3/4", with plain nut and lock washer. (For plate M2116 (3); plate M1911 (4); securing (1) louvre front angle and piece SH535A (7).)	(14)	.03 P
%(sh)R						BOLT, U. S. Std., hexagon head, 5/8" x 2", with plain nut and lock washer. (For support C68 (2).)	(2)	.03 P
%(sh)R						BOLT, U. S. Std., hexagon head, 5/8" x 2 1/4", with plain nut and lock washer. (For plate M1911 (2); bracket SH964A (1); securing (1) louvre front angle to bracket SH966A (2).)	(8)	.03 P
%(sh)R						BOLT, U. S. Std., hexagon head, 5/8" x 2 5/16", with plain nut and lock washer. (For angle M2794A (1); angle M2794B (1).)	(2)	.03

% (sh)R				BOLT, U. S. Std., hexagon head, $\frac{5}{8}$ " x $2\frac{1}{2}$ ", with plain nut and lock washer. (For bracket M182 (2); bracket M183 (2).)	(4)	.03 P
% (sh)R				BOLT, U. S. Std., hexagon head, $\frac{5}{8}$ " x $2\frac{1}{2}$ ". (For block M3806A (2); block M3806B (2).)	(4)	.03 P
% (sh)R				BOLT, U. S. Std., hexagon head, $\frac{5}{8}$ " x $2\frac{3}{4}$ ", with plain nut and lock washer. (For tank M1193 (2).)	(2)	.03 P
% (sh)R				BOLT, U. S. Std., hexagon head, $\frac{5}{8}$ " x $3\frac{3}{8}$ ", with plain nut and lock washer. (For flange SH849A (1).)	(2)	.03 P
% (sh)R	25	21		BOLT, U. S. Std., hexagon head, $\frac{3}{4}$ " x $1\frac{5}{8}$ ", with plain nut and lock washer. (For cleat M4129 (1).)	(2)	.04 P
% (sh)R				BOLT, U. S. Std., hexagon head, $\frac{3}{4}$ " x $1\frac{3}{4}$ ", with plain nut and lock washer. (For guide M2114 (4).)	(4)	.04 P
% (sh)R				BOLT, U. S. Std., hexagon head, $\frac{3}{4}$ " x $2\frac{1}{2}$ ", with plain nut and lock washer. (For bracket M184 (1).)	(1)	.04 P
% (sh)R				BOLT, U. S. Std., hexagon head, $\frac{3}{4}$ " x $2\frac{1}{2}$ ", with plain nut and lock washer. (For bracket SH971A (1); bracket SH971B (1).)	(2)	.04 P
% (sh)R				BOLT, U. S. Std., hexagon head, $\frac{3}{4}$ " x $2\frac{3}{8}$ ", with plain nut and lock washer. (For securing driver's seat to stays SH289A and SH289B (4).)	(4)	.04 P
% (sh)R				BOLT, U. S. Std., hexagon head, $\frac{3}{4}$ " x $2\frac{1}{2}$ ", with plain nut and lock washer. (For bracket M184 (1).)	(1)	.04 P
% (sh)R				BOLT, U. S. Std., square head, $\frac{3}{8}$ " x $1\frac{1}{2}$ ". (For bracket M3922 (1).)	(1)	.07 P
% (sh)R				BOLT, U. S. Std., square head, $\frac{3}{8}$ " x $1\frac{1}{4}$ ", with square nut and lock washer (For cleat M1945B (2); cleat M1945A (2); cleat M1946A (2); cleat M1946B (2); cleat M1947 (2).)	(12)	.02 P
% (sh)R				BOLT, U. S. Std., square head, $\frac{5}{8}$ " x $1\frac{1}{2}$ ", with square nut and lock washer. (For angle M2371 (2); angle M2370A (2); angle M2370B (2).)	(8)	.03 P
% (sh)R				BOLT, U. S. Std., square head, $\frac{5}{8}$ " x $1\frac{3}{4}$ ", with square nut and lock washer. (For piece M984 (7).)	(7)	.03 P
% (sh)R				BOLT, U. S. Std., square head, $\frac{5}{8}$ " x $2\frac{1}{16}$ ", with square nut and lock washer. (For angle M2072 (2).)	(6)	.03 P
% (sh)R				BOLT, U. S. Std., square head, $\frac{5}{8}$ " x $2\frac{1}{4}$ ", with square nut and lock washer. (For (1) angle M2072 (2).)	(2)	.03 P
% (sh)R				BOLT, U. S. Std., square head, $\frac{5}{8}$ " x $2\frac{3}{8}$ ", with square nut and lock washer. (For (1) angle M2072 (1); hanger SH424B (1).)	(2)	.03 P
&				BOLT, 6-pdr. spare parts box, assembly (Composed of: *one SH942C 6-pdr. spare parts box BOLT (2) one — NUT, plain, U. S. Std., hexagon, $\frac{1}{2}$ " one — WASHER, lock, $\frac{1}{2}$ " one — WASHER, plain, $\frac{5}{8}$ ".)	(2)	.29
						.25

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
& & (gv)&	60	2			SH188C SH104E 592 592 592 592 592 870	PARTS—Continued BOTTOM, gasoline tank strainer BOTTOM, transmission mechanical lubricator suction tube screen BOX, accessories or ration, assembly (Composed of: *one M4040D accessories or ration box BODY (2) *one M4040F accessories or ration box bottom ANGLE, long (2) *two M4040E accessories or ration box bottom ANGLE, short (4) one — accessories or ration box LID, assembly, *one M4040C accessories or ration box lid supporting ANGLE, long (2) *two M4040B accessories or ration box lid supporting ANGLE, short (4) twenty-eight — RIVET, button head, ¼" x ¾") BOX, clutch coupling BOX, cutout fuze, 6" x 6" x 3" BOX, fan bevel gear, assembly (Composed of: four (Timken 316-312) BEARING, roller, assembly, one — chain wheel SPINDLE, assembly, one SH233G driving pulley WASHER, two M1125 fan bevel GEAR, one M1123 fan bevel gear BOX, one M1126 fan bevel gear box bearing cover PLATE, one SH146A fan bevel gear box bearing cover plate GASKET, one SH193C fan bevel gear box chain SPROCKET, one M1124 fan bevel gear box COVER, one M1128 fan bevel gear box long distance TUBE, one M1129 fan bevel gear box pulley distance PIECE, one — fan bevel gear box pulley SPINDLE, assembly, one M1127 fan bevel gear box short distance TUBE, two SH146B fan bevel gear box side COVER,	3 6 (2)	\$0.24 .06 14.79
								5.28
								.85
								.38
								.65
& (ee)& %X	17	21		M855			1	5.51
							1	.90
							(1)	52.18

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
X						PARTS—Continued BOX, 6-pdr. gun tool, right, assembly (Composed of: *one SH942A 6-pdr. gun tool BOX, right (1) one SH942D 6-pdr. gun tool box LID, right, two SH942F 6-pdr. gun tool box lid HINGE, six — RIVET, button head, copper, 1/8" x 3/8", twenty-eight — SCREW, wood, round head, No. 10 (3/16+" x 3/4",) BRACE, flexible conduit BRACE, inlet duct BRACE, ventilating fan BRACKET, air gage board BRACKET, air pressure pump, left BRACKET, air pressure pump, right BRACKET, angle (under driver's turret) BRACKET, brake lever fulcrum, assembly (Composed of: *one M4131 brake lever fulcrum BRACKET (4) one — PIN, split, 1/4" x 2",) BRACKET, camouflage (net support), left (sponson) BRACKET, camouflage (net support), right (sponson) BRACKET, camouflage (net support), left (main hull, rear) BRACKET, camouflage (net support), right (main hull, rear) BRACKET, camouflage (net support), left (main hull, front) BRACKET, camouflage (net support), right (main hull, front) BRACKET, camouflage (net support), left (main hull, intermediate) BRACKET, camouflage (net support), right (main hull, intermediate) BRACKET, camouflage net support, left (main turret) BRACKET, camouflage net support, right (main turret) BRACKET, camouflage net support, left (front, main turret) BRACKET, camouflage net support, right (front, main turret)	(1)	\$13.00 9.00
%X					SH920F		1	.98
%X					SH958K		1	1.18
%X					SH960C		4	.22
%X					SH980D		2	.68
%X				MX101	672		1	.89
%X				MX100	672		1	.89
*	4	10		M2075	343		(1)	1.95
%X					172		(4)	2.53
(gai)&				M2126	477		1	.88
(gai)&				M2127	477		1	.88
(gai)&				M2128	359		1	.98
(gai)&				M2129	359		1	.98
(gai)&	6	10		M2132	359		1	.98
(gai)&				M2133	359		1	.98
(gai)&				M2130	359		1	.98
(gai)&				M2131	359		1	.98
(gai)&				M2440B	413		1	.97
(gai)&	9	9		M2440A	413		1	.97
(gai)&				M2439B	414		1	.86
(gai)&				M2439A	414		1	.86

&	8492	15	B13354	M639	LQ108A 170	BRACKET, camp kettle, assembly	(1)	2.99
						(Composed of: *one SH255B camp kettle BRACKET (1) one — spare fan belt HOLDER, assembly, four — RIVET, button head, $\frac{1}{4}$ " x $\frac{3}{4}$ ")		1.14
%X						BRACKET, carburetor throttle control shaft	1	.75
&						BRACKET, (center control) intermediate shaft	3	.98
&						BRACKET, clutch lever fulcrum	1	2.55
&						BRACKET, clutch throwout shaft	1	2.58
%X						BRACKET, clutch throwout shaft (left), assembly	(1)	8.76
&					SH953A	(Composed of: two SH953B clutch throwout auxiliary operating LEVER, one SH953C clutch throwout auxiliary operating SHAFT, one SH953A clutch throwout shaft BRACKET, two — PIN, taper, type A, No. 6 x 3," two M4172 clutch throwout lever feather KEY.)	1	2.18
						BRACKET, clutch throwout shaft, (left)	(2)	1.09
%X					SH380A	BRACKET, connecting lever fulcrum, assembly		1.08
						(Composed of: *one SH956B connecting lever fulcrum BRACKET (2) one — PIN, split, $3/16$ " x $1\frac{1}{8}$ ")	1	3.18
&						BRACKET, deflector plate	2	1.44
&						BRACKET, drive chain casing supporting, left	2	1.44
%X						BRACKET, drive chain casing supporting, right	2	.30
&						BRACKET, electric light (main turret)	(1)	3.11
&					70	BRACKET, engine control rocker arm, assembly		2.25
						(Composed of: *one SH965A engine control rocker arm BRACKET, long (1) *one SH965D engine control rocker arm BRACKET, short (2) six — RIVET, button head, $\frac{3}{8}$ x $1\frac{1}{4}$ ")		.40
&						BRACKET, engine double point suspension, left	1	2.25
&						BRACKET, engine double point suspension, right	1	2.25
&						BRACKET, engine room sliding door roller	4	1.07
&						BRACKET, engine single point suspension	1	7.76
%gakX						BRACKET, fire extinguisher, with bottom cut off	2	2.25
%gakX						BRACKET, fire extinguisher (Bracket FF39A, wholes drilled special for tank)	7	2.25
&						BRACKET, foot brake lever fulcrum, assembly	(2)	3.01
&					171	(Composed of: *one M641 foot brake lever fulcrum BRACKET (triangular) (2)		3.00
						one — PIN, split, $\frac{1}{4}$ " x $1\frac{3}{4}$ ")		

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
*				M4136 M3067 M3068 M3066	173 451 451 451 A3997 A3998	PARTS—Continued	2 (2) (2) (10) 1 1 (2)	\$1.12 .38 .38 .32 .30 .36 2.94
						BRACKET, foot and low speed brake rod spring		
						BRACKET, forward ammunition storage, 30° angle		
						BRACKET, forward ammunition storage, 60° angle		
						BRACKET, forward ammunition storage, 90° angle		
						BRACKET, funnel rack (front)		
						BRACKET, funnel rack (rear)		
						BRACKET, gun hanger, left, (front and right rear) (main hull), assembly	(2)	1.78
						(Composed of:		
						*one SH395B gun hanger BRACKET, left (2)		
						one SH395E gun hanger bracket CAP		
						one — gun hanger bracket PIN, assembly,		
						one SH395G gun hanger compression SPRING,		
						one SH395F gun hanger PLUNGER.)		
&						BRACKET, gun hanger, right (front and left rear) (main hull), assembly	(2)	2.94
						(Composed of:		
						*one SH395A gun hanger BRACKET, right (2)		
						one SH395E gun hanger bracket CAP,		
						one — gun hanger bracket PIN, assembly,		
						one SH395G gun hanger compression SPRING,		
						one SH395F gun hanger PLUNGER.)		
&		38	2			BRACKET, gun hanger (turret), assembly	(1)	4.48
						(Composed of:		
						*one SH395C gun hanger BRACKET (1)		
						one SH395E gun hanger bracket CAP		
						one — gun hanger bracket PIN, assembly,		
						one SH395G gun hanger compression SPRING,		
						one SH395F gun hanger PLUNGER,		
						one SH395D gun rest PLATE,		1.78
						one SH395K gun retaining SPRING,		
						one — RIVET, button head, 11/16" x 2 1/4",		

%X &	SH373N			two — SCREW, cap, U. S. Std., round head, $\frac{1}{4}$ " x $\frac{3}{8}$ ", two — WASHER, lock, $\frac{1}{4}$ ")	2 (6)	.18 2.18
				BRACKET, hand lamp		
*	431			BRACKET, hemispherical turret, assembly	(2)	2.17
				(Composed of:		
%X &	M4135			*one M3121 hemispherical turret BRACKET (6)	(1)	.49
				one M3127 locking SCREW.)		
				BRACKET, high speed brake rod spring	(1)	7.76
				BRACKET, hot food container, assembly		
				(Composed of:		
				*one SH239D hot food container bracket BRACE (1)		
				*one SH239C hot food container bracket BRACE (1)		2.28
				*one SH239B hot food container bracket PLATE, bottom		
				*one SH239A hot food container bracket PLATE, top		.42
				one — hot food container bracket STRAP, buckle end, assembly,		
				one SH239E hot food container bracket STRAP, plain end,		1.18
				six — RIVET, belt, brass, No. 10 x $\frac{3}{4}$ ",		
				eight — RIVET, button head, $\frac{1}{2}$ " x $1\frac{1}{8}$ ".		
				BRACKET, intermediate shaft	3	.98
%X &	M631 M1048			BRACKET, jockey pulley		.54
				BRACKET, low speed brake band, assembly	(2)	1.22
				(Composed of:		
				one MX82 low speed brake band bracket SPACER,		
				one MX49 low speed brake band support BRACKET,		
				one MX81 brake band pin retainer SPRING,		
				one — RIVET, button head, $3/16$ " x $1\frac{1}{8}$ ".	4	1.06
%X &	MX49			BRACKET, low speed brake band support		.38
				BRACKET (machine gun), cleaning rod	1	.22
%X &	B5926			BRACKET, machine gunner's seat strut fulcrum		.38
				BRACKET, main turret flap suspension	(1)	1.87
	362			BRACKET, medical outfit, assembly		
	423			(Composed of:		
				*one M2170 medical outfit BRACKET (1)		1.08
				one — medical outfit bracket STRAP, buckle end, assembly		
				one SH365B medical outfit bracket STRAP, plain end,		
				four — RIVET, button head, $3/16$ " x $\frac{1}{2}$ ",		
				four — RIVET, button head, $\frac{1}{4}$ " x $\frac{1}{2}$ ".		
%X &	B5925			BRACKET, oil can. (For left front and rear machine gun oiler)	2	.45
				BRACKET, oil can. (For right front machine gun oiler)		
	B5718				1	.45

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
						PARTS—Continued		
%X					B5929	BRACKET, oil can. (For left side machine gun oiler)	1	\$0.45
%X					B5924	BRACKET, oil can. (For right side machine gun oiler)	1	.45
%X				M2432	413	BRACKET, outlook turret compass	1	.42
%X					C1905	BRACKET, pyrene refill, assembly	(1)	.672 P
						(Composed of: three A4044 pyrene refill BRACKET, one B5933 pyrene refill bracket BAR, 1/8" x 28 5/8" (front), one B5934 pyrene refill bracket BAR, 3/4" x 28 5/8" (bottom), one B5935 pyrene refill bracket BAR, 3/4" x 28 5/8" (rear), seven A4055 pyrene refill bracket CLIP, twelve — RIVET, button head, 1/8" x 1/2", nine — RIVET, button head, 1/4" x 1",) BRACKET, pyrene refill	3	.45 P
&	2	11		M891	A4044	BRACKET, radiator support, front	2	1.12
&				M982	177	BRACKET, radiator support, rear	1	.98
&				M3026	550	BRACKET, rear shell storage	4	.25
&					SH950B	BRACKET, regulating tank valve	1	.32
%X	—	12			SH966A	BRACKET, rocker shaft (throttle control)	2	1.58
&				M3024	550	BRACKET, shell holder	44	.32
&					SH964A	BRACKET, spark and throttle control lever	2	2.25
&	—	12			SH967A	BRACKET, spark control bell crank lever, top	1	2.08
&						BRACKET, sponson ram rod, assembly	(4)	.59
					471	(Composed of: *one M2834 sponson ram rod BRACKET (4) one M2835 sponson ram rod bracket CLIP, three — RIVET, countersunk head, 1/8" x 1/2",) BRACKET, sponson roller	2	.38
&				M2382	470	BRACKET, starting motor	1	2.28
%X					SH137A	BRACKET, switchboard (large)	1	5.37
%X					SH994E	BRACKET, switchboard (small)	1	.48
%X					SH994D		1	.38

&	SH584K				BRACKET, tail light	1	.55
&					BRACKET, telescopic sight case carrier (sponson), assembly	(2)	.78
&					(Composed of: one M2837 telescopic sight case CARRIER, one M2836 telescopic sight case carrier BRACKET, two — RIVET, button head, 3/8" x 7/16".)		
&					BRACKET, telescopic sight case carrier (sponson)	2	.38
%X					BRACKET, tension adjusting screw	4	15.75
%X					BRACKET, throttle control bell crank lever	1	.98
&					BRACKET, throttle control bell crank lever	1	1.15
&					BRACKET, tool chest fastening	1	1.08
&					BRACKET, towing, back	1	12.75
&					BRACKET, towing, front	1	12.75
&					BRACKET, towing, roof	1	12.65
&					BRACKET, towing, side	2	8.78
&					BRACKET, track brake band, assembly	(2)	1.17
&					(Composed of: one MX81 brake band pin retainer SPRING, one MX47 track brake band BRACKET, one — RIVET, button head, 3/16" x 7/8".)		
&					BRACKET, track brake band	4	1.08
&					BRACKET, transmission brake band stop, assembly	(2)	4.80
&					(Composed of: one M342 transmission brake band stop BAR, *one M341 transmission brake band stop BRACKET (2)		.98
&					four — RIVET, button head, 1/4" x 1 1/4".)		
&					BRACKET, transmission high speed brake anchor	2	3.75
%X					BRACKET (transmission mechanical lubricator tank), supporting	1	.98
%X					BRACKET (transmission mechanical lubricator tank), supporting	1	1.08
&					BRACKET, transmission pinion shaft bearing housing, assembly	(1)	9.05
&					(Composed of: *one B6205 transmission pinion shaft bearing housing BRACKET (1)		7.75
&					one A7679 transmission pinion shaft bearing housing bracket CAP, two (A7681) STUD, 5/8" x 2 1/4", threaded U. S. Std. 1" and S. A. E. 1", assembly.)		

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
(gq)&	9	22			662	PARTS—Continued BRACKET, transmission sprocket bearing, inside, assembly (Composed of: *one M293 transmission sprocket bearing BRACKET, inside (2) two (MX10) STUD, 3/4" x 4 1/2", threaded U. S. Std. 1 1/2" and S. A. E. 1 1/2", assembly, two (MX36) STUD, 3/4" x 5 1/2", threaded U. S. Std. 1 1/2" and S. A. E. 1 1/2", assembly.) BRACKET, transmission sprocket bearing, outside, assembly (Composed of: *one M297 transmission sprocket bearing BRACKET, outside (2) two — transmission sprocket bearing outside bracket support FOOT, assembly, four (MX9) STUD, 3/4" x 3 3/4", threaded U. S. Std. 1 1/2" and S. A. E. 1 1/2", assembly.) BRACKET, water can, inner, assembly (Composed of: *one SH293A water can BRACKET, inner (1) four A8174 FASTENER, strap, No. 10, eight — RIVET, button head, 3/16" x 3/4") BRACKET, water can, outer, assembly (Composed of: *one SH293B water can BRACKET, outer (1) four — water can STOP, assembly, eight — RIVET, countersunk head, 1/4" x 1") BRACKET, 6-pdr. gun pedestal stop, left BRACKET, 6-pdr. gun pedestal stop, right BRAD, wire, No. 16, 1 1/4", lb. (For house lamp spare battery box (6).) BREATHER, crank case BRIDLE, foot brake BRUSH, distributor rotor, with spring, assembly	(2)	\$57.10
(gq)&	1	22			662	BRACKET, 6-pdr. gun pedestal stop, right BRAD, wire, No. 16, 1 1/4", lb. (For house lamp spare battery box (6).) BREATHER, crank case BRIDLE, foot brake BRUSH, distributor rotor, with spring, assembly	(2)	70.68
%X						BRACKET, 6-pdr. gun pedestal stop, right BRAD, wire, No. 16, 1 1/4", lb. (For house lamp spare battery box (6).) BREATHER, crank case BRIDLE, foot brake BRUSH, distributor rotor, with spring, assembly	(1)	2.76
%X						BRACKET, 6-pdr. gun pedestal stop, right BRAD, wire, No. 16, 1 1/4", lb. (For house lamp spare battery box (6).) BREATHER, crank case BRIDLE, foot brake BRUSH, distributor rotor, with spring, assembly	(1)	2.08
& & &(mh)R &X &			B8365 D14182	M3798B M3798A M765	511 511 LQ234A 215	BRACKET, 6-pdr. gun pedestal stop, right BRAD, wire, No. 16, 1 1/4", lb. (For house lamp spare battery box (6).) BREATHER, crank case BRIDLE, foot brake BRUSH, distributor rotor, with spring, assembly	2 2 6 1 1 (2)	.50 .50 .09 P 1.50 6.75 .06 P

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
& (pf)&	—	33	8201		LQ442A	BUSHING, oil pump driving shaft, upper	1	\$0.50
						BUSHING, reducing pipe, $\frac{3}{8}$ " x $\frac{1}{4}$ " (beaded). (For connection SH950D (2).)	2	.02 P
&		22		X248	801	BUSHING, reducing pipe, M. L. $\frac{1}{2}$ " x $\frac{1}{4}$ ". (For pipe SH976E (1).)	2	.04 P
						BUSHING, semaphore bottom bearing block	1	.38
&	32	22		M272	680	BUSHING, small planet pinion, bronze	6	1.25
						BUSHING, small planet pinion, steel	6	1.00
&	33	22		M271	680	BUSHING, sun pinion, small	2	2.40
						BUSHING, tachometer drive shaft	1	.04 P
&	43	22	D29843		703	BUSHING, tachometer drive shaft flanged	1	.04 P
						BUSHING, tachometer drive shaft plain	1	.04 P
&		26	D22921		50	BUSHING, track link	312	1.25
						BUSHING, track roller tube	116	4.00
&	12	29		M1263	56	BUSHING, transmission brake bearing	2	6.50
						BUSHING, transmission flanged sleeve, inner	2	3.50
&	41	22		M265	707	BUSHING, transmission flanged sleeve, outer	2	5.50
						BUSHING, transmission sprocket bearing, inside, assembly	(2)	8.58
&	50	22		M261	707	(Composed of: *one M296 transmission sprocket bearing BUSHING, inside (2)	(2)	8.50
						one M300 DOWEL, bronze, $\frac{5}{8}$ " x $\frac{1}{2}$ ".)		
&	57	22		M262	707	BUSHING, transmission sprocket bearing, outside, assembly	(2)	6.58
						(Composed of: *one M299 transmission sprocket bearing BUSHING, outside (2)		
&	8	22			707	one M300 DOWEL, bronze, $\frac{5}{8}$ " x $\frac{1}{2}$ ".)	3	.02 P
						BUSHING, voltage regulator housing insulating		
&	8062	19	D30368		LQ159A	BUSHING, voltage regulator insulating, thick	1	.03 P
						BUSHING, voltage regulator insulating, thin	6	.03 P
&			D25469		LQ523A	BUSHING, water pump bevel driver	2	.90
						BUTTERFLY, carburetor	4	.22
&			B8062		SH102H	BUTTON, transmission mechanical lubricator adjusting	6	.20

(ee)&					CABLE, armored automobile, double conductor (brass), ft. (2 pieces 3 ft. long required for starting battery to fuse box; 2 pieces 13 ft. long required for fuse box to lighting switch; 1 piece 29 ft. long required for lighting switch, left to tail lamp; 1 piece 8½ ft. long required for lighting switch, center to engine room right festoon lamp; 1 piece 2 ft. long required for lighting switch, center to engine room left festoon lamp; 1 piece 4 ft. long required for lighting switch, right to instrument board festoon lamp; 1 piece 13 ft. long required for instrument board festoon lamp to tachometer festoon light; 1 piece 3 ft. long required for tachometer festoon cable to main turret festoon lamp, right; 1 piece 5 ft. long required for main turret festoon lamp, right to main turret festoon lamp left).	— (1)	.22 3.65 P
%X					CABLE, distance recorder, assembly (Composed of: *one SH586D distance recorder CABLE (1) one P299 distance recorder end COUPLING, large, one P333 distance recorder end COUPLING, small) CABLE, distributor to ignition switch, left, assembly (Composed of: *one — low tension CABLE, 12½ ft. (1) two — low tension cable TERMINAL, with threaded ferrule, 3/16" hole.) CABLE, distributor to ignition switch, right, assembly (Composed of: *one — low tension CABLE, 14 ft. (1) two — low tension cable TERMINAL, with threaded ferrule, 3/16" hole.) CABLE, fuse box to lighting switch, assembly (Composed of: *one — fuse box to lighting switch CABLE (armored double conductor cable, 13 ft.) (2) two — low tension cable TERMINAL, with threaded ferrule, 3/16" hole.) CABLE, high tension (distributor left), to spark plug #1, left, assembly (Composed of: *one LQ358A high tension CABLE (distributor left), to spark plug #1, left (1) one LQ330A high tension cable INSULATOR one LQ328A high tension cable TERMINAL (distributor end), one LQ329A high tension cable TERMINAL (spark plug.) CABLE, high tension (distributor left), to spark plug #1, right, assembly (Composed of: *one LQ356A high tension CABLE (distributor left), to spark plug #1, right (1)	(1)	.46 P
%X				L8311		(1)	2.76 P .46 P
%X				L8309		(1)	.46 P
							.30

TANK, MARK VIII

Nde symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
%X						PARTS—Continued		
						CABLE, high tension (distributor left), to spark plug #1, right, assembly—Con. (Composed of: one LQ330A high tension cable INSULATOR, one LQ328A high tension cable TERMINAL (distributor end), one LQ329A high tension cable TERMINAL (spark plug).)		
%X						CABLE, high tension (distributor left), to spark plug #2, left, assembly (Composed of: *one LQ362A high tension CABLE (distributor left), to spark plug #2, left (1)	(1)	\$0.53 P
			L8315			one LQ330A high tension cable INSULATOR, one LQ328A high tension cable TERMINAL (distributor end), one LQ329A high tension cable TERMINAL (spark plug.)		.37
%X						CABLE, high tension (distributor left), to spark plug #2, right, assembly (Composed of: *one LQ360A high tension CABLE (distributor left), to spark plug #2, right (1)	(1)	.51 P
			L8313			one LQ330A high tension cable INSULATOR, one LQ328A high tension cable TERMINAL (distributor end), one LQ329A high tension cable TERMINAL (spark plug.)		.35
%X						CABLE, high tension (distributor left), to spark plug #3, left, assembly (Composed of: *one LQ366A high tension CABLE (distributor left), to spark plug #3, left (1)	(1)	.57 P
			L8319			one LQ330A high tension cable INSULATOR, one LQ328A high tension cable TERMINAL (distributor end), one LQ329A high tension cable TERMINAL (spark plug.)		.41
%X						CABLE, high tension (distributor left), to spark plug #3, right, assembly (Composed of: *one LQ364A high tension CABLE (distributor left), to spark plug #3, right (1)	(1)	.66 P
			L8317			*one LQ364A high tension CABLE (distributor left), to spark plug #3, right (1)		.50

%X		L8323	one LQ330A high tension cable INSULATOR, one LQ328A high tension cable TERMINAL (distributor end), one LQ329A high tension cable TERMINAL (spark plug.) CABLE, high tension (distributor left), to spark plug #4, left, assembly ----- (Composed of: *one LQ370A high tension CABLE (distributor left), to spark plug #4, left (1) ----- one LQ330A high tension cable INSULATOR, one LQ328A high tension cable TERMINAL (distributor end), one LQ329A high tension cable TERMINAL (spark plug.) CABLE, high tension (distributor left), to spark plug #4, right, assembly ----- (Composed of: *one LQ368A high tension CABLE (distributor left), to spark plug #4, right (1) ----- one LQ330A high tension cable INSULATOR, one LQ328A high tension cable TERMINAL (distributor end), one LQ329A high tension cable TERMINAL (spark plug.) CABLE, high tension (distributor left), to spark plug #5, left, assembly ----- (Composed of: *one LQ374A high tension CABLE (distributor left), to spark plug #5, left (1) ----- one LQ330A high tension cable INSULATOR, one LQ328A high tension cable TERMINAL (distributor end), one LQ329A high tension cable TERMINAL (spark plug.) CABLE, high tension (distributor left), to spark plug #5, right, assembly ----- (Composed of: *one LQ372A high tension CABLE (distributor left), to spark plug #5, right (1) ----- one LQ330A high tension cable INSULATOR, one LQ328A high tension cable TERMINAL (distributor end), one LQ329A high tension cable TERMINAL (spark plug.) CABLE, high tension (distributor left), to spark plug #6, left, assembly ----- (Composed of: *one LQ378A high tension CABLE (distributor left), to spark plug #6, left (1) ----- one LQ330A high tension cable INSULATOR, one LQ328A high tension cable TERMINAL (distributor end), one LQ329A high tension cable TERMINAL (spark plug.)	(1)	.65 P
%X		L8321		(1)	.72 P
%X		L12327		(1)	.75 P
%X		L12325		(1)	.80 P
X %		L12331		(1)	.84 P
					.68

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
%X			L12339			PARTS—Continued CABLE, high tension (distributor left), to spark plug #6, right, assembly (Composed of: *one LQ376A high tension CABLE (distributor left), to spark plug #6, right (1) one LQ330A high tension cable INSULATOR, one LQ328A high tension cable TERMINAL (distributor end), one LQ329A high tension cable TERMINAL (spark plug.) CABLE, high tension (distributor right), to spark plug #1, left, assembly (Composed of: *one LQ334A high tension CABLE (distributor right), to spark plug #1, left (1) one LQ330A high tension cable INSULATOR, one LQ328A high tension cable TERMINAL (distributor end), one LQ329A high tension cable TERMINAL (spark plug.) CABLE, high tension (distributor right), to spark plug #1, right, assembly (Composed of: *one LQ332A high tension CABLE (distributor right), to spark plug #1, right (1) one LQ330A high tension cable INSULATOR, one LQ328A high tension cable TERMINAL (distributor end), one LQ329A high tension cable TERMINAL (spark plug.) CABLE, high tension (distributor right), to spark plug #2, left, assembly (Composed of: *one LQ338A high tension CABLE (distributor right), to spark plug #2, left (1) one LQ330A high tension cable INSULATOR, one LQ328A high tension cable TERMINAL (distributor end), one LQ329A high tension cable TERMINAL (spark plug.) CABLE, high tension (distributor right), to spark plug #2, right, assembly (Composed of:	(1)	\$0.85 P
%X			L8310				(1)	.69
%X			L3308				(1)	.37 P
%X							(1)	.21
%X							(1)	.37 P
%X							(1)	.46 P
%X			L8314				(1)	.30
%X							(1)	.51 P

	L8312		*one LQ336A high tension CABLE (distributor right), to spark plug #2, right (1) one LQ330A high tension cable INSULATOR, one LQ328A high tension cable TERMINAL (distributor end), one LQ329A high tension cable TERMINAL (spark plug.) CABLE, high tension (distributor right), to spark plug #3, left, assembly (Composed of: *one LQ342A high tension CABLE (distributor right), to spark plug #3, left (1) one LQ330A high tension cable INSULATOR, one LQ328A high tension cable TERMINAL (distributor end), one LQ329A high tension cable TERMINAL (spark plug.) CABLE, high tension (distributor right), to spark plug #3, right, assembly (Composed of: *one LQ340A high tension CABLE (distributor right), to spark plug #3, right (1) one LQ330A high tension cable INSULATOR, one LQ328A high tension cable TERMINAL (distributor end), one LQ329A high tension cable TERMINAL (spark plug.) CABLE, high tension (distributor right), to spark plug #4, left, assembly (Composed of: *one LQ346A high tension CABLE (distributor right), to spark plug #4, left (1) one LQ330A high tension INSULATOR, one LQ328A high tension cable TERMINAL (distributor end), one LQ329A high tension cable TERMINAL (spark plug.) CABLE, high tension (distributor right), to spark plug #4, right, assembly (Composed of: *one LQ344A high tension CABLE (distributor right), to spark plug #4, right (1) one LQ330A high tension cable INSULATOR, one LQ328A high tension cable TERMINAL (distributor end), one LQ329A high tension cable TERMINAL (spark plug.) CABLE, high tension (distributor right), to spark plug #5, left, assembly (Composed of: *one LQ350A high tension CABLE (distributor right), to spark plug #5, left (1) one LQ330A high tension cable INSULATOR, one LQ328A high tension cable TERMINAL (distributor end), one LQ329A high tension cable TERMINAL (spark plug.)	(1)	.35
%X					.60 P
	L8318				.44
%X					.51 P
	L8316				.35
%X					.61 P
	L8322				.45
%X					.63 P
	L8320				.47
%X					.75 P
	L12326				.59

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
%X			L12324			PARTS—Continued CABLE, high tension (distributor right), to spark plug #5, right, assembly (Composed of: *one LQ348A high tension CABLE (distributor right), to spark plug #5, right (1) one LQ330A high tension cable INSULATOR, one LQ328A high tension cable TERMINAL (distributor end), one LQ329A high tension cable TERMINAL (spark plug).) CABLE, high tension (distributor right), to spark plug #6, left, assembly (Composed of: *one LQ354A high tension CABLE (distributor right), to spark plug #6, left (1) one LQ330A high tension cable INSULATOR, one LQ328A high tension cable TERMINAL (distributor end), one LQ329A high tension cable TERMINAL (spark plug).) CABLE, high tension (distributor right), to spark plug #6, right, assembly (Composed of: *one LQ352A high tension CABLE (distributor right), to spark plug #6, right (1) one LQ330A high tension cable INSULATOR, one LQ328A high tension cable TERMINAL (distributor end), one LQ329A high tension cable TERMINAL (spark plug).) CABLE, high tension, ft. (19 tinned copper strands B. & S. Ga. No. 26 or equal), Kerite insulation (1 piece 34 7/8" long required for cable LQ358A; 1 piece 39 3/8" long required for cable LQ360A; 1 piece 27 3/8" long required for cable LQ332A; 1 piece 27 3/8" long required for cable LQ334A; 1 piece 38 3/8" long required for cable LQ336A; 1 piece 33 3/8" long required for cable LQ338A; 1 piece 46 3/8" long required for cable LQ342A; 1 piece 38 3/8" long required for cable LQ340A; 1 piece 47 3/8" long required for cable LQ346A; 1 piece 48 3/8" long required for cable LQ344A; 1 piece 58 3/8" long required for cable LQ350A; 1 piece 50 3/8" long required for cable LQ348A; 1 piece 58 3/8" long required for cable LQ352A; 1 piece 60 3/8" long	(1)	\$0.65 P
%X			L12330					.49
%X			L12328				(1)	.77 P
%ceX								.61
%X							(1)	.75 P
%ceX								.59

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
%X						PARTS—Continued CABLE, intensifier high tension, length 12¼", with intensifier, assembly (Composed of: one SH1021F intensifier ball END, one (SH1021L) intensifier high tension CABLE, length 12¼", assembly, one SH1021E spark INTENSIFIER.)	(8)	\$0.46 P
%X						CABLE, intensifier high tension, length 12¼", assembly (Composed of: one LQ329A high tension cable TERMINAL, *one SH1021L intensifier high tension CABLE, length 12¼")	(8)	.24 P
*						CABLE, lighting switch, center to engine room left festoon lamp (armored auto- mobile double connector cable 8½ ft.)		.14
*						CABLE, lighting switch, center to engine room right festoon (lamp armored auto- mobile double connector cable 8½ ft.)	(1)	1.87 P
*						CABLE, lighting switch, left to tail lamp (armored automobile double connector cable 29 ft.)	(1)	2.00 P
*						CABLE, lighting switch, right to instrument board festoon lamp (armored auto- mobile double connector cable 4 ft.)	(1)	6.50 P
(ee) &						CABLE, low tension, ft. (single conductor, stranded 26, size B. & S. Ga. No. 30) (1 piece 12 ft. long required for left distributor to left ignition switch; 1 piece 14 ft. required for right distributor to right ignition switch; 1 piece 13 ft. required for 12-volt regulator (polarity reversing switch) to 12-volt ammeter; 1 piece 14 ft. 8-volt generator and armature to 8-volt regulator armature; 1 piece 2 ft. 8-volt regulator to ground terminal; 1 piece 14 ft. 8-volt generator field to 8-volt regulator field; 1 piece 2 ft. 12-volt ammeter to battery negative; 1 piece 5 ft. ignition battery, negative to ground; 1 piece 6 ft. ignition battery, positive to ignition switch; 1 piece 2½ ft. starting battery positive to ground; 1 piece 2 ft. telephone switch panel positive to ground lead A266; 1 piece 2 ft. telephone switch panel negative to starting battery negative lead A266; 1 piece 2 ft. tele- phone switch panel retard coil to mechanic switch terminal No. 7 lead A268; 1 piece 2 ft. telephone switch to mechanic switch terminal No. 6 lead A266;	(1)	.90 P

* (ee) & &	W-P24	1 piece 12' 8-volt generator voltage regulator armature terminal to ignition switch cable)	—	.08 P
		CABLE, main turret festoon lamp, right to main turret festoon lamp, left (armored automobile double connector cable, 5 ft.)	(1)	1.10 P
		CABLE, multiple, 0.15", ft. (1 piece 162½" long required for distance-recorder cable)	—	.22 P
&	W-P213	CABLE, starting and lighting battery, negative terminal, assembly	(2)	.33 P
		(Composed of: *one — CABLE, No. 00, 250,000 cm., acid proof, 8" long one B7028J cable TERMINAL, one W-T12 starting and lighting battery terminal CONNECTOR.)		.15
		CABLE, starting and lighting battery, positive terminal, assembly	(2)	.43 P
%X		(Composed of: *one — CABLE, No. 00, 250,000 cm., acid proof, 16" long one B7028J cable TERMINAL, one W-T12 starting and lighting battery terminal CONNECTOR.)		.30
		CABLE, starting battery, positive to ground, assembly	(1)	.25 P
		(Composed of: one — cable TERMINAL, S. A. E., A5, *one — low tension CABLE, 2½ ft.)		.20
%X		CABLE, starting battery to fuze box, assembly	(2)	.86 P
		(Composed of: two — cable TERMINAL, S. A. E., A5, two — low tension cable TERMINAL, with threaded ferrule, 3/16" hole, *one — starting battery to fuze box CABLE (armored double conductor cable, 3 ft.)		.66
		CABLE, starting motor to battery negative terminal cover, assembly	(1)	1.86 P
%X		(Composed of: *one — CABLE, No. 00, waterproof stranded, length 8½ ft. (2)		1.70
		two B7028J cable TERMINAL, Std.)		
		CABLE, starting motor to starting switch, assembly	(1)	1.86 P
%X		(Composed of: *one — CABLE, No. 00, waterproof stranded, length 8½ ft. (2)		1.70
		two B7028J cable TERMINAL, Std.)		
		CABLE, starting switch to starting battery positive terminal cover, assembly	(1)	.76 P
%X		(Composed of: *one — CABLE, No. 00, waterproof stranded, length 3 ft.		.60
		two B7028J cable TERMINAL, Std.)		

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
*						PARTS—Continued		
(gv)&					B179	CABLE, tachometer festoon light cable to main turret festoon lamp, right (armored automobile double connector cable, 3 ft.)	(1)	\$0.66 P
(gv)&					B178	CABLE, telephone (driver to left gunner) (length 146½')	1	2.50 P
(gv)&					B177	CABLE, telephone (driver to right gunner) (length 146½')	1	3.10 P
(gv)&					B176	CABLE, telephone (tank commander to driver) (length 162¼')	1	3.50 P
(ee)&						CABLE, telephone (tank commander) (length 138¼')	1	2.90 P
						CABLE, No. 00, ft. (waterproof stranded, 19 strands, 7 wires per strand) (1 piece 8½ ft. long required for starting motor to starting switch cable; 1 piece 8½ ft. long required for starting switch to starting battery positive terminal)		.20 P
%X						CABLE, 8 volt generator armature to 8 volt regulator armature, assembly (Composed of: *one — low tension CABLE, 14 ft. (1) two — low tension cable TERMINAL, with threaded ferrule, ¼" hole.)	(1)	1.25 P
%X						CABLE, 8 volt generator field to 8 volt regulator field, assembly (Composed of: *one — low tension CABLE, 14 ft. (1) two — low tension cable TERMINAL, with threaded ferrule, 3/16" hole.)	(1)	1.15
%X						CABLE, 8 volt generator voltage regulator armature terminal to ignition switch, assembly (Composed of: *one — low tension CABLE, 12" (1) one — low tension cable TERMINAL, with threaded ferrule, 3/16" hole, one — low tension cable TERMINAL, with threaded ferrule, ¼" hole.)	(1)	1.10 P
%X						CABLE, 8 volt regulator to ground terminal, assembly (Composed of: *one — low tension CABLE, 2 ft. (3) one — low tension cable TERMINAL, with threaded ferrule, 3/16" hole.)		1.00
%X						CABLE, 12 volt ammeter to battery, negative, assembly (Composed of:	(1)	.21 P
%X							(1)	.16
%X							(1)	.26 P

& %X						one — cable TERMINAL, S. A. E., A5, *one — low tension CABLE, 2 ft. (3) one — low tension cable TERMINAL, with threaded ferrule, 3/16" hole.) CABLE, 12 volt regulator polarity reversing switch to 12 volt ammeter, assembly (Composed of: *one — low tension CABLE, 13 ft. (1) one — low tension cable TERMINAL, with threaded ferrule, 3/16" hole.) CAM, distributor, assembly (Composed of: *one D29684 distributor CAM (2) one D30059 distributor cam PIN.) CAM, transmission mechanical lubricator feed adjusting CAP, carburetor float dust CAP, connecting forked end rod, assembly (Composed of: *one LQ123B connecting forked end rod CAP (12) one LQ129A connecting rod crank shaft bearing DOWEL.) CAP, connecting plain end rod CAP, distance recorder drive housing CAP, drive chain casing removable, assembly (Composed of: two M1583 drive chain casing angle CLEAT, side, one M1593 drive chain casing angle CLEAT, top, two M1585 drive chain casing BEADING, *one M1591 drive chain casing removable CAP (2) one M1594B drive chain casing removable cap register PLATE, left, one M1594A drive chain casing removable cap register PLATE, right, three — RIVET, button head, 5/16" x 3/4", fourteen — RIVET, button head, 5/16" x 5/8", ten — RIVET, countersunk head, 3/16" x 5/8") CAP, engine oil tank filler CAP, engine oil tank indicator flange (1/4" tap) CAP, gasoline tank filler CAP, gun hanger bracket CAP, (radiator) outlet pipe CAP, regulating tank, assembly (Composed of: *one SH950L regulating tank CAP (1) two SH972A regulating tank SUPPORT, six — RIVET, button head, 1/4" x 5/8")	(1)	.16 1.10 P
							(2)	1.05 1.97 P
& %X *					SH102F LQ534A	D13733 13385 18		1.96 25 .03 2.62
& (xy)& %X					LQ131B 586	C13226 18 S34		2.60 2.60 .25 9.72
%X %X %X %X %X &					231			6.10
%X %X %X %X %X &								.95 .32 1.97 .08 .36 4.27
&								2.65

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
%X				M3923	649	CAP, roof towing bracket	1	\$1.52
%X				X252	801	CAP, semaphore, bottom	1	1.00
%X				X250	801	CAP, semaphore, top	1	.90
%X					SH137B	CAP, starting motor bracket	1	2.28
*	38	22				CAP, transmission brake bearing, assembly	(2)	15.58
						(Composed of: *one M266 transmission brake bearing CAP (2)		
					672	one M300 DOWEL, bronze, 5/8" x 1/2")		15.50
&					SH102D	CAP, transmission mechanical lubricator delivery screw	6	.38
%X				M3305A	164	CAP, transmission mechanical lubricator oil tank indicator flange (3/8" drill)	1	.52
%X					A7679	CAP, transmission pinion shaft bearing housing bracket	1	.58
%X				M309	714	CAP, transmission pinion shaft bearing housing bracket	1	.41
(gq)&						CAP, transmission shifter shaft, plunger	1	
						CAP, transmission sprocket shaft, inside bearing, assembly	(2)	27.82
						(Composed of: one SH664C SLEEVE, (Herring Motor Co. type No. 60F), one M295 transmission sprocket bearing cap oil box COVER, *one M294 transmission sprocket shaft inside bearing CAP (2)		27.00
	14	22			664	one SH664A ELBOW, pipe, 1/4", one SH664B NUT, pipe elbow, 1/4", one — PIN, steel, 3/16" x 2 1/2", two — WASTE, wool, oz.)		
(gq)&						CAP, transmission sprocket shaft outside bearing, assembly	(2)	20.82
						(Composed of: one SH664C SLEEVE, (Herring Motor Co. type No. 60F), one M295 transmission sprocket bearing cap oil box COVER, *one M298 transmission sprocket shaft outside bearing CAP		20.00
	2	22			664	one SH664A ELBOW, pipe, 1/4", one SH664B NUT, pipe elbow, 1/4", one — PIN, steel, 3/16" x 2 1/2", two — WASTE, wool, oz.)		
&					SH959D	CAP, ventilating fan bearing	1	1.65

& %X %(gx)X	— 12125	24 BA109 15	SH959E 169	CAP, ventilating fan bearing CAP, water tank filler CARBURETOR, Zenith type, U. S. No. 52, Modified, assembly (Composed of: carburetor BODY, assembly, one — one — carburetor butterfly BARREL, assembly, one LQ531A carburetor FLOAT, one — carburetor float COVER, assembly, two — carburetor priming PLUG, assembly, four LQ510A carburetor SCREW, two — carburetor secondary WELL, assembly, two — carburetor throttle shaft yoke END, assembly, four — WASHER, lock, ¼", *one LQ512C WIRE, lock, soft iron, W. & M. Ga. No. 18 x 10" (2) *one LQ512D WIRE, lock, soft iron, W. & M. Ga. No. 18 x 19" (2).) CARRIER, telescopic sight case (sponson) CASE, crank, with crank shaft and connecting rods, assembly (Composed of: two — cam shaft driving shaft lower bearing container COVER, assembly. two LQ92A cam shaft upper driving shaft housing packing nut LOCK, six — connecting ROD, assembly, one — crank CASE, assembly, one LQ234A crank case BREATHER, one LQ236A crank case breather GASKET, one LQ235A crank case breather SCREEN, one — crank SHAFT, with gear and nut, assembly.) CASE, crank, assembly (Composed of: one — crank CASE, lower half, with bearing bolt, assembly, one — crank CASE, upper half, assembly, fifty (LQ243A) crank case upper to lower BOLT, assembly, two (LQ246A) crank case upper to lower BOLT, long, assembly, two (LQ245A) crank case upper to lower BOLT, short, assembly.) CASE, crank, lower half, assembly (Composed of: *one LQ180A crank CASE, lower half (1) *two LQ185A crank case oil pump to manifold TUBE (2) one LQ231A crank case oil retaining WASHER,	3 1 (2)	.95 1.50 40.94 P
&	— 12125	24 BA109 15	M2837 477	CAP, ventilating fan bearing CAP, water tank filler CARBURETOR, Zenith type, U. S. No. 52, Modified, assembly (Composed of: carburetor BODY, assembly, one — one — carburetor butterfly BARREL, assembly, one LQ531A carburetor FLOAT, one — carburetor float COVER, assembly, two — carburetor priming PLUG, assembly, four LQ510A carburetor SCREW, two — carburetor secondary WELL, assembly, two — carburetor throttle shaft yoke END, assembly, four — WASHER, lock, ¼", *one LQ512C WIRE, lock, soft iron, W. & M. Ga. No. 18 x 10" (2) *one LQ512D WIRE, lock, soft iron, W. & M. Ga. No. 18 x 19" (2).) CARRIER, telescopic sight case (sponson) CASE, crank, with crank shaft and connecting rods, assembly (Composed of: two — cam shaft driving shaft lower bearing container COVER, assembly. two LQ92A cam shaft upper driving shaft housing packing nut LOCK, six — connecting ROD, assembly, one — crank CASE, assembly, one LQ234A crank case BREATHER, one LQ236A crank case breather GASKET, one LQ235A crank case breather SCREEN, one — crank SHAFT, with gear and nut, assembly.) CASE, crank, assembly (Composed of: one — crank CASE, lower half, with bearing bolt, assembly, one — crank CASE, upper half, assembly, fifty (LQ243A) crank case upper to lower BOLT, assembly, two (LQ246A) crank case upper to lower BOLT, long, assembly, two (LQ245A) crank case upper to lower BOLT, short, assembly.) CASE, crank, lower half, assembly (Composed of: *one LQ180A crank CASE, lower half (1) *two LQ185A crank case oil pump to manifold TUBE (2) one LQ231A crank case oil retaining WASHER,	2 (1)	.01 P .01 P .38 1,352.70
&	— 12125	24 BA109 15	D12036 8174	CAP, ventilating fan bearing CAP, water tank filler CARBURETOR, Zenith type, U. S. No. 52, Modified, assembly (Composed of: carburetor BODY, assembly, one — one — carburetor butterfly BARREL, assembly, one LQ531A carburetor FLOAT, one — carburetor float COVER, assembly, two — carburetor priming PLUG, assembly, four LQ510A carburetor SCREW, two — carburetor secondary WELL, assembly, two — carburetor throttle shaft yoke END, assembly, four — WASHER, lock, ¼", *one LQ512C WIRE, lock, soft iron, W. & M. Ga. No. 18 x 10" (2) *one LQ512D WIRE, lock, soft iron, W. & M. Ga. No. 18 x 19" (2).) CARRIER, telescopic sight case (sponson) CASE, crank, with crank shaft and connecting rods, assembly (Composed of: two — cam shaft driving shaft lower bearing container COVER, assembly. two LQ92A cam shaft upper driving shaft housing packing nut LOCK, six — connecting ROD, assembly, one — crank CASE, assembly, one LQ234A crank case BREATHER, one LQ236A crank case breather GASKET, one LQ235A crank case breather SCREEN, one — crank SHAFT, with gear and nut, assembly.) CASE, crank, assembly (Composed of: one — crank CASE, lower half, with bearing bolt, assembly, one — crank CASE, upper half, assembly, fifty (LQ243A) crank case upper to lower BOLT, assembly, two (LQ246A) crank case upper to lower BOLT, long, assembly, two (LQ245A) crank case upper to lower BOLT, short, assembly.) CASE, crank, lower half, assembly (Composed of: *one LQ180A crank CASE, lower half (1) *two LQ185A crank case oil pump to manifold TUBE (2) one LQ231A crank case oil retaining WASHER,	1 (1)	679.23
*	37	14	D12036 8174	CAP, ventilating fan bearing CAP, water tank filler CARBURETOR, Zenith type, U. S. No. 52, Modified, assembly (Composed of: carburetor BODY, assembly, one — one — carburetor butterfly BARREL, assembly, one LQ531A carburetor FLOAT, one — carburetor float COVER, assembly, two — carburetor priming PLUG, assembly, four LQ510A carburetor SCREW, two — carburetor secondary WELL, assembly, two — carburetor throttle shaft yoke END, assembly, four — WASHER, lock, ¼", *one LQ512C WIRE, lock, soft iron, W. & M. Ga. No. 18 x 10" (2) *one LQ512D WIRE, lock, soft iron, W. & M. Ga. No. 18 x 19" (2).) CARRIER, telescopic sight case (sponson) CASE, crank, with crank shaft and connecting rods, assembly (Composed of: two — cam shaft driving shaft lower bearing container COVER, assembly. two LQ92A cam shaft upper driving shaft housing packing nut LOCK, six — connecting ROD, assembly, one — crank CASE, assembly, one LQ234A crank case BREATHER, one LQ236A crank case breather GASKET, one LQ235A crank case breather SCREEN, one — crank SHAFT, with gear and nut, assembly.) CASE, crank, assembly (Composed of: one — crank CASE, lower half, with bearing bolt, assembly, one — crank CASE, upper half, assembly, fifty (LQ243A) crank case upper to lower BOLT, assembly, two (LQ246A) crank case upper to lower BOLT, long, assembly, two (LQ245A) crank case upper to lower BOLT, short, assembly.) CASE, crank, lower half, assembly (Composed of: *one LQ180A crank CASE, lower half (1) *two LQ185A crank case oil pump to manifold TUBE (2) one LQ231A crank case oil retaining WASHER,	1 (1)	304.13 282.45 .15

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
*	27	14	12135			PARTS—Continued CASE, crank, lower half, assembly—Continued. (Composed of: *one LQ183A crank case TUBE, large (1) seven LQ194A crank shaft bearing DOWEL, one LQ181A lower crank case oil MANIFOLD, one LQ186A lower crank case oil pump suction TUBE, one LQ187A lower crank case oil pump suction tube EXTENSION, *six LQ184A lower crank case oil TUBE, small (6) one LQ201A lower crank case sump cover LOCK, one LQ182A (manifold drain) special PLUG, three LQ188A (manifold) PLUG, one — GASKET, copper, asbestos, $\frac{3}{8}$ ", one — GASKET, copper, asbestos, $\frac{5}{8}$ ", ten (LQ196A) STUD, $\frac{1}{4}$ " x 1 9/16", threaded, U. S. Std. 7/16" and S. A. E. 9/16", assembly, three (LQ233A) STUD, $\frac{3}{8}$ " x 1 11/16", threaded U. S. Std. 11/16" and S. A. E. 27/32", assembly, four (LQ197A) STUD, $\frac{3}{8}$ " x 1 31/32", threaded U. S. Std. 21/32" and S. A. E. $\frac{5}{8}$ ", assembly, three — WASHER, lock, $\frac{3}{8}$ ", ten LQ113A WASHER, special $\frac{1}{4}$ ", *one LQ176A WIRE, lock, W & M Ga. No. 18 x 10" (4.) CASE, crank, lower half, with bearing bolt, assembly (Composed of: one — crank CASE, lower half, assembly, six LQ238A crank shaft BEARING, lower half, long, one LQ240A crank shaft BEARING, lower half, short, fourteen LQ189A lower crank case bearing BOLT, long, assembly, two (LQ190A) lower crank case bearing BOLT, short, assembly.) CASE, crank, upper half, assembly (Composed of:		\$0.10
	34	14	B12136				(1)	.20
*			L209				(1)	.01 P 348.09
							(1)	322.38

D12035			*one LQ207A crank CASE, upper half (1) one — crank case drain TUBE, assembly, two LQ230A crank case oil filler baffle PLATE, one LQ231A crank case oil retaining WASHER, one LQ239A crank shaft BEARING, upper half, long, six LQ241A crank shaft BEARING, upper half, short, seven LQ194A crank shaft bearing DOWEL, one LQ242A crank shaft hub thrust bearing oil CUP, seventy-two (LQ247A) cylinder to crank case STUD, with plain nut, assembly, twenty-eight (LQ247A) cylinder to crank case STUD, with collar nut, assembly, one LQ252A Ordnance engine name PLATE, twelve LQ88A STUD, $\frac{1}{4}$" x 1 $\frac{3}{16}$", threaded U. S. Std. 7/16" and S. A. E. 9/16", three (LQ196A) STUD, $\frac{1}{4}$" x 1 $\frac{3}{16}$", threaded U. S. Std. 7/16", and S. A. E. 9/16", assembly, four (LQ229A) STUD, $\frac{1}{4}$" x 2 $\frac{1}{2}$", threaded U. S. Std. 1 $\frac{15}{16}$" and S. A. E. 9/16", assembly,	292.15
B12137	17	14	*one LQ212A upper crank case oil TUBE (1) two (LQ112A) BOLT, S. A. E., drilled, $\frac{1}{4}$" x 1 $\frac{1}{8}$", assembly, four — SCREW machine, No. 10 x 5/16", seven LQ113A WASHER, special, $\frac{1}{4}$".)	.15
W-X899			CASE, ignition battery, assembly (Composed of: *one — ignition battery CASE, (wood) (1) two W-V12 ignition battery case HANDLE, *three — ignition battery case PARTITION (2) six — BOLT, U. S. Std., countersunk head, 3/16" x 9/16", with round nut.)	1.86 P (1)
M3020	550		CASE, shell holder spring CASE, starting and lighting battery, assembly (Composed of: *one — starting and lighting battery CASE (2) two W-V14 starting and lighting battery case HANDLE, six — BOLT, U. S. Std., countersunk head, $\frac{1}{4}$" x $\frac{3}{4}$", with round nut.)	.48 1.26 P (2)
W-X854			CASE, transmission bevel gear, assembly (Composed of: *one M263 transmission bevel gear CASE (1) four (MX14) STUD, $\frac{1}{2}$" x 1 $\frac{9}{16}$", threaded U. S. Std. $\frac{1}{2}$" and S. A. E. $\frac{7}{8}$", assembly,	.90 222.56 (1)
%X &				
(gq)&	46 20	22 23		220.00

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
(g) &	46 20	22 23				CASE, transmission bevel gear, assembly—Continued. (Composed of: four (MIX5) STUD, 3/4" x 5 1/2", threaded U. S. Std. 1 1/2" and S. A. E. 1 1/8", assembly.)		
&	18	22		M278	678	CASE, transmission gear, brake drum half	2	\$81.00
&	39	22		M277	678	CASE, transmission gear, plain half	2	71.50
%X						CASING, control rod, assembly	(2)	4.35
						(Composed of: *one M2185 control rod CASING (2)		3.75
						three M2186 control rod casing CLEAT, six — RIVET, button head, 5/16" x 1".)		
%X						CASING, distance recorder cable, assembly	(1)	4.85 P
						(Composed of: one SH586E distance recorder cable CASING, two P300 distance recorder cable casing coupling NUT, one P55 distance recorder cable coupling COLLAR, one P29 distance recorder cable coupling COLLAR, one P59 distance recorder cable end COUPLING, one P27 distance recorder cable end COUPLING.)		
&					SH586E	CASING, distance recorder cable (flexible 1/2")	1	4.10 P
&						CASING, drive chain, assembly	(2)	24.29
						(Composed of: *one M1590 drive chain CASING (2)		15.23
					290	two M1583 drive chain casing angle CLEAT, side, one M1593 drive chain casing angle CLEAT, top, two M1584 drive chain casing angle cleat packing STRIP, two M1585 drive chain casing BEADING, one M1592 drive chain casing hull back plate ANGLE, two M1581 drive chain casing register PLATE, one M1588 drive chain casing supporting BRACKET, left,		

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
(cp)(d)&					A6940	PARTS—Continued CHAIN, standard, ft. (steel close-twisted link machine No. 3) (5 pieces 8' long re- quired for chain JB51D; 2 pieces 4½" long required for chain JB5C)	—	\$0.10 P
(cp)(d)*						CHAIN, standard, No. 1, assembly	(2)	.44 P
						(Composed of: *one JB5C standard CHAIN, 4¾" (2)		.04
						one A6941 standard chain bolt SNAP, one A6942 standard chain eye RIVET, two A6951 standard chain RING. (For outside tool chest.))		
(cp)(d)*						CHAIN, standard, No. 8, assembly	(5)	.36 P
						(Composed of: *one JB51D CHAIN, standard, length 8"		.06
						one A6942 standard chain eye RIVET, two A6951 standard chain RING. (For pin SH395H (1).)		
&					B34F	CHAIN, steel, length 4" (Simmon's type No. 1). (For pin B34G (1).)	5	.04 P
(mh)&					A8394	CHAIN, twist coil, 3/16", ft. (1 piece 27" long required for chain SH234N)	—	.30 P
%X	29	2			SH193D	CHAIN, ventilating fan (Auto type, silent chain, ½" pitch, 60° ¾" wide, 61¾" long)		
X				M2143		CHANNEL, bulkhead stiffening top plate	1	9.00 P
X				M2110		CHANNEL, deflector, rear, left	1	5.75
X						CHANNEL, deflector, rear, right	1	10.50
X				M2111		CHANNEL, deflector, rear, right	1	10.50
X						CHANNEL, deflector side, left, assembly	(1)	10.73
						(Composed of: *one M2108 deflector side CHANNEL, left (1)		9.68
					380	*two M1004 outlet louvre fish PLATE (2)		.97
					504	eight — RIVET, button head, 5/16" x 1½".)		
X						CHANNEL, deflector side, right, assembly	(1)	10.73
						(Composed of: *one M990 deflector side CHANNEL, right (1)		9.68

504	*two M1004 outlet/louvre fish PLATE (2) eight — RIVET, button head, 5/16" x 1 1/2" CHANNEL, rear control, assembly (Composed of: four — brake lever fulcrum BRACKET, assembly, four M4130 control channel angle CLEAT, left, two M4129 control channel angle CLEAT, right, two M4136 foot and low speed brake rod spring BRACKET, two M4135 high speed brake rod spring BRACKET, *one M4128 rear control CHANNEL (1) four — RIVET, button head, 1/2" x 3/4", four — RIVET, button head, 1/2" x 1 1/4", twelve — RIVET, button head, 1/2" x 2", eight — RIVET, button head, 1/2" x 2 1/4") CHANNEL, engine transverse, front, assembly (Composed of: one M189 engine single point suspension CLEAT, *one M181 engine transverse CHANNEL, front (1) two — RIVET, button head, 5/8" x 2 1/4") CHANNEL, engine transverse, rear, assembly (Composed of: one M186 engine bearer gusset PLATE, left, one M185 engine bearer gusset PLATE, right, *one M180 engine transverse CHANNEL, rear (1) four — RIVET, button head, 11/16" x 2 1/4") CHANNEL, sponson roof plate, left side CHANNEL, sponson roof plate, right side CHANNEL, sponson splash (upper edge of gun shield, right side) CHEST, outside tool, assembly (Composed of: three GB3J door HINGE, male, three GB3K door hinge PIN, *one SH584D outside tool chest ANGLE, corner, left (front) (1), *one SH584C outside tool chest ANGLE, corner, right (front) (1), *one SH584G outside tool chest ANGLE, corner, left (rear), *one SH584F outside tool chest ANGLE, corner, right (rear), *one SH584M outside tool chest ANGLE, corner, outside (left), *one SH584L outside tool chest ANGLE, corner, outside (right), *two SH584N outside tool chest ANGLE, end (bottom),	(1)	27.94
174			8.62
71			9.34
71			8.92
481 480 SH485E	M2776 M2775 %X	(1) (1) 1 (1)	32.50 32.50 4.97 43.64
&			

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&						PARTS—Continued CHEST, outside tool, assembly—Continued. (Composed of: *two SH584E outside tool chest ANGLE, end (top), *two SH584B outside tool chest ANGLE, front and rear (bottom), *one SH584H outside tool chest ANGLE, front (top), *one SH584A outside tool chest ANGLE, rear (top), one — outside tool chest DOOR, assembly, *one SH583E outside tool chest PLATE, bottom *two SH583F outside tool chest PLATE, end *one SH583C outside tool chest PLATE, front *one SH583A outside tool chest PLATE, rear *one SH583D outside tool chest PLATE, top one SH584K tail light BRACKET, two — tool chest HASP, assembly, nine — RIVET, button head, ¼" x ¾", two hundred — RIVET, button, head ¼" x 7⁄8", and three — eight — RIVET, button head, ¼" x 1", fourteen — RIVET, button head, ¼" x 1½") CHOKE, carburetor, No. 36 (army) CLAMP, exhaust manifold guard, large assembly (Composed of: *one SH154A exhaust manifold guard CLAMP (2) two — NUT, plain, U. S. Std., hexagon, brass, ¾") CLAMP, exhaust manifold guard, small, assembly (Composed of: *one SH154C exhaust manifold guard CLAMP (2) two — NUT, plain, U. S. Std., hexagon, brass, ¾") CLAMP, exhaust manifold guard pipe CLAMP, flexible conduit, I. D. 1 1/16" CLAMP, flexible conduit, I. D. 1½"		\$4.52 1.35 1.08 4.26 4.52
& %X			13378		LQ528A		2 (2)	4.45 .84
								.74
%X %X %X							(2)	.74
								.64
							4	.08 P
							1	.18 P
%X					SH153X SH920A SH921C		1	.16 P

%X			SH921G	CLAMP, flexible conduit, I. D. 1 1/16"	1	.15 P
%X			SH920E	CLAMP, flexible conduit, offset I. D. 1 3/8"	2	.20 P
%X			SH921A	CLAMP, flexible conduit, I. D. 1 3/8"	1	.15 P
%X			SH920B	CLAMP, flexible conduit, I. D. 2 1/16"	1	.16 P
%X			SH920D	CLAMP, flexible conduit, I. D. 2 1/4"	3	.20 P
%X			SH984G	CLAMP, gasoline tube	2	.10 P
%X			SH984K	CLAMP, gasoline tube	1	.08 P
%X	8450	15	LQ178A	CLAMP, hose, 1 1/16" (For hose LQ177A (2))	48	.01 P
%X				CLAMP, hose, 1 1/2", assembly	(2)	.03 P
				(Composed of: *one B101480A hose CLAMP, 1 1/2" (2)		.02 P
				one — BOLT, stove, rd. hd. 1/4" x 1 1/4", w/ stove bolt nut and lock washer. (For radiator hose, 3 ply, I. D. 1 1/4".)		
%X	6	14	LQ176A	CLAMP, hose, 1 3/8". (For hose LQ175A (2))	12	.02 P
%X				CLAMP, hose, 2 1/4", assembly	(2)	.04 P
				(Composed of: *one B101480P hose, CLAMP, 2 1/4" (2)		.03 P
				one — BOLT, stove, rd. hd. 1/4" x 1 1/4", w/ stove bolt nut and lock washer. (For radiator hose, 5 ply, I. D. 2".)		
%X				CLAMP, hose, 2 3/4", assembly	(12)	.05 P
				(Composed of: *one B101480Z hose CLAMP, 2 3/4" (12)		.04 P
				one — BOLT, stove, rd. hd. 1/4" x 1 1/4", w/ stove bolt nut and lock washer. (For radiator hose, 5 ply, I. D. 2 1/2", coupling SH975E (2); coupling SH975C (3) connection SH199B (2).)		
%X			SH1021G	CLAMP, intensifier board	8	.16
X		M4130	173	CLEAT, control channel angle, left	4	.95
X		M4129	173	CLEAT, control channel angle, right	2	.95
X		M2186	373	CLEAT, control rod casing	6	.18
X		M1583	222	CLEAT, drive chain casing angle, side	8	.28
X		M1593	231	CLEAT, drive chain casing angle, top	4	.25
X		M3310	165	CLEAT, engine oil tank support	4	.38
X		M189	70	CLEAT, engine single point suspension	1	.40
X			A4025	CLEAT, funnel rack	1	.12
&	8338		LQ318A	CLEVIS, adjustable, S. A. E., 1/4", R. H. thread. (For rod LQ315A (1).)	1	.50
(cp) R			A6954	CLEVIS, padlock (For padlock No. 840 (1))	1	.08 P
%X			SH98C	CLIP, brake spring	1	.75

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
&					A263	CLIP, cable, 3/4". (For cable B177 (6); cable B176 (3); cable B178 (7); cable B179 (8).)	24	\$0.01 P
(gv)&					A264	CLIP, cable, double, 3/4". (For cable B177 (2).)	2	.02
(gv)&					A265	CLIP, cable, double, 1/4". (For cable B178 (2).)	2	.05
&			L13533		LQ174A	CLIP, cylinder water inlet manifold left extension	1	.25
&			L13532		LQ173A	CLIP, cylinder water inlet manifold right extension	1	.25
X					SH291C	CLIP, driver's seat, length 3 1/2'	1	.20
&					SH98B	CLIP (foot brake), bridle	1	1.25
&			D80267			CLIP, generator drive shaft end housing binding bolt	1	.03 P
%X					SH373M	CLIP, hand lamp spring	1	.18
&			12283		LQ325A	CLIP, high tension cable tube	6	.03
&					SH373J	CLIP, house lamp spare battery box spring	1	.15
&					A4055	CLIP, pyrene refill bracket	7	.42
&					SH280E	CLIP, radiator cooling fan fastening, No. 1	1	.24
&					SH280F	CLIP, radiator cooling fan fastening, No. 2	1	.36
&					SH488A	CLIP, spare barrel lower (left sponson)	1	.36
&					SH488B	CLIP, spare barrel upper (left sponson)	1	.40
%X					SH372C	CLIP, spare barrel lower (main hull)	4	.40
%X					SH372A	CLIP, spare barrel upper (main hull)	4	.70
&				M2835	488	CLIP, sponson ramrod bracket	4	.18
&				M2437	424	CLIP, spring. (On machinegunner's seat (1); main turret (4); sponson, right (2); left (2).)	14	.22
&			D25647			CLIP, switch and voltage regulator terminal	4	.01 P
&	6	30		M365	698	CLIP, transmission high-speed brake band	2	.48
&			D13611			CLIP, voltage regulator, with contact, assembly	(1)	.54 P
(Composed of: *one D11426 voltage regulator CONTACT, *one D29455 voltage regulator terminal CLIP.)								
&	—	24			SH976A	CLIP, water pipe		.48
&	—	24			SH975C	CLIP, water pipe connection		.58

% (p) X	—	24	A16484	COCK, drain, ¼" pipe thread, tee handle. (For tube C8015 (1).)	1	.17 P
				COCK, drain, ½", tee handle. (For flange M3311 (1); pipe SH976E (1); pipe SH976K (1); pipe SH976V (1).)	5	.21 P
% X			SH962H	COCK, regulating tank air, No. 1 (Lunkenheimer type, ¼", modified)	1	.60
				COCK, stop, ¼", lever handle. (For regulating tank flexible tube connection, assembly (2).)	2	.23 P
&	(b) &	D13740	B101964A	COCK, soldering, ¼" (brass). (For tube C8013 (3).)	3	.75 P
				COIL, distributor induction, assembly	(2)	.20 P
&		D13784		(Composed of: two (D31012) distributor terminal nut SCREW, assembly.)	(1)	5.66 P
				COIL, generator field, assembly		
% X				*one — generator field COIL (1)		4.99
				one (D29829) generator field coil STUD, long, assembly,		
				one (D30383) generator field coil STUD, short, assembly.)		
				COLLAR, carburetor throttle control tube end, assembly	(1)	.09 P
&		L13236		(Composed of: *one LQ119A carburetor throttle control tube end COLLAR (1)		.08
				one — PIN, split, 3/32" x ¾"		
&	9	21	SH869A	COLLAR, clutch cone supporting	1	8.25
				COLLAR, clutch sliding	1	15.78
&	11	21	SH999A	COLLAR, clutch spring thrust	1	5.00
				COLLAR, distance recorder cable coupling	1	.02
&	28	P55	SH998B	COLLAR, distance recorder cable coupling	1	.02
				COLLAR, engine control rocker shaft	2	.38
&		P29	SH965C	COLLAR, generator brush arm	1	.02 P
				COLLAR, generator field coil stud spacing	1	.01 P
&	D30314	D30313		COLLAR, generator field coil stud spacing	1	.01 P
				COLLAR, throttle release spring, assembly	(1)	.50
% X				(Composed of: *one SH993C throttle release spring COLLAR, threaded		.22
				one — BOLT, U. S. Std., hexagon head, ¼" x 7/8",		
&	—	12		one — WASHER, lock, ¼"		
				COLLAR, transmission mechanical lubricator shaft stop (large)	1	.24
&			SH102K	COLLAR, transmission mechanical lubricator shaft stop (small). (For shaft SH101H (1); cam shaft SH101P (1).)	2	.09
				COLLAR, valve spring, lower	24	.02
&			I-Q296A	COLLAR, valve spring, upper	24	.50
				COLLET, pipe, ¼" (brass). (For sprocket cap, M298 (1); elbow SH664A (1) tubes, B101982A, B, C, D, and E (1), tube B101992A (2).)	12	.05 P

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
&						COMPOUND, sealing, lb. (1 lb. required for starting and lighting battery; ap- proximately ½-lb. required for ignition battery) -----	—	\$0.40
&					A8406	CONDUIT, flexible steel, ½" x 28" -----	1	.24 P
&					A8405	CONDUIT, flexible steel, ¾" x 23" -----	1	.26 P
&					A8404	CONDUIT, flexible steel, 1" x 15½" -----	1	.28 P
&					A8403	CONDUIT, flexible steel, 1½" x 6½ ft. -----	1	2.28 P
(ee)&						CONDUIT, flexible steel, ½", ft. (1 piece 28" long required for conduit A8406) -----	—	.10 P
(ee)&						CONDUIT, flexible steel, ¾", ft. (1 piece 23" long required for conduit A8405) -----	—	.13 P
(ee)&						CONDUIT, flexible steel, 1", ft. (1 piece 15½" long required for conduit A8404) -----	—	.21 P
(ee)&						CONDUIT, flexible steel, 1½", ft. (1 piece 6½ ft. long required for conduit A8403) -----	—	.35 P
&	3	21				CONE, clutch, assembly ----- (Composed of: *one SH876A clutch CONE (1) ----- one SH869A clutch cone supporting COLLAR, one SH997C clutch LINING, one Q52A PLUG, pipe, square head, ½", six — RIVET, button head, 5/16" x 1½", forty-three — RIVET, countersunk head, copper, 3/16" x 11/16".) CONE, engine oil tank delivery pipe ----- CONE, male union. (For tube LQ461A (1).) ----- CONE, roller bearing, bore 1.1875", length 0.873" ----- CONE, roller bearing, bore 2.75", length 2.135" ----- CONE, ventilating fan inlet ----- CONNECTION, air pipe regulating tank ----- CONNECTION, cam shaft housing end cover oil ----- CONNECTION, combination valve to flexible tube, assembly ----- (Composed of: two Q51QC ELBOW, M. I., 90°, beaded, ¼",	(1)	20.76
&					166		1	.38
&			L8458 {Timken 316 or equal. }	M3298	LQ463A		2	.07
(c)&			{Timken 6454 or equal. }				4	2.00 P
(c)&							2	8.60 P
&					SH959A		1	3.75
&					SH950D		1	.42
&	12	14	8462		LQ56A		2	.43
&							(1)	4.43 P

& %X %X	15	14	B8463	LQ464A SH402H	one Q51SC ELBOW, M. I., 90°, beaded, ½", one Q51DE ELBOW, street, M. I., 90°, ½", one — NIPPLE, pipe, W. I., ¼" x 1½", two — NIPPLE, pipe, W. I., ¼" x 1¼", six — NIPPLE, pipe, W. I., ¼" x 1½", one — NIPPLE, pipe, W. I., ¼" x 2½", one — NIPPLE, pipe, W. I., ¼" x 3½", one — NIPPLE, pipe, W. I., ¾" x 1¼", one — NIPPLE, pipe, W. I., ½" x 3½", one — TEE, reducing, M. I., beaded, ¾" x ¾" x ¼", one — TEE, reducing, M. I., beaded, ½" x ¾" x ¼", three — UNION, M. I., brass seat, ¼", three — VALVE, horizontal check, brass, ¼") CONNECTION, crank case oil tube union CONNECTION, exhaust pipe CONNECTION, regulating tank flexible, assembly	1 2 (1)	1.50 2.50 1.79 P
	13	8			(Composed of: two — BUSHING, pipe, ¾" x ¼", faced, two — COCK stop, brass, ¼" lever handle, two Q51BE ELBOW, street, M. I., 90°, ¼", two — NIPPLE, pipe, close, W. I., ¼", one — TEE, M. I., beaded, ¾" x ¾" x ½") CONNECTION, spark and throttle control engine lever, assembly	(2)	.38
					(Composed of: *one SH964G spark and throttle control engine lever CONNECTION (2) one — SCREW, set, square head, cup point, ¼" x ⅝") CONNECTION, transmission mechanical lubricator delivery CONNECTION, water pipe to pump, assembly	6 (1)	.36 .38 4.64 P
& &				SH102B	(Composed of: one — water pipe drain PLUG, assembly, one SH976L water pipe drain plug pipe COUPLING, *one SH974A water pipe to pump CONNECTION (1.) CONNECTION, water tank outlet CONNECTOR, conduit, ½", assembly		
		24			(Composed of: one — conduit CONNECTOR, ½" (2) one — conduit lock NUT, ½" one — BOLT, stove, 3/16" x 1", with stove bolt nut and lock washer. For conduit A8406 (2).)	1 (2)	4.35 2.75 .22 P
		—					.18
& (ee)&	—	24		M1231	167		
	—	—					

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
(ee)&						PARTS—Continued CONNECTOR, conduit, ¾", assembly (Composed of: *one — conduit CONNECTOR, ¾" (2), one — conduit lock NUT, ¾", one — BOLT, stove, 3/16" x 1", with stove bolt nut and lock washer For conduit A8405 (2).) CONNECTOR, conduit, 1", assembly (Composed of: *one — conduit CONNECTOR, 1" (2) one — conduit lock NUT, 1", one — BOLT, stove, 3/16" x 1¼", with stove bolt nut and lock washer. For conduit A8404 (2).) CONNECTOR, conduit, 1½", assembly (Composed of: *one — conduit CONNECTOR, 1½" (2) one — conduit lock NUT, 1½", one — BOLT, stove, 3/16" x 1½", with stove bolt nut and lock washer. For conduit A8403 (2).) CONNECTOR, distributor ignition coil and distributor head stud and plate CONNECTOR, generator brush arm mounting stud CONNECTOR, ignition battery CONNECTOR, ignition switch ammeter terminal (left) CONNECTOR, ignition switch terminal (between ammeter and switch handle stud) CONNECTOR, ignition switch terminal (between switch handle stud) CONNECTOR, starting and lighting battery, top CONNECTOR, starting and lighting battery negative terminal CONNECTOR, starting and lighting battery positive terminal CONTAINER, cam shaft driving shaft lower bearing CONTAINER, generator driving shaft upper ball bearing	(2)	\$0.30 P
(ee)&							(2)	.25
(ee)&							(2)	.37 P
(ee)&							(2)	.30
(ee)&							(2)	.64 P
								.50
&			D29603				2	.03 P
&			D30316				1	.02 P
&			W-C153				4	.10 P
&			D30370				1	.02 P
&			D30057				1	.01 P
&			D30055				1	.01 P
&			W-O511				4	.15 P
&			W—				2	.10 P
&			W—				2	.10 P
&	8154	16	C8070		LQ97A		2	5.25
&			B8154		LQ392A		1	1.25

&	CONTAINER, spare parts, assembly	(1)	4.70
	(Composed of: *one SH286A spare parts CONTAINER (1) two SH286C spare parts container SUPPORT, four — RIVET, button head, ¼" x 11/16")		4.50
	CONTROL, front, assembly	(1)	261.06
	(Composed of: eight M771 brake connecting LINK, one M764A brake PEDAL, one SH98D brake pedal SPRING, one SH98C brake spring CLIP, one — clutch connecting ROD, front. assembly, one — clutch lever STOP, assembly, one M772 clutch operating LEVER, one M752 control GATE, left, one M751 control GATE, right, two M749 control lever LOCK, two — control lever lock PIN, assembly, two M753 control lever SPRING, eight M569C control rod fork END, two — control spring adjusting EYEBOLT, assembly, one M786 driver's seat support PLATE, left, one M787 driver's seat support PLATE, right, one M765 foot brake BRIDLE, one SH98B (foot brake) bridle CLIP, one M766 foot brake bridle distance PIECE, two M769 foot brake LINK, one M770 foot brake suspension LINK, one M795 foot brake suspension link SLEEVE, eight (M568C) fork end PIN, length 1 9/16", assembly, eight (M568A) fork end PIN, length 1 7/8", assembly, two (M568B) fork end PIN, length 2 ¼", assembly, three — front control connecting ROD, assembly, one M747 front control lever FULCRUM, left, one M746 front control lever FULCRUM, right, four M784 front control swing LINK, one — front control swing link SHAFT, assembly, one — fulcrum SHAFT, assembly, one — high and low speed control LEVER, left, assembly,		

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&						PARTS—Continued CONTROL, front, assembly—Continued. (Composed of: one — high and low speed control LEVER, right, assembly, one M759 high speed selector LEVER, left, one M758 high speed selector LEVER, right, three — joint PIN, assembly, two M763 low speed brake LINK, two — low speed brake suspension LINK, assembly, two M762 low speed connecting LINK, one M756 low speed selector LEVER, left, one M757 low speed selector LEVER, right, one M779 reverse lever QUADRANT, one — reverse operating LEVER, assembly, two M781 reverse quadrant distance PIECE, four — selector lever STOP, assembly, one M785 spring anchor ANGLE, four M775 spring link distance PIECE, two — BOLT, U. S. Std., hexagon head, $\frac{3}{8}$" x 2$\frac{1}{4}$", with plain nut and lock washer. eight — BOLT, U. S. Std., hexagon head, $\frac{1}{2}$" x 1$\frac{1}{4}$", with plain nut and lock washer, four — BOLT, U. S. Std., hexagon head, $\frac{1}{2}$" x 1$\frac{3}{8}$", with plain nut and lock washer, two — BOLT, U. S. Std., hexagon head, $\frac{1}{2}$" x 3$\frac{1}{2}$", with plain nut and lock washer, two — BOLT, U. S. Std., hexagon head, $\frac{1}{2}$" x 6$\frac{3}{4}$", with plain nut and lock washer, two — BOLT, U. S. Std., hexagon head, $\frac{1}{2}$" x 7$\frac{1}{4}$", with plain nut and lock washer.) CONTROL, rear, assembly (Composed of: four M4137 brake gear spring WASHER, large,	(1)	\$41.54

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
& %X %X &				M1038	SH976L 197 SH901F	PARTS—Continued		
						COUPLING, water pipe drain plug pipe (¼", modified, ¾" long)	2	\$0.02 P
						COVER, air duct mud hole (between radiator and roof)	1	.88
						COVER, air pressure pump air hole	1	.08
& & &	8095	13	B8072 C8095		LQ102A LQ46A	COVER, cam shaft driving shaft lower bearing container, assembly	(2)	4.14
						(Composed of: one LQ91A cam shaft driving shaft housing packing NUT, one LQ102A cam shaft driving shaft lower bearing container COVER, one LQ90A cam shaft driving shaft upper housing PACKING.)		
						COVER, cam shaft driving shaft lower bearing container	2	3.50
						COVER, cam shaft housing	10	.82
						COVER, cam shaft housing end, assembly	(2)	1.96
						(Composed of: one LQ57A cam shaft housing cover oil connection NUT, *one LQ54A cam shaft housing end COVER (2)		1.37
& &	8467	13	C8467		LQ47A	one LQ56A cam shaft housing end cover oil CONNECTION, two — GASKET, copper asbestos, ¾")		
						COVER, cam shaft housing, flywheel end	2	2.75
& & &	27	21	13382	M856	LQ532A 870	COVER, carburetor float, assembly	(2)	.99
						(Composed of: one LQ532A carburetor float COVER, one LQ534A carburetor float dust CAP, two LQ535A carburetor float WEIGHT, two LQ536A carburetor float weight AXLE, one — carburetor needle VALVE, assembly, one — WIRE, lock, brass, B. & S. Ga., No. 20 x 1¼")		
						COVER, carburetor float	2	.50
						COVER, clutch coupling (half)	2	.80
						COVER, crank case oil filler, assembly	(1)	.57
	8129	14				(Composed of: *one LQ219A crank case oil filler COVER (1)		.45

%X	11	20	M1124	SH363A 194 SH146B	one LQ220A crank case oil filler cover SPRING, two LQ221A PIN, escutcheon, No. 13 x 3/8") COVER, engine room removable plate hand hole (on left side) COVER, fan bevel gear box COVER, fan bevel gear box side COVER, gasoline tank, left, assembly (Composed of: two M1789 door HINGE, female, *one M1785 gasoline tank COVER, left (1) two SH537A gasoline tank cover HINGE, male, one — gasoline tank cover LOCK, assembly, one H20/21195 gasoline tank cover lock WASHER, one M1787 gasoline tank left cover STOP, one J206/21067 HANDLE, six — RIVET, button head, 3/8" x 1 3/8", two — RIVET, button head, 3/8" x 1 1/2", four — RIVET, button head, 7/16" x 1 1/8", five — RIVET, button head, 7/16" x 1 3/8") COVER, gasoline tank, right, assembly (Composed of: two M1789 door HINGE, female, *one M1786 gasoline tank COVER, right (1) two SH537A gasoline tank cover HINGE, male, one — gasoline tank cover LOCK, assembly, one H20/21195 gasoline tank cover lock WASHER, one J206/21067 HANDLE, six — RIVET, button head, 3/8" x 1 3/8", two — RIVET, button head, 3/8" x 1 1/2", one — RIVET, button head, 7/16" x 1 1/8", five — RIVET, button head, 7/16" x 1 3/8") COVER, generator end, assembly (Composed of: *one D29838 generator end COVER (1), one D30510 generator end cover INSULATOR, one D13838 generator end cover OILER, one D31239 generator end cover oiler WASHER, one D30323 generator end cover oiler WICK, one D30263 generator field coil long stud EYELET.)	1 1 2 (1)	10.25 .97 .24 36.89
&				536		(1)	35.20
				536			28.36
%X			D13826			(1)	.90 P

TANK, MARK VIII

76

671					*one M264 transmission bevel gear case COVER (1) four (MX25) STUD, 1/2" x 2 17/32", threaded U. S. Std. 1" and S. A. E. 3/8", assembly, two (MX98) STUD, 1/2" x 2 3/8", threaded U. S. Std. 1" and S. A. E. 3/8", assembly, two M300 DOWEL, bronze, 5/8" x 1 1/2") COVER, transmission mechanical lubricator COVER, transmission sprocket bearing cap box COVER, unilet, rectangular blank, 1" (For 1" x 1" type T unilet) COVER, unilet, 2 holes. (For 1 1/2" type L unilet) COVER, water pump CRADLE, 9" ball mount gun, assembly (Composed of: one B39A 9" ball mount gun CRADLE, two (B33N) 9" ball mount gun cradle set SCREW, assembly, one B33L 9" ball mount key stop SCREW, one B33A 9" ball mount trunnion PIN.) CRADLE, 9" ball mount gun (1-52) CRANK, bell, clutch throwout stop CRANK, starting, assembly (Composed of: one SH67B starting crank LEVER, one SH65G starting crank lever HANDLE, one SH66D starting crank lever handle GRIP.) CROSS, plain, 1/4" (MD. (For tube C8015 (1)) CUP, crank shaft thrust bearing oil CUP, distributor, assembly (Composed of: (N. D. 1200) BEARING, ball, radial, dia. 1.1811", bore .3937", face four (for equal) .3543", one D29734 ball bearing retaining NUT, one D29609 ball bearing spacing SLEEVE, two (D29896) distributor advance lever attaching STUD, assembly, one D14181 distributor condenser and breaker PLATE, with contact arm stud, assembly, three (D29874) distributor condenser and breaker plate attaching STUD, assembly, one (D29595) distributor condenser and breaker plate STUD, assembly, *one D29730 distributor connector PLATE (2),	1 4 1 1 1 (5) 5 1 (1) 1 1 (2)	80.00 .48 .68 .08 P .18 P 3.45 16.29 15.98 2.08 4.07 .05 P .12 P 8.13 P
-----	--	--	--	--	---	---	--

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&			D14180			PARTS—Continued CUP, distributor, assembly—Continued. (Composed of: one D29729 distributor connector plate INSULATOR, two D29630 distributor connector plate screw insulating BUSHING, *one D29787 distributor CUP (2), four (D30536) distributor cup STUD, assembly, three — PIN, split, brass, 1/16" x 3/8", two D29598 SCREW, slotted head No. 8-32 x .391", two D26441 WASHER, plain, .173" x .344" x .025".) CUP, governor ball CUP, governor thrust bearing CUP, grease, No. 0 x 1/8". (For cover M264 (2); ventilating fan, assembly (2)) CUP, grease, No. 4 x 1/2". (For housing M250 (1)) CUP, priming, No. 00 x 1/8", lever handle. (For liberty engine) CUP, roller bearing, dia. 2.8593", width 15/16" CUP, roller bearing, dia. 5.875", width 1 3/4" CUP, tachometer drive shaft oil, assembly CUTOUT, single pole (auto fiber 1 to 50 volts, 20 amperes) CYLINDER, assembly (Composed of: *one LQ281A cylinder BARREL (12) *one LQ65D cylinder elbow BRACE (12) *two LQ284A cylinder elbow FLANGE (24) *one LQ282A cylinder exhaust ELBOW (12) *one LQ283A cylinder inlet ELBOW (12) *one LQ290A cylinder water inlet PIPE (12) *one LQ291A cylinder water outlet PIPE (12)	1 1 4 1 12 4 2 (1) 4 (12)	\$1.52 .68 P .07 P 1.60 P .12 P .90 P 3.30 P .11 P .30 P 24.81 15.00 .05 .50 2.50 2.50 .25 .20
						SH987B		
						SH143A		
						(8009)		
						Timken 312 or equal.		
						Timken 6420 or equal.		
						D13974		
						31-37-2T		
						8098		
						8030		
						8031		
						8032		

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
*	16	22		M2071B M2071A M286 X267 M252 M276	339 339 680 802 SH964C 703 676	PARTS—Continued DIAPHRAGM, No. 9, left DIAPHRAGM, No. 9, right DISK, large plant pinion DISK, semaphore register DISK, spark and throttle control lever friction DISK, transmission pinion shaft bearing housing packing DISK, transmission small spur ring DISTRIBUTOR, assembly (Composed of: one — distributor adapter BASE, with cup, assembly, two D29899 distributor advance LEVER, one D14181 distributor condenser breaker PLATE, with contact arm stud, assembly, one D13725 distributor HEAD, assembly, twelve D31698 distributor head high tension terminal NUT, twelve D20241 WASHER, lock, .195" x .33" x .046".) DOOR, engine room (sliding), left, assembly (Composed of: one M2151 door HANDLE, *one M2146B engine room (sliding) DOOR, left (1) one M2154 engine room sliding door catch BEARING, two M2147 engine room sliding door roller BRACKET, one M2164 machine gunner's seat CATCH, one — machine gunner's seat PLATE, assembly, six — RIVET, button head, 1/4" x 7/8", two — RIVET, button head, 5/16" x 1", two — RIVET, button head, 3/8" x 1 1/8", four — RIVET, button head, 7/16" x 1 3/8".)	(1) (1) 2 1 2 1 2 (2)	\$6.75 6.75 35.00 1.08 1.75 1.56 51.00 35.18 P
&					363		(1)	13.95
&								8.50

&				DOOR, engine room (sliding), right, assembly (Composed of: one M2151 door HANDLE, *one M2146A engine room (sliding) DOOR, right (1) one M2154 engine room sliding door catch BEARING, two M2147 engine room sliding door roller BRACKET, one M2164 machine gunner's seat CATCH, one — machine gunner's seat PLATE, assembly, six — RIVET, button head, ¼" x ⅞", two — RIVET, button head, 5/16" x 1", two — RIVET, button head, ⅜" x 1½", four — RIVET, button head, 7/16" x 1⅜".)	(1)	13.95
	363			DOOR, ignition inspection, assembly (Composed of: *one M2167A ignition inspection DOOR (1) two M2151 door HANDLE, two — RIVET, button head, 3/16" x ⅞", *one M2167B WIRE, steel, 3/16" x 92%".)	(1)	8.50
	370			DOOR, outside tool chest, assembly (Composed of: one C114E door HANDLE, three GB3L door HINGE, female, *one SH583B outside tool chest DOOR (1) two GB5K STAPLE, one — CHAIN, standard, No. 1, assembly, one — PADLOCK, No. 840, with standard chain No. 1, assembly, nine — RIVET, button head, ¼" x ¾", four — RIVET, button head, ¼" x ⅞", four — WASHER, plain, ¼".)	(1)	2.36
%X				DOOR, main turret roof, left, assembly (Composed of: two M1790 door HINGE, male, one M2357 main turret roof door apron PLATE, *one M2356 main turret roof door PLATE, left (1) four — RIVET, button head, 3/16" x 1⅜", six — RIVET, button head, 7/16" x 1 7/16".)	(1)	16.74
	410	7	9			12.89

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
%X	6	9		410		PARTS—Continued DOOR, main turret roof, right, assembly (Composed of: two M1790 door HINGE, male, *one M2355 main turret roof door PLATE, right (1) one M45/21421 turret roof door chubb LOCK, with three keys, one M2414 turret roof door PLATE, four — RIVET, button head, 1/4" x 7/8", six — RIVET, button head, 7/16" x 1 7/16".)	(1)	\$17.80
						DOOR, side, left, assembly (Composed of: two — door LOCK, left, assembly, two SH544A fire extinguisher BRACKET, one SH544B fire extinguisher BRACKET, w/bottom cut off, *one M3120 hemispherical turret cover PLATE (3) *one M704 side DOOR, lower part, left (1) *one M702 side DOOR, upper part, left (1) *two M709 side door butt STRAP (4) *one M708 side door CLIP two M706 side door HINGE, eighteen — RIVET, button head, 3/16" x 1", eight — RIVET, button head, 3/8" x 1 1/8", four — RIVET, button head, 9/16" x 2", four — RIVET, button head, 9/16" x 2 3/8", four — RIVET, button head, 9/16" x 2 1/2", two — RIVET, button head, 11/16" x 2 5/8", four — RIVET, button head, 11/16" x 3".)	(1)	258.43
						DOOR, side, right, assembly (Composed of: two — door LOCK, right, assembly, two SH544A fire extinguisher BRACKET,	(1)	258.43
%X	5	9		431 542 543		DOOR, side, right, assembly (Composed of: two — door LOCK, right, assembly, two SH544A fire extinguisher BRACKET,	(1)	55.75 127.00 56.69 .89 .41
						DOOR, side, right, assembly (Composed of: two — door LOCK, right, assembly, two SH544A fire extinguisher BRACKET,	(1)	55.75 127.00 56.69 .89 .41
						DOOR, side, right, assembly (Composed of: two — door LOCK, right, assembly, two SH544A fire extinguisher BRACKET,	(1)	55.75 127.00 56.69 .89 .41

	5	9		431		one SH544B fire extinguisher BRACKET, w/bottom cut off, *one M3120 hemispherical turret cover PLATE (3) *one M705 side DOOR, lower part, right (1) *one M703 side DOOR, upper part, right (1) *two M709 side door butt STRAP (4) *two M708 side door CLIP (4) two M706 side door HINGE, eighteen — RIVET, button head, 3/16" x 1", eight — RIVET, button head, 3/8" x 1 1/2", four — RIVET, button head, 9/16" x 2", four — RIVET, button head, 9/16" x 2 1/2", four — RIVET, button head, 9/16" x 2 1/2", four — RIVET, button head, 1 1/16" x 2 5/8", two — RIVET, button head, 1 1/16" x 3". DOWEL, bronze, 5/8" x 1/2". (For cap M266 (1); cover M264 (2); bushing M296 (1); bushing M299 (1).) DOWEL, connecting-rod crank shaft bearing DOWEL, crank shaft bearing DOWEL, hand starter (housing) DOWEL, 3/16" x 3/8". (For housing LQ162A (1); body LQ427A (1).) DRIVE, distance recorder (Johns-Manville Co. type), assembly (Composed of: one S30A distance recorder drive cable SHAFT, with gear, one S23 distance recorder drive cable shaft INSERT, *one S374F distance recorder drive HOUSING (1) one S34 distance recorder drive housing CAP, one S114 distance recorder drive PINION, one S11 distance recorder drive pinion NUT, one S372A distance recorder drive pinion SHAFT, with gear, one S375 distance recorder drive pinion shaft BEARING, one S4040 distance recorder drive pinion shaft WASHER, one S10 distance recorder drive pinion WASHER, two S35 distance recorder drive shaft WASHER.) DRIVER, water pump bevel DRUM, clutch DRUM, clutch stop DRUM, track brake DRUM, transmission high speed brake					55.75 127.00 56.69 .89 .41
&	4	22	M300	713			8 12 14 2 2 (1)	.08 .02 .05 .03 .01 6.23 P			
&		8028		LQ129A							
&	26	14	8018	LQ194A							
&				SH65F							
&	174	19	174	LQ163A							
% (gy) X											
&	40	14	C8077	LQ156A			1	6.98			
&	2	21		SH866A			1	8.76			
&	16	21	M858	870			1	5.25			
&	7	22	M292	691			2	78.00			
&	42	22	M269	699			2	26.00			

TANK, MARK VIII

Nde symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
%X						PARTS—Continued DUCT, air (between radiator and roof), assembly (1) (Composed of: *one M1036 air DUCT (1) \$20.13 one M1038 air duct mud hole COVER, 17.28 one M1039 air duct mud hole JOINT, one M1036A air duct mud hole RING, eight — SCREW, cap. U. S. Std., hexagon head, 3/8" x 3/4", eight — WASHER, lock, 3/8" DUCT, ventilating inlet fan 1 EAR, low speed brake band 4 EAR, track brake band 4 ECCENTRIC, transmission mechanical lubricator 6 ECCENTRIC, transmission mechanical lubricator force feed 6 ELBOW, (engine) oil tank suction oil tube 1 ELBOW, (exhaust) (flanged) connection 5.00 P ELBOW, exhaust manifold guard, inner, assembly 3.28 (Composed of: *one SH153S exhaust manifold BAND, bottom, inner (2)08 *one SH153N exhaust manifold BAND, bottom (with holes) (1)18 *one SH153K exhaust manifold BAND, top and bottom (without holes) (2)18 *one SH153H exhaust manifold BAND, top and bottom (with holes) (2)18 *one SH154K exhaust manifold elbow COVER (2)50 *two SH153Z exhaust manifold guard band CLIP, inner (4)05 *one SH153C exhaust manifold guard inside connecting STRAP, long (2)20 *one SH153B exhaust manifold guard outside connecting STRAP, long (without holes) (1)30 *one SH153E exhaust manifold guard outside connecting STRAP, small (without holes) (1)18		

		*three SH153F exhaust manifold guard inside connecting STRAP, small (6)05
		two SH153X exhaust manifold guard pipe CLAMP, *one SH154N exhaust pipe COVER (2)70
		twenty-five — RIVET, button head, 3/16" x 1/2", eight — RIVET, button head, 3/16" x 5/8", four — RIVET, button head, 3/16" x 3/4".
%X		ELBOW, exhaust manifold guard, outer assembly (1) 3.70
		(Composed of: *one SH153S exhaust manifold BAND, bottom, inner (2)05 *one SH153M exhaust manifold BAND, bottom (with holes) (1)18 *one SH153H exhaust manifold BAND, top and bottom (with holes) (2)18 *one SH153K exhaust manifold BAND, top and bottom (without holes) (2)18 *one SH154K exhaust manifold elbow COVER (2)50 *two SH153Z exhaust manifold guard band CLIP, inner (4)05 *three SH153T exhaust manifold guard connecting CLIP (3)06 *one SH153C exhaust manifold guard inside connecting STRAP, long (2)20 *three SH153F exhaust manifold guard inside connecting STRAP, small (6)05 *one SH153A exhaust manifold guard outside connecting STRAP, long (1)30 *one SH153D exhaust manifold guard outside connecting STRAP, small (with hole) (1)18 two SH153X exhaust manifold guard pipe CLAMP, *four SH153G exhaust manifold guard strap CLAMP (4)06 P *one SH154N exhaust pipe COVER (2)70 twenty-five — RIVET, button head, 3/16" x 1/2", eight — RIVET, button head, 3/16" x 5/8", four — RIVET, button head, 3/16" x 3/4".
&		ELBOW, intake header water inlet, assembly (12) .49
		(Composed of: *one LQ309A FLANGE, 3/4" tube (12)44 *one LQ308A intake header water inlet ELBOW (12).)
	8171	
	8170	
(pf) &	Q51QD	ELBOW, M. I., 45°, beaded, 3/2". (For housing M250 (1)).
(pf) &	Q51DD	ELBOW, M. I., 45°, beaded, 3/4". (For pipe M1229 (1)).
(pf) &	Q51QC	ELBOW, M. I., 90°, beaded, 3/4". (For combination valve to flexible tube con- nection, assembly (2)).
	24	
		 2
		04 P

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
%pf X	—				Q51SC	ELBOW, M. I., 90°, beaded, 1/8". (For pipe SH199C (1); combination valve to flexible tube connection, assembly (2).)	3	\$0.08 P
%pf X	—	24			Q51RD	ELBOW, M. I., 90°, beaded, 3/8". (For pipe M1229 (2).)	2	.10 P
(pf)&		24			Q51WC	ELBOW, M. I., 90°, beaded, 1". (For pipe M1229 (2).)	2	.09 P
(pf)&					Q51MC	ELBOW, M. I., 90°, beaded, 2". (For pipe SH199F (1).)	1	.32 P
%pf X					Q51CC	ELBOW, plain, 1/8" pipe thread (M. I.). (For ventilating fan, assembly (1) Tube C8014A (1); tube C8014B (1); Tube C8014C (1); tube C8016 (1).)	5	.03 P
%X					SH664A	ELBOW, pipe, 1/4" (Herring Motor Co. type, No. 69F). (For cap M298 (1); cap M294 (1).)	4	.04
%X					SH976W	ELBOW, radiator drain pipe (Std. 90°, 1/2" modified)	1	.09 P
(pf)&					Q51PE	ELBOW, street, M. I., 45°, 1/2". (For combination valve to flexible tube connection, assembly (1).)	1	.08 P
%(mh)					Q51AE	ELBOW, street, 1/8", (M. I.), 90°. (For hand pressure pump (1).)	1	
%pf X					Q51BE	ELBOW, street, M. I., 90°, 1/4". (For pipe SH976E (1); regulating tank flexible tube connection, assembly (2).)	4	.04 P
%pf X					Q51DE	ELBOW, street, M. I., 90°, 1/2". (For combination valve to flexible tube connection, assembly (2); pipe SH976K (1).)	3	.08 P
&						ELECTROLITE, 1.255 S. G., qt. (1 quart required for starting and lighting battery; approximately 1/2 pint required for battery.)	—	.60 P
%(mh) X	—	12			967	END, adjustable yoke rod, S. A. E., 5/16". (For control rods.)	2	.10 P
%(mh) X	—	12			967	END, adjustable yoke rod, S. A. E., 3/8". (For control rods.)	5	.12 P
%(mh) X	—	12			967	END, adjustable yoke rod, S. A. E., 1/2". (For control rods.)	12	.16 P
%X						END, carburetor throttle shaft yoke, assembly	(4)	1.27
			13414			(Composed of: *one LQ554A carburetor throttle shaft yoke END (4) two — carburetor throttle shaft yoke end BOLT, assembly, two LQ557A carburetor throttle shaft yoke end SCREW)		.85
%X				M569C	SH946F	END, control rod fork. (For (2) rods M576 (1).)	2	.25 P
%X	M569	6			946	END, control rod fork. (For rod M789A (2); rod M789B (2); rod M581 (1); rod M574 (2); rod M573 (2); rod M575 (1); rod M579 (2); rod M578 (2); (3) rod M576 (2); rod SH946D (2); rod SH229A (2).)	41	.25 P

%X				SH953E	END, control rod fork. (For rod M581 (1); rod SH953D (2).)	3	.25 P
%X	M569	6		170	END, control rod fork, length 1". (For rod SH946E (2).)	4	.25 P
%X	M569B	6			END, control rod fork, length 1½". (For band M575 (2)).	2	.25 P
%X		12		SH993G	END, engine control spring rod	1	.30 P
%X		6		M570	END, fork. (For rod M571 (2); rod M566 (1).)	3	.25 P
&				B4024	END, funnel rack strap	1	.22
%X	15	30		699	END, high speed brake band anchor	2	2.58
%X				SH1021F	END, intensifier ball	24	.02 P
%X					END, platform ammunition storage fork, assembly	(2)	.49 P
					(Composed of:		
				573	*one M3189 platform ammunition storage fork END (2)		.25 P
					one — NUT, plain, U. S. Std., hexagon, %"		
					one — PIN, type A, .610" x 2/16", with two split pins,		
					one — WASHER, lock, %".)		
%X				SH922A	END, terminal cover	6	.22
(gw)&					ENGINE, Ordnance Liberty, (Trego, 5 x 7, 12 cylinders), assembly	(1)	3,128.99 P
					(Composed of:		
					two — cam shaft driving SHAFT, lower, with container, as-		
					sembly,		
					two — cam shaft driving shaft bearing container COVER, as-		
					sembly,		
					two LQ98A		
					cam shaft driving shaft lower bearing container GASKET,		
					(gu) LQ101A		
					cam shaft driving shaft lower bearing container SHIM,		
					medium,		
					(gu) LQ100A		
					cam shaft driving shaft lower bearing container SHIM,		
					thick,		
					(gu) LQ99A		
					cam shaft driving shaft lower bearing container SHIM,		
					thin,		
					one —		
					cam shaft HOUSING, with cam shaft, left, assembly,		
					one —		
					cam shaft HOUSING, with cam shaft, right, assembly,		
					(gu) LQ504A		
					cam shaft housing cylinder SHIM, medium,		
					(gu) LQ505A		
					cam shaft housing cylinder SHIM, thick,		
					(gu) LQ503A		
					cam shaft housing cylinder SHIM, thin,		
					two — CARBURETOR (Zenith type, No. 52, modified), as-		
					sembly,		
					one — carburetor throttle control connecting SHAFT, assembly,		
					one — carburetor throttle control SHAFT, assembly,		
					one LQ108A		
					carburetor throttle control shaft BRACKET,		
					two (LQ114A) carburetor throttle control shaft bracket BOLT, assembly,		

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
(gw)&						PARTS—Continued ENGINE, Ordnance Liberty, (Trego. 5. x 7., 12 cylinders), assembly—Contd. (Composed of: - one (LQ111A) carburetor throttle control shaft LEVER, assembly, - one LQ119A carburetor throttle control tube end COLLAR, assembly, - two LQ424A carburetor to intake header GASKET, - one LQ420A carburetor to intake header SCREW, long, - one LQ419A carburetor to intake header SCREW, short, - four LQ425A carburetor to intake header UNION, - one — crank CASE, with crank shaft and connecting rods, assembly, - one LQ232A crank case cover GASKET, - one — crank case lower half oil sump STRAINER, assembly, - two — crank case oil FILLER, assembly, - two LQ228A crank case oil filler GASKET, - one — crank case oil filler SCREEN, assembly, - one LQ464A crank case oil tube union CONNECTION, - one LQ465A crank case oil tube union connection GASKET, - two — crank case to cam shaft housing oil TUBE, assembly, - twelve — CYLINDER, with valves and piston, assembly, - four LQ250A cylinder to crank case GASKET, - twenty-four LQ177A cylinder water HOSE, - two LQ168A cylinder water inlet MANIFOLD, - one LQ172A cylinder water inlet manifold EXTENSION, left, - one LQ170A cylinder water inlet manifold EXTENSION, right, - one LQ174A cylinder water inlet manifold left extension CLIP, - one LQ173A cylinder water inlet manifold right extension CLIP, - two — DISTRIBUTOR, assembly, - one — distributor control connecting ROD, assembly, - two LQ312A distributor to cam shaft housing GASKET, - twelve LQ306A exhaust header GASKET, - one SH868A FLYWHEEL,		

one —	GENERATOR, assembly,
one —	generator drive SHAFT, assembly,
one LQ406A	generator driving shaft ball bearing container GASKET,
(gu) LQ405A	generator driving shaft ball bearing upper container SHIM, medium,
(gu) LQ404A	generator driving shaft ball bearing upper container SHIM, thick,
(gu) LQ403A	generator driving shaft ball bearing upper container SHIM, thin,
one LQ251A	generator GASKET,
one LQ232A	governor to crank case GASKET,
one —	high tension cable TUBE, with cables, assembly,
one LQ416A	inlet header water outlet EXTENSION,
four —	intake HEADER, assembly,
twelve LQ411A	intake header GASKET,
twelve —	intake header water inlet ELBOW, assembly,
one (LQ413A)	intake header water OUTLET, double, assembly,
one LQ415A	intake header water OUTLET, single,
one LQ414A	intake header water outlet GASKET,
one LQ200A	lower crank case sump COVER,
one —	oil PUMP, assembly,
one LQ195A	oil pump body GASKET,
one SH993E	throttle release SPRING,
one (SH993C)	throttle release spring COLLAR, assembly,
one —	water PUMP, assembly,
one —	water pump bevel driver HOUSING, with driver, assembly,
one LQ165A	water pump bevel driver housing SCREW,
(gu) LQ153A	water pump shaft bearing retainer SHIM, medium,
(gu) LQ152A	water pump shaft bearing retainer SHIM, thick,
(gu) LQ151A	water pump shaft bearing retainer SHIM, thin,
ten LQ164A	BOLT, S. A. E., drilled, ¼" x 15/16", threaded 9/16", assembly,
forty-eight LQ178A	CLAMP, hose, 1 1/16",
twelve —	CLAMP, hose, 1½",
twelve LQ410A	CUP, priming, No. 00 x 1/8",
twelve LQ417A	GASKET, flange, ¾" tube,
six LQ175A	HOSE, rubber, 3 ply, I. D. 1 1/8", O. D. 1 9/16", length 2½",
twenty-four LQ299A	PLUG, spark, with gasket,

Note symbol	Identification No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
(gw)&						PARTS—Continued ENGINE, Ordnance Liberty, (Trego, 5. x 7., 12 cylinders), assembly—Contd. (Composed of: one LQ393A SCREW, cap. U. S. Std., flat head, ¼" x ¾", twenty-four LQ418A SCREW, special, 5/16" x 11/16", two LQ52A WASHER, special, 5/16", one LQ166A WASHER, special, ¾", *two LQ512E WIRE, lock, soft iron. W. & M. Ga. No. 18 x 4" (2) *thirteen LQ31A WIRE, lock, W. & M. Ga. No. 18 x 8" (22) *two LQ167A WIRE, lock, W. & M. Ga. No. 18 x 10" (6).) EXTENSION, cylinder water inlet manifold, left EXTENSION, cylinder water inlet manifold, right EXTENSION, inlet header water outlet EXTENSION, instrument board EXTENSION, lower crank case oil pump suction tube EXTENSION, ventilating fan (discharge) box, lower EXTENSION, ventilating fan (discharge) box, upper EYEBOLT, clutch throwout stop rod, assembly (Composed of: *one M4156 clutch stop rod EYEBOLT (1) two SH953B clutch stop rod eyebolt NUT, two SH955A clutch stop rod eyebolt WASHER, two — NUT, plain, U. S. Std., hexagon, ½") EYEBOLT, control spring adjusting, assembly (Composed of: *one M754 control spring adjusting EYEBOLT (2) two — NUT, plain, U. S. Std., ½") EYEBOLT, driver's turret flap EYEBOLT, platform ammunition storage, assembly (Composed of: *one M3190 platform ammunition storage EYEBOLT (2) 		
&	12097	15	177		LQ172A		1	\$0.01
&	12096	15	L209		LQ170A		1	.01
&	5	14	C12097		LQ416A		1	1.04
%X			B12436		B5877		1	.95
&	29	14	8040		LQ187A		1	.48
&					SH963B		1	.35
&					SH963A		1	.70
%X					955		(1)	5.35
%X								.94
%X							(2)	.82
%X					224			.92
%X			M2427		412		2	.88
%X					573		(2)	.32
%X								.48
%X								.45

&	C65	D29869 D30263 D30367	one — NUT, pipe lock, $\frac{5}{8}$ ")	1	.03
			EYE, screw. (For exterior telephone head cord snap.)	1	.03 P
			EYELET, generator brush arm mounting	1	.02 P
			EYELET, generator field coil long stud	3	.02 P
			EYELET, voltage regulator housing	(1)	163.95
			FAN, radiator cooling, with housing, assembly		
			(Composed of:		
			two SKF1308 BEARING, ball, radial, dia. 3.5433", bore 1.5748", height .9055",		
			one — radiator cooling FAN, assembly,		
			one SH281A radiator cooling fan ball race COVER,		
&			one SH282B radiator cooling fan ball race HOUSING,		
			two SH281B radiator cooling fan ball race housing GASKET,		
			one SH279E radiator cooling fan distance PIECE,		
			one SH281D radiator cooling fan drive distance TUBE,		
			one — radiator cooling fan HOUSING, assembly,		
			one SH281C radiator cooling fan housing spider cover PLATE,		
			one SH279F radiator cooling fan inside bearing oil PIPE,		
			one — radiator cooling fan PULLEY, assembly,		
			one — radiator cooling fan SPINDLE, assembly,		
			twenty-one — BOLT, U. S. Std., hexagon head, $\frac{3}{8}$ " x $\frac{3}{4}$ ", with plain nut and lock washer,		
&			six — BOLT, U. S. Std., hexagon head, $\frac{3}{8}$ " x 1", with plain nut and lock washer,		
			one — BOLT, U. S. Std., hexagon head, $\frac{1}{2}$ " x 1", with plain nut and lock washer,		
			one — KEY, Woodruff, No. A,		
			one — KEY, Woodruff, No. G,		
			eight — SCREW, machine, round head, No. 14-20 x $\frac{1}{2}$ ")		
			FAN, radiator cooling (24'), assembly	(1)	30.55
			(Composed of:		
			sixty-four SH278A radiator cooling fan BLADE,		
			one SH278B radiator cooling fan HUB,		
			one SH278D radiator cooling fan PLATE,		
			one SH278E radiator cooling fan RIM,		
&			two hundred		
			and fifty-six		
			twelve — RIVET, button head, $\frac{3}{16}$ " x $\frac{5}{8}$ ",		
			twelve — RIVET, button head, $\frac{5}{16}$ " x $1\frac{1}{4}$ ")		
			— RIVET, button head, $\frac{3}{16}$ " x $\frac{5}{8}$ ",		
			— RIVET, button head, $\frac{5}{16}$ " x $1\frac{1}{4}$ ")		
			— RIVET, button head, $\frac{3}{16}$ " x $\frac{5}{8}$ ",		
			— RIVET, button head, $\frac{5}{16}$ " x $1\frac{1}{4}$ ")		
			— RIVET, button head, $\frac{3}{16}$ " x $\frac{5}{8}$ ",		
			— RIVET, button head, $\frac{5}{16}$ " x $1\frac{1}{4}$ ")		

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
						PARTS—Continued FAN, ventilating, (7½"), with housing, assembly (Composed of: two SKF1204 BEARING, ball, radial, dia. 1.8504", bore .7874", height .5512", one SH204A generator coupling FLANGE, one — ventilating FAN, assembly, one SH959B ventilating fan ball bearing HOLDER, one SH959D ventilating fan bearing CAP, three SH959E ventilating fan bearing CAP, one SH958B ventilating fan coupling SLEEVE, one SH957A ventilating fan HOUSING, one SH959A ventilating fan inlet CONE, one SH959H ventilating fan inner bearing grease PIPE, (length 4¼"), one SH959G ventilating fan inner bearing grease PIPE, (length 5"), one SH960B ventilating fan intake BOX, one SH959F ventilating fan outer bearing grease PIPE, one — ventilating fan SPINDLE, assembly, one SH958N ventilating fan spindle KEY, one SH193B ventilating fan SPROCKET, one SH958C ventilating fan sprocket SLEEVE, three — BOLT, U. S. Std., hexagon head, ¾" x 2¼", with plain nut and lock washer, three — BOLT, U. S. Std., hexagon head, ¾" x 2¼", with plain nut and lock washer, one — BOLT, U. S. Std., hexagon head, ½" x 1½", with plain nut and lock washer, five — BOLT, U. S. Std., hexagon head, ½" x 1½", with plain nut and lock washer, two — COUPLING, pipe, ½", two — CUP, grease, No. 0 x ½",	(1)	\$75.92

			one — ELBOW, M. I., 90°, plain, $\frac{1}{8}$ ", two — KEY, Woodruff, No. 9, two — PIN, steel, $\frac{1}{8}$ " x $\frac{1}{4}$ ", four — SCREW, cap, U. S. Std., hexagon head, $\frac{1}{2}$ " x $\frac{5}{8}$ ", one — SCREW, cap, U. S. Std., hexagon head, $\frac{1}{2}$ " x 1", two — SCREW, set, square head, cup point, 5/16" x 1", five — WASHER, lock, $\frac{1}{2}$ ". FAN, ventilating, assembly (Composed of: four SH960C ventilating fan BRACE, *one SH960A ventilating fan WHEEL (1) eight — NUT, plain, U. S. Std., hexagon, $\frac{1}{4}$ ".)	(1)	25.00
%X		SH4445D	FASTENER, distance recorder flexible tube, No. 1	1	.08
%X		SH4445E	FASTENER, distance recorder flexible tube, No. 2	1	.12
%X		SH4445L	FASTENER, (gas air and distance recorder) tube, No. 1	1	.09
%X		SH4445H	FASTENER, (gas air and distance recorder) tube, No. 2	1	.18
(mh)&		15-2KN-1	FASTENER, strap, No. 2, with loop No. 1, assembly (Composed of: *one NBIB strap FASTENER, No. 2 (4), one A8177 strap LOOP, No. 1. (For stop SH293E (4).)	(4)	.17
(mh)&		15-2KN-1	FASTENER, strap, No. 2. (For holder SH285A (2).)	2	.10
(mh)&		A8174	FASTENER, strap, No. 10. (For bracket, inner SH293A (4); holder SH443A (2); holder SH285A (1).)	7	.15
%X		377	FASTENER, turret roof door	2	1.05
&	F19/2121C	SH4445B	FASTENER, wire, No. 1. (For lighting cable.)	24	.09
&		SH4445A	FASTENER, wire, No. 2. (For telephone cable.)	4	.10
&		SH4445G	FASTENER, wire, No. 3. (For telephone cable.)	12	.05
%X	D30382		FERRULE, switch and voltage regulator terminal fiber	4	.03 P
	15		FILLER, crank case oil, assembly (Composed of: *one LQ214A crank case oil FILLER (2) one — crank case oil filler COVER, assembly, one LQ217A crank case oil filler cover HINGE, one LQ218A crank case oil filler cover hinge PIN, one LQ219A crank case oil filler cover LOCK, one — crank case oil filler STRAINER, assembly, five LQ221A escutcheon PIN, No. 13 x $\frac{3}{8}$ ".)	(2)	2.96
	8156				1.77
%X		C8155	FILLER, flexible electric conduit clamp	1	.08 P

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
%X						PARTS—Continued FILTER, engine oil tank, assembly (Composed of: one M3298 engine oil tank delivery pipe CONE, *one M3299 engine oil tank filter BODY (1) one M3300 engine oil tank filter GAUZE, *one M3297 engine oil tank filter RING, bottom (1) *one M3296 engine oil tank filter RING, top (1) FLANGE, ball mount, inner (on main turret) FLANGE, ball mount, inner FLANGE, ball mount, outer (on main turret) FLANGE, ball mount, outer FLANGE, cam shaft distributor driving FLANGE, clutch spring (half) FLANGE, distributor coupling FLANGE, engine oil tank filler plug FLANGE, engine oil tank filling cover FLANGE, engine oil tank suction and delivery FLANGE (engine oil tank) suction oil tube FLANGE, gasoline tank drain plug FLANGE, gasoline tank filler cap, assembly (Composed of: *one SH951B gasoline tank filler cap FLANGE (3) one Q52D PLUG, pipe, square head, 1/8".) FLANGE, generator coupling FLANGE, indicator FLANGE, radiator pipe FLANGE, water tank filler pipe FLAP, main turret, side, assembly (Composed of: two M1789 door HINGE, female,	(1)	\$3.21
X					165			1.09
%X					166			.48
%X				B/20793	637			10.18
%X				M3119	429			9.75
%X				A/20793	637			12.38
%X				M3118	429			10.35
%X	13006	13	B13006		LQ43A			2.70
&	22	21			SH849A			2.15
&			D30538					.18 P
&					SH978M			1.10
&				M3293	164			1.38
&				M3315	164			.78
&					SH207C			.48
&				M1757	187			.48
&							(3)	6.27
&					951			6.24
&					SH204A			.88
&				M3304	164			.78
&				M1195	167			.58
&	—	24		M1194	167			1.45
&	45	2					(2)	49.27

				407	*one M2353 main turret FLAP, side (2) one M2377 main turret flap catch PLATE, one — main turret flap ring BOLT, assembly, one M2375 main turret flap splash PLATE, bottom, two M2374 main turret flap splash PLATE, side, one SH420A main turret flap splash PLATE, top, eleven — RIVET, button head, 7/16" x 1½", four — RIVET, button head, 7/16" x 2⅝")			
&	13381		LQ531A		FLOAT, carburetor FLOAT, regulating tank, assembly (Composed of: *one SH950C regulating tank FLOAT (1) *one SH950F regulating tank float ROD (1.) FLYWHEEL FOOT, radiator cooling fan, outlet end, inside FOOT, radiator cooling fan, outlet end, outside FOOT, radiator cooling fan, rear inside FOOT, radiator cooling fan, rear outside FOOT, transmission sprocket bearing outside bracket support, assembly (Composed of: *one M391 transmission sprocket bearing outside bracket support FOOT (2) one — NUT, jam, U. S. Std., 1".)		2 (1)	43 .63
&		16		SH962C SH868A SH280D SH280B SH280C SH280A	FLOAT, regulating tank FOOT, regulating tank relief valve FOOT, radiator cooling fan, outlet end, inside FOOT, radiator cooling fan, outlet end, outside FOOT, radiator cooling fan, rear inside FOOT, radiator cooling fan, rear outside FOOT, transmission sprocket bearing outside bracket support, assembly (Composed of: *one M391 transmission sprocket bearing outside bracket support FOOT (2) one — NUT, jam, U. S. Std., 1".)		1 1 1 1 1 1 (2)	.25 .38 .10 1 1 1 1 1.15 1.15 1.94
&		13 47		M301	714	FORK, transmission shifter FRAME, generator, with pole piece and field coil, assembly (Composed of: one D13784 generator field COIL, assembly, four D30521 generator field coil insulating STRIP, one D13823 generator FRAME, with pole piece, assembly.) FRAME, generator, with pole piece, assembly (Composed of: *one D29805 generator FRAME (1) four D29804 generator frame pole PIECE, two D29225 generator housing PIN (.0945" x .218"), eight D25673 SCREW, slotted head, 5/16"-24 x .562") FRAME, inlet louvre, left side FRAME, inlet louvre, right side	1 (1)	7.80 12.23 P 6.45 P 3.75
&				M983 M982	499 499	FRAME, inlet louvre, left side FRAME, inlet louvre, right side	1 1	22.50 22.50

TANK, MARK VIII

Note symbol	Identification No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&						PARTS—Continued		
						FRAME, regulating tank relief valve guide, assembly (Composed of: *one SH962D regulating tank relief valve guide FRAME (1) one SH962E regulating tank relief valve guide PIN.)	(1)	\$0.66
(gq)&						FRAME, transmission, with brackets and caps, assembly (Composed of: twenty MX13 bevel WASHER, transmission bevel gear CASE, assembly, one — transmission FRAME, assembly, two — transmission sprocket bearing BRACKET, inside, assembly, two — transmission sprocket bearing BRACKET, outside, assembly, twenty — transmission sprocket bearing bracket to channel BOLT, assembly, two — transmission sprocket shaft inside bearing CAP, assembly, two — transmission sprocket shaft outside bearing CAP, assembly.)	(1)	749.09
&						FRAME, transmission, assembly (Composed of: *fur M338 transmission brake suspension BRACKET (4) *two M385 transmission brake suspension STOP (2) *one M374 transmission frame CHANNEL, bottom (1) *one M373 transmission frame CHANNEL, top (1) *one M375 transmission frame DIAPHRAGM, middle (1) *one M377 transmission frame diaphragm ANGLE, inner, left (1) *one M376 transmission frame diaphragm ANGLE, inner, right (1) *two M378 transmission frame diaphragm ANGLE, outer (2) *two M380 transmission frame diaphragm GUSSET, inner (left top and right bottom) (2) *two M382 transmission frame diaphragm GUSSET, inner (right top and left bottom) (2)	(1)	99.89
								2.75 1.52 20.75 20.75 15.65 4.78 4.78 4.78 88 88

[illegible]

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
&			D29782			GASKET, distributor cup	2	\$0.03 P
&			D30274			GASKET, distributor ignition coil and distributor head stud insulator	4	.01 P
%X				M3295	166	GASKET, engine oil tank filler cap (leather)	1	.12
&					SH207G	GASKET (engine), oil (tank) pipe flange	2	.08
%X			8176		LQ306A	GASKET, exhaust header	12	.03
%X					SH146A	GASKET, fan bevel gear box bearing cover plate	1	.18
%X					SH194B	GASKET, fan bevel gear housing side cover	2	.08
%X					SH194A	GASKET, fan bevel gear housing upper cover	1	.12
&					LQ417A	GASKET, flange, ¾" tube, (For elbow LQ308A (1).)	12	.01
%X			8389		LQ251A	GASKET, generator	1	.01
&	8347	16	8347		LQ406A	GASKET, generator driving shaft ball bearing container	1	.50
&	8205	15	B8205		LQ232A	GASKET, governor to crank case	1	.02
&			8175		LQ411A	GASKET, intake header	12	.01
%X	2	14	B8153		LQ414A	GASKET, intake header water outlet	2	.05
%X	8348	15	B8348			GASKET, oil pressure gage (see vellumoid)	1	.10
%X	8382	15	B8382		LQ195A	GASKET, oil pump body	1	.10
*	—	12			LQ454A	GASKET, oil pump lower half body cover	—	
&					SH281B	GASKET, radiator cooling fan ball race housing	2	.10
&					SH607A	GASKET, radiator core	1	.98
&				M888	607	GASKET, radiator header	2	1.25
&				M1241	168	GASKET, radiator inlet and outlet pipe	2	.28
&					SH950M	GASKET, regulating tank cap (vellum)	1	.35
&					SH608F	GASKET, rubber, 2¾" x 2¾" x ⅜", (For plate M880 (1); plate SH608B (1); plate SH608A (1).)	4	.12
%X					LQ300A	GASKET, spark plug	—	.01
&	12	22		M326	672	GASKET, transmission bevel gear case	2	.50
&				M315	678	GASKET, transmission gear case	4	.50
%X	28	22		M316	672	GASKET, transmission (gear case) oil filling plug	3	.08
&					SH104G	GASKET, transmission mechanical lubricator cover	1	.12

&	8215	17	8215	SH104A	GASKET, transmission mechanical lubricator stuffing box	1	.04
&	8345	14	8345	LQ149A	GASKET, water pump cover	1	.01
&				LQ154A	GASKET, water pump shaft bearing retainer	1	.01
&			M1240	168	GASKET, water tank outlet pipe	1	.25
&		6	M752	237	GATE, control, left	1	11.80
&		6	M751	237	GATE, control, right	1	11.80
&			M3300	166	GAUZE, engine oil tank filter	1	.78
&				SH188D	GAUZE, wire, brass, 7 $\frac{1}{4}$ " x 10 $\frac{3}{8}$ ", No. B & S gage 31, mesh 30. (For gasoline tank strainer, assembly (2).)	6	.35 P
&				SH188E	GAUZE, wire, brass, 7 $\frac{1}{4}$ " x 10 $\frac{3}{8}$ ", No. B & S gage 45, mesh 80. (For gasoline tank strainer, assembly (1).)	3	.50 P
&	8093	13	C8093	LQ36A	GEAR, cam shaft	2	17.00
&			B8076	LQ104A	GEAR, cam shaft driving shaft, lower	2	3.10
&	8094	13	C8094	LQ77A	GEAR, cam shaft driving shaft, upper	2	1.30
&		34	C8067	LQ258A	GEAR, crank shaft	1	15.00
%X				SH586B	GEAR, distance recorder	1	7.45
&	4	20		195	GEAR, fan bevel	2	3.60
&	8074	16	B8074	LQ400A	GEAR, generator driving shaft, lower	1	4.12
&	8080	16	B8080	LQ395A	GEAR, generator driving shaft, upper	1	4.20
&		33	8178	LQ434A	GEAR, oil pump driven, lower	1	2.00
&		33	8177	LQ438A	GEAR, oil pump driven, upper	2	2.00
&		33	8186	LQ433A	GEAR, oil pump driving, lower	1	.75
&		33	8187	LQ439A	GEAR, oil pump driving, upper	1	.77
&				SH66A	GEAR, starting crank counter shaft	1	5.97
&			D29845		GEAR, tachometer drive shaft	1	.41 P
&	61	22			GEAR, transmission bevel, assembly	(2)	73.86
(Composed of: one M258A transmission bevel GEAR, one M258B transmission bevel gear clutch RING, one — transmission flanged SLEEVE, assembly, six — RIVET, button head, $\frac{5}{8}$ " x 2 $\frac{3}{8}$ ", six — RIVET, button head, $\frac{5}{8}$ " x 2 $\frac{3}{8}$ ", one — SCREW, set, headless, 5/16" x $\frac{1}{2}$ ".)							
&			M258A	948	GEAR, transmission bevel	2	35.60
&				SH103B	GEAR, transmission mechanical lubricator worm	1	1.08
&	19	23	M257A	948	GEAR, transmission shifter	1	24.75

TANK, MARK VIII

100

X & &	— SH104H	GLASS, oil pressure gage. (For Edelman type, SH559C). GLASS, transmission mechanical lubricator sight feed hood (7/64" x 1 1/4" x 5 1/8") GOVERNOR, with sprocket, assembly (Composed of: one SH193A fan double drive SPROCKET, one — GOVERNOR, assembly, one SH144A governor LEVER, one SH144C governor spindle KEY, one — BOLT, U. S. Std., hexagon head, 1/4" x 1 9/16", with plain nut and lock washer, one Q74H KEY, Woodruff, No. 7.) GOVERNOR, assembly (Composed of: one Gurney 306 BEARING, ball, thrust, dia. 2.8347", bore 1.1811", height .9449", one S. K. F. 1109F BEARING, ball, thrust, dia. 2.87", bore 1.7717", height .79", one SH142E governor ARM, one SH142A governor arm BUSHING, one SH142B governor arm bushing set SCREW, one SH142C governor arm bushing set screw NUT, one SH987B governor ball CAP, one SH987A governor ball retaining RING, one SH142F governor bearing SPACER, two SH142G governor felt retaining WASHER, one SH141A governor HOUSING, front half, one SH145A governor housing, rear half, one SH142H governor oil retaining WASHER, one — governor SPINDLE, assembly, one SH143A governor thrust bearing CUP, one SH143B governor thrust bearing MOUNT, four — BALL, steel, 1", five — BOLT, U. S. Std., hexagon head, 3/8" x 1 1/8", with plain nut and lock washer, one Q74R KEY, Woodruff, No. A, one Q52A PLUG, pipe, square head 1/4") GRIP, starting crank lever handle	1 1 (1)	.05 P 52.70
&	SH66D		(1)	44.10 P .48

TANK, MARK VIII

Note symbol	Identification No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
%X						PARTS—Continued GUARD, exhaust manifold, left, assembly (1) (Composed of: *one SH154E exhaust manifold clamping STRAP, large (2)15 *one SH154F exhaust manifold clamping STRAP, small (2)14 *one SH152D exhaust manifold connecting ANGLE, left (2)60 *one SH152C exhaust manifold connecting ANGLE, right (2)60 *one SH154M exhaust manifold COVER, left (1) 1.50 *one SH152BB exhaust manifold guard BAND, inner, large (without holes) (1)18 *one SH152K exhaust manifold guard BAND, inner, small (2)15 *one SH152AA exhaust manifold guard BAND, outer, large (without holes) (1) 28 *one SH152H exhaust manifold guard BAND, outer, small (2)25 *one SH152L exhaust manifold guard BRACE, large (2)25 *one SH152M exhaust manifold guard BRACE, small (2)20 one — exhaust manifold guard CLAMP, large, assembly, one — exhaust manifold guard CLAMP, small, assembly, two SH154G exhaust manifold guard SPACER, $\frac{3}{8}$" x $\frac{3}{8}$", two SH154H exhaust manifold guard SPACER, $\frac{3}{8}$" x $\frac{3}{8}$", *two SH152G exhaust manifold guard STRIP, inner (4)20 four SH152F exhaust manifold guard WASHER, four — BOLT, stove, round head, $\frac{1}{4}$" x $\frac{3}{4}$", with two stove bolt nuts and washers, twenty-six — RIVET, button head, $\frac{3}{16}$" x $\frac{1}{2}$") GUARD, exhaust manifold, right, assembly (1) (Composed of: *one SH154E exhaust manifold clamping STRAP, large (2)15 *one SH154F exhaust manifold clamping STRAP, small (2)14 *one SH152D exhaust manifold connecting ANGLE, left (2)60 *one SH152C exhaust manifold connecting ANGLE, right (2)60		\$6.86
%X								

					*one SH154L exhaust manifold COVER, right (1)	1.50
					*one SH152B exhaust manifold guard BAND, inner, large (with holes) (1)	.18
					*one SH152K exhaust manifold guard BAND, inner, small (2)	.15
					*one SH152A exhaust manifold guard BAND, outer, large (with holes) (1)	.28
					*one SH152H exhaust manifold guard BAND, outer, small (2)	.25
					*one SH152L exhaust manifold guard BRACE, large (2)	.25
					*one SH152M exhaust manifold guard BRACE, small (2)	.20
					one — exhaust manifold guard CLAMP, large, assembly,	
					one — exhaust manifold guard CLAMP, small, assembly,	
					two SH154G exhaust manifold guard SPACER, $\frac{3}{8}$ " x $\frac{3}{8}$ ",	
					*two SH154H exhaust manifold guard SPACER, $\frac{3}{8}$ " x $\frac{3}{8}$ ",	
					*two SH152G exhaust manifold guard STRIP, inner (4)	
					four SH152F exhaust manifold guard WASHER,	
					four — BOLT, stove, round head, $\frac{1}{4}$ " x $\frac{3}{4}$ ", with two stove bolt nuts and washers,	.20
					twenty-six — RIVET, button head, $3/16$ " x $1\frac{1}{2}$ ".)	
%X	10	28	M1479	62	GUARD, track adjusting screw (hull plate)	.95
&		D30898			GUARD, voltage regulator armature regulating spring	.02 P
&			M2428	412	GUIDE, driver's turret flap raising lever	.52
&			M2155B	364	GUIDE, engine room door, bottom, left	.95
&			M2155A	364	GUIDE, engine room door, bottom, right	.95
*			M2156	364	GUIDE, engine room door, top	(1)
&			M2208	374	GUIDE, fan discharge door, top	.75
&			SH655H		GUIDE, hand starter lock plunger	.22
*			M2166	370	GUIDE, ignition inspection door, bottom	(1)
*			M2165	370	GUIDE, ignition inspection door, side	.78
	—	12	8384	LQ446A	GUIDE, oil pump pressure relief valve	1.51
&	—	6	M742	228	GUIDE, pawl. (For lever M738A (1); lever M177 (1).)	.18
&	2	3	M2114	378	GUIDE, towing cable	1.431
				LQ288A	GUIDE, valve stem, exhaust	.43
&		8026		LQ289A	GUIDE, valve stem, inlet	.43
&			M2209	374	GUIDE, ventilating shutter, bottom	1
&			M2208	374	GUIDE, ventilating shutter, top	.75
*			M2068	340	GUSSET, roof channel to side (right)	(1)
&			M2151	363	HANDLE, door. (For door M2146A (1); door M2146B (1); inspection door (1).)	.48
&			C114E	582	HANDLE, door. (For outside tool chest.)	1
E20/						
&			21195	412	HANDLE, door lock. (For door lock, left, assembly (1); right, assembly (1).)	.48
&			M2152	363	HANDLE, engine room door catch	2
						1.00

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
%X &			W-V12	M3131 J206/ 21067 A42/ 21221	434 538 642	PARTS—Continued		
						HANDLE, hemispherical turret	6	\$1.52
						HANDLE (holes 6" apart). (On main turret (3); cover M1785 (1), cover M1786 (1).)	5	.28
						HANDLE, ignition battery case	2	.08
						HANDLE, revolver hole cover operating	9	.40
%X &					802	HANDLE, semaphore sprocket, near side, assembly	(1)	2.81
						(Composed of: one — semaphore detent PLUNGER, assembly, one X274 semaphore detent SPRING, one X271 semaphore handle PIN, short, one X272 semaphore handle TUBE, short, one X275 semaphore spring WASHER, *one X269 semaphore sprocket HANDLE, near side (1) one — BOLT, U. S. Std., hexagon head, 1/4" x 1 3/8", with plain nut, one — WASHER, plain, 5/16")		1.60
						HANDLE, semaphore sprocket, off side, assembly	(1)	2.09
						(Composed of: one X246 semaphore handle PIN, long, one X247 semaphore handle TUBE, long, *one X270 semaphore sprocket HANDLE, off side (1) one — BOLT, U. S. Std., hexagon head, 1/4" x 1 3/8", with plain nut, one — WASHER, plain, 5/16")		1.38
						HANDLE, starting and ignition battery case	4	.08
%X & (n)&			W-V14		SH65G SH992B SH424B	HANDLE, starting crank lever	1	.44
						HANGER, battery shelf	1	2.28
						HANGER, map board buckle	1	.22
						HASP, tool chest, assembly	(2)	.19 P
						(Composed of: one GB5G tool chest HASP,		

[illegible]

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&						PARTS—Continued		
						HEADER, radiator, rear, assembly—Continued. (Composed of: two SH608F rubber GASKET, 2 3/4" x 2 3/4" x 1/8", four — RIVET, button head, 5/16" x 1 1/8", four — SCREW, cap, U. S. Std., hexagon head, 3/8" x 1 1/2", four — SCREW, cap, U. S. Std., hexagon head, 3/8" x 5/8".)		
&					SH101A	HEADER, transmission mechanical lubricator cylinder pump	6	\$0.58
&				M2158	SH103A	HEADER, butt, 2" x 4 1/4". (For machine gunner's seat plate, assembly (2); (Officer's) map board M2441 (2); lid M4040A (2).)	6	1.18
&					362	HINGE, door, female. (For flap M2353 (2); cover M1785 (2); cover M1786 (2); main turret roof door (2).)	10	.45
&			8157	M1789	LQ217A	HINGE, crank case oil filler cover	2	.10
&					537	HINGE, door, female. (For outside tool chest.)	12	1.50
(c)&				M1790	GB3L	HINGE, door, male. (For plate M2355 (2); plate M2356 (2); cover M1785 (2); main turret roof door (2); cover M1786 (2).)	3	1.06
&					537	HINGE, door, male. (For outside tool chest.)	12	1.50
(c)&				M2403	GB3J	HINGE, driver's turret flap	3	1.60
&					417	HINGE, gasoline tank cover, female	4	.52
&					SH537B	HINGE, gasoline tank cover, male	4	1.35
&					SH537A	HINGE, map board buckle. (For board M2441 (1).)	4	1.18
%X				M2444	424	HINGE, side door	2	.15 P
&				M706	544	HINGE, spanson	8	2.25
&				M2826	477	HINGE, spanson, left hull (lower right and upper left)	4	5.75
&				M2828	477	HINGE, spanson, right hull (lower left and upper right)	2	10.00
&				M2827	477	HINGE, spanson seat, female	2	10.00
&				M2814	472	HINGE, spanson seat, male	4	1.00
&				M2815	472	HINGE, 2 1/2" x 2 1/2" (Stanley type, No. 808). (For lid SH576G (2).)	4	1.00
&					SH576K	HINGE, 6-pdr. spare parts box	4	.08
&					SH942F	HOLDER, spare fan belt, assembly	4	.12 P
&							(1)	1.78

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
& %X %X %X %X	8152	15	8152		SH649A	HOOK, towing cable carrying, front (holes 5 11/16" apart)	2	\$4.72
					SH649B	HOOK, towing cable carrying, rear (holes 5 5/8" apart)	2	4.72
					LQ177A	HOSE, cylinder water	24	.02 P
					SH199B	HOSE (engine outlet pipe) connection, short (5 ply, 2 1/2" hose, length 3 1/2')	(2)	.20 P
					SH168U	HOSE, radiator inlet (3 ply hose, 1 1/4", length 6')	(1)	.20 P
&(mh) R %X	12128 7	24	24		SH975C	HOSE, radiator outlet (5 ply hose, 2 1/2", length 6')	(3)	.25 P
						HOSE, rubber, 1 1/4", 3 ply, ft. (1 piece 6" long required for hose SH168U)	—	.35 P
					LQ175A	HOSE, rubber, 3 ply, 1 3/8", O. D. 1.9/16", length 2 5/8" (ends dipped in cement). (For extension LQ172A (2); header LQ413A (1); header LQ415A (1); extension LQ170A (2).)		
&(mh) R &(mh) R						HOSE, rubber, 2", 5 ply, ft. (1 piece 3 1/2" long required for hose SH975D)	6	.08 P
						HOSE, rubber, 2 1/2", 5 ply, ft. (3 pieces 6" long required for hose SH975C; 1 piece 12 1/2" long required for hose SH975E; 2 pieces 3 1/2" long required for hose SH199B)	—	.40 P
%X	—	24			SH975E	HOSE, water pipe (5 ply hose, 2 1/2", 12 1/2" long)	(1)	.50 P
%X	8109	13			SH975D	HOSE, (water) pump outlet (5 ply hose, 2", length 3 1/2')	(1)	.20 P
&	—	24				HOUSING, cam, with camshaft, left, assembly	(1)	259.10
						(Composed of: one — cam SHAFT, left, with bearings, assembly, seven (LQ40A) cam shaft BOLT, assembly, one LQ43A cam shaft distributor driving FLANGE, one — cam shaft driving SHAFT, upper, assembly, one — cam shaft driving shaft HOUSING, upper, assembly, (gu) LQ86A cam shaft driving shaft housing flange SHIM, medium, (gu) LQ85A cam shaft driving shaft housing flange SHIM, thick, (gu) LQ87A cam shaft driving shaft housing flange SHIM, thin, one LQ84A cam shaft driving shaft upper flange GASKET, one LQ36A cam shaft GEAR, (gd) one LQ38A cam shaft gear SHIM, medium, (gd) one LQ39A cam shaft gear SHIM, thick,		

&				(gd) one LQ37A cam shaft gear SHIM, thin, one — cam shaft HOUSING, assembly, six — cam shaft rocker LEVER, left, assembly, six — cam shaft rocker LEVER, right, assembly, four (LQ88A) STUD, ¼" x 1 3/16", threaded U. S. Std., 7/16" and S. A. E. 9/16", assembly, *seven LQ31A WIRE, lock, W & M Ga. No. 18 x 8" (22.) HOUSING, cam, with cam shaft, right, assembly (Composed of: one — cam SHAFT, right, with bearings, assembly, seven (LQ40A) cam shaft BOLT, assembly, one LQ43A cam shaft distributor driving FLANGE, one — cam shaft driving SHAFT, upper, assembly, one — cam shaft driving shaft HOUSING, upper, assembly, (gu) LQ86A cam shaft driving shaft housing flange SHIM, medium, (gu) LQ85A cam shaft driving shaft housing flange SHIM, thick, (gu) LQ87A cam shaft driving shaft housing flange SHIM, thin, one LQ84A cam shaft driving shaft upper flange GASKET, one LQ36A cam shaft GEAR, (gd) one LQ38A cam shaft gear SHIM, medium, (gd) one LQ39A cam shaft gear SHIM, thick, (gd) one LQ37A cam shaft gear SHIM, thin, one — cam shaft HOUSING, assembly, six — cam shaft rocker LEVER, left, assembly, six — cam shaft rocker LEVER, right, assembly, four (LQ88A) STUD, ¼" x 1 3/16", threaded U. S. Std. 7/16" and S. A. E. 9/16", assembly, *seven LQ31A WIRE, lock, W & M Ga. No. 18 x 8" (22.) HOUSING, cam shaft, assembly (Composed of: seven LQ38A cam shaft bearing lock SCREW, one LQ75A cam shaft driving shaft BUSHING, upper, small, *one LQ45A cam shaft HOUSING (2) eighteen (LQ50A) cam shaft housing BOLT, assembly, *two LQ35A cam shaft housing core hole PLUG (4) five LQ46A cam shaft housing COVER, one LQ47A cam shaft housing COVER, (flywheel end), one — cam shaft housing end COVER, assembly, one — cam shaft housing PLUG,	(1)	.01 259.10
				(gd) one LQ37A cam shaft gear SHIM, thin, one — cam shaft HOUSING, assembly, six — cam shaft rocker LEVER, left, assembly, six — cam shaft rocker LEVER, right, assembly, four (LQ88A) STUD, ¼" x 1 3/16", threaded U. S. Std., 7/16" and S. A. E. 9/16", assembly, *seven LQ31A WIRE, lock, W & M Ga. No. 18 x 8" (22.) HOUSING, cam shaft, assembly (Composed of: seven LQ38A cam shaft bearing lock SCREW, one LQ75A cam shaft driving shaft BUSHING, upper, small, *one LQ45A cam shaft HOUSING (2) eighteen (LQ50A) cam shaft housing BOLT, assembly, *two LQ35A cam shaft housing core hole PLUG (4) five LQ46A cam shaft housing COVER, one LQ47A cam shaft housing COVER, (flywheel end), one — cam shaft housing end COVER, assembly, one — cam shaft housing PLUG,	(2)	.01 106.06
&	12486	13			90.34	
	12124	13	D12124 L50569		.10	

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&	12486					PARTS—Continued HOUSING, cam shaft, assembly—Continued. (Composed of: seven — GASKET, copper asbestos, $\frac{3}{8}$ ", one — GASKET, copper asbestos, $\frac{3}{8}$ ", one — GASKET, copper asbestos, $1\frac{1}{8}$ ") HOUSING, generator drive shaft end, with tachometer drive shaft bearing, assembly (Composed of: one — generator drive shaft end HOUSING, lower, assembly, one — tachometer drive SHAFT, assembly, one D13830 tachometer drive shaft BEARING, one D29843 tachometer drive shaft BUSHING, one D22921 tachometer drive shaft bushing inner BUSHING, flanged, one D29920 tachometer drive shaft bushing inner BUSHING, plain, one D29844 tachometer drive shaft gear pin SPRING.) HOUSING, generator drive shaft end, lower, assembly (Composed of: *one D29880 generator drive shaft end HOUSING, lower (1), one D30374 generator drive shaft end housing PACKING, one D29763 generator drive shaft end housing packing NUT, one D13974 tachometer drive shaft oil cup.) HOUSING, cam shaft driving shaft, upper, assembly (Composed of: one LQ76A cam shaft driving shaft BUSHING, upper, small, *one LQ81A cam shaft driving shaft HOUSING, upper (2) *one LQ82A cam shaft upper housing FLANGE (2) one — NAIL, wire, finishing, 8d.) HOUSING, generator top end, with brush arms, assembly (Composed of: one (N. D. #1200) BEARING ball, radial, dia. 1.1811", bore .3937", face one (or equal) .3543",	(1)	\$5.01 P
							(1)	3.15 P
&							(2)	2.18
							(1)	1.75 25
&			8103 B8109 D13827				(1)	6.90 P

				two D28929 ball bearing felt WASHER, one D30134 generator ball bearing RETAINER (inner), four D30449 generator BRUSH, four D13829 generator brush ARM, assembly, one D30314 generator brush arm COLLAR, two (D30070) generator brush arm mounting STUD, (grounded), as- sembly, one (D29811) generator brush arm mounting STUD, (long terminal), assembly, one (D30135) generator brush arm mounting STUD, assembly, one D30316 generator brush arm mounting stud CONNECTOR, one D30315 generator brush arm mounting stud INSULATOR, four D22645 generator brush arm small spring plain WASHER, four D29818 generator brush arm SPRING (large), four D30193 generator brush arm SPRING (small), one D14178 generator top end HOUSING, assembly, four — PIN, split, brass, 1/16" x 3/8") HOUSING, generator top end, assembly (Composed of: four D29855 generator brush arm spring STUD, four D29849 generator brush arm spring stud BUSHING, one D30152 generator brush arm stud insulating WASHER (inner), one D30138 generator brush arm stud insulating WASHER, *one D29803 generator top end HOUSING (1).) HOUSING, governor, front half HOUSING, governor, rear half HOUSING, radiator cooling fan, assembly (Composed of: one SH279B radiator cooling fan ANGLE, outlet, bottom, one SH279C radiator cooling fan ANGLE, outlet, outside, one SH279A radiator cooling fan ANGLE, outlet, rear side, *one SH282C radiator cooling fan cut-off SHEET (1) one SH280D radiator cooling fan FOOT, outlet end, inside, one SH280B radiator cooling fan FOOT, outlet end, outside, one SH280C radiator cooling fan FOOT, rear, inside, one SH280A radiator cooling fan FOOT, rear, outside, one SH278C radiator cooling fan foot filler STRIP, *one SH276A radiator cooling fan HOUSING, blind side (1) *one SH277A radiator cooling fan HOUSING, inlet side (1)	(1)	6.87 P
&	D14178	SH141A SH145A		1 1 (1)	5.38 2.97 74.83	
&					2.56	
&					15.37 15.37	

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&						PARTS—Continued HOUSING, radiator cooling fan, assembly—Continued. (Composed of: one SH282A radiator cooling fan housing SPIDER, seven (SH279D) radiator cooling fan housing spider STUD, assembly, *one SH283A radiator cooling fan scroll SHEET (1) five — RIVET, button head, ¼" x ¾", eighteen — RIVET, button head, ¼" x ¾", four — SCREW, wood, flat head, No. 12 (7/32—" x 1") HOUSING, radiator cooling fan ball race HOUSING, starting crank HOUSING, transmission pinion shaft bearing, assembly		\$15.00
					SH282B SH399B	HOUSING, radiator cooling fan ball race HOUSING, starting crank HOUSING, transmission pinion shaft bearing, assembly	1 1 (1)	4.98 5.18 136.29
					708	(Composed of: two (MX99) air pressure pump STUD, assembly, two (Timken) BEARING, roller, assembly, one — transmission bevel pinion SHAFT, assembly, one M249 transmission bevel pinion shaft bearing distance PIECE, (gd) thirteen MX35 transmission bevel pinion shaft bearing distance SHIM, one M246 transmission bevel pinion shaft flange COUPLING, *one M250 transmission pinion shaft bearing HOUSING (1) one M252 transmission pinion shaft bearing housing packing DISC, one M253 transmission pinion shaft bearing housing oil retaining WASHER, one M251 transmission pinion shaft packing GLAND, four (MX22) transmission pinion shaft packing gland BOLT, assembly.) HOUSING, ventilating fan HOUSING, voltage regulator, assembly		20.75
& &					SH957A	HOUSING, ventilating fan HOUSING, voltage regulator, assembly	1 (1)	8.00 .92 P
			D13865			(Composed of: *one D30364 voltage regulator HOUSING, three D30367 voltage regulator housing EYELET,		

&	8239	19	8426			three D30368 voltage regulator housing insulating BUSHING, six D29240 voltage regulator housing insulating WASHER, three D20915 WASHER, plain, .314" x .625" x .031")	(1)	17.32
	—	34				HOUSING, water pump bevel driver, with driver, assembly		
&	8065	19	B8065			(Composed of: one LQ156A water pump bevel DRIVER, two LQ159A water pump bevel driver BUSHING, one — water pump bevel driver HOUSING, assembly.)	(1)	8.34
						HOUSING, water pump bevel driver, assembly		
*	8426	15				(Composed of: *one LQ160A water pump bevel driver bushing HOUSING, (flywheel end) (1) *one — water pump bevel driver HOUSING (distributor end), assembly (1) two (LQ164A) BOLT, S. A. E., drilled, 1/4" x 15/16", threaded 9/16", assembly.)	(1)	4.54
	8064	19	B8064 174			HOUSING, water pump bevel driver (distributor end), assembly		
&	8064	19	B8064 174	SH278B		(Composed of: *one LQ162A water pump bevel driver HOUSING (distributor end) (1) *one LQ163A DOWEL, 3/16" x 3/8")	1	4.53
						HUB, radiator cooling fan		
&						HUB, spark and throttle control lever, assembly	(2)	5.72
						(Composed of: one SH964D spark and throttle control LEVER, one — spark and throttle control engine lever CONNECTION, assembly, one SH964B spark and throttle control lever HUB, one — PIN, steel, 1/8" x 15/16")		
&	12517	17	B12517	SH964B LQ146A		HUB, spark and throttle control lever	2	1.08
			S23			IMPELLER, water pump		
&			D29729			INSERT, distance recorder drive cable shaft	1	2.25
			D29632			INSULATOR, distributor connector plate		
&			D30315			INSULATOR, distributor ignition coil and distributor head	2	.02 P
			D30510			INSULATOR, generator brush arm mounting stud		
&				LQ330A		INSULATOR, generator end cover	1	.06 P
						INSULATOR, high tension cable		
&			W-J46			INSULATOR, ignition battery (rubber)	24	.06 P
			D30052			INSULATOR, ignition switch contact		
&			D25470			INSULATOR, voltage regulator	1	.02 P

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&						PARTS—Continued		
			D29480		SH1021E	INSULATOR, voltage regulator clip, with contact (under)	1	\$0.02 P
						INTENSIFIER, spark	24	.20 P
			W-B173			JAR, ignition battery (hard rubber)	1	1.00 P
						JAR, starting and lighting battery (hard rubber)	6	1.00 P
						JAW, starting crank	1	5.18
&						JET, carburetor cap, assembly	(4)	.23
						(Composed of:		
			13374			*one LQ518A carburetor cap JET (4)		.22
						one LQ517A carburetor cap jet and main jet WASHER.)		
						JET, carburetor compensating (army) 170, assembly	(4)	.10
						(Composed of:		
&			13379			*one LQ529A carburetor compensating JET (army) 170 (4)		.09
						one LQ530A carburetor compensating jet needle valve seat fiber		
						WASHER.)		
						JET, carburetor main (army), assembly	(4)	.25
						(Composed of:		
						one LQ517A carburetor cap jet and main jet WASHER,		
%X & &(mb)R &(mb)R &			13397			*one LQ543A carburetor main JET (4.)	1	.24
				M1039	197	JOINT, air duct mudhole cover (between radiator and roof)	3	.45
				M1766	236	JOINT, gasoline filler flange	2	.50
						KEEPER, fixed, ¾", for 1½" strap. (For strap SH285D (1); strap SH443C (1).)	1	.02
						KEEPER, fixed, 1", for 1½" strap. (For strap SH239F (1).)	1	.05
			159		LQ105A	KEY, camshaft lower driving shaft (3/16" x ½" x ¾"). (For water pump (1); shaft LQ94A (2).)	5	.01
& & & & & &			160		LQ78A	KEY, camshaft upper driving shaft (¾" x ½" x 13/16"). (For shaft LQ73A (2); shaft LQ386A (4).)	8	.01
						KEY, clutch (sliding collar)	4	.45
			21		SH861D	KEY, clutch throwout lever feather	5	.28
				M4172	955	KEY, distributor cam	2	.03 P
			D30008			KEY, fan bevel gear box spindle	2	.09
					SH196A			

TANK, MARK VIII

Note symbol	Identification No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
%X	8425	13				PARTS—Continued LEVER, camshaft rocker, right, assembly—Continued. (Composed of: one LQ67A camshaft rocker lever TAPPET, assembly, (gd) one LQ68A camshaft rocker lever tappet SHIM, medium, (gd) one LQ70A camshaft rocker lever tappet SHIM, thick, (gd) one LQ69A camshaft rocker lever tappet SHIM, thin, (gd) one LQ65K camshaft rocker lever tappet SHIM, solid, .032" thick, (gd) one LQ65L camshaft rocker lever tappet SHIM, solid, .05" thick, one LQ65B camshaft rocker roller pin SLEEVE, one LQ65C camshaft rocker roller sleeve PIN.) LEVER, carburetor throttle control shaft, assembly	(1)	\$0.69
%X	8493	15	B8493			(Composed of: *one LQ111A carburetor throttle control shaft LEVER (1) one (LQ112A) BOLT, S. A. E., drilled, ¼" x 1½", assembly.) LEVER, clutch operating LEVER, clutch throwout, left LEVER, clutch throwout, right LEVER, clutch throwout auxiliary operating LEVER, clutch throwout operating LEVER, distributor advance LEVER, control rod rocking. (For center control rods (8); bracket M641 (1).) LEVER, driver's turret flap locking LEVER, driver's turret flap raising LEVER, engine control connecting LEVER, foot brake horizontal LEVER, governor LEVER, high and low speed control, left, assembly (Composed of: two — control lever trigger PIN, assembly, one M744 control lever trigger SPRING,	(1)	.60
&				M772	213A	LEVER, clutch operating	1	9.72
&				M4162	952	LEVER, clutch throwout, left	1	5.15
&				M4163	952	LEVER, clutch throwout, right	1	4.75
&					SH953B	LEVER, clutch throwout auxiliary operating	2	3.25
&				M4164	952	LEVER, clutch throwout operating	1	4.50
&				M640	170	LEVER, control rod rocking. (For center control rods (8); bracket M641 (1).)	10	1.15
&			D29899			LEVER, distributor advance	4	.28 P
&				M2429	415	LEVER, driver's turret flap locking	1	.38
&				M2426	414	LEVER, driver's turret flap raising	1	1.95
&					SH965H	LEVER, engine control connecting	2	1.35
&				M4132	172	LEVER, foot brake horizontal	2	3.18
&					SH144A	LEVER, governor	1	1.19
&						LEVER, high and low speed control, left, assembly	(1)	17.14

&	221			one M739 hand lever TRIGGER, *one M738B high and low speed control LEVER, left (1) one (M776) high and low speed control lever BOLT, assembly, one M741 high and low speed control lever PAWL, one M755 high and low speed control lever pawl STOP, one M748 high and low speed control lever spring PIN, one — high and low speed control lever trigger ROD, assembly, one M742 pawl GUIDE, one M745 trigger spring PIN, two — RIVET, button head, 5/16" x 1 3/4". LEVER, high and low speed control, right, assembly (Composed of: two — control lever trigger PIN, assembly, one M744 control lever trigger SPRING, one M739 hand lever TRIGGER, *one M738A high and low speed control LEVER, right (1) one (M776) high and low speed control lever BOLT, assembly, one M741 high and low speed control lever PAWL, one M755 high and low speed control lever pawl STOP, one M748 high and low speed control lever spring PIN, one — high and low speed control lever trigger ROD, assembly, one M742 pawl GUIDE, one M745 trigger spring PIN, two — RIVET, button head, 5/16" x 1 3/4".) LEVER, high speed selector, left LEVER, high speed selector, right LEVER, low speed brake horizontal, left LEVER, low speed brake horizontal, right LEVER, low speed selector, left LEVER, low speed selector, right LEVER, periscope hole cover, assembly (Composed of: *one M2410 periscope hole cover LEVER (4) *one SH438D periscope hole cover lever locking LUG one SH438C periscope lever RING, one — RIVET, button head, 5/16" x 5/8", For outlook turret (2); roof door (1); driver's turret (1).)	(1)	13.09
				one M739 hand lever TRIGGER, *one M738B high and low speed control LEVER, left (1) one (M776) high and low speed control lever BOLT, assembly, one M741 high and low speed control lever PAWL, one M755 high and low speed control lever pawl STOP, one M748 high and low speed control lever spring PIN, one — high and low speed control lever trigger ROD, assembly, one M742 pawl GUIDE, one M745 trigger spring PIN, two — RIVET, button head, 5/16" x 1 3/4". LEVER, high and low speed control, right, assembly (Composed of: two — control lever trigger PIN, assembly, one M744 control lever trigger SPRING, one M739 hand lever TRIGGER, *one M738A high and low speed control LEVER, right (1) one (M776) high and low speed control lever BOLT, assembly, one M741 high and low speed control lever PAWL, one M755 high and low speed control lever pawl STOP, one M748 high and low speed control lever spring PIN, one — high and low speed control lever trigger ROD, assembly, one M742 pawl GUIDE, one M745 trigger spring PIN, two — RIVET, button head, 5/16" x 1 3/4".) LEVER, high speed selector, left LEVER, high speed selector, right LEVER, low speed brake horizontal, left LEVER, low speed brake horizontal, right LEVER, low speed selector, left LEVER, low speed selector, right LEVER, periscope hole cover, assembly (Composed of: *one M2410 periscope hole cover LEVER (4) *one SH438D periscope hole cover lever locking LUG one SH438C periscope lever RING, one — RIVET, button head, 5/16" x 5/8", For outlook turret (2); roof door (1); driver's turret (1).)		
&	223	6	M759	LEVER, high speed selector, left	1	9.50
				LEVER, high speed selector, right		
&	172	6	M758 M4133	LEVER, low speed brake horizontal, left	1	3.18
				LEVER, low speed brake horizontal, right		
&	225	6	M756 M757	LEVER, low speed selector, left	1	4.50
				LEVER, low speed selector, right		
&	438			LEVER, periscope hole cover, assembly (Composed of: *one M2410 periscope hole cover LEVER (4) *one SH438D periscope hole cover lever locking LUG one SH438C periscope lever RING, one — RIVET, button head, 5/16" x 5/8", For outlook turret (2); roof door (1); driver's turret (1).)	(4)	.53
				LEVER, periscope hole cover, assembly (Composed of: *one M2410 periscope hole cover LEVER (4) *one SH438D periscope hole cover lever locking LUG one SH438C periscope lever RING, one — RIVET, button head, 5/16" x 5/8", For outlook turret (2); roof door (1); driver's turret (1).)		
&				LEVER, high speed selector, left	1	9.50
				LEVER, high speed selector, right		
&				LEVER, low speed brake horizontal, left	1	3.18
				LEVER, low speed brake horizontal, right		
&				LEVER, low speed selector, left	1	4.50
				LEVER, low speed selector, right		
&				LEVER, periscope hole cover, assembly (Composed of: *one M2410 periscope hole cover LEVER (4) *one SH438D periscope hole cover lever locking LUG one SH438C periscope lever RING, one — RIVET, button head, 5/16" x 5/8", For outlook turret (2); roof door (1); driver's turret (1).)	(4)	.53
				LEVER, periscope hole cover, assembly (Composed of: *one M2410 periscope hole cover LEVER (4) *one SH438D periscope hole cover lever locking LUG one SH438C periscope lever RING, one — RIVET, button head, 5/16" x 5/8", For outlook turret (2); roof door (1); driver's turret (1).)		
&				LEVER, high speed selector, left	1	9.50
				LEVER, high speed selector, right		
&				LEVER, low speed brake horizontal, left	1	3.18
				LEVER, low speed brake horizontal, right		
&				LEVER, low speed selector, left	1	4.50
				LEVER, low speed selector, right		
&				LEVER, periscope hole cover, assembly (Composed of: *one M2410 periscope hole cover LEVER (4) *one SH438D periscope hole cover lever locking LUG one SH438C periscope lever RING, one — RIVET, button head, 5/16" x 5/8", For outlook turret (2); roof door (1); driver's turret (1).)	(4)	.53
				LEVER, periscope hole cover, assembly (Composed of: *one M2410 periscope hole cover LEVER (4) *one SH438D periscope hole cover lever locking LUG one SH438C periscope lever RING, one — RIVET, button head, 5/16" x 5/8", For outlook turret (2); roof door (1); driver's turret (1).)		

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&						PARTS—Continued	(1)	\$13.17
						LEVER, reverse operating, assembly (Composed of: two — control lever trigger PIN, assembly, one M744 control lever trigger SPRING, one M739 hand lever TRIGGER, one M742 pawl GUIDE, one M780 reverse lever PAWL, *one M177 reverse operating LEVER (1) one — reverse operating lever trigger ROD, assembly, one M745 trigger spring PIN, two — RIVET, button head, 5/16" x 1 3/4".)		
						214		
&	50	2				LEVER, spark and throttle control, assembly (Composed of: one SH964A spark and throttle control lever BRACKET, one SH964C spark and throttle control lever friction DISC, two SH964F spark and throttle control lever friction WASHER, one — spark and throttle control lever HUB, assembly, one — spark and throttle control lever STUD, assembly.)	(2)	7.48
						SH964D LEVER, spark and throttle control		
						SH970A LEVER, spark control bell crank, lower		
&	—	12				SH970C LEVER, spark control bell crank, upper	2	1.75
						SH67B LEVER, starting crank		
						SH966F LEVER, throttle control bell crank		
&	—	12				LEVER, transmission brake	1	1.35
						686 LEVER, transmission high speed brake, assembly		
						(Composed of: *one M355B transmission high speed brake LEVER, left (2) *one M355A transmission high speed brake LEVER, right (2) four — RIVET, button head, 3/8" x 1 3/4".)		
&	8	31-32		M330		LEVER, transmission vertical shifter shaft, bottom	4	1.25
						LEVER, transmission high speed brake, assembly		
						(Composed of: *one M355B transmission high speed brake LEVER, left (2) *one M355A transmission high speed brake LEVER, right (2) four — RIVET, button head, 3/8" x 1 3/4".)		
&	11	30				LEVER, transmission vertical shifter shaft, top	(2)	3.14
						697 LEVER, spark control bell crank, lower		
						697 LEVER, spark control bell crank, upper		
&	21	23		M304		SH67B LEVER, starting crank	1	1.55
						SH966F LEVER, throttle control bell crank		
						686 LEVER, transmission brake		
&	16	23		M303		LEVER, transmission high speed brake, assembly	4	4.12
						(Composed of: *one M355B transmission high speed brake LEVER, left (2) *one M355A transmission high speed brake LEVER, right (2) four — RIVET, button head, 3/8" x 1 3/4".)		
						LEVER, transmission vertical shifter shaft, bottom		
&	16	23				LEVER, transmission vertical shifter shaft, top	(2)	3.14
						697 LEVER, spark control bell crank, lower		
						697 LEVER, spark control bell crank, upper		

&			LID, accessories and ration box, assembly (Composed of: *one M4040A accessories and ration box LID (2) two M2158 HINGE, butt, 2" x 4¼", six — RIVET, button head, ¼" x ⅞".)	(2)	6.55
&	592		LID, ammunition storage, assembly (Composed of: *one SH576G ammunition storage LID (2) one SH576D ammunition storage lid BATTEN, long, one SH576F ammunition storage lid BATTEN, short, left, one SH576E ammunition storage lid BATTEN, short, right, two SH576K HINGE, 2½" x 2½", six — RIVET, button head, ¼" x 9/16", fourteen — SCREW, wood, countersunk head, No. 10 (3/16+" x ⅝")	(2)	5.57
&			LID, 6-pdr. gun box, left		4.82
&	SH942E		LID, 6-pdr. gun box, right	1	3.75
&	SH942D	3	LINING, brake, 1½" wide, ¼" thick, ft. (Raybestos or equal) (2 pieces 27¾" long required for lining MX109; 2 pieces 13¾" long required for lining M364)	1	3.75
(mh)&	—	30	LINING, brake, 2" wide, 3/16" thick, ft. (Raybestos or equal) (1 piece 27¾" long required for clutch throwout stop band M4158)	—	.45 P
(mh)&			LINING, brake, 2¾" wide, 5/16" thick ft. (Raybestos or equal) (4 pieces 36 7/16" long required for lining MX107)	—	1.02
(mh)&			LINING, brake, 3¼" wide, 5/16" thick, ft. (Raybestos or equal) (4 pieces 35½" long required for lining MX108)	—	.62 P
&	SH997C		LINING, clutch	—	.84 P
&	M4159		LINING, clutch throwout stop	1	4.50
%X	M337	2	LINK, brake band suspension	1	.75
&	M771	—	LINK, brake connecting	4	3.75
&	SH944C		LINK, clutch swing, long	8	.32
%X	SH944B		LINK, clutch swing, short	1	1.74
%X	M769	—	LINK, foot brake	1	1.24
&	M770	6	LINK, foot brake suspension	2	3.25
&	M784	—	LINK, front control swing	1	1.95
%X	M763	6	LINK, low speed brake	4	3.95
&		—	LINK, low speed brake suspension, assembly (Composed of: *one M760 low speed brake suspension LINK (2) one — low speed brake suspension PIN, assembly.)	2	3.25
	212		LINK, low speed connecting	(2)	2.05
&	M762	—	LINK, low speed connecting	2	1.56
		6			5.04

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
& %X %X & &	1	26	13539 L13151 6 8163	M749	SH50A 51 51 LQ559A LQ423A 227 LQ219A	PARTS—Continued	(156)	\$31.70 6.50 6.50 .01 1 .06 1 .26 2 .10 2.23
						LINK, track, assembly (Composed of:		
						*two M1265 track LINK, left half (312)		
						*two M1261 track LINK, right half (312)		
						two M1263 track link BUSHING, two — track link PIN, assembly.)		
& %X %X & &	— 61	2				LOCK, carburetor cap jet	4 1 1 2 (4)	
						LOCK, carburetor to intake header stud nut		
						LOCK, control lever		
						LOCK, crank case oil filler cover		
						LOCK, door, left, assembly		
&						(Composed of: one M719 door lock CATCH, left, one E20/21195 door lock HANDLE, one M721 door lock SPINDLE, one M722 door lock SPRING, *one M715 lock BRACKET, left (4)	(2)	.38 .22 2.23
						*one M717 lock packing PIECE, left (4)		
						two — RIVET, button head, ¼" x ¾", two — RIVET, button head, ¼" x 1¼", For door lock, left (2); main turret side flap (1).)		
						LOCK, door, right, assembly		
						(Composed of: one M720 door lock CATCH, right, one E20/21195 door lock HANDLE, one M721 door lock SPINDLE, one M722 door lock SPRING, *one M716 lock BRACKET, right (4)		
&						*one M718 lock packing PIECE, right (4)		.38 .22
						two — RIVET, button head, ¼" x ¾", two — RIVET, button head, ¼" x 1¼".)		

&					LOCK, gasoline tank cover, assembly (Composed of: one M722 door lock SPRING, *one M1793 gasoline tank cover latch SPINDLE (2) *one M716 lock BRACKET (4) one M720 lock CATCH, right, *one M718 lock packing PIECE, right (4) two — RIVET, button head, 1/4" x 3/4", two — RIVET, button head, 1/4" x 1 1/4".)	(2)	1.71
	%X				LOCK, lower crank case sump cover	1	.35
	%X				LOCK, oil pump upper screen nut	1	.02
	&				LOCK, turret roof door chubb, with three keys	1	1.50
					LOOP strap, No. 1. (For strap fastener, No. 2 (1).)	4	.07 P
	(mh)&				LUBRICATOR, transmission mechanical, assembly	(1)	37.32
	&				(Composed of: six SH102H transmission mechanical lubricator adjusting BUTTON, six (SH101Q) transmission mechanical lubricator BOLT, assembly, one SH101P transmission mechanical lubricator cam SHAFT, six SH101G transmission mechanical lubricator center piece WASHER, one SH105A transmission mechanical lubricator COVER, six SH101A transmission mechanical lubricator cylinder pump HEADER, six SH102B transmission mechanical lubricator delivery CONNEC- TION, six SH102D transmission mechanical lubricator delivery screw CAP, six SH102E transmission mechanical lubricator delivery tube NUT, six SH101L transmission mechanical lubricator ECCENTRIC, six SH101M transmission mechanical lubricator eccentric PIN, six SH102F transmission mechanical lubricator feed adjusting CAM, six SH103A transmission mechanical lubricator feed pump HEADER, M-G, twelve SH101J transmission mechanical lubricator flat SPRING, six SH102G transmission mechanical lubricator force feed ECCEN- TRIC, six SH105C transmission mechanical lubricator (lower plunger) YOKE, six SH105E transmission mechanical lubricator oil PAN,		

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
& * & %X %(gr)X	12123	15	C12123	MX86 M2839 MX87	681 692 LQ168A	PARTS—Continued LUBRICATOR, transmission mechanical, assembly—Continued. (Composed of: six SH101E transmission mechanical lubricator PLUG, six SH101K transmission mechanical lubricator PLUNGER, lower, six SH104B transmission mechanical lubricator PLUNGER, upper, six SH104F transmission mechanical lubricator sight feed TUBE, six SH105G transmission mechanical lubricator snap PIN, six SH104K transmission mechanical lubricator suction screen BODY, six SH104L transmission mechanical lubricator suction screen STRAINER, six SH104D transmission mechanical lubricator suction screen TOP, six SH101B transmission mechanical lubricator suction TUBE, six SH104E transmission mechanical lubricator suction tube screen BOTTOM, six SH104C transmission mechanical lubricator suction tube SPRING, six SH105B transmission mechanical lubricator upper plunger YOKE, one SH103B transmission mechanical lubricator worm GEAR, one — PACKING, 3/16" x 6", six — PIN, brass, 1/16" x 1/8", six — PIN, split, 3/32" x 3/8", six — SCREW, machine, headless, No. 7—32 x 1/4", six — SCREW, machine, round head, brass, No. 10—24 x 1/4", six — SCREW, machine, round head, No. 10—24 x 1/4") LUG, low speed brake band stop LUG, sponson. (For holding sponson in position.) LUG, track brake band stop MANIFOLD, cylinder water inlet MANIFOLD, exhaust, left, assembly (Composed of:	2 2 2 2 (1)	\$0.42 1.00 .42 15.00 33.32

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
(pf)&						NIPPLE, pipe, W. I., ½" x 2". (For combination valve to flexible tube connec- tion (1).)	1	\$0.03 P
(pf)&						NIPPLE, pipe, W. I., ½" x 3¼". (For combination valve to flexible tube con- nection (1).)	1	.04 P
(pf)&						NIPPLE, pipe, W. I., ½" x 3½". (For combination valve to flexible tube con- nection (1).)	1	.04 P
(pf)&	—	24			169	NIPPLE, pipe, W. I., ¾" x 2". (For pipe M1229 (1).)	1	.04 P
(pf)&	—	24				NIPPLE, pipe, W. I., 1" x 1½". (For pipe M1229 (3).)	3	.04 P
(pf)&	—	24				NIPPLE, pipe, W. I., 1" x 3". (For pipe M1229 (1).)	1	.04 P
(pf)&	—	24				NIPPLE, pipe, W. I., 1" x 3½". (For pipe M1229 (1).)	1	.04 P
%(pf)X						NIPPLE, pipe, W. I., close, ¼". (For regulating tank flexible connection (2).)	2	.03 P
%(pf)X						NIPPLE, pipe, W. I., close, ½" x 1¾". (For housing M250 (1).)	1	.03 P
(pf)X					B6498QA	NIPPLE, short, ¼" x 1½" (G. I.). (For tube C8012 (1).)	3	.03 P
%X					SH199G	NIPPLE, water tank filler pipe	1	.12 P
%X				MX102	SH901B	NUT, air pressure pump check	4	.06
%X					713	NUT, air pressure pump stud (jam, S. A. E., ½", ¾" thick)	2	.02 P
&			D29734			NUT, ball bearing retaining. (For distributor lower bearing (1).)	2	.10 P
%X					SH996D	NUT, battery shelf support holding down bolt	6	.15
&	8066	13	B8066		LQ91A	NUT, cam shaft driving shaft; housing packing	2	.54
&			B8122		LQ57A	NUT, cam shaft housing cover oil connection	2	.14
&			8142		LQ106A	NUT, cam shaft lower driving shaft	2	.35
&			13362		LQ514A	NUT, carburetor altitude air valve and yoke end bolt	6	.04
%X			13386		LQ585A	NUT, carburetor float cover wing	4	.02
&(sh)R						NUT, castle, S. A. E., 7/16". (For bolt MX26)	32	.01 P
&(sh)R						NUT, castle, S. A. E., ½". (For stud MX14; stud MX98; bolt MX8; bolt MX11; stud MX12.)	30	.01 P
%(sh)R						NUT, castle, S. A. E., ¾". (For stud A7681; shaft SH65L; bolt M317.)	9	.01 P
%(sh)R						NUT, castle, S. A. E., ¾". (For stud MX10; Stud MX36; stud MX5; stud MX25; spindle SH282D (2); spindle SH144B; bolt MX1.)	47	.01 P
%(sh)R						NUT, castle, S. A. E., 7/8". (For bolt M318.)	6	.01 P

&	D29573			NUT, castle, No. 6—32 x .218" x .188" thick. (For distributor resistance unit mounting stud D29663; distributor contact arm spring screw D29574.)	6	.03 P
&	D29864			NUT, castle, No. 10—30 x .437" x .218" thick. (For voltage regulator terminal stud D30366; ignition switch, assembly D1120 (9); distributor advance lever stud D29896; ignition switch screw D30362; generator field coil stud D29829; generator field coil stud D30383.)	19	.06 P
&	D30646			NUT, castle, No. 10—30 x .437" x .406" thick. (For distributor condenser and breaker plate stud D29595.)	2	.03 P
&	D29917			NUT, castle, ¼"—28 x .437" x .281" thick. (For voltage regulator; assembly D5721; voltage regulator terminal stud D30380; generator brush arm mounting stud D29811; distributor ignition coil and distributor head stud D29635.)	7	.03 P
&	D30527			NUT, castle, ¼"—28 x .437" x .281" thick. (For regulator voltage, assembly D5718.)	1	.03 P
&	D30309			NUT, castle, ¾"—24 x 9/16" x 13/32" thick. (For generator armature shaft (commutator end).)	1	.03 P
%X			SH955B	NUT, clutch stop eyebolt (plain, U. S. Std., hexagon, ¾" thick)	1	.03 P
(ee)&			SH955D	NUT, clutch throwout stop rod	2	.02 P
(ee)&				NUT, conduit lock, ½". (For conduit A8406.)	4	.04 P
(ee)&				NUT, conduit lock, ¾". (For conduit A8405.)	2	.02 P
(ee)&				NUT, conduit lock, 1". (For conduit A8404.)	2	.03 P
(ee)&				NUT, conduit lock, 1½". (For conduit A8403.)	2	.06 P
&	18 B14284	13220	LQ126A	NUT, connecting forked end rod bolt	24	.03
&	18 14283	13251	LQ134A	NUT, connecting plain end rod bolt	12	.04
&	B265		LQ244A	NUT, crank case lower to upper bolt	50	.07
&	21	26	SH136A	NUT, crank shaft	1	.72
&	B12222		LQ275A	NUT, crank shaft flywheel hub thrust bearing retaining	1	1.87
&(sh)R				NUT, crown, U. S. Std., 7/16". (For sprocket X257 (1); shaft X266 (1).)	3	.01 P
%(sh)R				NUT, crown, U. S. Std., ½". (For separator SH234G (2); axle SH234K (2); axle SH234L (1).)	5	.01 P
%X	B13535		LQ249A	NUT, crown, U. S. Std., ¾". (For pin M4165 (1).)	1	.01 P
&	P300		586	NUT, cylinder to crank case stud (flanged). (For stud LQ247A (1).)	28	.10
(gy)&	S11		586	NUT, distance recorder cable casing coupling	2	.12 P
&	D29494			NUT, distance recorder drive pinion	1	.04 P
&	D30535			NUT, distributor contact arm dismounting stud	6	.15 P
&	D13811			NUT, distributor cup stud	8	.05 P
&				NUT, distributor head, with connector, assembly	(4)	.16 P
				(Composed of:		
				*one D29694 distributor head attaching SPRING,		
				*one D13735 distributor head terminal NUT,		
				*one D29664 distributor induction coil CONNECTOR.)		

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
%X & & %(pf)R			D31698 D30996		SH207D Q50AA	NUT, distributor head high tension terminal	12	\$0.01 P
						NUT, distributor terminal screw (brass, round, No. 10—35 x .36" x .171" thread)	4	.02 P
						NUT, (engine) oil tank suction oil tube nipple	2	.08
& & &	8151	16	D29763 13478		LQ401A SH142C	NUT, flared tube union, S. A. E., 1/4". (For oil pressure gage SH559C (1); pipe SH99H (1); pipe (assembly) SH99G (1); pipe (assembly) SH559D (1))	4	.11 P
						NUT, generator drive shaft end housing packing	1	.06 P
						NUT, generator driving shaft	1	.35 P
% (sh)R % (sh)R &	13	22		M313	679 LQ192A	NUT, governor arm bushing set screw (jam, 3/4")	1	.02 P
						NUT, jam, U. S. Std., 5/16". (For screw B33N (2))	20	.01 P
						NUT, jam, U. S. Std., 1". (For foot M391 (1))	2	.02 P
% (sh)R % (sh)R % (sh)R						NUT, large planet pinion. (For shaft M782 (2); pin M284 (1))	8	.24
						NUT, lower crank case bearing bolt	16	.08
						NUT, machine screw, No. 8 (5/32")—30. (For screw, machine, round head, No. 8 x 3/4"; airplane watch mat screw; machine screw, NC round head, No. 8 x 1 (1))	14	.01 P
%X %X %X	—	33	8535		LQ456A SH373Q SH664B	NUT, machine screw, No. 10 (3/16")—24. (For screw, machine, round head, No. 10 x 1/2"; screw, machine, round head, No. 10 x 3/4"; screw, machine, round head, No. 10 x 1")	7	.01 P
						NUT, oil pump upper screen	1	.03
						NUT, pigeon basket hook (U. S. Std., hexagon, 1/2", 5/16" thick)	1	.02 P
% (sh)R % (sh)R % (sh)R % (sh)R						NUT, pipe, elbow, 1/4" (Herring Motor Co. type No. 61F). (For cap M298; cap M294)	4	.02 P
						NUT, pipe lock, 3/8". (For eyebolt M3190.)	2	.03 P
						NUT, pipe lock, 3/4". (For rod M566 (2); rod M571 (2))	4	.04 P
% (sh)R % (sh)R % (sh)R						NUT, plain, S. A. E., hexagon, 1/4". (For bolt SH101Q.)	6	.01 P
						NUT, plain, S. A. E., hexagon, 5/16". (For rod SH993A; rod SH968H)	2	.01 P
						NUT, plain, S. A. E., hexagon, 3/8". (For bolt MX22 (2); stud MX99; screw M400; bolt, S. A. E., 3/8" x 2 1/4"; rod SH968D (2); rod SH993K; rod SH968A (2); rod SH969B (2))	31	.01 P
% (sh)R						NUT, plain, S. A. E., hexagon, 1/2". (For stud MX99; screw MX88; screw M343; rod SH969C (2); rod SH969D (2); rod SH969A (2))	20	.01 P

% (sh)R % (sh)R % (sh)R	NUT, plain, S. A. E., hexagon, $\frac{3}{4}$ " (For bolt M388)	2	.01 P
	NUT, plain, U. S. Std., hexagon, $\frac{3}{16}$ " (For bolt, U. S. Std., hexagon head, $\frac{3}{16}$ " x $\frac{5}{8}$ ")	4	.01 P
% (sh)R	NUT, plain, U. S. Std., hexagon, $\frac{1}{4}$ " (For rod M743; rod M778; bolt, U. S. Std., hexagon head, $\frac{1}{4}$ " x $\frac{5}{8}$ "; bolt, U. S. Std., hexagon head, $\frac{1}{4}$ " x $\frac{3}{4}$ "; bolt, U. S. Std., hexagon head, $\frac{1}{4}$ " x $\frac{7}{8}$ " for strap SH569P (2); bolt, U. S. Std., hexagon head, $\frac{1}{4}$ " x 1"; bolt, U. S. Std., hexagon head, $\frac{1}{4}$ " x 1 $\frac{1}{2}$ "; bolt, U. S. Std., hexagon head, $\frac{1}{4}$ " x 1 $\frac{3}{4}$ "; bolt, U. S. Std., hexagon head, $\frac{1}{4}$ " x 1 $\frac{5}{8}$ "; bolt, U. S. Std., hexagon head, $\frac{1}{4}$ " x 1 $\frac{7}{8}$ "; bolt, U. S. Std., hexagon head, $\frac{1}{4}$ " x 1 $\frac{15}{16}$ "; screw, cap, U. S. Std., button head, $\frac{1}{4}$ " x 2"; brace SH960C (2))	61	.01 P
	NUT, plain, U. S. Std., hexagon, $\frac{5}{16}$ " (For stud X251; block X263 (2); block X262 (2); bolt, U. S. Std., hexagon head, $\frac{5}{16}$ " x $\frac{1}{2}$ "; bolt, U. S. Std., hexagon head, $\frac{5}{16}$ " x $\frac{3}{4}$ "; bolt, U. S. Std., hexagon head, $\frac{5}{16}$ " x 1"; bolt, U. S. Std., hexagon head, $\frac{5}{16}$ " x 1 $\frac{1}{4}$ "; screw, cap, U. S. Std., hexagon head, $\frac{5}{16}$ " x 1"; screw, cap, round head, $\frac{5}{16}$ " x 1" (2))	101	.01 P
% (sh)R % (sh)R	NUT, plain, U. S. Std., hexagon, $\frac{5}{16}$ " bronze. (For plug SH951E.)	3	.03 P
	NUT, plain, U. S. Std., hexagon, $\frac{3}{8}$ " (For stud SH194D; bolt SH550A; bolt SH402L (2); bolt, U. S. Std., countersunk head, $\frac{3}{8}$ " x $\frac{1}{2}$ "; bolt, U. S. Std., countersunk head, $\frac{3}{8}$ " x 1 $\frac{1}{2}$ "; bolt, U. S. Std., hexagon head, $\frac{3}{8}$ " x $\frac{1}{4}$ "; bolt, U. S. Std., hexagon head, $\frac{3}{8}$ " x $\frac{1}{2}$ "; bolt, U. S. Std., hexagon head, $\frac{3}{8}$ " x 1 $\frac{1}{4}$ "; bolt, U. S. Std., hexagon head, $\frac{3}{8}$ " x 1 $\frac{1}{2}$ " for housing SH145A; bolt, U. S. Std., hexagon head, $\frac{3}{8}$ " x 1 $\frac{5}{16}$ "; bolt, U. S. Std., hexagon head, $\frac{3}{8}$ " x 1 $\frac{3}{4}$ "; bolt, U. S. Std., hexagon head, $\frac{3}{8}$ " x 1 $\frac{1}{2}$ "; bolt, U. S. Std., hexagon head, $\frac{3}{8}$ " x 1 $\frac{3}{8}$ "; bolt, U. S. Std., hexagon head, $\frac{3}{8}$ " x 2 $\frac{1}{4}$ "; bolt, U. S. Std., hexagon head, $\frac{3}{8}$ " x 2"; bolt, U. S. Std., hexagon head, $\frac{3}{8}$ " x 2 $\frac{1}{2}$ "; bolt, U. S. Std., hexagon head, $\frac{3}{8}$ " x 3 $\frac{1}{2}$ "; pin M2149; screw, cap, U. S. Std., flat head, $\frac{3}{8}$ " x 1 $\frac{1}{2}$ "; screw cap, U. S. Std., flat head, $\frac{3}{8}$ " x 1 $\frac{5}{16}$ "; screw, cap, U. S. Std., flat head, $\frac{3}{8}$ " x 1 $\frac{1}{2}$ ")	226	.01 P
% (sh)R % (sh)R	NUT, plain, U. S. Std., hexagon, brass, $\frac{3}{8}$ " (For clamp SH154A (2); clamp SH154C (2))	8	.03 P
	NUT, plain, U. S. Std., hexagon, $\frac{7}{16}$ " (For screw M4175; bolt, U. S. Std., hexagon head, $\frac{7}{16}$ " x 1"; bolt, U. S. Std., hexagon head, $\frac{7}{16}$ " x 1 $\frac{1}{8}$ "; screw, cap, U. S. Std., round head, $\frac{7}{16}$ " x 1 $\frac{1}{4}$ ")	29	.02 P

PARTS—Continued

[illegible]

Note symbol	Identification No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
& %(sh)R %(sh)R %(sh)R %(sh)R %(sh)R %(sh)R			W-S1029			PARTS—Continued		
						NUT, starting and lighting battery sealing (lead, single thread).....	12	\$0.08 P
						NUT, stove bolt, 3/16" (For stove bolt, flat head, 3/16" x 1"; stove bolt, round head, 3/16" x 5/8")	4	.01 P
						NUT, stove bolt, 1/4" (For stove bolt, round head, 1/4" x 7/16"; stove bolt, round head, 1/4" x 1/2"; stove bolt, round head, 1/4" x 5/8"; stove bolt, round head, 1/4" x 3/4" (2); stove bolt, round head, 1/4" x 1"; stove bolt, round head, 1/4" x 1 1/4"; stove bolt, round head, 1/4" x 2")	92	.01 P
						NUT, switch and voltage regulator stud	2	.06 P
						NUT, towing shackle pin	8	.25
						NUT, transmission bevel pinion shaft	1	.26
						NUT, transmission brake adjusting	4	1.58
						NUT, transmission high speed brake adjusting	2	1.05
						NUT, transmission mechanical lubricator delivery tube	6	.24
& %(sh)R %X %X %X %X %X %X %X %X			D30360	M3921 MX33 M332 M357 L8459	647 705 687 698 SH102E SH101D LQ462A SH412A	NUT, transmission mechanical lubricator stuffing box gland	1	.07
						NUT, tube union, 1/4". (For tube LQ461A.)	4	.03
						NUT, turret roof door fastener pin	4	
						NUT, U. S. Std., round, 3/16". (For bolt, U. S. Std., countersunk head, 3/16" x 9/16".)	6	.01 P
						NUT, U. S. Std., round, 1/4". (For bolt, U. S. Std., countersunk head, 1/4" x 5/8".)	12	.01 P
						NUT, U. S. Std., square, 1/4". (For bolt, carriage, 1/4" x 1 9/16".)	86	.01 P
						NUT, U. S. Std., square, 3/8". (For bolt, carriage, 3/8" x 1 1/2"; bolt, U. S. Std., square head, 3/8" x 1 1/4".)	16	.01 P
						NUT, U. S. Std., square, 5/8". (For bolt, U. S. Std., square head, 5/8" x 1 1/2"; bolt, U. S. Std., square head, 5/8" x 1 3/4"; bolt, U. S. Std., square head, 5/8" x 2 1/16"; bolt, U. S. Std., square head, 5/8" x 2 1/4"; bolt, U. S. Std., square head, 5/8" x 2 5/8".)		
						NUT, ventilating fan coupling (S. A. E., 1/4", 3/16" thick)	25	.01 P
						NUT, ventilating fan sprocket (S. A. E., 1/2", 3/16" thick)	2	.04
%X %X	8214	17	8214		SH958E SH958F LQ147A	NUT, water pump shaft	1	.14

%X		D13838					OILER, generator end cover	1 (1)	.0615
%X	8	14					OUTLET, intake header water, double, assembly (Composed of: two LQ422A) carburetor to intake header BOLT; assembly, one LQ423A carburetor to intake header stud nut LOCK, one LQ413A intake header water OUTLET, double (1) one — GASKET, copper asbestos, %", one LQ145A PLUG, hexagon head, %").		4.47
	C12428				LQ415A		OUTLET, intake header water, single	1	2.84
%X	4	14	C12427	M387	669	PACKER, transmission frame, fiber (additional)		4	.15
%X				M386	669	PACKER, transmission frame, fiber (main)		6	.15
(mh)&						PACKING, asbestos-graphite, 3/16", spool (2 pieces 11 9/16" long required for water pump packing)		—	.50 P
&	11	14	8068		LQ90A		PACKING, cam shaft driving shaft upper housing	2	.10
&	8068	13		M188	70	PACKING, engine double point suspension		2	.18
&				M187	70	PACKING, engine single point suspension		1	.12
&				M1753D	653	PACKING, gasoline tank, No. 1		2	.40
&				M1753E	653	PACKING, gasoline tank, No. 2		2	.35
&				M1753F	653	PACKING, gasoline tank, No. 3		2	.30
&				M1753G	654	PACKING, gasoline tank, floor		1	5.25
&				M1753H	655	PACKING, gasoline tank, front end (assembled)		3	.75
&				M1753A	654	PACKING, gasoline tank, front end		1	3.00
&				M1753J	655	PACKING, gasoline tank, rear end		3	.60
&				M1753M	655	PACKING, gasoline tank, rear end		1	2.25
&				M1753L	655	PACKING, gasoline tank casing, side, left		1	3.25
&				M1753K	655	PACKING, gasoline tank casing, side, right		1	3.25
&			D30374			PACKING, generator drive shaft end housing		1	.02 P
&					SH424A	PACKING, hemispherical turret anti-splash half, top		6	1.75
&				M3124	428	PACKING (hemispherical turret support) bracket		(gt) 24	.18
&				M2160	270	PACKING, machine gunner's seat hinge		4	.18
*				M2438	424	PACKING, main turret periscope clip		(4)	.05
*				M1907	534	PACKING, roof (behind front louvre)		(1)	3.40
&				M2817	473	PACKING, sponson seat hinge		4	.24
&				M3125	428	PACKING, trunion		(gt) 24	.72
&				M2109	380	PACKING (under left side deflector channel)		1	1.82
&				M2112	380	PACKING (under rear deflector channels)		2	.82
&				M2823	473	PACKING (upper and lower spare barrel clip (sponson))		2	.18
%X					101	PACKING, 3/16" x 6". (For shaft SH101P (I).)		1	.05

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
%cpX (cp) ^{ys}						PADLOCK, No. 840, with padlock clevis. (For outside tool chest (1).)	(1)	\$2.10 P
						PADLOCK, No. 840, with standard chain No. 1, assembly (Composed of: one — CHAIN, standard, No. 1, assembly, one JB5F PADLOCK, No. 840, with padlock clevis.)	(1)	2.54 P
&					SH105E	PAN, transmission mechanical lubricator oil	6	.08
						PAWL, high and low speed control lever	2	.68
&					219	PAWL, reverse lever	1	.44
						PEDAL, brake	1	10.00
%X					633	PEG, peep hole cover plate operating	20	.05
						PIECE (exhaust pipe) filler	4	.28
%X					SH402M SH985L	PIECE, extension, ½". (For tube SH984B.)	1	.10
						PIECE, fan bevel gear box pulley distance	1	.22
&					196	PIECE, foot brake gear distance	1	.74
						PIECE, foot brake bridge distance	1	.74
&					217	PIECE, gasoline tank cover hinge, left, assembly (Composed of: two SH537B gasoline tank cover HINGE, female, *one SH536B gasoline tank cover hinge PIECE (1) four — RIVET, button head, ⅝" x 1⅝".)	(1)	5.11
						PIECE, gasoline tank cover hinge, right, assembly (Composed of: two SH537B gasoline tank cover HINGE, female, *one SH536A gasoline tank cover hinge PIECE (1) four — RIVET, button head, ⅝" x 1⅝".)	(1)	5.11
&						PIECE, gasoline tank packing, top (front), assembly (Composed of: *one M1753C gasoline tank packing PIECE, top (1) one — STRIP, felt, 4⅝" x 38" x ¼".)	(1)	1.25
						PIECE, gasoline tank packing, top (rear), assembly	(1)	.80
&					653	PIECE, gasoline tank packing, top (rear), assembly	(1)	.95

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
*				M1910	534	PIECE, roof plate packing (behind rear louvre)	(1)	\$1.76
*				M2036	330	PIECE, sponson stiffener packing	(2)	14.76
&				M775	217	PIECE, swing link distance	4	.22
&	55	22		M249	705	PIECE, transmission bevel pinion shaft bearing distance	2	.35
	8	23		B34G		PIN, ball mount ball locking	5	.38
%cX						PIN, brass, 1/16" x 1/8". (For cover SH105A (6).)	6	.01 P
&(gh)R						PIN, brass, .09" x .210". (For voltage regulator, assembly D5718.)	1	.01 P
&			D80515		LQ120A	PIN, brazing (see nail 2d finishing)	—	.01 P
					LQ83A	PIN, brazing (see nail 8d finishing)	—	.01 P
&					LQ65C	PIN, cam shaft rocker roller sleeve. (For lever LQ62A (1); Lever LQ60A (1).)	24	.08
%X			13358		LQ513A	PIN, carburetor air intake dowel	4	.01
&			13411		LQ552A	PIN, carburetor bail hook (screw for scoop spring)	4	.27
&			13412		LQ553A	PIN, carburetor bail hook pin taper	4	.01
&						PIN, carburetor float cover clamp bolt, assembly	(4)	.06
						(Composed of:		
			13384			*one LQ533A carburetor float cover clamp bolt PIN (4).		.05
						one — PIN, split, 1/16" x 1/2".		
%X						PIN, clutch throwout bell crank, assembly	(1)	.56
						(Composed of:		
					955	*one M4165 clutch throwout bell crank PIN (1)		.51
						one — NUT, crown, U. S. Std., 5/8",		
						one — PIN, split, 5/32" x 1".		
%X						PIN, clutch throwout lever, assembly	(2)	.82
						(Composed of:		
						*one SH943A clutch throwout lever PIN (2)		.78
						one — NUT, plain, U. S. Std., hexagon, 5/8",		
						one — WASHER, lock, 5/8".		
%X						PIN, clutch throwout stop band, assembly	(1)	.26
						(Composed of:		

%X	955	*one M4157 clutch throwout stop band PIN (1) one — PIN, split, $\frac{1}{8}$ " x $\frac{7}{16}$ ") PIN, clutch throwout stop rod, assembly (Composed of: *one M4152 clutch throwout stop rod PIN (1) one — PIN, split, $\frac{1}{8}$ " x 1".) PIN, control lever lock, assembly (Composed of: *one M750 control lever lock PIN (2) one — PIN, split, $\frac{3}{32}$ " x $\frac{5}{16}$ ") PIN, control lever trigger, assembly (Composed of: *one M740 control lever trigger PIN (6) one — PIN, split, $\frac{1}{16}$ " x $\frac{3}{8}$ ") For high and low speed lever, left, assembly (2); high and low speed lever, right, assembly (2); reverse operating lever, assembly (2). PIN, cooling system drain plug swivel PIN, crank case oil filler cover hinge PIN, distributor cam PIN, distributor head clamp PIN, door hinge. (For hinges M1789 and M1790.) PIN, door hinge. (For hinges GB3L and GB3J.) PIN, drive sprocket collar bushing, assembly (Composed of: *one SH40AE drive sprocket collar bushing PIN (50) one — PIN, split, $\frac{3}{8}$ " x $1\frac{1}{4}$ ") PIN, driver's turret flap hinge, assembly (Composed of: *one M2405 driver's turret flap hinge PIN (1) two — NUT, plain, U. S. Std., hexagon, $\frac{1}{2}$ ") PIN, driver's turret flap locking lever, assembly (Composed of: *one M2430 driver's turret flap locking lever PIN (1) one — PIN, split, $\frac{1}{8}$ " x $1\frac{1}{2}$ " , one — WASHER, plain, $\frac{5}{16}$ ") PIN, escutcheon, No. 13 x $\frac{3}{8}$ " (brass, round head). (For spring LQ220A (2); hinge LQ217A (3); lock LQ219A (2).)	14	.25 .42 .41 .19 .18 .21 .20 .09 .01 .01 P .03 P .15 .03 P 1.26 1.25 .93 .89 .30 .28 .01
%X	955		(1)	
%X	955		(2)	
%X	227		(6)	
%X	227			
%X	SH976P LQ218A	8159 D30059 D29802	2 2 2	.09 .01 .01 P
%X	537 GB3K	M1791	8 12 3 (50)	.03 P .15 .03 P 1.26
%X	417		(1)	1.25 .93
%X	412		(1)	.89 .30
%X	LQ221A	261		.28 .01

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
%X					171	PARTS—Continued PIN, fork end, length 1 9/16", assembly (Composed of: *one M568C fork end PIN, length 1 9/16" (44) one — PIN, split, 1/8" x 1". For end M569C (1); end M570 (1).) PIN, fork end, length 1 1/8", assembly (Composed of: *one M568A fork end PIN, length 1 1/8" (15) one — PIN, split, 1/8" x 1". For end M569A (1); end M569B (1); rod M565 (1); link M771 (1).) PIN, fork end, length 1 7/8", assembly (Composed of: *one SH953F fork end PIN, length 1 7/8" (3) one — PIN, split, 1/8" x 7/8". For end SH953E (1).) PIN, fork end, length 2 1/4", assembly (Composed of: *one M568B fork end PIN, length 2 1/4" (2) one — PIN, split, 1/8" x 1". For shaft M783 (2).) PIN, gasoline tank cover hinge, assembly (Composed of: *one SH537C gasoline tank cover hinge PIN (2) one — PIN, split, 1/8" x 1".) PIN, generator housing (.0945" x .218") PIN, gun hanger bracket, assembly (Composed of: *one SH395H gun hanger bracket PIN (5) *one — standard CHAIN, No. 8, assembly.)	44 <	

%X	14	30		698	PIN, high speed brake anchor, assembly (Composed of: *one M363 high speed brake anchor PIN (2) one — PIN, split, 3/16" x 2".)	(2)	.43
%X				698	PIN, high speed free end brake band	4	.42
&	—	6	M356	227	PIN, high and low speed control lever spring	2	.38
%X			M748		PIN, joint, assembly (Composed of: *one M790 joint PIN (3) one — PIN, split, 3/16" x 1 1/4".)	(3)	.25
				220	PIN, large planet pinion, assembly (Composed of: one M313 large planet pinion NUT, one M284 large planet pinion PIN (6) one — PIN, split, 3/16" x 2 1/4", one — PLUG, expansion, 1/8".)	(6)	.29
&	26	22			PIN, low speed brake anchor (Composed of: *one M761 low speed brake suspension link PIN (2) one — PIN, split, 3/16" x 1 1/4".)		.28
				679	PIN, low speed brake suspension link, assembly (Composed of: *one M339 low speed and track brake suspension PIN (4) two — PIN, split, 1/4" x 1 1/2". For low speed (2); track brake (2).)	2	3.38
%X	10	32	M348	681		(2)	3.12
%X				220			.78
							.49
%X	12	32		687		(4)	.48
							2.52
%X	2	31				(8)	2.50
	5	32					
%X				687			.49
							.48
%X				362		(2)	.19
							.18
&	—	33	8383	LQ436A		1	.12
&	—	33	8179	LQ437A		1	.07

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
%X					438	PARTS—Continued PIN, periscope hole cover, length over all 1 15/16", assembly (Composed of: *one M2411 periscope hole cover PIN (3) one — NUT, plain, U. S. Std., hexagon, 1/2", one — WASHER, lock, 1/4" On outlook turret (2); roof door (1).) PIN, periscope hole cover, length over all 2 5/16", assembly (Composed of: *one M2425 periscope hole cover PIN (1) one — NUT, plain, U. S. Std., hexagon, 1/2", one — WASHER, lock, 1/4" On driver's turret.)	(3)	\$0.51 .48
							(1)	.61
								.58
& &					LQ467A	PIN, piston PIN, radiator support swivel (rear), assembly (Composed of: *one M889 radiator support swivel PIN (1) one — PIN, split, 3/16" x 1 1/2" PIN, regulating tank relief valve guide PIN, regulating tank valve bracket, assembly (Composed of: *one SH950G regulating tank valve bracket PIN (1) one — PIN, split, 1/16" x 3/8" PIN, revolver hole cover operating handle PIN, revolver hole cover swivel, assembly (Composed of: one D42/21221 revolver hole cover handle SPRING, one A42/21221 revolver hole cover operating HANDLE, one SH642A revolver hole cover operating handle PIN, *one M2627 revolver hole cover swivel PIN (9) three SH642B SPRING, Belleville, I. D. 13/16", O. D. 1 1/2", 1" thick,	12 (1)	.93 .29
							1 (1)	.08 .13
& &					950 SH642A			.12
							9 (9)	.02 2.57
								1.00

& %(mh)X	196	F42/21221	15	642	one — NUT, plain, U. S. Std., hexagon, ½" PIN, revolver hole stop PIN, rod end, ¼" x 51/64", assembly (Composed of: *one A8035 rod end PIN, ¼" x 51/64" (2) one — PIN, split, 1/16" x ½" For rod SH993K (1); rod SH993A (1); engine (2).) PIN, rod end, 5/16" x 31/32", assembly (Composed of: *one A1810 rod end PIN, 5/16" x 31/32" (4) one — PIN, split, 3/32" x ½" For 5/16" adjustable yoke rod end, (1), 2 used in engine.) PIN, rod end, ¾" x 1 3/32", assembly (Composed of: *one A8036 rod end PIN, ¾" x 1 3/32" (5) one — PIN, split, 3/32" x ¾" For ¾" adjustable yoke rod end (1).) PIN, rod end, ½" x 1 27/64", assembly (Composed of: *one A1547 rod end PIN, ½" x 1 27/64" (12) one — PIN, split, ⅛ x ⅞" For ½" adjustable yoke rod end (1).) PIN, roller sliding door, assembly (Composed of: *one M2149 roller sliding door PIN (4) one — NUT, plain, U. S. Std., hexagon, ⅝", one — WASHER, lock ⅝") PIN, semaphore handle, long PIN, semaphore handle, short PIN, shell holder, assembly (Composed of: *one M3025 shell holder PIN (44) one — PIN, split, 1/16" x ⅜") PIN, side door hinge, assembly (Composed of: *one M707 side door hinge PIN (4) one SH545A side door hinge pin NUT (plain, U. S. Std., hexagon, ¾", 1/8" thick).)	18 (4)
& X246 X271 & %X				802 802 550 545	1 1 (44) (4)	
& %X					1.04 1.00	

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&	36	22			679	PARTS—Continued		
						PIN, small planet pinion, assembly (Composed of: one M314 small planet pinion NUT; *one M274 small planet pinion PIN (6) one — PIN, split, 3/16" x 2", one — PLUG, expansion, 1/2".) PIN, split, 1/16" x 3/8". (For pin M740; plunger X273; pin M3025; pin SH950G; seat LQ546A.) PIN, split, 1/16" x 1/2". (For stud LQ88A; stud LQ196A; bolt LQ164A; pin LQ321A; pin LQ533A; valve LQ567A; shaft LQ520A; bolt LQ585A; bolt LQ40A; bolt LQ114A; bolt LQ125A; bolt LQ443A; bolt LQ112A; pin A8035; pin LQ229A (2).) PIN, split, 1/16" x 5/8". (For stud LQ302A; bolt LQ50A; bolt LQ262A; tappet LQ67A; stud LQ301A.) Pin, split, 3/32" x 3/8". (For plunger SH101K.) PIN, split, 3/32" x 1/2". (For pin A1810.) PIN, split, 3/32" x 5/8". (For stud LQ304A; stud LQ197A; stud LQ269A; stud LQ270A; stud LQ271A; bolt LQ246A; bolt LQ245A; pin M750; stud LQ303A.) PIN, split, 3/32" x 3/8", bronze. (For shaft LQ138A.) PIN, split, 3/32" x 3/4". (For bolt LQ133A; collar LQ119A; pin A8036.) PIN, split, 3/32" x 7/8". (For bolt MX26; bolt LQ189A (2); bolt LQ190A (2).) PIN, split, 3/32" x 1". (For stud MX14; stud MX25; stud MX98; bolt MX8; bolt MX11; stud MX12.) PIN, split, 3/32" x 1 1/4". (For spindle SH282D (2).) PIN, split, 1/2 x 1/2". (For shaft SH65C.) PIN, split, 1/2" x 3/8". (For shaft X266.) PIN, split, 1/2" x 3/4". (For spindle M1131; pin M2161.) PIN, split, 1/2" x 3/8". (For pin M4157; pin SH953F; pin A1547.) PIN, split, 1/2" x 1". (For separator SH234C (2); axle SH234K (2); axle SH234L; sprocket X257; pin M4152; bracket M641; pin M568A; pin M568B; pin M568C;	(6)	\$1.96
% (sh)R							54	.01 P
							144	.01 P
% (sh)R							90	.01 P
							6	.01 P
% (sh)R							4	.01 P
							70	.01 P
% (sh)R							1	.01 P
							18	.01 P
% (sh)R							64	.01 P
							28	.01 P
% (sh)R							2	.01 P
							1	.01 P
% (sh)R							1	.01 P
							3	.01 P
% (sh)R							6	.01 P

% (sh)R	pin SH537C; shaft LQ94A.)	113	.01 P
% (sh)R	PIN, split, $\frac{1}{8}$ " x $1\frac{1}{4}$ ". (For spindle M1132; stud A7681; bolt M317.)	9	.01 P
% (sh)R	PIN, split, $\frac{1}{8}$ " x $1\frac{3}{8}$ ". (For stud MX10; stud MX36; stud MX9; stud MX5.)	20	.01 P
% (sh)R	PIN, split, $\frac{1}{8}$ " x $1\frac{1}{2}$ ". (For spring SH65D; bolt MX1; pin M2430, shaft, SH66C.)	22	.01 P
% (sh)R	PIN, split, $\frac{1}{8}$ " x $1\frac{3}{4}$ ". (For bolt M318.)	6	.01 P
% (sh)R	PIN, split, 5/32" x 1". (For pin, type A, .610 x 2 3/16" (2), pin M4165.)	3	.01 P
% (sh)R	PIN, split, 5/32" x $1\frac{1}{2}$ ". (For spindle SH144B.)	1	.01 P
% (sh)R	PIN, split, 3/16" x 1". (For bolt M776.)	2	.01 P
% (sh)R	PIN, split, 3/16" x $1\frac{1}{2}$ ". (For bracket SH956B.)	2	.01 P
% (sh)R	PIN, split, 3/16" x $1\frac{3}{4}$ ". (For pin M790; pin M761.)	5	.01 P
% (sh)R	PIN, split, 3/16" x $1\frac{1}{2}$ ". (For shaft M782 (2); bolt M767; bolt M776; pin M889.)	7	.01 P
% (sh)R	PIN, split, 3/16" x 2". (For shaft M783 (2); pin M274; shaft M302; pin M363; shaft M638 (2).)	13	.01 P
% (sh)R	PIN, split, 3/16" x $2\frac{1}{2}$ ". (For shaft M247; pin M284.)	7	.01 P
% (sh)R	PIN, split, $\frac{1}{4}$ " x $1\frac{1}{2}$ ". (For pin M336; pin M339 (2); pin M1262.)	328	.01 P
% (sh)R	PIN, split, $\frac{1}{4}$ " x $1\frac{3}{4}$ ". (For bracket M641.)	2	.01 P
% (sh)R	PIN, split, $\frac{1}{4}$ " x 2". (For bracket M4131.)	4	.01 P
% (sh)R	PIN, split, $\frac{1}{4}$ " x 3". (For nut SH136A.)	1	.01 P
% (sh)R	PIN, split, 5/16" x $1\frac{3}{4}$ ". (For pin M1543.)	36	.01 P
% (sh)R	PIN, split, 5/16" x 3". (For pin M3920 (2).)	8	.01 P
% (sh)R	PIN, split, $\frac{3}{8}$ " x $1\frac{3}{4}$ ". (For pin SH40AE.)	50	.01 P
& (sh)R	brush arm mounting stud D30070; distributor condenser and breaker plate stud D29595; distributor condenser and breaker plate stud D29784; distributor ignition coil and distributor head D29635; distributor advance lever attaching stud D29896; distributor cup stud D30536; generator brush arm mounting stud D29811; generator brush arm mounting stud D30135; distributor cup, assembly D14180 (3); generator top end housing D13827 (4); ignition switch nut D29864; generator field coil stud D29829; generator field coil stud D30383.)	46	.01 P
& (sh)R	PIN, split, brass, 1/16" x $\frac{1}{2}$ ". (For ignition switch screw D29864; ignition switch screw D30362; voltage regulator terminal stud D30366; voltage regulator terminal stud D30380.)	7	.01 P
& (sh)R	PIN, split, brass, 7/64" x $\frac{3}{4}$ ". (For generator.)	1	.01 P
X	PIN, sponson hinge, assembly	(4)	6.35
	(Composed of:		
	*one M2829 sponson hinge PIN (4)		5.93
	one M2831 sponson hinge pin NUT,		
	one M2830 sponson hinge pin WASHER.)		

TANK, MARK VIII

Note symbol	Identification No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&						PARTS—Continued		
						PIN, sponson periscope hole cover, assembly (Composed of: *one M2770 sponson periscope hole cover PIN (2) one — NUT, plain, U. S. Std., hexagon, 1/8", one — WASHER, plain, 1/2")	(2)	\$0.21
&				M2516	472	PIN, sponson seat hinge PIN, steel, 3/8" x 1/4". (For housing SH957A (2).) PIN, steel, 1/8" x 3/8". (For shank LQ422A and head LQ421A (1).) PIN, steel, 1/8" x 5/16". (For end SH922A (2).) PIN, steel, 1/8" x 15/16". (For hub SH964B.) PIN, steel, 1/8" x 1 5/16". (For cam shaft LQ73A.) PIN, steel, 3/16" x 1". (For stud SH964E.) PIN, steel, 3/16" x 2 1/2". (For cover M295.) PIN, steel, 1/4" x 3/8". (For bracket SH964A.) PIN, steel, 1/4" x 1". (For hook M2169A.) PIN, steel, 1/4" x 3". (For hasp GB5G.) PIN, tachometer drive shaft gear attaching PIN, taper, type A, No. 0 x 3/8". (For worm SH103D.) PIN, taper, type A, No. 2 x 1 1/4". (For shaft SH965B (2).) PIN, taper, type A, No. 2 x 1 1/2". (For shaft SH965B; shaft SH966D (2); shaft LQ386A.) PIN, taper, type A, No. 6 x 3". (For lever SH953B.) PIN, towing shackle, assembly (Composed of: *one M3920 towing shackle PIN (4) two M3921 towing shackle pin NUT, two — PIN, split, 5/16" x 3".)		
%X				M353	692	PIN, track brake anchor PIN, track link, assembly (Composed of:	2 (312)	.58 1.60

%X	13	29	50	*one M1262 track link PIN (312) one — PIN, split, 1/4" x 1 1/2" PIN, track roller, assembly (Composed of:	(58)	1.59
&			57	*one M1337 track roller PIN (56) one Q52C PLUG, pipe, square head, 3/4" PIN, track roller pinion, assembly (Composed of:	(36)	22.53
			53	*one M1543 track roller pinion PIN (36) one — PIN, split, 5/16" x 1 3/4", one — PLUG, pipe, square head, 1/4", brass.) PIN, transmission brake adjusting swivel PIN, transmission mechanical lubricator eccentric PIN, transmission mechanical lubricator snap PIN, trigger spring. (For lever M738A; lever M738B; lever M177.) PIN, turret roof door fastener, assembly (Composed of:		22.50
%X	6	31	687	*one M2366 turret roof door fastener PIN (2) two SH412A turret roof door fastener pin NUT.) PIN, type A, .610" x 2 3/16", with two split pins. (For end M3189.) PIN, voltage regulator armature retaining (German silver, .062" x 1") PIN, voltage regulator mounting coil nut (wire) PIN, voltage regulator terminal stud split PIN, wire, .031" x .625". (For distributor contact arm spring.) PIN, 7 1/2" ball mount ball locking (hemispherical turret), assembly (Composed of:	4	3.15
&			SH101M	one B34G ball mount ball locking PIN, one SH1712K ball mount ball locking pin HOOK, 17/32" hole, one B34F CHAIN, steel, length 4", two B34D steel chain RING.) PIN, 7 1/2" ball mount ball locking (main turret), assembly (Composed of:	6	3.08
&		32	SH105G	one B34G ball mount ball locking PIN, one SH1712B ball mount ball locking pin HOOK, 11/16" hole, one B34F CHAIN, steel, length 4", two B34D steel chain RING.) PIN, 7 1/2" ball mount ball locking (main turret), assembly (Composed of:	6	1.50
X	—	6	227	one B34G ball mount ball locking PIN, one SH1712K ball mount ball locking pin HOOK, 17/32" hole, one B34F CHAIN, steel, length 4", two B34D steel chain RING.) PIN, 7 1/2" ball mount ball locking (main turret), assembly (Composed of:	(2)	.01
			412	one B34G ball mount ball locking PIN, one SH1712K ball mount ball locking pin HOOK, 17/32" hole, one B34F CHAIN, steel, length 4", two B34D steel chain RING.) PIN, 7 1/2" ball mount ball locking (main turret), assembly (Composed of:	6	.06
%X				one B34G ball mount ball locking PIN, one SH1712K ball mount ball locking pin HOOK, 17/32" hole, one B34F CHAIN, steel, length 4", two B34D steel chain RING.) PIN, 7 1/2" ball mount ball locking (main turret), assembly (Composed of:	3	.20
				one B34G ball mount ball locking PIN, one SH1712K ball mount ball locking pin HOOK, 17/32" hole, one B34F CHAIN, steel, length 4", two B34D steel chain RING.) PIN, 7 1/2" ball mount ball locking (main turret), assembly (Composed of:	(2)	.65
				one B34G ball mount ball locking PIN, one SH1712K ball mount ball locking pin HOOK, 17/32" hole, one B34F CHAIN, steel, length 4", two B34D steel chain RING.) PIN, 7 1/2" ball mount ball locking (main turret), assembly (Composed of:	4	.55
%X				one B34G ball mount ball locking PIN, one SH1712K ball mount ball locking pin HOOK, 17/32" hole, one B34F CHAIN, steel, length 4", two B34D steel chain RING.) PIN, 7 1/2" ball mount ball locking (main turret), assembly (Composed of:	2	.20
				one B34G ball mount ball locking PIN, one SH1712K ball mount ball locking pin HOOK, 17/32" hole, one B34F CHAIN, steel, length 4", two B34D steel chain RING.) PIN, 7 1/2" ball mount ball locking (main turret), assembly (Composed of:	1	.02 P
				one B34G ball mount ball locking PIN, one SH1712K ball mount ball locking pin HOOK, 17/32" hole, one B34F CHAIN, steel, length 4", two B34D steel chain RING.) PIN, 7 1/2" ball mount ball locking (main turret), assembly (Composed of:	1	.01
				one B34G ball mount ball locking PIN, one SH1712K ball mount ball locking pin HOOK, 17/32" hole, one B34F CHAIN, steel, length 4", two B34D steel chain RING.) PIN, 7 1/2" ball mount ball locking (main turret), assembly (Composed of:	3	.01
				one B34G ball mount ball locking PIN, one SH1712K ball mount ball locking pin HOOK, 17/32" hole, one B34F CHAIN, steel, length 4", two B34D steel chain RING.) PIN, 7 1/2" ball mount ball locking (main turret), assembly (Composed of:	4	.01 P
%X				one B34G ball mount ball locking PIN, one SH1712K ball mount ball locking pin HOOK, 17/32" hole, one B34F CHAIN, steel, length 4", two B34D steel chain RING.) PIN, 7 1/2" ball mount ball locking (main turret), assembly (Composed of:	(3)	.64
				one B34G ball mount ball locking PIN, one SH1712K ball mount ball locking pin HOOK, 17/32" hole, one B34F CHAIN, steel, length 4", two B34D steel chain RING.) PIN, 7 1/2" ball mount ball locking (main turret), assembly (Composed of:	(2)	.64

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
(c)%X &	1	25			B33A	PIN, 9" ball mount trunnion	5	\$3.74
	17	2				PINION, chain sprocket and roller, assembly	(2)	277.60
& (gy)& & & & X X X						(Composed of: one M1541 chain sprocket and roller PINION, eighteen — track roller pinion PIN, assembly, eighteen M1542 track roller pinion ROLLER.)		
				M1541	55	PINION, chain sprocket and roller	2	205.60
			S114		586	PINION, distance recorder drive	1	1.25
	25	22		M280	679A	PINION, planet, large	6	32.00
	35	22		M270	679A	PINION, planet, small	6	18.00
	6	22		M291	706	PINION, transmission chain sprocket	2	95.00
	20	22		M287	704	PINION, transmission sun, large	2	24.00
	44	22				PINION, transmission sun, small, assembly	(2)	37.40
						(Composed of: one M268 sun pinion BUSHING, small, *one M267 transmission sun PINION, small (2).)		
	X			M3301	704	PIPE, engine oil tank delivery	1	35.00
X	X	24		M1228	165	PIPE, engine outlet (developed length 26¼")	1	.38
X	23	2		SH403B		PIPE, exhaust (flexible, O. D. 3 11/32", length 14½")	2	4.07 P
X	3	2		SH140H		PIPE, exhaust, long	2	3.50 P
X	2	2		SH140L		PIPE, exhaust, short	2	1.75 P
X				M1765	236	PIPE, gasoline tank suction	3	.38 P
X						PIPE, radiator cooling fan inside bearing oil	1	.12 P
X						PIPE, radiator drain, long, assembly	(2)	1.54 P
						(Composed of: one — BUSHING, reducing pipe, M. I., ½" x ¼", one — COCK, drain, tee handle, ½", one Q51BE ELBOW, street, M. I., 90°, ¼", *one SH976E PIPE, W. I., ¼" x 31" (2).)		
	—	24						.25

X				PIPE, radiator drain, short, front, assembly (Composed of: one — COCK, drain, tee handle, ½", one Q51DE ELBOW, street, M. I., 90°, ½", *one SH976K PIPE, W. I., ½" x 10¼" (1).)	(1)	1.33 P
%X	—	24		PIPE, radiator drain, short, rear, assembly (Composed of: one — COCK, drain, tee handle, ½", *one SH976V PIPE, W. I., ½" x 12½" (1) one SH976W radiator drain pipe ELBOW.)	(1)	.09 1.36 P
& & %X	— — —	24 24 24	M1229	PIPE, radiator inlet PIPE, radiator outlet PIPE, track roller pinion bearing oil, assembly (Composed of: *one M1830 track roller pinion bearing oil PIPE (2) one Q51A REDUCER, pipe, M. I., ¼" x ½"*)	1 1 (2)	.12 2.48 7.50 .18 P
%X %X %X %X	— — 4 —	24 — 4 24	57 SH199C SH959H SH959G SH959F	PIPE, vapor outlet PIPE, ventilating fan inner bearing grease, length 4¼" PIPE, ventilating fan inner bearing grease, length 5" PIPE, ventilating fan outer bearing grease PIPE, water tank filler, assembly (Composed of: one Q51MC ELBOW, M. I., 90°, beaded, 2", *one SH199F PIPE, W. I., 2" x 10½" (1) one SH199G water tank filler pipe NIPPLE.)	1 1 1 1 (1)	.15 .18 .12 P .12 P .12 P .99
%X	—	24		PIPE, water (under engine), assembly (Composed of: *one SH976B water PIPE (1) one — water pipe drain PLUG, assembly, one SH976L water pipe drain plug COUPLING.)	(1)	.37 1.19 .90
%X & & & & & &	— — — — — —	24 24 24 24 24 24	SH671A SH169J SH169K SH169K SH169L SH169M SH169R SH169S	PIPE, W. I., ½" x 7". (For transmission bevel gear case cover (2).) PIPE, W. I., ¾" x 10½". (For radiator inlet pipe (1).) PIPE, W. I., ¾" x 12½". (For radiator inlet pipe (1).) PIPE, W. I., ¾" x 12½". (For radiator inlet pipe (1).) PIPE, W. I., ¾" x 19". (For radiator inlet pipe (1).) PIPE, W. I., ¾" x 30". (For radiator inlet pipe (1).) PIPE, W. I., 1" x 5¼". (For radiator inlet pipe (1).) PIPE, W. I., 1" x 5½", threaded one end. (For radiator inlet pipe (1).)	2 1 1 1 1 1 1 1	.02 P .12 P .12 P .12 P .20 P .30 P .10 P .10 P

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
& (gaj)&					LQ466A	PARTS—Continued		
						PISTON (old type in first 100 tanks) PISTON, assembly (Composed of: one SH1020A PISTON, one LQ467A piston PIN, two LQ470A piston pin RETAINER, one LQ469A piston RING, bottom, one SH1020B piston RING, lower (oil), one LQ468A piston RING, intermediate.)	12 12	\$11.00 12.55
(gaj)& & * * * * * * * * * * * & & * (gb)* & (gb)* & %X	8	5			SH1020A SH901D 197 301 298 357 355 355 353 SH492A SH491A LQ29A 954 954 385 SH294B M1949 SH550F SH294A LQ230A 380	PISTON PISTON, air pressure pump PLATE, air duct (between radiator and roof) PLATE, back PLATE, back (under sponson) PLATE, bulk head, bottom PLATE, bulk head, center PLATE, bulk head, side PLATE, bulk head, top PLATE, butt, sponson, left PLATE, butt, sponson, right PLATE, cam shaft end PLATE, clutch throwout bell crank carrier PLATE, clutch throwout stop anchor PLATE, cover (behind mud chute) PLATE, cover (exhaust) PLATE, cover (hole in floor plate, No. 2) PLATE, cover (removable platform rest, plate, rear) PLATE, cover (top roller) PLATE, crank case oil filler baffle PLATE, deflector	12 4 1 (1) (2) (1) (1) (2) (1) (1) (1) (1) 2 1 1 (2) (2) 1 1 (2) 2 1	11.00 .98 .92 220.00 28.00 21.75 42.40 1.28 38.60 75.00 75.00 .10 .88 5.18 4.25 4.50 .18 4.25 .42 12.38

[illegible]

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&						PARTS—Continued		
						PLATE, engine room removable, right side, assembly (Composed of:	(1)	\$171.80
						*one M2077 engine room removable PLATE, right side (1) *one M2001 engine room removable plate butt STRAP (2) twenty-two SH303B BOLT, tap, 3/4" x 1 1/4", threaded 1", six — RIVET, button head, 3/4" x 1 1/8", four — RIVET, button head, 3/4" x 2 1/8", twenty-two — WASHER, lock, 3/4"		165.00 4.80
*	—	7		M1971B	297	PLATE, engine room side, No. 1, left	(1)	332.00
*	—	7		M1971A	297	PLATE, engine room side, No. 1, right	(1)	332.00
*	—	7		M1973	299	PLATE, engine room side, No. 2, left	(1)	339.72
*	—	7		M2070	342	PLATE, engine room side, No. 2, right	(1)	340.00
*	—	7		M1990	303	PLATE, engine room side, No. 3	(2)	112.00
&				M1034	202	PLATE, fan and radiator air duct, front	1	2.75
				M1035A	203A	PLATE, fan and radiator air duct, front side	1	1.28
&				M1035B	203A	PLATE, fan and radiator air duct, front upper	1	.98
				M1033	200	PLATE, fan and radiator air duct, rear bottom	1	7.48
&				M1032	201	PLATE, fan and radiator air duct, side	1	3.50
				M1126	196	PLATE, fan bevel gear box bearing cover	1	.38
&	7	20		M1931	516	PLATE, floor, No. 1	(1)	346.00
				M1932	513	PLATE, floor, No. 2	(1)	396.75
*				M1933	515	PLATE, floor, No. 3	(1)	191.17
*				M1934	514	PLATE, floor, No. 4	(1)	199.76
*				M1935	566	PLATE, floor, No. 5	(1)	267.90
*				M1936	564	PLATE, floor, No. 6	(1)	237.00
*				M1937	562	PLATE, floor, No. 7	(1)	255.00
*				M1938	563	PLATE, floor, No. 8	(1)	267.90
*				M3063B	448	PLATE, forward ammunition storage shell tube, left	(1)	38.00
*				M3063A	448	PLATE, forward ammunition storage shell tube, right	(1)	38.00
*				M1964B	304	PLATE, front inside upper, left	(1)	112.75

* &	M1964A	304	PLATE, front inside upper, right	(1)	112.75
* &	M1988	300	PLATE, front mud chute, bottom	(2)	84.00
* &	M1987	300	PLATE, front mud chute, side (front)	(2)	42.50
* &	M1986	295	PLATE, front mud chute, side (rear)	(2)	51.37
* &	M1989B	309	PLATE, front mud chute back, left	(1)	2.76
* &	M1989A	309	PLATE, front mud chute back, right	(1)	2.76
* &	M2033	333	PLATE, front sloping	(1)	238.00
* &	M1965	301	PLATE, front (under sponson)	(2)	53.40
* &	M2094	348	PLATE, front wing lower, inside	(2)	168.00
* &	M1961B	305	PLATE, front wing lower, outside, left	(1)	138.50
* &	M1961A	305	PLATE, front wing lower, outside, right	(1)	138.50
* &	M2093	347	PLATE, front wing upper, inside	(2)	102.75
* &	M1962B	302	PLATE, front wing upper, outside, left	(1)	102.75
* &	M1962A	302	PLATE, front wing upper, outside, right	(1)	102.75
* &	M1911	527	PLATE, gasoline tank roof	(1)	172.00
* &	M1479	62	PLATE, guard in hull (track adjusting screw)	4	.95
& &	SH395D		PLATE, gun rest (main turret)	1	.98
& &	SH65K		PLATE, hand starter retaining	2	.08
& &	M2134B	360	PLATE, helmet compartment division, left	1	4.80
& &	M2134A	360	PLATE, helmet compartment division, right	1	4.80
	W-E690		PLATE, ignition battery, negative, assembly	(4)	1.76 P
			(Composed of: one W-G524 ignition battery negative plate connecting STRAP, four W-F94 ignition battery PLATE, negative.)		
& &	W-F94		PLATE, ignition battery, negative	16	.40 P
& &	W-E689		PLATE, ignition battery, positive, assembly	(4)	1.36 P
			(Composed of: three W-F93 ignition battery PLATE, positive, one W-G523 ignition battery positive plate connecting STRAP.)		
& &	W-F93		PLATE, ignition battery, positive	12	.40 P
& &			PLATE, ignition battery jar cover, bottom, assembly	(4)	.26 P
			(Composed of: *one — ignition battery jar cover PLATE, bottom (4) two W-AD17 ignition battery jar cover plate WASHER, (soft rubber).)		.20
&	D30363		PLATE, ignition switch terminal	1	.04 P
* &	M986	501	PLATE, inlet louvre cover	(1)	1.78
* &	M995A	500	PLATE, inlet louvre retaining, front	1	.88
* &	995B	500	PLATE, inlet louvre retaining, rear	1	.88
&	M1977	376	PLATE, inside (side of gasoline tank)	(2)	238.00

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
*				M1983A	325	PLATE, inside skirting, front half	(2)	\$108.00
*				M1983B	325	PLATE, inside skirting, rear half	(2)	75.00
%X				M2034	333	PLATE, (inspection and fan hole) cover	3	7.00
&				M1047	234	PLATE, jockey pulley cover	1	.38
%X				M1000	501	PLATE, louvre packing	4	.22
%X						PLATE, machine gunner's seat, assembly	(2)	2.53
						(Composed of:		
						two M2158 HINGE, butt, 2" x 4¼",		
					370	*one M2157 machine gunner's seat PLATE (2)		.85
						two M2163 machine gunner's seat strut fulcrum BRACKET,		
						one M2437 spring CLIP,		
						eight — RIVET, button head, ¼" x 11/16",		
						four — RIVET, button head, ¼" x 7/8",		
	3	10		M2350	405	PLATE, main turret, front, left side	(1)	58.40
*	—	7		M2348	408	PLATE, main turret, front, right side	(1)	58.40
*	43	2		M2351	409	PLATE, main turret, rear, left side	(1)	230.54
*	—	7		M2407	405	PLATE, main turret, rear, left side	(1)	80.69
*	43	2		M2349	409	PLATE, main turret, rear, right side	(1)	230.54
*				M2406	405	PLATE, main turret, rear, right side	(1)	80.69
&				M2377	414	PLATE, main turret flap catch	2	.28
&				M2375	420	PLATE, main turret flap splash, bottom	2	.50
&				M2374	420	PLATE, main turret flap splash, side	2	.36
&					SH420A	PLATE, main turret flap splash, top	2	.68
*	—	7		M2362	407	PLATE, main turret front, center	(1)	38.27
(gb)*					SH409A	PLATE, main turret machine gun hole cover (side)	(2)	20.00
&	—	7		M2364	423	PLATE, main turret rear peep hole splash	1	.98
*	—	7		M2373	411	PLATE, main turret roof, left side	(1)	127.50
*	—	7		M2372	411	PLATE, main turret roof, right side	(1)	127.50

&			M2357	420	PLATE, main turret roof door apron	1	.77
*			M2394	423	PLATE, main turret splash, top	(2)	.30
*	—	7	M2363	405	PLATE, main turret wing, front	(2)	57.39
&			FF55HC		PLATE, name	1	1.00
&		33	LQ435A		PLATE, oil pump separating	1	.60
&		8188	LQ435A		PLATE, Ordnance engine name (Liberty 12)	(1)	1.10
&		L15001	LQ252A		PLATE, outlet louvre frame side (left), assembly	(1)	4.86
&					(Composed of: two M1000 louvre packing PLATE, *one M993 outlet louvre cover PLATE (1) *one M989 outlet louvre frame side PLATE (left) (1) five — RIVET, button head, $\frac{1}{8}$ " x 1" one — RIVET, countersunk head, $\frac{1}{2}$ " x 1"		2.08 2.28
(gm)*		7	M2361	435	PLATE, outlook turret roof	(1)	29.32
*	—		M1963B	296	PLATE, outside, left (front of sponson)	(1)	235.08
*			M1963A	296	PLATE, outside, right (front of sponson)	(1)	235.08
*		7	M1984	319	PLATE, outside skirting, front half	(2)	450.00
*	—		M1985	318	PLATE, outside skirting, rear half	(2)	236.00
%X	—	7			PLATE, peep hole cover, assembly	(20)	3.10
					(Composed of: *one 3X90 packing PLATE (20) *one 14X90 cover plate packing PIECE (20) *one 1X90 peep hole cover PLATE (20) one 4X90 peep hole cover plate operating KNOB, one — peep hole cover plate operating BOLT, assembly, two — RIVET, countersunk head, $\frac{3}{16}$ " x 1", two — RIVET, countersunk head, $\frac{3}{8}$ " x $1\frac{1}{4}$ ". For left sponson (4); right sponson (3); outlook turret (4); main turret (9).)		.80 .38 1.05
&	3	9	2X90	362	PLATE, (peep hole cover) revolving. (On left sponson (4) right sponson (3); out-look turret (4); main turret (9).)	20	3.67
*			M2424	438	PLATE, periscope hole cover	(1)	.98
&			SH571D		PLATE, platform ammunition storage, bottom	1	8.50
&			SH573L		PLATE, platform ammunition storage cover	1	.30
&			SH612A		PLATE, radiator, left side	1	4.75
&			SH612B		PLATE, radiator, right side	1	4.75
&			SH278D		PLATE, radiator cooling fan	1	5.12
&			SH281C		PLATE, radiator cooling fan housing spider cover	1	.46
&			SH608A		PLATE, radiator drain pipe connection stiffening (tapped $\frac{1}{4}$ ")	1	.35

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
&				M880	608	PLATE, radiator drain pipe connection stiffening (tapped 1/4")	2	\$0.45
&				M897	608	PLATE, radiator steam pipe connection stiffening (tapped 3/4")	1	.45
&				M887	608	PLATE, radiator steam pipe connection stiffening (tapped 1")	1	.58
&					SH608B	PLATE, radiator drain pipe connection stiffening (tapped for countersunk head bolt)	1	.35
&				M886	608	PLATE, radiator water connection stiffening	1	.98
*				M2096	349	PLATE, rear mud chute sloping side	(2)	25.50
*				M2095	349	PLATE, rear mud chute vertical side	(2)	55.65
&	2 58	9 2		C128/20384	642	PLATE, revolver hole cover. (On sponson, left (3); sponson, right (2).)	7	2.80
*				M1909A	533	PLATE, roof (back of front louvre)	(1)	2.25
*				M1905	528	PLATE, roof (in front of front louvre)	(1)	17.72
*				M1902	528	PLATE, roof (over driver)	(2)	19.00
*				M1918	529	PLATE, roof (rear of mud chute)	(2)	2.45
*				M1914	531	PLATE, roof (rear of mud chute)	(2)	1.96
*				M1912A	529	PLATE, roof (side of back louvre)	(1)	23.48
&				M1901B	534	PLATE, roof, front, left (without holes for cable clips)	1	58.80
&				M1901A	534	PLATE, roof, front, right (with holes for cable clips)	1	58.80
*				M1917	529	PLATE, roof, rear (under track)	(2)	2.35
*				M1924	530	PLATE, roof stiffening (at towing bracket)	(1)	4.30
*				M1915A	526	PLATE, roof (under track, rear, left side)	(1)	42.00
*				M1904A	526	PLATE, roof (under track, rear, right side)	(1)	42.00
X	6	27		M1552	63	PLATE, shaft bearing. (For shaft M402 (2); shaft M1544 (2).)	4	6.32
X	1	27		M1411	62	PLATE, shaft nut locking	4	.48
*				M2028	377	PLATE, side (above rear mud chute)	(2)	16.50
*		7		M1968B	300	PLATE, side, left (at side door)	(1)	8.50
*		7		M1968A	300	PLATE, side, right (at side door)	(1)	8.50
*				M1967B	385	PLATE, side, left (top of door)	(1)	108.72
*		7		M1967A	385	PLATE, side, right (top of door)	(1)	108.72
*		7		M1992	350	PLATE, side (top of sponson)	(2)	62.30

*	7	M1970B	298	PLATE, side, rear, left (sponson)	(1)	149.22
*	7	M1970A	298	PLATE, side, rear, right (sponson)	(1)	149.22
*	—	M710	541	PLATE, side door splash, bottom	(2)	1.80
*	—	M713	541	PLATE, side door splash, front, left	(1)	2.12
*	—	M714	541	PLATE, side door splash, front, right	(1)	2.12
*	—	M712	541	PLATE, side door splash, rear	(2)	2.12
*	—	M711	541	PLATE, side door splash, top	(2)	1.80
*	—	M2098	350	PLATE, sloping, bottom	(2)	35.40
*	—	M2014	345	PLATE, sloping front	(1)	98.00
*	—	M2097	350	PLATE, sloping, top	(2)	49.20
*	7	M2738	457	PLATE, sponson back	(2)	78.12
*	7	M2750	463	PLATE, sponson back, left side	(1)	145.27
*	—	M2739	461	PLATE, sponson back, right side	(1)	145.27
*	7	M2744	464	PLATE, sponson back wing, left side	(1)	27.81
*	—	M2742	456	PLATE, sponson back wing, right side	(1)	24.60
*	—	M2799	485	PLATE, sponson back wing plate splash, right side	(1)	11.94
*	—	M2801	456	PLATE, sponson back wing splash, left side	(1)	65.97
*	—	M2757B	466	PLATE, sponson floor, left	(1)	65.97
*	—	M2757A	466	PLATE, sponson floor, right	(1)	68.05
*	7	M2733B	451	PLATE, sponson front lower, left	(1)	68.05
*	7	M2733A	451	PLATE, sponson front lower, right	(1)	16.95
*	7	M2734B	451	PLATE, sponson front upper, left	(1)	16.95
*	7	M2734A	451	PLATE, sponson front upper, right	(1)	16.95
*	—	M2732A	457	PLATE, sponson front vertical, left	(1)	25.50
*	—	M2732B	457	PLATE, sponson front vertical, right	(1)	25.50
*	7	M2745	462	PLATE, sponson front wing, left side	(1)	43.78
*	—	M2743	462	PLATE, sponson front wing, right side	(1)	44.65
*	—	M2802	474	PLATE, sponson front wing plate splash, left side	1	3.00
*	—	M2800	474	PLATE, sponson front wing plate splash, right side	1	3.00
*	—	M2844	471	PLATE, sponson peep hole splash, left side	(1)	.98
*	7	M2756B	467	PLATE, sponson roof, left	(1)	104.57
*	7	M2756A	467	PLATE, sponson roof, right	(1)	104.57
*	7	M2766	468	PLATE, sponson shield, bottom, left side (front)	(1)	15.91
*	7	M2768	468	PLATE, sponson shield, bottom, left side (rear)	(1)	8.63
*	7	M2767	468	PLATE, sponson shield, bottom, left side (intermediate)	(1)	8.63
*	—	M2762	468	PLATE, sponson shield, bottom, right side (front)	(1)	4.75
*	—	M2760	470	PLATE, sponson shield, bottom, right side (intermediate)	(1)	2.98
*	—	M2761	470	PLATE, sponson shield, bottom, right side (rear)	(1)	3.96
*	—	M2763	467	PLATE, sponson shield, top, left side (front)	(1)	8.63

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
*				M2765	469	PLATE, sponson shield, top, left side (rear)	(1)	\$8.63
*				M2759	469	PLATE, sponson shield, top, right side (front)	(1)	8.63
*				M2764	469	PLATE, sponson shield, top, right side (intermediate)	(1)	8.63
*				M2758	467	PLATE, sponson shield, top, right side (rear)	(1)	18.37
*	—	7		M2748	465	PLATE, sponson side, left side	(1)	96.92
*				M2737	465	PLATE, sponson side, right side	(1)	102.05
*				M2747	464	PLATE, sponson side lower, left side (rear)	(1)	27.20
*				M2736	456	PLATE, sponson side lower, right side (rear)	(1)	18.23
*	—	7		M2746	464	PLATE, sponson side upper, left side	(1)	10.00
*				M2735	456	PLATE, sponson side upper, right side	(1)	7.50
*				M2740B	458	PLATE, sponson sloping bottom, left	(1)	163.27
*				M2740A	458	PLATE, sponson sloping bottom, right	(1)	163.27
*	—	7		M2749	459	PLATE, sponson sloping side, left side	(1)	182.37
*				M2741	460	PLATE, sponson sloping side, right side	(1)	182.37
&				SH485C		PLATE, sponson splash (upper edge of gun shield, left side)	1	3.50
*				SH487A		PLATE, sponson top shield plate splash, right side	(1)	1.48
&			W-E712			PLATE, starting and lighting battery, negative, assembly	(6)	1.42
(Composed of: one W-G542 starting and lighting battery negative plate connecting STRAP, seven W-F82 starting and lighting battery PLATE, negative.)								
&			W-F82			PLATE, starting and lighting battery, negative	42	.18
&			W-E711			PLATE, starting and lighting battery, positive, assembly	(6)	1.24
(Composed of: six W-F81 starting and lighting battery PLATE, positive, one W-G541 starting and lighting battery positive plate connecting STRAP.)								
&			W-F81			PLATE, starting and lighting battery, positive	36	.18
&	9	28		M1484	60	PLATE, track adjusting bracket	4	1.50
*	—	7		M1903	525	PLATE, turret roof, rear	(1)	115.75

&	—	7	M2414	414	PLATE, turret roof door lock	1	.31
			M1969	300	PLATE (under door)	(2)	51.00
*	—	7	M2073	343	PLATE (under driver's turret)	(1)	11.00
*			M1939	517	PLATE (under gasoline tank)	(1)	156.00
*	—	7	M2174	364	PLATE, vertical beam inner skirting	(2)	1.48
*			M1978	381	PLATE, wing inside, rear	(2)	148.26
*	—	7	M1975B	294	PLATE, wing outside, back, left	(1)	264.35
*			M1975A	294	PLATE, wing outside, back, right	(1)	264.35
*	—	7	M1976B	295	PLATE, wing outside, rear, left	(1)	203.89
*			M1976A	295	PLATE, wing outside, rear, right	(1)	203.89
*	—	7	M3784B	510	PLATE, 6-pdr. gun pedestal, left	(1)	4.20
*			M3784A	510	PLATE, 6-pdr. gun pedestal, right	(1)	4.20
*	—	7	M3781B	507	PLATE, 6-pdr. gun pedestal, front, left	(1)	6.52
*			M3781A	507	PLATE, 6-pdr. gun pedestal, front, right	(1)	6.52
*	—	7	M3782	507	PLATE, 6-pdr. gun pedestal, side	(2)	5.76
*			M3780B	510	PLATE, 6-pdr. gun pedestal back, left	(1)	8.29
*	—	7	M3780A	510	PLATE, 6-pdr. gun pedestal back, right	(1)	8.29
*			M3779B	507	PLATE, 6-pdr. gun pedestal base, left	(1)	15.75
*	—	7	M3779A	507	PLATE, 6-pdr. gun pedestal base, right	(1)	15.75
*			M3783B	510	PLATE, 6-pdr. gun pedestal shell, left	(1)	4.20
*	—	7	M3783A	510	PLATE, 6-pdr. gun pedestal shell, right	(1)	4.20
*			M3778	268	PLATE, 6-pdr. gun pedestal top, left	(1)	31.00
*	—	7	M3777	269	PLATE, 6-pdr. gun pedestal top, right	(1)	31.00
%X	6	5	SH901E		PLUG, air pressure pump displacement	4	.72
&	8133	13	LQ48A		PLUG, cam shaft housing	2	.05
			LQ568A		PLUG, carburetor air valve	2	.04
&			LQ524A		PLUG, carburetor body	4	.10
					PLUG, carburetor gasoline, assembly	(2)	.11
&					(Composed of: *one LQ537A carburetor gasoline PLUG (2) one LQ538A carburetor gasoline plug fiber WASHER.)		.10
					PLUG, carburetor internal body, assembly	(8)	.14
&					(Composed of: one LQ549A carburetor internal body fiber WASHER, *one LQ541A carburetor internal body PLUG (8).)		.13
					PLUG, carburetor priming, assembly	(4)	.12
&					(Composed of: *one LQ549A carburetor priming PLUG (4) *one LQ550A carburetor priming plug TUBE (4).)		.09
							.03

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
&			13484 13481 13483 8136		LQ266A LQ263A LQ265A LQ256A SH978N	PLUG, crank pin	12	\$0.10
						PLUG, crank shaft gear end	1	.15
						PLUG, crank shaft main bearing	11	.12
&						PLUG, crank shaft propeller end	1	.03
						PLUG, engine oiled tank filler flange (square head, 1" drilled)	1	.04
&(pf)R						PLUG, expansion, ½". (For pin M284 (1); pin M274 (1))	12	.01
						PLUG, gasoline tank drain	3	.78
&			8501 250 8133		187 LQ388A LQ145A	PLUG, generator driving	1	.01
						PLUG, hexagon head, ¾". (For water pump (1); oil pump (1); outlet LQ413A (1))	3	.03 P
%X						PLUG, ignition battery vent, assembly	(4)	.08 P
						(Composed of: *one L-12 ignition battery vent PLUG (4) one M-8 ignition battery vent plug WASHER (soft rubber).)		.05
&			14 34 161		LQ188A	PLUG (manifold). (For manifold LQ181A (2); tube LQ186A (1))	3	.05
						PLUG (manifold drain), special	1	.13
&			6275 B14375		LQ182A LQ428A Q52A	PLUG, oil pump lower half body	1	.05
						PLUG, pipe, square head, ¼". (For governor housing assembly (1); collar SH869A (1); cylinder SH900C (1); base SH903A (3).)	9	.02 P
%X						PLUG, pipe, square head, ⅝", brass. (For pin MI543 (1).)	36	.06 P
						PLUG, pipe, square head, ¼". (For cap M3305A (1); cover M1124 (1); cap M3305A (1); cover M1124 (1); cap M3305B (1).)	3	.02 P
%X					Q52B Q52C	PLUG, pipe, square head, ¾". (For shaft MI402 (1); shaft MI474 (2); pin MI337 (1)).	64	.02 P
						PLUG, pipe, square head, ½". (For filler cap flange SH951B (1); hand starter, assembly (1)).	4	.02 P
%X					Q52E LQ299A	PLUG, pipe, square head, ¾". (For shaft MI544 (2); flange M3315 (1))	5	.03 P
						PLUG, spark, with gasket		.90 P
%X						PLUG, starting and lighting battery vent	6	.05 P

%X				53		PLUG, track locking screw adjusting screw	4	.04
%X	29	22	M1476	672		PLUG, transmission gear case oil filling, bronze	1	.78
%X	11	23	M311B	672		PLUG, transmission gear case oil filling, C. I.	2	.22
%X			M311A	SH101E		PLUG, transmission mechanical lubricator	6	.06
&						PLUG, triple combination valve, assembly	(3)	1.21
						(Composed of:		
						*one SH951E triple combination valve PLUG (3)		1.18
						one — NUT, plain, U. S. Std., hexagon, bronze, 5/16")		
&						PLUG, water pipe drain, assembly	(2)	.27
						(Composed of:		
		24				*one SH976D water pipe drain PLUG (2)		.02
						one SH976S cooling system drain plug CHAIN,		
						*one SH976M cooling system drain plug chain RING (2)		.05
						*one SH976N cooling system drain plug RING (2)		.05
						one SH976P cooling system drain plug swivel PIN,		
						one SH976R cooling system drain plug swivel pin WASHER)		
&						PLUG, 12 volt generator voltage regulator polarity reversing switch	1	.12
&				SH861A		PLUNGER, clutch spring	6	.48
%X	5	21		SH395F		PLUNGER, gun hanger	5	.08
%X				SH65C		PLUNGER, hand starter lock	1	.44
%X						PLUNGER, semaphore detent, assembly	(1)	.39
						(Composed of:		
				802		*one X273 semaphore detent PLUNGER		.38
						one — PIN, split, 1/16" x 3/8")		
%X			M3023	550		PLUNGER, shell holder	44	.22
&				SH101K		PLUNGER, transmission mechanical lubricator, lower	6	.42
&				SH104B		PLUNGER, transmission mechanical lubricator, upper	6	.18
&			M307	714		PLUNGER, transmission shifter shaft detent	1	.22
&						POST, semaphore, assembly	(1)	19.87
						(Composed of:		
				802		*one M4022 semaphore POST (1)		15.75
						two X254 semaphore stirrup RING,		
						two X255 semaphore stirrup ring RIVET,		
						one X319 semaphore tube RIVET,		
						one — BOLT, U. S. Std., hexagon head, 3/8" x 3 1/2", with plain nut,		
						two — STUD, 5/16" x 4 1/8", threaded U. S. Std., 1/2" and 3/4", assem-		
						bly.)		

Note symbol	Identification No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
%X %X	1	5			SH900B	PARTS—Continued PULLEY, air pressure pump PULLEY, jockey, with arms, assembly (Composed of: one — jockey PULLEY, assembly, two SH234H jockey pulley ARM. one — jockey pulley arm AXLE, assembly, one — jockey pulley arm SEPARATOR, assembly, one — jockey pulley AXLE, assembly, one SH234F jockey pulley distance TUBE, one SH234E jockey pulley long distance TUBE, one SH234D jockey pulley short distance TUBE.) PULLEY, jockey, assembly (Composed of: one {SKF1304} BEARING, ball, radial, dia. 2.0472", bore .7874", face {for equal} .5906". one SH234D jockey PULLEY, one M1047 jockey pulley cover PLATE, four — SCREW, cap. U. S. Std., hexagon head, ¼" x ⅞", drilled head. *one — WIRE, lock, W & M. Ga. No. 20, 10" long (1).) PULLEY, jockey PULLEY, radiator cooling fan, assembly (Composed of: *one SH233C radiator cooling fan PULLEY (1) one SH233D radiator cooling fan pulley COVER, eleven— RIVET, belt, brass, No. 8 x 1") PULLEY, radiator cooling fan driving, assembly (Composed of: *one SH233A radiator cooling fan driving PULLEY (1) one SH233B radiator cooling fan driving pulley COVER, eleven— RIVET, belt, brass, No. 8 x 1").	1 (1)	\$1.78 14.61
%X	27	2					(1)	7.85
& %X					SH234D		1 (1)	.01 P 1.38 9.57
%X							(1)	7.48 10.84 8.48

%X					SH102A	PULLEY, transmission mechanical lubricator	1	1.38
%X	—	5			SH971C	PULLEY, transmission mechanical lubricator driving	1	1.75
%X	4	2				PUMP, air pressure, assembly	(1)	32.69
						(Composed of: one SH901F air pressure pump air hole COVER, one SH903A air pressure pump BASE, two SH900A air pressure pump BEARING, two SH901C air pressure pump BUSHING, four SH901B air pressure pump check NUT, four SH900C air pressure pump CYLINDER, four SH901E air pressure pump displacement PLUG, four SH901D air pressure pump PISTON, one SH900B air pressure pump PULLEY, one — air pressure pump SHAFT, assembly, four SH901A air pressure pump SPRING, four — BOLT, U. S. Std., hexagon head, $\frac{3}{8}$ " x $1\frac{1}{4}$ ", with plain nut and lock washer, one — KEY, Woodruff, No. 5, seven Q52A PLUG, pipe, square head, $\frac{1}{8}$ ", eight — SCREW, cap, U. S. Std., hexagon head, $5/16$ " x $\frac{3}{4}$ ", six — SCREW, cap, U. S. Std., hexagon head, $\frac{3}{8}$ " x $\frac{3}{4}$ ".)		
%X	16	8			SH980B	PUMP, hand pressure	1	4.50
%X	8200	15				PUMP, oil, assembly	(1)	28.98 P
	—	33				(Composed of: one LQ447A oil pressure relief valve SPRING, one — oil pump BODY, lower half, assembly, one — oil pump BODY, upper half, assembly, one LQ434A oil pump driven GEAR, lower, two LQ438A oil pump driven GEAR, upper, one LQ433A oil pump driving GEAR, lower, one LQ439A oil pump driving GEAR, upper, one LQ436A oil pump driven PIN, long, one LQ437A oil pump driven PIN, short, one LQ444A oil pump driving SHAFT, one LQ453A oil pump lower half body COVER, one LQ454A oil pump lower half body cover GASKET,		

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
%X	8200	15				PARTS—Continued PUMP, oil, assembly—Continued. (Composed of: one LQ448A oil pump pressure relief VALVE, one LQ446A oil pump pressure relief valve GUIDE, (gd) one LQ65A oil pump pressure relief valve spring SHIM, one LQ445A oil pump relief valve SEAT, one LQ435A oil pump separating PLATE, one — oil pump STRAINER, lower, assembly, one — oil pump STRAINER, upper, assembly, four (LQ443A) oil pump upper half body BOLT, assembly, ten (LQ164A) BOLT, S. A. E., drilled, ¼" x 15/16", threaded 9/16", assembly, one — GASKET, copper asbestos, 5/8", one LQ145A PLUG, hexagon head, 5/8", *two LQ31A WIRE, lock, W. & M. Ga. No. 18 x 8" (22) *one LQ167A WIRE, lock, W. & M. Ga. No. 18 x 10" (6).)		
	—	33						
	—	34						
&	12211	15	177			PUMP, water, assembly (Composed of: one (H. B. 303) BEARING, ball, radial, dia. 1.8504", bore .6693", thick- ness .5512", one — water pump BODY, assembly, one LQ150A water pump COVER, one LQ149A water pump cover GASKET, one LQ146A water pump IMPELLER, *three LQ141A water pump PACKING (3) one — water pump SHAFT, with gear, assembly, one LQ140A water pump shaft bearing RETAINER,	(1)	\$0.01 P .01 P
	42	14	L209					29.67 P
	8213	17	15004 or 14334					.10

& %X	L209	M779	217	one LQ151A water pump shaft bearing retainer GASKET, two LQ142A water pump shaft GLAND, one LQ143A water pump shaft gland SPRING, one — GASKET, copper asbestos, $\frac{3}{8}$ " , one LQ145A PLUG, hexagon head, $\frac{3}{8}$ " , *one LQ167A WIRE, lock, W. & M. Ga. No. 18 x 10" (6.)) QUADRANT, reverse lever RACK, funnel, assembly (Composed of: one A3987 funnel rack BRACKET, (front), one A3988 funnel rack BRACKET, (rear), one A4025 funnel rack CLEAT, one — funnel rack STRAP, buckle end, assembly, one — funnel rack STRAP, plain end, assembly, *one A3999 PACKING (1) *one A4000 PACKING (1) *one A4001 PACKING (1) *one A4002 PACKING (1) *one A4003 PACKING (1) *one A4004 PACKING (1) *one A4005 PACKING (1) *one A4006 PACKING (1) *one A4007 PACKING (1) seven — BURR, copper, No. 8, twelve — NAIL, finishing, 3d, four — SCREW, wood, flat head, No. 8 (5/32+") x $\frac{3}{4}$ " , two — SCREW, wood, flat head, No. 8 (5/32+") x $\frac{7}{8}$ " , two — SCREW, wood, flat head, No. 8 (5/32+") x 1" , twenty-two — SCREW, wood, flat head, No. 8 (5/32+") x 1 $\frac{1}{2}$ " , two — SCREW, wood, round head, No. 8 (5/32+") x $\frac{3}{4}$ " , five — SCREW, wood, round head, No. 8 (5/32+") x 1") RADIATOR, assembly (Composed of: one — radiator CORE, front, assembly, one — radiator CORE, rear, assembly, one SH607A radiator core GASKET, one — radiator HEADER, front, assembly, one — radiator HEADER, rear, assembly, two M888 radiator header GASKET,	1 (1)	.01 .78 4.07
&	2	1			(1)	302.48

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
&	1	2				RADIATOR, assembly—Continued. (Composed of: two SH607B radiator intermediate tube plate REINFORCE, one SH612A radiator PLATE, left side, one SH612B radiator PLATE, right side, one SH606D radiator reinforcing STRIP, left, one SH606C radiator reinforcing STRIP, right, thirteen — BOLT, U. S. Std., countersunk head, $\frac{3}{8}$ " x $1\frac{1}{2}$ ", with plain nut and lock washer, twelve — BOLT, U. S. Std., hexagon head, $5/16$ " x $\frac{3}{4}$ " with plain nut and lock washer, forty-two — BOLT, U. S. Std., hexagon head, $5/16$ " x 1", with plain nut and lock washer, forty-three — BOLT, U. S. Std., hexagon head, $\frac{3}{8}$ " x $1\frac{1}{2}$ ", with plain nut and lock washer, sixteen — BOLT, U. S. Std., hexagon head, $\frac{3}{8}$ " x $1\frac{1}{2}$ ".)		
						RAIL, track bulb, No. 1, left (outer left or inner right)	2	\$8.35
						RAIL, track bulb, No. 1, right (outer right or inner left)	2	8.35
						RAIL, track bulb, No. 2, left (outer left or inner right)	2	18.75
						RAIL, track bulb, No. 2, right (outer right or inner left)	2	18.75
						RAIL, track bulb, No. 3, left (outer left or inner right)	2	18.75
						RAIL, track bulb, No. 3, right (outer right or inner left)	2	18.75
						RAIL, track bulb, No. 4, left (outer left or inner right)	2	18.75
						RAIL, track bulb, No. 4, right (outer right or inner left)	2	18.75
						RAIL, track bulb, No. 5, left (outer left or inner right)	2	17.60
						RAIL, track bulb, No. 5, right (outer right or inner left)	2	17.60
						RATCHET, semaphore control	1	.84
						RECORDER, distance (Johns-Manville Co. type, M-26)	1	20.00 P
						REDUCER, conduit, 1" to $\frac{3}{4}$ ". (For conduit A8405 (1).)	1	.09 P
						REDUCER, conduit, $1\frac{1}{2}$ " to 1". (For conduit A8403 (1).)	1	.13 P

% (p)R %X	D5721	Q51A	REDUCER, pipe, M. L. $\frac{1}{4}$ " x $\frac{1}{8}$ ". (For pipe M1830 (1).) REGULATOR, voltage, with housing, assembly (Composed of: one D5718 voltage REGULATOR, assembly, one D13865 voltage regulator HOUSING, assembly, one D30380 voltage regulator terminal STUD, large, assembly, two D30366 voltage regulator terminal STUD, small, assembly.)	2 (1)	.02 P 6.11 P
			REGULATOR, voltage, assembly (Composed of: *one D30101 terminal CLIP, long (1), *two D30100 terminal CLIP, short (2), one D13886 voltage regulator ARMATURE, assembly, *one D25401 voltage regulator armature CLIP (1), one (D30141) voltage regulator armature regulating spring adjusting screw, assembly, one D30898 voltage regulator armature regulating spring GUARD, one D24082 voltage regulator armature retaining PIN, *one D30109 voltage regulator BRACKET (1), one D13611 voltage regulator CLIP, with contact, assembly, one D29480 voltage regulator clip INSULATOR, with contact (under), one (D13795) voltage regulator contact SCREW, assembly, six — voltage regulator mounting terminal SCREW, with thin bushing, assembly, one — voltage regulator mounting terminal SCREW, with thick bushing, assembly, *one — voltage regulator SPOOL, assembly (1), *one D25394 voltage regulator support PLATE (1), two D25470 voltage regulator terminal INSULATOR, *two D30532 voltage regulator terminal SEPARATOR (2), one D30527 NUT, castle, $\frac{1}{4}$ "—28 x 7/16" x .281" thick, one D30515 PIN, brass, .09" x .210", one D25461 RIVET, button head, brass, .091" x .191", two D30108 SCREW, slotted head, No. 2—64 x .215", one D24953 WASHER, lock, .275" x .454" x .031", one D30528 WIRE, copper, .0403" x 1 1/16".)		
& %X & &	5X90	SH607B	REINFORCE, radiator intermediate tube plate	2	2.58
		633	REST, head, padded	20	.55
		SH573K	REST, removable platform (forward)	1	.40
&		SH550E	REST, removable platform, rear	1	.30

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
&	29	21		M2842	489	REST, sponson foot (on floor plate)	2	\$0.42
	&					RETAINER, clutch ball, assembly	(1)	2.30
&	6	21				(Composed of: *one SH998C clutch ball RETAINER (1)		2.00
	&					thirty — BALL, steel, ¼")		
	&				SH861C	RETAINER, clutch spring	6	.38
	&		D29579			RETAINER, distributor cam oil, felt	2	.01 P
	&		D29571			RETAINER, distributor cam oil, steel	2	.01 P
	&		D29611			RETAINER, distributor upper ball bearing	2	.01 P
	&		D30134			RETAINER, generator ball bearing (inner)	1	.05 P
	8524	16	8524		LQ390A	RETAINER, generator driving shaft ball bearing	1	.25
	&					RETAINER, hemispherical turret antispash, long, assembly	(3)	1.94
	&					(Composed of: *one SH434B hemispherical turret antispash RETAINER, long (3)		.50
&						six SH434D hemispherical turret antispash SPRING, twelve — RIVET, countersunk head, copper, 3/16" x ¼")		
						RETAINER, hemispherical turret antispash, short, assembly	(3)	1.60
						(Composed of: *one SH434C hemispherical turret antispash RETAINER, short (3)		.40
						five SH434D hemispherical turret antispash SPRING, ten — RIVET, countersunk head, copper, 3/16" x ¼")		
						RETAINER, piston pin	24	.07
	&		12547		LQ470A	RETAINER, track driving shaft (shipping)	4	.48
	&	22			SH61A	RETAINER, transmission flanged sleeve outer bushing oil	2	.48
	&	17	B14333	M310	LQ140A	RETAINER, water pump shaft bearing	1	4.50
	&				SH278E	RIM, radiator cooling fan	1	2.95
	*			M1401	52	RIM, track driving wheel	4	65.75
%X	&			M1036A	156	RING, air duct mud hole	1	1.28
	&		D/20793		637	RING (ball mount), splash. (For hemispherical turret (1), side door (1).)	5	1.28
	&	15			SH997A	RING, clutch end bearing	1	3.57

&	30	21		SH861E	RING, clutch snap	1	1.12
&	8	21		SH849C	RING, clutch spring retainer	1	1.56
&	4	21		SH998A	RING, clutch spring stop	1	6.78
(mh)&					RING, D, 1" x 1 1/4". (For spare belt holder (2).)	2	.05 P
&				SH987A	RING, governor ball retaining	1	.45
&	22	22		679A	RING, large planet pinion	2	25.00
&				M2391	RING, main turret flap	2	.12
&				SH438C	RING, periscope lever. (On outlook turret (2); driver's turret (1), right sponson (1); left sponson (1); roof door (1).)	6	.08
&				SH1020B	RING, piston, bottom	12	.18
&				LQ468A	RING, piston, intermediate	12	.15
&				LQ469A	RING, piston, top	12	.15
&				SH574F	RING, platform ammunition storage thumb screw chain double	1	.08
&	3	21		706	RING, retaining. (For shaft M289 (4); pinton M267 (2).)	6	.72
&	40	22		803	RING, semaphore stirrup	2	1.25
&				X254	RING, small planet pinion	2	22.00
&	27	22		M273	RING, standard chain. (See Standard chain S Hook)		.05 P
(cp)(a)&				A6951	RING, steel chain	10	.05 P
(c)&				B34D	RING, track roller spring split (steel, 3/16" x 3/8" x 12.56")	116	.35
&	7	29		53	RING, transmission bevel gear clutch	2	17.00
&				M1335	RING, transmission cross shaft retaining	2	.38
&	12	22		M258B	RING, transmission spur, large	2	64.00
&	17	22		M256	(Composed of: one M276 transmission small spur ring DISC, *one M275 transmission spur RING, small (2) sixteen — RIVET, button head, 1/2" x 1 1/4")	(2)	96.16
&	34	22		M279	RIVET, belt, brass, No. 8 x 1" with burr. (For cover SH233B (11); cover SH233D (11).)	22	.01 P
&(sh)R				677	RIVET, belt, brass, No. 10 (.134") x 3/4", with burr. (For strap SH443D (2); strap SH443C (2).)	4	.01 P
&(sh)R					RIVET, belt, brass, No. 10 (.134") x 3/4", with burr. (For strap SH285C (2); strap SH285D (2); strap SH239E (3); strap SH239F (3).)	10	.01 P
&(sh)R					RIVET, belt, copper, No. 10 (.134") x 1/2", with burr. (For strap A3990 (2); strap B5900 (9).)	11	.01 P
&(sh)R					RIVET, button head, 5/64" x 5/32". (For cover D13817 (3).)	3	.01 P
X			D24247		RIVET, button head, 1/8" x 3/8". (For connection SH950D (6).)	6	.01 P
&(sh)R							

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
&(sh)R	&(sh)R	&(sh)R	&(sh)R	&(sh)R	&(sh)R	RIVET, button head, 1/8" x 7/16". (For carrier M2837 (2); chain SH574H (1); holder SH950H (6).)	11	\$0.01 P
						RIVET, button head, 1/8" x 1/2". (For seven clips A4055 (12).)	12	.01 P
						RIVET, button head, 3/16" x 3/8". (For clip LQ174A (1); clip LQ173A (1); holder SH285A strap fastener, No. 10 (2); holder SH285A strap fastener, No. 2 (2).)	8	.01 P
						RIVET, button head, 3/16" x 1/2". (For bracket M2170 (4); strap exhaust manifold guard elbow, outer, assembly (25); strap exhaust manifold guard elbow, inner, assembly (25); exhaust manifold guard, right, assembly (26); exhaust manifold guard, left, assembly (26); ammunition storage (above rear shell storage) (18).)	124	.01 P
&(sh)R	&(sh)R	&(sh)R	&(sh)R	&(sh)R	&(sh)R	RIVET, button head, 3/16" x 5/8". (For band SH153K (8); band SH153H (8); platform ammunition storage thumb screw chain, assembly (1); blade SH278A (4).)	273	.01 P
						RIVET, button head, 3/16" x 3/4". (For bracket M486A (2); bracket SH293A strap fastener, No. 10 (2); elbow, outer, assembly (4); elbow, inner, assembly (4).)	18	.01 P
						RIVET, button head, 3/16" x 1/2". (Through bracket MX47 and spring MX81 (1).)	2	.01 P
						RIVET, button head, 3/16" x 1". (For bracket SH544B to side door left and right (6); bracket SH544A to side door left and right (6).)	36	.01 P
&(sh)R	&(sh)R	&(sh)R	&(sh)R	&(sh)R	&(sh)R	RIVET, button head, 3/16" x 1 1/8". (Through bracket MX49 and spring MX81 (1).)	2	.01 P
						RIVET, button head, 1/4" x 1/2". (For flange M1757 (6); bracket M2170 (4); handle SH291D (2); plate FF55FC (2).)	26	.01 P
						RIVET, button head, 1/4" x 9/16". (For hinge SH576K (3).)	12	.01 P
						RIVET, button head, 1/4" x 5/8". (For stop SH293E strap fastener, No. 2 (2); water tank (1).)	9	.01 P
&(sh)R	&(sh)R	&(sh)R	&(sh)R	&(sh)R	&(sh)R	RIVET, button head, 1/4" x 11/16". (For support SH286C (2); clip M2437 (2); hinge M2158 (3).)	20	.01 P
						RIVET, button head, 1/4" x 3/4". (For band M4158 (3); angle M4040C (5); angle M4040B (3); angle M4040E (3); angle M4040F (5); securing lid M4040A to box (6); holder SH285A to bracket SH285B (4); outside tool chest (9); hinge GB3L (3); holder SH443A strap fastener, No. 10 (2); angle SH279A (5); engine oil tank, assembly (24); water tank (44); piece M717 (2); piece M718 (2).)	174	.01 P

&(sh)R			RIVET, button head, $\frac{1}{4}$ " x $\frac{7}{8}$ ". (For outside tool chest (203); support SH972A (6); plate M2157 to door M2146A and M2146B (6); handle C114E (4); sheet SH282C (8); angle SH279B (5); angle SH279C (5); hinge M2158 (3); rear shell storage, assembly (24); engine oil tank, assembly (13); lock M45/21421 (4); bracket M2163 (2); plate M3063A through 10 brackets M3024 (20); plate M3063B through 10 brackets M3024 (20); plate M3783A through 2 brackets M3024 (4); plate M3783B through 2 brackets M3024 (4).)	357	.01 P
&(sh)R			RIVET, button head, $\frac{1}{4}$ " x 1". (For (three) bracket A4044 (3); plate M4160 (6); outside tool chest (8); engine oil tank, assembly (12); water tank (2).)	37	.01 P
&(sh)R			RIVET, button head, $\frac{1}{4}$ " x $1\frac{1}{8}$ ". (For outside tool chest (14); rear shell storage, assembly (8).)	22	.01 P
&(sh)R			RIVET, button head, $\frac{1}{4}$ " x $1\frac{3}{16}$ ". (For bracket MX49 (3).)	12	.01 P
&(sh)R			RIVET, button head, $\frac{1}{4}$ " x $1\frac{1}{4}$ ". (For bar M342 (4); piece M717 (2); piece M718 (2).)	24	.01 P
&(sh)R			RIVET, button head, $\frac{1}{4}$ " x $1\frac{1}{8}$ ". (For plate M3780A angle M3789A through 2 brackets M3024 (4); plate M3790B angle M3789B through 2 brackets M3024 (4); plate M3780A angle M3791A and bracket M3024 (2); plate M3780B angle M3791B and bracket M3024 (2); plate M3780A angle M3795A and bracket M3024 (2); plate M3780B angle M3795B and bracket M3024 (2).)	16	.01 P
&(sh)R			RIVET, button head, $\frac{1}{4}$ " x $1\frac{1}{2}$ ". (For angle M3789A plate M3780A through 2 brackets M3798A (2); angle M3789B plate M3780B through 2 brackets M3798B (2).)	8	.01 P
&(sh)R			RIVET, button head, $5/16$ " x $\frac{5}{8}$ ". (For lug SH438D (1); securing bracket SH285B (2).)	8	.01 P
&(sh)R			RIVET, button head, $5/16$ " x $\frac{3}{4}$ ". (For through two cleat M1583 (3); angle M1592 (17); cleat M1593 (3); cap M1594B (4); cap M1594A (4).)	62	.01 P
&(sh)R			RIVET, button head, $5/16$ " x $\frac{7}{8}$ ". (For through two cleat M1583 (3); plate M1581 (4); bracket M1588 (7); bracket M1587 (7); handle M2151 to ignition inspection door (2).)	36	.01 P
&(sh)R			RIVET, button head, $5/16$ " x 1". (For flange M1194 (6); flange M1195 (2); cleat M2186 (2); handle M2151 to engine room door (2).)	24	.01 P
&(sh)R	31	21	RIVET, button head, $5/16$ " x $1\frac{1}{8}$ ". (For collar SH869A (6); plate M897 (4); plate M887 (4); plate M886 (6); flange M1194 (2); flange M1195 (2).)	24	.01 P
&(sh)R			RIVET, button head, $5/16$ " x $1\frac{1}{4}$ ". (For hub SH278B (12).)	12	.01 P
&(sh)R			RIVET, button head, $5/16$ " x $1\frac{3}{4}$ ". (For guide M742 (2).)	6	.01 P
&(sh)R			RIVET, button head, $\frac{3}{8}$ " x $\frac{7}{8}$ ". (For piece M988 (8).)	16	.01 P
&(sh)R			RIVET, button head, $\frac{3}{8}$ " x $1\frac{1}{8}$ ". (For bearing M2154 (2); hinge SH537A (2); bearing SH289E (2); ring M1756 (8); water tank (16); machine gunner's seat (6).)	72	.01 P

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
&(sh)R						RIVET, button head, 3/8" x 1 1/4". (For plate M1196 (3); bracket SH965A (6); handle J206/21067 (main turret) (2).)	15	\$0.01 P
&(sh)R						RIVET, button head, 3/8" x 1 3/8". (For handle J206/21067 (2); through lever M355B and M355A (4); hinge SH537B (2).)	20	
&(sh)R						RIVET, button head, 3/8" x 1 1/2". (For plate M2354 through lock M2431A (4); plate M2354 through lock M2431 B (4); washer H20/21195 (2).)	12	.01 P
&(sh)R						RIVET, button head, 3/8" x 1 3/8". (For plate M2349 through handle J206/21067 (2); plate M2351 through handle J206/21067 (2); plate M2406 through handle J206/21067 (2); lock, door, No. 26 to side door, left (4); lock, door, No. 27 to side door, right (4).)		
&(sh)R						RIVET, button head, 7/16" x 1". (For plate M1911 through 4 hinges M1790 (4); hinge M2815 (2); rear shell storage, assembly (8).)	22	.01 P
&(sh)R						RIVET, button head, 7/16" x 1 1/8". (For beam M1900 through plate M1909A (4); plate M3777 through plate M3784A (1); stop M1787 (3); hinge M1789 (1); support M2819 (2).)	30	.01 P
&(sh)R						RIVET, button head, 7/16" x 1 1/4". (For hook M2168 and bulk head (1); plate M1963B and plate M3063B (5); plate M1963A and plate M3063A (5); plate M1904A and strip M1904B (2); plate M1904A and strip M1904C (5); plate M1915A and strip M1915C (2); plate M1915A and strip M1915B (5); plate M1912A and strip M1912C (4); plate M1912A and strip M1912B (2); plate M1909A and strip M1909B (4); plate M1911 and strip M1788 through 4 hinges M1790 (8); hinge M1789 to gasoline tank cover (3).)	13	.01 P
&(sh)R						RIVET, button head, 7/16" x 1 3/8". (For strip M2446 and roof plate (2); plate M1970A and plate M714 (2); plate M1970B and plate M713 (2); plate M1969 and plate M710 (1); plate M1971A and plate M710 (1); plate M1971B and plate M710 (1); plate M1970A and plate M710 (1); plate M1970B and plate M710 (1); plate M1968A and plate M712 (2); plate M1968B and plate M712 (2); plate M1971B and plate M712 (6); plate M1971A and plate M712 (6); plate M2372 through 2 batten M2359 (6); plate M2373 through 2 batten M2373 (6); plate M2372 and batten M2358 (3); plate M2373 and batten M2358 (3); plate M2372 and strip	55	.01 P

&(sh)R	M2446 (2); plate M2372 and catch M2445 (1); bracket M2147 (2); plate M2356 (4); turret outlook, assembly (50).)	111	.01 P
	RIVET, button head, 7/16" x 1 7/16". (For hinge M1790 to main turret roof door, right and left (3).)	12	.01 P
&(sh)R	RIVET, button head, 7/16" x 1 1/2". (For plate M2372 and plate M2394 (3); plate M2373 and plate M2394 (3); plate M2749 through 2 hinges M2014 through 2 packing M2817 (4); plate M2741 through 2 hinges M2014 through 2 packing M2817 (4); plate M3777 and plate M3783A (5); plate M3778 and plate M3783B (5); plate M3777 and plate M3784A (2); plate M3778 and plate M3784B (2); rear shell storage, assembly (39); turret outlook, assembly (18).)	85	.01 P
	RIVET, button head, 7/16" x 1 1/8". (For plate M1975B and angle M2031 (4); plate M1975A and angle M2032 (4); plate M1977 and angle M2031 (4); plate M1977 and angle M2032 (4); beam M1929 and angle SH523A (3); plate M1931 through 2 brackets M3068 (4); plate M2373 through 2 hinges M1790 (6); plate M2372 through 2 hinges M1790 (6); plate M2372 through 2 hinges M1789 (6); hinge M1789 (5).)	57	.01 P
&(sh)R	RIVET, button head, 7/16" x 1 3/4". (For plate M1963B through 3 brackets M3066 (6); plate M1963A through 3 brackets M3066 (6); plate M1964A through 2 brackets M3066 (4); plate M1964B through 2 brackets M3066 (4); plate M1970A and plate M714 (4); plate M1970B and plate M713 (4); plate M1970B and plate M711 (1); plate M1970A and plate M711 (1); plate M1967A and plate M711 (6); plate M1967B and plate M711 (6); plate M1969 and plate M710 (5); plate M3778 and plate M3784B through plate M3779B (1); rear shell storage, assembly (8).)	71	.01 P
	RIVET, button head, 7/16" x 1 1/8". (For seat M2818B and sponson (4); seat M2818A and sponson (4); flap M2353 (9); hinge M1789 (1).)	30	.01 P
&(sh)R	RIVET, button head, 7/16" x 2". (For plate M2402 (2); plate M2404 (3); plate M2401 (2); hinge M2403 to plate M2352 (1).)	9	.01 P
	RIVET, button head, 7/16" x 2 1/8". (For plate M1967A plate M711 and strap M1982 (1); plate M1967B plate M711 and strap M1982 (1); hinge M1789 (2).)	10	.01 P
&(sh)R	RIVET, button head, 7/16" x 2 1/4". (For plate M2014 plate M2033 and bracket M3068 (4); batten M2386 (1).)	6	.01 P
	RIVET, button head, 7/16" x 2 3/8". (For hinge M2403 to plate M2352 (1).)	2	.01 P
&(sh)R	RIVET, button head, 1/2" x 3/4". (For bracket M4135 (2).)	4	.01 P
	RIVET, button head, 1/2" x 1 1/8". (For plate M1907 and piece M985 (6); plate M986 and frame M982 (3); plate M1908 and frame M982 (5); plate M1908 and frame M983 (5); strip M1005 and frame M983 (3); plate SH239B (4); plate SH239A (4); transmission frame, assembly (4).)	34	.01 P

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
&(sh)R						RIVET, button head, ½" x 1¼". (For packing M2112 and channel M2111 (2); packing M2112 and channel M2110 (2); plate M2740A and plate M3784A (4); plate M2740B and plate M3784B (4); plate M2740A and plate M3783A (4); plate M2740B and plate M3783B (4); piece M999 (2); plate M989 through plate M993 (5).)	41	\$0.01 P
&(sh)R						RIVET, button head, ½" x 1½". (For plate M2003 and angle M1592 (11); plat- form ammunition storage (Browning machine gun) assembly (4).)	26	.01 P
&(sh)R						RIVET, button head, ½" x 1¾". (For plate M1484 and plate M1962B (5); plate M1484 and plate M1962A (5); transmission frame, assembly (4); bracket SH956B (2).)	28	.01 P
&(sh)R						RIVET, button head, ½" x 1¾". (For plate M1975B and plate M1552 (4); plate M1975A and plate M1552 (4); plate M1976B and plate M1552 (4); plate M1976A and plate M1552 (4); frame M982 through 2 pieces M999 (4); frame M983 through 2 pieces M999 (4); transmission frame, assembly (12); plate M1552 (4).)	52	.01 P
&(sh)R						RIVET, button head, ½" x 1½". (For bracket M4136 (2); platform ammunition storage (Browning machine gun) assembly (6); disk M275 (16).)	42	.01 P
&(sh)R						RIVET, button head, ½" x 2". (For cleat M4130 (3).)	12	.01 P
&(sh)R						RIVET, button head, ½" x 2½". (For bracket M4131 (2).)	8	.01 P
&(sh)R						RIVET, button head, ½" x 2¼". (For support M2162 angle M1942A angle M1942B and plate M2139 (1).)	1	.01 P
&(sh)R						RIVET, button head, ½" x 2¾". (For support M2162 angle M1942A angle M1942B plate M2139 and guide M2209 (1).)	1	.01 P
&(sh)R						RIVET, button head, 9/16" x 1½". (For plate M2406 and plate M3120 (1).)	1	.01 P
&(sh)R						RIVET, button head, 9/16" x 2". (For strap M709 (2).)	8	.01 P
&(sh)R						RIVET, button head, 9/16" x 2¼". (For plate M2407 and plate M3120 (4); plate M2406 and plate M3120 (3).)	7	.01 P
&(sh)R						RIVET, button head, 9/16" x 2¾". (For plate M3120 to side door left and right (4).)	8	.01 P
&(sh)R						RIVET, button head, 9/16" x 2½". (For strap M709 (2).)	8	.01 P

&(sh)R	RIVET, button head, $\frac{5}{8}$ " x $1\frac{1}{2}$ ". (For channel M2111 and ledge M2113 (4); channel M2110 and ledge M2113 (4); channel M2108 (8); channel M1990 (8))	24	.01 P
&(sh)R	RIVET, button head, $\frac{5}{8}$ " x $1\frac{1}{8}$ ". (For plate M2363 and flange A/20793 (4); plate M2768 angle M2808 and angle M2778 (1); plate M2766 angle M2806 and angle M2778 (1); disk M1404 (18))	154	.01 P
&(sh)R	RIVET, button head, $\frac{5}{8}$ " x 2". (For plate M2766 and angle M2778 (2); plate M2767 and angle M2778 (3); plate M2768 and angle M2778 (2); plate M2762 and angle M2777 (3); plate M3782 and angle M3799A (3); plate M3782 and angle M3799B (3); plate M3782 and angle M3791A (4); plate M3782 and angle M3791B (4); plate M3782 and angle M3796A (3); plate M3782 and angle M3796B (3))	30	.01 P
&(sh)R	RIVET, button head, $\frac{5}{8}$ " x $2\frac{1}{8}$ ". (For cleat M189 (2); gear M258 (6))	14	.01 P
&(sh)R	RIVET, button head, $\frac{5}{8}$ " x $2\frac{1}{4}$ ". (For plate M2363 angle M2419A and flange A/20793 (1); plate M2363 angle M2420A and flange A/20793 (1); plate M2363 angle M2419B and flange A/20793 (1); plate M2363 angle M2420B and flange A/20793 (1))	4	.01 P
&(sh)R	RIVET, button head, $\frac{5}{8}$ " x $2\frac{3}{8}$ ". (For plate M2762 angle M2805 and angle M2777 (1); plate M2766 angle M2805 and angle M2778 (1); transmission bevel gear, assembly (6))	14	.01 P
&(sh)R	RIVET, button head, $\frac{5}{8}$ " x $2\frac{3}{8}$ ". (For boss M1403 (24))	96	.01 P
&(sh)R	RIVET, button head, $1\frac{1}{16}$ " x $1\frac{1}{4}$ ". (For plate M1938 and diaphragm M2059B (4); plate M1938 and diaphragm M2059A (4); plate M1935 and diaphragm M2173A (2); plate M1935 and diaphragm M2173B (2); plate M1933 and diaphragm M2056B (4); plate M1933 and diaphragm M2056A (4))	20	.01 P
&(sh)R	RIVET, button head, $1\frac{1}{16}$ " x $1\frac{3}{8}$ ". (For diaphragm M2055 and plate M1984 (1); diaphragm M2055 and plate M1983A (1); diaphragm M2056B and plate M1984 (1); diaphragm M2056A and plate M1984 (1); diaphragm M2056A and plate M1983A (1); diaphragm M2056B and plate M1983A (1); diaphragm M2057A and plate M1984 (1); diaphragm M2057A and plate M1984 (1); diaphragm M2057A and plate M1983A (1); diaphragm M2057B and plate M1983A (1); diaphragm M2173B and plate M1984 (1); diaphragm M2173A and plate M1984 (1); diaphragm M2057A and plate M1985 (1); diaphragm M2057A and plate M1985 (1); diaphragm M2057B and plate M1983B (1); diaphragm M2057B and plate M1983B (1); diaphragm M2057A and plate M1983B (1); diaphragm M2058B and plate M1985 (1); diaphragm M2058A and plate M1985 (1); diaphragm M2058B and plate M1983B (1); diaphragm M2058A and plate M1983B (1); angle M2020A and piece M1906A (5); angle M2020B and piece M1906B (5); plate M1914 and angle M2020A (6); plate M1914 and angle M2020B (6); plate M1938 and angle M2017 B (8); plate M1938 and angle M2017A (8); plate M1938 and angle M2018A (8); plate M1938 and angle M2018B (8); plate M1936 and		

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&(sh)R						PARTS—Continued RIVET, button head, 11/16" x 1½"—Continued. angle M2018B (1); (none for 2018A) plate M1936 and angle M2017B (1); plate M1936 and angle M1942B (2); plate M1935 and angle M1942A (2); plate M1935 and angle M2018B (9); plate M1935 and angle M2018A (9); plate M1935 and angle M2017B (9); plate M1935 and angle M2017A (9); plate M1934 and angle M2018B (6); plate M1934 and angle M2018A (6); plate M1933 and angle M2018B (6); plate M1933 and angle M2018A (6); plate M1933 and angle M2017B (6); plate M1933 and angle M2017A (6); plate M2139 and angle M2142B (1); plate M2139 and angle M2142A (1); plate M2138 and angle M2142B (7); plate M2138 and angle M2142A (7); plate M2157 and angle M2142B (4); plate M2157 and angle M2142A (4); plate M2138 through 2 straps M2145 (4); plate M2137 through 2 straps M2145 (4); plate M2139 and strap M2144 (10); plate M2138 and strap M2144 (10); plate M1901A and angle M2019A (5); plate M1901B and angle M2019B (5); plate M1903 and angle M2019A (3); plate M1903 and angle M2019B (3); plate M1901A and strap M1894A (3); plate M1901B and strap M1894B (3); plate M1903 and strap M1894A (3); plate M1903 and strap M1894B (3); plate M1915A and angle M2019B (6); plate M1901A and angle M2020A (28); plate M1901B and angle M2020B (28); plate M1903A and angle M2020A (3); plate M1903A and angle M2020B (3); plate M1904A and angle M2020A (19); plate M1915A and angle M2020B (19); plate M1918 and angle M2020A (1); plate M1918 and angle M2020B (1); plate M1917 and angle M2020A (4); plate M1917 and angle M2020B (4); plate M1903 and plate M1924 (7); plate M2756A and channel M2775 (24); plate M2756B and channel M2776 (24). RIVET, button head, 11/16" x 1½". (For plate M1989A and angle M2060A (3); plate M1936 and bracket M6412 (6); plate M1932 and diaphragm M2055 (4); channel M2143 and plate M2137 (10); plate M2758 and channel M2775 (2); plate M2759 and channel M2775 (2); plate M2757A and plate SH491A (7); plate M2757B and plate SH492A (7); plate M2757A and strap M2783A (1); plate M2757A and strap M2786A (1); plate M2757B and strap M2786B (1); plate M2768 and angle M2808 (1); plate M2761 and angle M2777 (3); plate M2760 and angle M2777 (2);	416	\$0.01 P

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&(sh)R						PARTS—Continued RIVET, button head, 11/16" x 1 3/4"—Continued. M1922B (2); angle M2019A stiffener M1922A strip M1923 (5); angle M2019B stiffener M1922B strip M1923 (5); angle M2019A plate M1904 and stiffener M1922A (2); angle M2019B plate M1915A and stiffener M1922B (2); angle M1895 plate M1903 and angle M2020A (1); angle M1895 plate M1903 and angle M2020B (1); angle M1897A plate M1904A and angle M2020A (1); angle M1897B plate M1915A and angle M2020B (1); plate M1915A angle M2020B and beam M1899 (2); plate M1904A angle M2020A and beam M1925 (2); angle M2020B plate M1915A and beam M1900 (1); angle M2020A plate M1904A and beam M1913 (1); angle M2020B plate M1915A and beam M1913 (1); plate M1903 angle M1895 and plate M1924 (1); plate M2388 and angle M2415B (2); plate M2354 and batten M2386 (1); plate M2733A and strap M2784A (1); plate M2733B and strap M2784B (1); plate M2758 channel M2775 and plate SH487A (1).)	75	\$0.02 P
						RIVET, button head, 11/16" x 1 7/8". (For diaphragm M2055 and plate M1984 (4); diaphragm M2055 and plate M1983A (4); diaphragm M2056B and plate M1984 (3); diaphragm M2056 and plate M1984 (3); diaphragm M2056A and plate M1983A (3); diaphragm M2056B and plate M1983A (3); diaphragm M2057B and plate M1984 (2); diaphragm M2057A and plate M1984 (2); diaphragm M2057A and plate M1983A (2); diaphragm M2057B and plate M1983A (2); diaphragm M2073B and plate M1984 (2); diaphragm M2073A and plate M1984 (2); diaphragm M2057B and plate M1985 (2); diaphragm M2057A and plate M1985 (2); diaphragm M2057B and plate M1983B (2); diaphragm M2057A and plate M1983B (2); diaphragm M2058B and plate M1985 (2); diaphragm M2058A and plate M1985 (2); diaphragm M2058A and plate M1983B (2); diaphragm M2059A and plate M1985 (3); diaphragm M2059B and plate M1983B (3); diaphragm M2059A and plate M1983B (3); diaphragm M2071B and plate M1985 (3); diaphragm M2071A and plate M1985 (3); diaphragm M2071B and plate M1983B (3); diaphragm M2071A and plate M1983B (3); angle M2061A		

plate M1987 and plate M2137 (5); angle M2061B plate M1987 and plate M2137 (3); angle M2025 plate M1939 (8); plate M1988 and beam M1930 (10); plate M1937 and beam M1930 (18); angle M1937 and plate M2018B (7); angle M1937 and plate M2018A (7); angle M1937 and plate M2017B (6); angle M1937 and plate M2017A (6); angle M1938 and plate M2018A (1); angle M1938 and plate M2018B (1); angle M1937 and beam M1929 (18); angle M1936 and beam M1929 (10); plate M1936 and angle M2018B (5); plate M1936 and angle M2018A (6); plate M1936 and angle M2017B (5); plate M1936 and angle M2017A (6); plate M1937 and channel M180 (5); plate M1936 and channel M181 (5); plate M1937 and bracket M186 (2); plate M1937 and bracket M185 (2); plate M1936 and angle M1942B (16); plate M1935 and angle M1942A (16); plate M1934 angle M2018B and beam M1928 (1); plate M1934 angle M2018A and beam M1928 (1); plate M1934 angle M2017B and beam M1927 (1); plate M1934 angle M2017A and beam M1927 (1); plate M1934 angle M2018B and beam M1927 (1); plate M1934 angle M2017B and beam M1927 (1); plate M1934 angle M2017A and beam M1927 (1); plate M1933 angle M2018A and beam M1927 (1); plate M1933 angle M2017B and beam M1927 (1); plate M1933 angle M2017A and beam M1927 (1); plate M1935 and beam M1928 (18); plate M1934 and beam M1928 (10); plate M1934 and beam 1927 (18); plate M1933 and beam M1927 (18); plate M1901A and angle M2040A (4); plate M2139 and angle M2142B (1); plate M2137 and angle M1895 (2); plate M1901A and angle M2069 (4); plate M1901B and angle M2069 (4); plate M1901A and angle M2019A (35); plate M1901B and angle M2019B (35); plate M1901A and strap M1894A (1); plate M1903 and strap M1894A (1); plate M1903 and strap M1894B (1); plate M1915A and angle M2019B (17); plate M1904 and angle M2019A (22); plate M1918 and angle M2019A (2); plate M1918 and angle M2019B (2); plate M1916 and angle M2019A (5); plate M1916 and angle M2019B (5); plate M1901A and angle M2030A (10); plate M1901A and angle M1893A (5); plate M1901B and angle M1893B (5); plate M1902 and angle M1893A (2); plate M1902 and angle M1893B (2); plate M1902 and strap M1892 (5); plate M1901A and strap M1892 (5); plate M1901B and strap M1892 (5); plate M1902 and angle M2415A (7); plate M1902 and angle M2415B (7); plate M1901A and angle M2390A (20); plate M1901B and angle M2390B (20); plate M1903 and angle M2390A (4); plate M1903 and angle M2390B (4); plate M1903 and plate M1924 (13); plate M1903 and angle M2381 (12); plate M1903 and angle M1895 (16); plate M1905 and angle M1896 (7); plate M1904A and angle M1897A (4); plate M1915A and angle M1897B (4); plate M1904A and beam M1925 (8); plate M1915A and beam M1899 (8); plate M1904A and beam M1903 (4); plate M1915A and beam M1900 (4); plate M1904A and

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&(sh)R						PARTS—Continued RIVET, button head, 11/16" x 1 1/4"—Continued. angle M1913 (4); plate M1915A and angle M1913 (4); plate M1915A and sup- port M898 (2); plate M1915A and support M899 (2); plate M1912A and strap M1919 (9); plate M1912A and beam M1900 (1); plate M1912A and angle M1913 (1); plate M2372 and angle M2417 (3); plate M2373 and angle M2417 (3); plate M2373 and angle 2318B (3); plate M2372 and angle M2418A (3); plate M2372 and angle M2383A (4); plate M2373 and angle M2383B (4); plate M2372 and angle M2384 (14); plate M2373 and angle M2408 (14); plate M2372 and strap M2399 (3); plate M2373 and strap M2399 (3); plate M2372 and strap M2400 (2); plate M2373 and strap M2400 (2); plate M2372 and angle M2378 (3); plate M2373 and angle M2379 (3); plate M2372 and strap M2398 (7); plate M2373 and strap M2398 (7); plate M2407 and angle M2379 (1); plate M2406 and angle M2378 (1); strip M2798 and plate M2739 (4); strip M2798 and plate M2750 (4); plate M2739 strap M2781A and holder SH471A (2); plate M2750 strap M2781B and holder SH471A (2); plate M2750 strap M2781B and bracket M2036 (1); plate M2739 strap M2781A and bracket M2836 (1); plate M2759 channel M2775 and angle M2803 (1); plate M2763 angle M2805 and channel M2776 (1); plate M2765 angle M2807 and channel M2776 (1); plate M2757A angle M3790A and plate SH491A (1); plate M2757B angle M3790B and plate SH492A (1); plate M2757A strap M2783A and angle M3790A (4); plate M2757B strap M2783B and angle M3790B (4); plate M2757A plate SH491A and strap M2786A (1); plate M2757B plate SH492A and strap M2786B (1).) RIVET, button head, 11/16" x 2". (For plate M1962B and strap M2000 (4); plate M1962A and strap M2000 (4); plate M1961B and strap M2000 (4); plate M1961A and strap M2000 (4); plate M1962B and beam M2039B (4); plate M1962A and beam M2039A (4); plate M1961B and beam M2039B (7); plate M1961A and beam M2039A (7); plate M2093 and strap M1995 (4); plate M2094 and strap M1995 (4); plate M2093 and beam M2039B (5); plate M2093 and beam M2039A (5); plate M2094 and beam M2039B (7); plate M2094 and beam M2039A (7); plate M1984 and beam M2039B (6); plate M1984 and beam M2039A (6); plate M1983A and	783	.02 P

beam M2039B (6); plate M1983A and beam M2039A (6); plate M1983A and strap M1995 (1); plate M2014 and angle M1950 (8); plate M2014 and angle M2015A (7); plate M2014 and angle M2015B (7); plate M2014 and angle M2016A (8); plate M2014 and angle M2016B (8); plate M1984 and strap M2000 (1); diaphragm M2173A and beam M2174 (4); diaphragm M2173B and beam M2174 (4); strip M2002 strap M1994B and angle M2007B (6); strip M2002 strap M1994A and angle M2007A (6); plate M1985 and strap M1994B (10); plate M1985 and strap M1994A (10); plate M1985 and strap M2177 (4); plate M1983B and strap M1993 (4); plate M1983B and angle M2017A (11); plate M1983B and angle M2017B (11); plate M1978 and angle M2017A (1); plate M1978 and angle M2017B (1); plate M1978 and strap M1993 (4); plate M1985 and plate SH294B (3); angle M2005B strip M2037B and plate M1976B (3); angle M2005A strip M2037A and plate M1976B (3); angle M2004B strip M2037B and plate M1976B (3); angle M2004A strip M2037A and plate M1976B (2); plate M1970A and hinge M706 (2); plate M1970B and hinge M706 (2); plate M1973 plate M1979 and angle M2019B (3); plate M2070 plate M1979 and angle M2019A (3); angle M1921A and plate M1989A (2); angle M1921B and plate M1989B (2); angle M2060A and plate M1989A (1); angle M2060B and plate M1989B (1); angle M1972A and plate M2003 (9); angle M1972B and plate M2003 (9); angle M1913 and plate M2003 (10); angle M2044A and plate M2003 (2); angle M2044B and plate M2003 (2); angle M1943 and plate M2003 (19); angle M2027A and plate M1977 (6); angle M2027B and plate M1977 (6); angle M2022A and plate M1978 (6); angle M2022B and plate M1978 (6); angle M1943 and angle M2017B (1); angle M1943 and angle M2017A (1); plate M1938 diaphragm M2058B and beam M1930 (4); plate M1938 diaphragm M2058A and beam M1930 (4); plate M2139 and angle M2141A (2); plate M2139 and angle M2141B (2); plate M2140 and angle M2141A (5); plate M2140 and angle M2141B (5); gusset M2067C and beam M2047 (3); gusset M2066 and beam M2047 (3); gusset M2066 and beam M2029 (3); 2 gussets M2066 and beam M2029 (3); gusset M2067A and beam M2029 (3); 2 gussets M2066 and beam M1928 (8); gusset M2067C and angle M2069 (4); gusset M2067A and angle M2069 (4); gusset M2067B and beam M2041 (3); gusset M2066 and beam M2041 (3); gusset M2066 and beam M1929 (4); gusset M2067B and beam M1925 (4); gusset M2068 and beam M2042 (3); gusset M2066 and beam M2042 (3); gusset M2066 and beam M1930 (4); plate M1901A and M1893A and angle M2020A (1); plate M1901B angle M1893B and angle M2020B (1); plate M2739 strip M2798 through 2 supports M2820 (2); plate M2750 strip M2798 through 2 supports M2820 (2); plate M2763 and channel M2775 (2); plate M2763 and angle M2805 (1); plate M2765 and channel M2776 (2); plate M2764 and channel M2776 (3); plate M2765 and angle M2807 (1); plate M3777 and angle M3788 (10); plate M3778 and angle M3800 (10); plate M3777 and angle M3789 (5); plate M3778 and angle M3793

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&(sh)R						PARTS—Continued RIVET, button head, 11/16" x 2"—Continued. (5); plate M3777 and angle M3796A (3); plate M3778 and angle M3796B (1); plate M3777 and angle M3789A (8); plate M3778 and angle M3789B (8); plate M3781B and angle M3793 (6); plate M3781A and angle M3792 (5); plate M3781A and angle M2794A (6); plate M3781B and angle M2784B (6); plate M3781A and angle M3799A (2); plate M3781B and angle M3799B (2); plate M3782 and angle M3797A (4); plate M3782 and angle M3797B (4); plate M3780A and angle M3791A (1); plate M3780B and angle M3791B (1); plate M3780A and angle M3790A (5); plate M3780B and angle M3790B (6); plate M3780A and angle M3789A (6); plate M3780B and angle M3789B (6); plate M3780A and angle M3795A (4); plate M3780B and angle M3795B (4); transmission frame, assembly (6))	550	\$0.02 P
						RIVET, button head, 11/16" x 2½". (For angle M1999B and plate M1962 B (4); angle M1999A and plate M1962A (4); angle M1999B and plate M1961B (6); angle M1999A and plate M1961A (6); angle M1999B and plate M2093 (4); angle M1999A and plate M2093 (4); angle M1999B and plate M2094 (6); angle M1962B and plate M2094 (6); channel M2108 and roof plate (11); plate M1962B and angle M2019B (3); plate M1962A and angle M2019A (3); angle M2030B and plate M2093 (4); angle M2030A and plate M2093 (4); plate M1963B and beam M2039B (6); plate M1963A and beam M2039A (6); plate M1963B and angle M2016B (8); plate M1963A and angle M2016A (8); plate M1963B and strap M2000 (1); plate M1963A and strap M2000 (1); plate M1963B and strap M1980 (2); plate M1963A and strap M1980 (2); plate M1965 and strap M1980 (2); plate M1964A and angle M2030A (6); plate M1964B and angle M2030B (6); plate M1964A and beam M2039B (6); plate M1964B and beam M2039A (6); plate M1964A and strap M1995 (1); plate M1964B and strap M1995 (1); plate M2033 plate M2014 and angle M1899A (1); plate M2033 plate M2014 and angle M1893B (1); plate M2033 plate M2014 and angle M1950 (1); plate M1966 and strap M1981 (1); plate M1975B and strap M2006 (12); plate M1975A and strap M2006 (12); plate M1978 and angle M2004B (9); plate M1978 and angle M2004A (8); plate M1976B and angle M2004B (8); plate M1976A and angle M2004A (8);		

plate M1970A and beam M2047 (14); plate M1970B and beam M2029 (14); plate M1970A and strap M1981 (1); plate M1970B and strap M1981 (1); plate M1970A and strap M2048 (2); plate M1970B and strap M2048 (2); plate M1969 and strap M2048 (2); plate M1969 and strap M2049 (2); plate M1970A and strap M1982 (2); plate M1970B and strap M1982 (2); plate M1967A and strap M1982 (2); plate M1967B and strap M1982 (2); plate M1971B and angle M2141B (8); plate M1971A and angle M2141A (8); plate M1968B and angle M2141B (3); plate M1968A and angle M2141A (3); plate M1967A and angle M2141A (2); plate M1967B and angle M2141B (2); plate M1967A and angle M2019A (5); plate M1967B and angle M2019B (5); plate M1971B and plate M1979 (2); plate M1971A and plate M1979 (2); plate M1971B and angle M2062B (2); plate M1971A and angle M2062A (2); plate M1971B and angle M2063B (5); plate M1971A and angle M2063A (5); plate M1971B and strap M2046 (3); plate M1971A and beam M2041 (13); plate M1973 and strap M2046 (2); plate M2070 and beam M2041 (12); plate M1988 and angle M2060A (5); plate M1988 and angle M2060B (5); plate M1988 and angle M2061B (6); plate M1988 and angle M2061A (6); plate M1988 an angle M2063B (3); plate M1988 and angle M2063A (3); plate M1986 and angle M2061A (5); plate M1986 and angle M2061B (3); plate M1986 and angle M2062B (3); plate M1986 and angle M2062A (3); plate M1986 and angle M1987A (5); plate M1986 and angle M1987B (5); plate M1973 and angle M2019B (3); plate M2077 and angle M2019A (3); plate M2070 and beam M2042 (10); plate M1973 and strap M2043 (8); plate M1990 and angle M2019B (9); plate M1990 and angle M2019A (9); plate M2043 (2); plate M1990 and beam M2042 (2); plate M1975B and strap M2177 (5); plate M1975A and strap M2177 (5); plate M1976B and strap M2177 (9); plate M1976A and strap M2177 (9); plate M1975B and angle M2045B (3); plate M1975A and angle M2045A (3); plate M1975B and angle M2019B (5); plate M1975A and angle M2019A (5); plate M2028 and angle M2019B (6); plate M2028 and angle M2019A (6); plate M1975B and angle M2107B (5); plate M1975A and angle M2107A (5); plate M1975B and angle M2103B (3); plate M1975A and angle M2103A (3); plate M1977 and angle M2106A (2); plate M1977 and angle M2106B (2); plate M2098 and angle M2007A (5); plate M2098 and angle M2007B (5); plate M2098 and angle M2101A (2); plate M2098 and angle M2101B (2); plate M2097 and angle M2101B (3); plate M2097 and angle M2101A (3); plate M2096 and angle M2101B (3); plate M2096 and angle M2101A (3); plate M2096 and angle M2103A (2); plate M2096 and angle M2103B (2); plate M2096 and angle M2102A (1); plate M2096 and angle M2102B (1); plate M2098 and angle M2105A (1); plate M2098 and angle M2105B (1); plate M2098 and angle M2099A (4); plate M2097 and angle M2104A (3); plate M2097 and angle M2104B (3); plate

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&(sh)R						PARTS—Continued RIVET, button head, 11/16" x 2½"—Continued. M2097 and strap M2099A (4); plate M2097 and strap M2099B (4); plate M2097 and angle M2106A (6); plate M2097 and angle M2106B (6); plate M1977 and angle M2027A (4); plate M1977 and angle M2027B (4); plate M1977 and angle M1972A (8); plate M1977 and angle M1972B (8); plate M1977 and angle M2026A (11); plate M1977 and angle M2026B (11); plate M1977 and angle M2023A (5); plate M1977 and angle M2023B (5); plate M1930 plate M1938 and angle M1943 (10); plate M1938 through 2 strip M2064 and angle M1943 (8); plate M1938 strip M2064 and angle M2007B (1); plate M1938 strip M2064 and angle M2007A (1); plate M1936 beam M1929 and diaphragm M2057B (4); plate M1936 beam M1929 and diaphragm M2057A (4); plate M1934 beam M1928 and diaphragm M2057B (4); plate M1934 beam M1928 and diaphragm M2057A (4); plate M1933 beam M1941 and piece M2086 (18); plate M1932 and beam M1941 (18); plate M1932 and angle M2018B (6); plate M1932 and angle M2018A (6); plate M1932 and angle M2017B (6); plate M1932 and angle M2017A (6); plate M1932 and strap M1940 (18); plate M1931 and strap M1940 (12); plate M1931 and angle M2018B (5); plate M1931 and angle M2018A (5); plate M1931 and angle M2017B (5); plate M1931 and angle M2017A (5); plate M1931 and angle M1950 (16); plate M2038 through 2 beams M2039A (26); plate M2038 and beam M2039B (26); plate M2038 and angle M2040A (4); plate M2038 and angle M2040B (4); strip M2150 plate M2140 and angle M2141A (2); strip M2150 plate M2140 and angle M2141B (2); gusset M2068 and channel M1900 (4); plate M2388 and plate M2389 (6); plate M2387 and plate M2389 (3); plate M2362 and plate M2389 (2); plate M2372 plate M2398 and bracket M2393 (1); plate M2373 plate M2398 and bracket M2393 (1); plate M2732A and angle M2777 (1); plate M2732B and angle M2778 (1); plate M2745 and strap M2788 (5); plate M2745 and angle M2806 (1); plate M2745 angle M2805 (1); plate M2743 and angle M2803 (1); plate M2743 and angle M2804 (1); plate M2733A and angle M2784A (4); plate M2733B and angle M2784B (4); plate M2733A and plate SH491A (3); plate M2733B and plate SH492A (3); plate M2733A and angle M2777 (8); plate M2733B and angle		

M2778 (8); plate M2733A and strap M2784C (1); plate M2733B and strap M2784C (1); plate M2736 and strap M2782 (1); plate M2736 and strap M2784C (1); plate M2736 and strap M2782 (1); plate M2747 and strap M2784C (1); plate M2736 and angle M2777 (4); plate M2747 and angle M2778 (6); plate M2737 and angle M2777 (3); plate M2748 and angle M2778 (2); plate M2748 and strap M2782 (1); plate M2737 and strap M2782 (1); plate M2734A and channel M2775 (6); plate M2734B and channel M2776 (6); plate M2735 and channel M2775 (4); plate M2746 and channel M2776 (6); plate M2737 and channel M2775 (5); plate M2748 and channel M2776 (4); plate M2737 and channel M2780 (7); plate M2748 and channel M2780 (7); plate M2738 and channel M2780 (8); plate M2748 and plate SH492A (5); plate M2737 and plate SH491A (5); plate M2738 and plate SH491A (3); plate M2738 and plate SH492A (3); plate M2738 and channel M2775 (4); plate M2738 and channel M2776 (4); plate M2738 and strap M2781A (10); plate M2738 and strap M2781B (10); plate M2739 and channel M2775 (4); plate M2750 and channel M2776 (4); plate M2739 and strap M2786A (1); plate M2750 and strap M2786B (1); plate M2739 and plate SH491A (2); plate M2750 and plate SH492A (2); plate M2739 and strap M2781A (7); plate M2750 and strap M2781B (7); plate M2741 and plate SH491A (26); plate M2749 and plate SH492A (26); plate M2741 and angle M3795A (4); plate M2749 and angle M3795B (4); plate M2744 and strap M2789 (2); angle M2119 and strut M2120 (1); angle M2118 and strut M2121 (1); angle M2119 and strut M2124 (1); angle M2118 and strut M2125 (1); angle M2119 and strut M2122 (1); angle M2118 and strut M2123 (1); plate M186 (2); plate M185 (2); trans-	mission frame, assembly (4); RIVET, button head, 11/16" x 2 1/4", (For plate M1996A and hinge M2827 (1); plate M1996A and hinge M2828 (1); plate M1996B and hinge M2827 (1); plate M1996B and hinge M2828 (1); plate M2033 and plate M2014 (4); plate M2014 and angle M1893A (5); diaphragm M2071B plate M1985 and strap M1994B (1); diaphragm M2071A plate M1985 and strap M1994A (1); diaphragm M2071A plate M1983B and angle M2017A (1); diaphragm M2071B plate M1983B and angle M2017B (1); plate M1970A through 2 hinges M706 (2); plate M1970B through 2 hinges M706 (2); plate M2021 and angle M2024 (10); plate M2021 and angle M2025 (8); plate M1939 angle M2026A and angle M2017A (11); plate M1939 angle M2026B and angle M2017B (11); plate M1939 angle M1943 angle M2017B and plate M1938 (1); plate M1939 angle M1943 angle M2017A and plate M1938 (1); plate M1938 angle M2017B and beam M1930 (1); plate M1938 angle M2017A and beam M1930 (1); plate M1937 angle M2017B and beam M1930 (1); plate M1937 angle M2017A and beam M1930 (1); plate M1937 angle M2007B and beam M2008B (8); plate M1937 angle M2007A and beam M2008A (8); plate M1936 angle M2007B and beam M2008B (7); plate M1936 angle M2007A and beam M2008A (7); plate M1937 angle	1,150 \$0.02 P
--	--	------------------------------

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&(sh)R						PARTS—Continued RIVET, button head, 11/16" x 2¼"—Continued. M2018B and beam M1930 (1); plate M1937 angle M2018A and beam M1930 (1); plate M1938 angle M2018B and beam M1930 (1); plate M1938 angle M2018A and beam M1930 (1); plate M1937 angle M2018B and beam M1929 (1); plate M1937 angle M2018A and beam M1929 (1); plate M1937 angle M2017B and beam M1929 (1); plate M1937 angle M2017A and beam M1929 (1); plate M1936 angle M2018B and beam M1929 (1); plate M1936 angle M2018A and beam M1929 (1); plate M1935 angle M2007B and angle M2008B (9); plate M1935 angle M2007A and angle M2008A (9); plate M1934 angle M2007B and angle M2008B (6); plate M1934 angle M2007A and angle M2008A (6); plate M1933 angle M2007B and angle M2008B (6); plate M1933 angle M2007A and angle M2008A (6); plate M2139 angle M1942A and angle M1942B (14); plate M2137 angle M1895 and angle M1896 (8); plate M1902 angle M1893A and angle M2415A (1); plate M1902 angle M1893B and angle M2415B (1); plate M1902 strap M1892 and angle M2415A (1); plate M1902 strap M1892 and angle M2415B (1); plate M1901A strap M1892 and angle M2390B (1); plate M1901A strap M1894 and angle M2390A (1); plate M1901B strap M1894B and angle M2390B (1); plate M1903 strap M1894A and angle M2390A (1); plate M1903 strap M1894B and angle M2390B (1); plate M1903 plate M1924 and angle M1895 (2); plate M1903 plate M1924 and angle M2381 (5); piece M1906A angle M1921A and holder SH443E (1); piece M1906B angle M1921B and holder SH443E (1); plate M2388 and angle M2415B (4); plate M2387 and angle M2415A (6); plate M2387 and angle M2419A (2); plate M2388 and angle M2419B (2); plate M2363 and angle M2415A (3); plate M2363 and angle M2415B (3); plate M2363 and angle M2419A (2); plate M2363 and angle M2419B (2); plate M2363 and angle M2420A (1); plate M2363 and angle M2420B (1); plate M2363 and angle M2418A (2); plate M2363 and angle M2418B (2); plate M2363 and angle M2395 (4); plate M2362 and angle M2420A (2); plate M2362 and angle M2420B (2); plate M2362 and angle M2417 (3); plate M2350 and angle M2395 (2); plate M2348 and angle M2395 (2); plate M2350 and angle M2383B (3); plate M2348 and angle M2383A (3); plate		

[illegible]

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&(sh)R						PARTS—Continued RIVET, button head, 11/16" x 2%—"Continued. M1983A angle M2017B and angle M2018B (40); plate M1983A beam M2174 and strap M1984 (4); plate M1983B beam M2174 and strap M1988 (4); plate M1984 through 2 straps M1998 (4); plate M1985 through 2 straps M1998 (4); plate M1985 strap M2006 and angle M2008B (10); plate M1985 strap M2006 and angle M2008A (10); plate M1985 strap M1994B and angle M2008B (10); plate M1985 strap M1994A and angle M2008A (10); plate M1985 angle M2005B and strip M2037B (25); plate M1985 angle M2005A and strip M2037A (25); plate M1983B angle M2005B and strip M2037B (28); plate M1983B angle M2005A and strip M2037A (28); plate M1983B angle M2017A and angle M2018A (26); plate M1983B angle M2017B and angle M2017B (26); plate M2005B strip M2037B and plate M1978 (3); plate M2005A strip M2037A and plate M1978 (3); angle M2004B strip M2037B and plate M1978 (2); angle M2004A strip M2037A and plate M1978 (2); angle M1921A plate M1989A and angle M2060A (1); angle M1921B plate M1989B and angle M2060B (1); angle M2061A plate M1987 and plate M2137 (2); angle M2061B plate M1987 and plate M2137 (2); angle M2141A plate M2137 and plate M1987 (3); angle M2141B plate M2137 and plate M1987 (3); angle M2177 plate M1975B and strut M2133 (1); angle M2177 plate M1975A and strut M2122 (1); bracket M2128 plate M1976B and strap M2177 (2); bracket M2129 plate M1976A and strap M2177 (2); plate M2003 angle M2044B and angle M2045 (3); plate M2003 angle M2044A and angle M2045 (3); plate M1937 channel M180 and angle M2018B (1); plate M1937 channel M180 and angle M2018A (1); plate M1937 channel M180 and angle M2017B (1); plate M1937 channel M180 and angle M2017A (1); plate M1936 channel M181 and angle M2018B (1); plate M1936 channel M181 and angle M2018A (1); plate M1936 channel M181 and angle M2017B (1); plate M1931 strap M1940 and plate M3063A (3); plate M1931 strap M1940 and plate M3063B (3); guide M2209 angle M1942A angle M1942B and plate M2139 (8); plate M2439 angle M2384 bracket M2434 (2); plate M2351 angle M2408 and bracket M2434 (2); plate M2351 and plate SH409A (4); plate M2349 and plate SH409A (4); plate M2737 channel M2775 and bracket M2127 (1); plate M2748 channel M2776 and bracket		

	\$0.02 P
M2126 (1); plate M2737 strap M2780 and bracket M2127 (1); plate M2748 strap M2780 and bracket M2126 (1); plate M3778 and angle M3789A (1); plate M3778 angle M3800 and angle M3789B (1); plate M3780A angle M3791A and angle M3790A (1); plate M3780B angle M3791B and angle M3790B (1); cleat M1946A (2); cleat M1947 (2); cleat M1945A (2); cleat M1945B (2); cleat M1946B (2))	651
RIVET, button head, 11/16" x 2½". (For plate M1963B beam M2039B and strap M2000 (1); plate M1963A beam M2039A and strap M2000 (1); plate M1963B beam M2016B and strap M2000 (1); plate M1963A beam M2016A and strap M2000 (1); plate M1963B strap M2000 and angle M2007B (6); plate M1963A strap M2000 and angle M2007A (6); plate M1963B strap M2006 and angle M2007B (1); plate M1963A strap M2006 and angle M2007A (1); plate M1964A and hinge M2827 (1); plate M1996A and hinge M2828 (1); plate M1996B and hinge M2827 (1); plate M1996B and hinge M2828 (1); plate M1964A beam M2039B and strap M1995 (1); plate M1964B beam M2039A and strap M1995 (1); plate M2033; plate M2014 and angle M2075 (7); plate M1965 angle M2007B and strap M2006 (12); plate M1965 angle M2007A and strap M2006 (12); plate M1966 angle M2007B and strap M2006 (9); plate M1970B angle M2007B and strap M2006 (4); plate M1970A angle M2007A and strap M2006 (4); plate M1969 angle M2017 and strap M2006 (8); plate M1969 angle M2007A and strap M2006 (8); plate M1971B angle M2007B and strap M2006 (10); plate M1971A angle M2007A and strap M2006 (10); plate M1973 angle M2007B and strap M2006 (5); plate M2070 angle M2007A and strap M2006 (5); plate M1973 angle M2007B and strap M1994B (5); plate M2070 angle M2007A and strap M1994A (5); plate M1970A beam M2047 through (2) hinges M706 (2); plate M1970B beam M2029 through (2) hinges M706 (2); plate M1971A strap M2049 and angle M2141A (3); plate M1971B strap M2049 and angle M2141B (3); plate M1967A angle M2019A and plate M1979 (3); plate M1967B angle M2019B and plate M1979 (3); plate M1973 plate M1979 and angle M2019B (1); plate M2070 plate M1979 and angle M2019A (1); plate M1973 angle M2118 and angle M2019B (1); plate M2073 angle M2119 and angle M2019A (1); plate M1979 plate M1971B and beam M2041 (1); plate M1979 plate M1971A and strap M2046 (1); plate M1979 plate M1971B and angle M2062B (1); plate M1979 plate M1971A and angle M2062A (1); plate M1973 plate M1979 and strap M2046 (1); plate M2070 plate M1979 and beam M2041 (1); plate M1989A plate SH294A and angle M1921A (2); plate M1989B plate SH294A and angle M1921B (2); angle M2061B plate M1988 and angle M2063B (1); angle M2061A plate M1988 and angle M2063A (1); angle M2061A angle M2062B and plate M1986 (1); angle M2061B angle M2062A and plate M1986 (1); strut M2121 angle M2019B and	

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&(sh)R						PARTS—Continued RIVET, button head, 11/16" x 2½"—Continued. plate M1973 (1); strut M2120 angle M2019A and plate M2070 (1); strut M2121 strap M2043 and plate M1973 (1); strut M2120 beam M2042 and plate M2070 (1); plate M1990 angle M2019B and strut M2125 (1) plate M1990 angle M2019A and strut M2124 (1); plate M1990 angle M2044B and strut M2125 (1); plate M1990 angle M2044A strut M2124 (1); plate M2096 angle M2101B and angle M2103B (1); plate M2096 angle M2101A and angle M2103A (1); plate M2096 angle M2102B and angle M2101B (1); plate M2096 angle M2102A and angle M2101A (1); plate M2095 angle M2105A and plate M2003 (1); plate M2095 angle M2105B and plate M2003 (1); plate M2098 angle M2105A and strap M2099A (1); plate M2098 angle M2105B and strap M2099B (1); plate M2098 angle M2101A and strap M2099A (1); plate M2098 angle M2101B and strap M2099B (1); plate M2097 angle M2104B and strap M2099A (1); plate M2097 angle M2104B and strap M2099B (1); plate M2095 angle M2104A and strap M2003 (4); plate M2095 angle M2104B and strap M2003 (4); plate M1977 angle M2106A and angle M1972A plate M1977 angle M2106B and angle M1972B (1); plate M1977 angle M2106B and angle M2027B (1); plate M1977 angle M2106A and angle M2027A (1); plate M2095 angle M2044A and plate M2003 (3); plate M2095 angle M3044B and plate M2003 (3); plate M2095 angle M1913 and plate M2003 (5); plate M1939 angle M1943 plate M1938 and angle M2018B (1); plate M1939 angle M1943 plate M1938 and angle M2018A (1); plate M1933 angle M2018B beam M1941 and piece M2086 (1); plate M1933 angle M2017B beam M1941 and piece M2086 (1); plate M1933 angle M2017A beam M1941 and piece M2086 (1); plate M1932 angle M2018B and beam M1941 (1); plate M1932 angle M2018A and beam M1941 (1); plate M1932 angle M2017B and beam M1941 (1); plate M1932 angle M2017A and beam M1941 (1); plate M1932 angle M2007B and angle M2008B (6); plate M1932 angle M2007A and angle M2008A (6); plate M1932 angle M2018B and strap M1940 (1); plate M1932 angle M2018A and strap M1940 (1); plate M1932 angle		

M2017B and strap M1940 (1); plate M1932 angle M2017A and strap M1940 (1); plate M1931 angle M2018B and strap M1940 (1); plate M1931 angle M2017B and strap M1940 (1); plate M1931 angle M2017A and strap M1940 (1); plate M1931 angle M2007B and angle M2008B (6); plate M1931 angle M2007A and angle M2007A (6); plate M1903 plate M1924 and bracket M3922 (4); plate M1915A packing M2109 channel M2108 and strap M1919 (9); plate M1915A packing M2109 channel M2108 and beam M1900 (1); plate M1915A packing M2109 channel M2108 and beam M1913 (1); packing M2350 angle M2395 and bracket M2439B (2); plate M2348 angle M2395 and bracket M2439A (2); plate M2351 angle M2397 and bracket M2440B (2); plate M2349 angle M2396 and bracket M2440A (2); plate M2743 strap M2787 and angle M2803 (1); plate M2743 strap M2787 and angle M2804 (1); plate M2745 strap M2788 and angle M2806 (1); plate M2745 strap M2788 and angle M2805 (1); plate M2733 strip M2810 and angle M3788 (7); plate M2733B strip M2810 and angle M3800 (7); plate M2733A plate SH491A and angle M3788 (1); plate M2733B plate SH492A and angle M3800 (1); plate M2736 plate SH491A and angle M3788 (5); plate M2747 plate SH492A and angle M3800 (6); plate M2737 plate SH491A and angle M3788 (2); plate M2737 plate SH491A and angle M2780 (1); plate M2748 plate SH492A and angle M2780 (1); plate M2738 strap M2780 and plate SH491A (1); plate M2738 strap M2780 and plate SH492A (1); plate M2738 plate SH491A strap M2781A (1); plate M2738 plate SH492A and strap M2781B (1); plate M2739 plate SH491A and strap M2786A (1); plate M2750 plate SH492A and strap M2786B (1); plate M2744 angle M2807 and strap M2789 (1); plate M2744 angle M2808 and strap M2789 (1)..... RIVET, button head, 11/16" x 2 5/8". (For plate M2033 plate M2014 and angle M1893A (3); plate M2033 plate M2014 and angle M1950 (8); plate M1976B angle M2004B and angle M2118 (1); plate M1976A angle M2004A and angle M2119 (1); plate M2021 angle M2023A and angle M2022A (5); plate M2021 angle M2023B and angle M2022B (5); plate M1938 angle M2007B angle M2008B and beam M1930 (1); plate M1938 angle M2007A angle M2008A and beam M1930 (1); plate M1937 angle M2007B angle M2008B and beam M1930 (1); plate M1937 angle M2007A angle M2008A and beam M1929 (1); plate M1937 angle M2007A angle M2008A and beam M1929 (1); plate M1936 angle M2007B angle M2008B and beam M1929 (1); plate M1936 angle M2007A angle M2008A and angle M1942B (1); plate M1936 angle M2007A angle M2008A and angle M1942B (1); plate M1935 angle M2007B angle M2008B and angle M1942A (1); plate M1935 angle M2007A angle M2008A and angle M1942A (1); plate M1935 angle M2007B angle M2008B	331	\$0.02 P
--	-----	----------

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&(sh)R						PARTS—Continued RIVET, button head, 11/16" x 2 3/4"—Continued. and beam M1928 (1); plate M1935 angle M2007A angle M2008A and beam M1928 (1); plate M1934 angle M2007B angle M2008B and beam M1928 (1); plate M1934 angle M2007A angle M2008A and beam M1928 (1); plate M1934 angle M2007B angle M2008B and beam M1927 (1); plate M1934 angle M2007A angle M2008A and beam M1927 (1); plate M1933 angle M2007B angle M2008B and beam M1927 (1); plate M1933 angle M2007A angle M2008A and beam M1927 (1); plate M2395 angle M2415A and plate M2363 (1); plate M2395 angle M2415B and plate M2363 (1); plate M2363 angle M2420A and angle M2418A (1); plate M2363 angle M2420B and angle M2418B (1); plate M2362 angle M2420A and angle M2417 (1); plate M2362 angle M2420B and angle M2417 (1); plate M2350 angle M2395 and angle M2390B (1); plate M2348 angle M2395 and angle M2390A (1); plate M2350 angle M2383B and batten M2385B (1); plate M2348 angle M2383A and batten M2385A (1); plate M2350 strap M2422 and batten M2386 (1); plate M2348 strap M2422 and batten M2386 (1); plate M2350 angle M2390B and strap M2422 (1); plate M2348 angle M2390A and strap M2422 (1); plate M2354 batten M2386 and strap M2422 (2); plate M2354 angle M2390B through (2) straps M2422 (2); plate M2354 angle M2390A through (2) straps M2422 (2); plate M2351 angle M2390B and strap M2422 (1); plate M2349 angle M2390A and strap M2422 (1); plate M2351 batten M2422 and strap M2422 (1); plate M2349 batten M2386 and strap M2422 (1); plate M2349 angle M2384 and batten M2385B (1); plate M2351 angle M2408 and batten M2385A (1); plate M2351 plate SH395D plate SH409A (2); plate M2351 angle M2397 and angle M2390B (1); plate M2349 angle M2396 and angle M2390A (1); plate M2407 angle M2397 and angle M2381 (1); plate M2406 angle M2396 and angle M2381 (1); plate M3777 plate M3779A and angle M3792 (2); plate M3778 plate M3779B and angle M3793 (2); plate M3778 angle M3791B and plate M3779B (1); hinge M706 to side door left and right (1); transmission frame, assembly (12.) ----- RIVET, button head, 11/16" x 2 3/4". (For plate M1996A and hinge M2827 (2); plate M1996A and hinge M2828 (2); plate M1996B and hinge M2827 (2); plate M1996B and hinge M2828 (2); plate M1970A beam M2047 and bracket SH395B (1);	104	\$0.02 P
&(sh)R								

&(sh)R					58	.02 P
				plate M1970A beam M2047 and bracket SH395A (1); plate M1970B beam M2029 and bracket SH395B (1); plate M1970B beam M2029 and bracket SH395A (1); piece M2036 stiffener M2035 plate M1992 and angle M2019B (21); piece M2036 stiffener M2035 plate M1992 and angle M2019A (21); angle M2061A plate M1987 angle M2141A and plate M2137 (1); angle M2061B plate M1987 angle M2141B and plate M2137 (1); strap M2177 plate M1975B angle M2019B and strut M2133 (1); strap M2177 plate M1975A angle M2019A and strut M2122 (1). RIVET, button head, 11/16" x 2 1/8". (For plate M1967B angle M2019B, plate M1979 and bracket M2130 (1); plate M1967A angle M2019A plate M1979 and bracket M2131 (1); plate M1967B angle M2062B plate M1979 and bracket M2131 (1); plate M2003 angle M2105A plate M2095 and angle M2044A (1); plate M2003 angle M2105B plate M2095 and angle M2044B (1); plate M1932 strap M1940 angle M2007B and angle M2008B (1); plate M1932 strap M1940 angle M2007A and angle M2008A (1); plate M1931 strap M1940 angle M2007B and angle M2008B (1); plate M1931 strap M1940 angle M2007A and angle M2008A (1); plate M1931 angle M2018B and angle M1950 (1); plate M1931 angle M2018A and angle M1950 (1); plate M1931 angle M2017B and angle M1950 (1); plate M1931 angle M2017A and angle M1950 (1); plate M1903 plate M1924 bracket M3922 and angle M1895 (2); plate M1933 beam M1941 piece M2086 angle M2007B and angle M2008B (1); plate M1933 beam M1941 piece M2086 angle M2007A and angle M2008A (1); plate M1932 beam M1941 angle M2007B and angle M2008B (1); plate M1932 beam M1941 angle M2007A and angle M2008B (1); plate M1932 beam M1941 angle M2007A and angle M2008A (1). RIVET, button head, 11/16" x 3". (For hinge M706 to side door left and right (2)).	20	.02 P
				RIVET, button head, 11/16" x 3 1/4". (For plate M1963B piece M2036 stiffener M2035 and angle M2019B (8); plate M1963A piece M2036 stiffener M2035 and angle M2019A (8); plate M1970B angle M2019B piece M2036 and stiffener M2035 (4); plate M1970A angle M2019A piece M2036 and stiffener M2035 (4); plate M1967B angle M2019B piece M2036 and stiffener M2035 (9); plate M1967A angle M2019A piece M2036 and stiffener M2035 (9)). RIVET, button head, 11/16" x 3 3/4". (For plate M2739 strip M2798 and lug M2839 (1); plate M2750 strip M2798 and lug M2839 (1)). RIVET, button head, 3/4" x 1 1/8". (For strap M2001 (left) (3); strap M2001 (right) (4)). RIVET, button head, 3/4" x 2 1/8". (For strap M2001 (left) (7); strap M2001 (right) (4); rim M1471 (24); rim M1401 (24)). RIVET, button head, 3/4" x 2 1/8". (For plate M1978 and bearing M1546 (6)). RIVET, button head, 3/4" x 2 1/8". (For plate M1977 and bearing M1406 (6)).	8	.03 P
&(sh)R					42	.02 P
					2	.02 P
					7	.02 P
&(sh)R					203	.02 P
					12	.02 P
					12	.02 P

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
&(sh)R &(sh)R						RIVET, button head, $\frac{7}{8}$ " x $2\frac{1}{4}$ ". (For bracket M3918 and plate M1939 (5).)	5	\$0.02 P
						RIVET, button head, $\frac{7}{8}$ " x $2\frac{1}{4}$ ". (For bracket M3917 and plate M1931 (4); bracket M3917 strap M1994B strip M2002 and angle M2007B (3); bracket M3917 strap M1994A strip M2002 and angle M2007A (3).)	10	.02 P
&(sh)R &(sh)R						RIVET, button head, $\frac{7}{8}$ " x $2\frac{1}{4}$ ". (For plate M1939 angle M2025 and bracket M3918 (2).)	2	.02 P
						RIVET, button head, $\frac{7}{8}$ " x $2\frac{1}{4}$ ". (For plate M2021 and bracket M3818 (5).)	5	.03 P
&(sh)R &(sh)R						RIVET, button head, $\frac{7}{8}$ " x $2\frac{1}{4}$ ". (For bracket M3917 plate M1931 and angle M1950 (2).)	2	.03 P
						RIVET, button head, $\frac{7}{8}$ " x 3". (For plate M2021 angle M2025 and bracket M3918 (2).)	2	.03 P
&(sh)R &(sh)R						RIVET, button head, $\frac{7}{8}$ " x $3\frac{1}{4}$ ". (For bracket M3917 plate M2033 and plate M2014 (5); bracket M3919 strap M1994B angle M2000B and plate M1985 (3); bracket M3919 strap M1994A angle M2008A and plate M1985 (3).)	11	.04 P
						RIVET, button head, $\frac{7}{8}$ " x $3\frac{1}{2}$ ". (For bracket M3917 plate M2033 plate M2014 and angle M1950 (2).)	2	.04 P
X X			D23298 D25461			RIVET, button head, brass, $5\frac{1}{4}$ " x $1\frac{1}{4}$ ". (For generator brush arm D13829 (2).)	8	.01 P
						RIVET, button head, brass, .091" x .191". (For voltage regulator, assembly D5718 (1).)	1	.01 P
X X			D26824 D29767			RIVET, button head, brass, .107" x .157". (For distributor shaft, assembly D13899 (1).)	2	.01 P
						RIVET, button head, copper, $\frac{1}{4}$ " x $\frac{3}{4}$ ". (For hinge SH942F (3).)	12	.01 P
&(sh)R &(sh)R						RIVET, countersunk head, .061" x .141". (For distributor contact spring D13803 (2).)	8	.01 P
						RIVET, countersunk head, $\frac{1}{4}$ " x $\frac{1}{2}$ ". (For dip M2835 (3).)	12	.01 P
&(sh)R &(sh)R						RIVET, countersunk head, $3\frac{1}{16}$ " x $\frac{1}{2}$ ". (For ammunition storage (above rear shell storage) (52); removable platform storage, assembly (12); platform ammunition storage (Browning machine gun), assembly (31).)	95	.01 P
						RIVET, countersunk head, $3\frac{1}{16}$ " x $9\frac{1}{16}$ ". (For arm X259 (4).)	8	.01 P

&(sh)R	RIVET, countersunk head, 3/16" x 5/8". (For ammunition storage (above rear shell storage), assembly (426); heading M1585 (5); removable platform storage, assembly (250); platform ammunition storage (Browning machine gun), assembly (386).)	1,082	.01 P
&(sh)R	RIVET, countersunk head, 3/16" x 7/8". (For platform ammunition storage (Browning machine gun), assembly (3).)	3	.01 P
&(sh)R	RIVET, countersunk head, 3/16" x 1". (For piece 14X90 (2); platform ammunition storage (Browning machine gun), assembly (6); cleat SH291F (10).)	56	.01 P
&(sh)R	RIVET, countersunk head, 1/4" x 7/8". (For platform ammunition storage (Browning machine gun), assembly (2).)	2	.01 P
&(sh)R	RIVET, countersunk head, 1/4" x 5/8". (For hinge M2158 (3).)	6	.01 P
&(sh)R	RIVET, countersunk head, 1/4" x 1". (For stop SH293E (2); platform ammunition storage (Browning machine gun), assembly (7).)	15	.01 P
&(sh)R	RIVET, countersunk head, 1/4" x 1 3/16". (For lug MX86 (3); lug MX87 (3).)	12	.01 P
&(sh)R	RIVET, countersunk head, 5/16" x 1". (For end M361 (6).)	12	.01 P
&(sh)R	RIVET, countersunk head, 5/16" x 1 1/8". (For band M359 (3); band M360 (3).)	12	.01 P
&(sh)R	RIVET, countersunk head, 5/16" x 1 1/4". (For plate 3X90 (2).)	40	.01 P
&(sh)R	RIVET, countersunk head, 3/8" x 1 3/8". (For ear MX48 (8); bracket MX49 (8); and plate M2845 (4); plate M2739 and plate M2845 (4); plate M2750 and plate M2845 (4); plate M2745 and plate M2845 (4); plate M2743 and plate M2845 (4); plate M2744 and plate M2844 (4).)	144	.01 P
&(sh)R	RIVET, countersunk head, 3/8" x 1 1/2". (For plate M2362 and plate M2845 (4); plate M2387 and plate M2845 (4); plate M2388 and plate M2845 (4); plate M2348 and plate M2845 (4); plate M2349 and plate M2845 (4); plate M2351 and plate M2845 (4); plate M2350 and plate M2845 (4); plate M2406 and plate M2364 (4).)	32	.01 P
&(sh)R	RIVET, countersunk head, 7/16" x 1". (For plate M1904A and strip M1904D (4).)	4	.01 P
&(sh)R	RIVET, countersunk head, 7/16" x 1 1/8". (For angle M2075 plate M2073 and strip M2074 (6); plate M2389 through 2 hinges M2403 (4).)	10	.01 P
&(sh)R	RIVET, countersunk head, 7/16" x 2 1/4". (For angle M2015A angle M2075 plate M2073 and piece M2076 (1); angle M2015B angle M2075 plate M2073 and piece M2076 (1).)	2	.01 P
&(sh)R	RIVET, countersunk head, 1/2" x 1". (For plate M989 through plate M993 (1).)	1	.01 P
&(sh)R	RIVET, countersunk head, 11/16" x 1 3/8". (For plate M2756B channel M2776 (3); plate M2756A and channel M2775 (3).)	6	.01 P
&(sh)R	RIVET, countersunk head, 11/16" x 1 1/2". (For channel M2143 and plate M2137 (7); plate M2757A and strap M2786A (1); plate M2757B and strap M2786B (1); plate M3777 and angle M3788 (1); plate M3778 and angle M3800 (1).)	11	.01 P

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
&(sh)R						RIVET, countersunk head, 11/16" x 1 3/8". (For plate M2732A and strap M2784A (1); plate M2732B and strap M2784B (1); plate M2740A and strap M2784A (1); plate M2740B and strap M2784B (1).)	4	\$0.01 P
&(sh)R						RIVET, countersunk head, 11/16" x 1 3/4". (For plate M2740A and strip M2812A (2); plate M2740B and strip M2812B (2); plate M2740A and strip M2811 (3); plate M2740B and strip M2811 (3).)	10	.01 P
&(sh)R						RIVET, countersunk head, 11/16" x 1 7/8". (For strap M1994B plate M1985 and angle M2008B (1); strap M1994A plate M1985 and angle M2008A (1).)	2	.01 P
&(sh)R						RIVET, countersunk head, 11/16" x 2". (For strap M1994B strip M2002 and angle M2007B (1); strap M1994A strip M2002 and angle M2007A (1).)	2	.01 P
&(sh)R						RIVET, countersunk head, copper, 3/16" x 1/4". (For spring SH434D (2).)	66	.01 P
&(sh)R						RIVET, countersunk head, copper, 3/16" x 1/2". (For lining M4159 (14).)	14	.01 P
&(sh)R						RIVET, countersunk head, copper, 3/16" x 11/16". (For lining SH997C (43).)	43	.01 P
&(sh)R						RIVET, countersunk head, copper, 1/4" x 3/4". (For lining M359 (1).)	2	.01 P
&(sh)R						RIVET, countersunk head, copper, 1/4" x 1". (For lining M364 (4); lining MX109 (11).)	30	.01 P
&(sh)R						RIVET, countersunk head, copper, 1/4" x 1 1/8". (For lining MX107 (18); lining MX108 (16).)	136	.01 P
&(sh)R						RIVET, countersunk head, copper, 1/4" x 1 1/4". (For lining M364 (1).)	2	.01 P
&(sh)R						RIVET, countersunk head, copper, 1/4" x 1 3/4". (For lining MX107 (5); lining MX108 (6).)	44	.01 P
(cp)&					A6942	RIVET, eye, standard chain. (For chain JB5D (1); chain JB5C (1).)	7	.20 P
&					SH574L	RIVET, platform ammunition storage locking strip	1	.12
&		X255			803	RIVET, semaphore stirrup ring	2	.38
&		X319			803	RIVET, semaphore tube	1	.52
&(sh)R						RIVET, wagon box, 1/8" x 1/2". (For hinge SH373L (3); hinge SH373K (3).)	6	.01 P
&						ROD, clutch, center, length 93", assembly	(1)	7.97
(Composed of: *one SH229A clutch ROD, center, length 93" (1) two — NUT, plain, U. S. Std., hexagon, 3/4".)								
								7.89

&					ROD, clutch connecting, front (length 12%), assembly (Composed of: *one M789B clutch connecting ROD, front (1) two — NUT, plain, U. S. Std., hexagon, ¾", ROD, clutch, rear, assembly (Composed of: *one M581 clutch ROD, rear (1) two — NUT, plain, U. S. Std., hexagon, ¾", ROD, clutch throwout auxiliary, rear, assembly (Composed of: *one SH953D clutch throwout auxiliary ROD, rear (1) two — NUT, plain, U. S. Std., hexagon, ¾", ROD, clutch throwout stop, assembly (Composed of: *one M4151 clutch throwout stop ROD (1) four SH955D clutch throwout stop rod NUT (¾", ½" thick).))	(1)	1.28
&	—	6	216		ROD, connecting, forked end, assembly (Composed of: *one LQ123A connecting ROD, forked end (6) one LQ136A connecting rod piston pin BUSHING, one LQ128A connecting rod crank shaft BEARING, lower half, one LQ127A connecting rod crank shaft BEARING, upper half, ROD, connecting, plain end, assembly (Composed of: two (LQ133A) connecting plain end rod BOLT, assembly, *one LQ131B connecting plain end rod CAP *one LQ131A connecting ROD, plain end (6) one LQ136A connecting rod piston pin BUSHING.)	(1)	1.20
&	—	6	218		ROD, connecting, assembly (Composed of: one — connecting ROD, forked end, assembly, one — connecting ROD, plain end, assembly.)	(1)	3.58
&	—	6	218		ROD, control, front, assembly (Composed of: *one M576 control ROD, front (5) two — NUT, plain, U. S. Std., hexagon, ¾", For high speed (2); foot brake (2); clutch (1).)	(1)	3.50
&	—	6	218		ROD, clutch throwout stop, assembly (Composed of: *one M581 clutch ROD, rear (1) two — NUT, plain, U. S. Std., hexagon, ¾", ROD, clutch throwout auxiliary, rear, assembly (Composed of: *one SH953D clutch throwout auxiliary ROD, rear (1) two — NUT, plain, U. S. Std., hexagon, ¾", ROD, clutch throwout stop, assembly (Composed of: *one M4151 clutch throwout stop ROD (1) four SH955D clutch throwout stop rod NUT (¾", ½" thick).))	(1)	.96
&	—	6	218		ROD, clutch throwout stop, assembly (Composed of: *one M581 clutch ROD, rear (1) two — NUT, plain, U. S. Std., hexagon, ¾", ROD, clutch throwout auxiliary, rear, assembly (Composed of: *one SH953D clutch throwout auxiliary ROD, rear (1) two — NUT, plain, U. S. Std., hexagon, ¾", ROD, clutch throwout stop, assembly (Composed of: *one M4151 clutch throwout stop ROD (1) four SH955D clutch throwout stop rod NUT (¾", ½" thick).))	(1)	.88
&	13440	18	955		ROD, connecting, forked end, assembly (Composed of: *one LQ123A connecting ROD, forked end (6) one LQ136A connecting rod piston pin BUSHING, one LQ128A connecting rod crank shaft BEARING, lower half, one LQ127A connecting rod crank shaft BEARING, upper half, ROD, connecting, plain end, assembly (Composed of: two (LQ133A) connecting plain end rod BOLT, assembly, *one LQ131B connecting plain end rod CAP *one LQ131A connecting ROD, plain end (6) one LQ136A connecting rod piston pin BUSHING.)	(6)	1.54
&	13441	18	955		ROD, connecting, plain end, assembly (Composed of: two (LQ133A) connecting plain end rod BOLT, assembly, *one LQ131B connecting plain end rod CAP *one LQ131A connecting ROD, plain end (6) one LQ136A connecting rod piston pin BUSHING.)	(6)	1.38
&	13441	18	955		ROD, connecting, plain end, assembly (Composed of: two (LQ133A) connecting plain end rod BOLT, assembly, *one LQ131B connecting plain end rod CAP *one LQ131A connecting ROD, plain end (6) one LQ136A connecting rod piston pin BUSHING.)	(6)	28.18
&	13441	18	955		ROD, connecting, plain end, assembly (Composed of: two (LQ133A) connecting plain end rod BOLT, assembly, *one LQ131B connecting plain end rod CAP *one LQ131A connecting ROD, plain end (6) one LQ136A connecting rod piston pin BUSHING.)	(6)	2.62
&	13441	18	955		ROD, connecting, plain end, assembly (Composed of: two (LQ133A) connecting plain end rod BOLT, assembly, *one LQ131B connecting plain end rod CAP *one LQ131A connecting ROD, plain end (6) one LQ136A connecting rod piston pin BUSHING.)	(6)	18.50
&	13441	18	955		ROD, connecting, plain end, assembly (Composed of: two (LQ133A) connecting plain end rod BOLT, assembly, *one LQ131B connecting plain end rod CAP *one LQ131A connecting ROD, plain end (6) one LQ136A connecting rod piston pin BUSHING.)	(6)	17.90
&	—	18	229		ROD, connecting, assembly (Composed of: one — connecting ROD, forked end, assembly, one — connecting ROD, plain end, assembly.)	(6)	2.60
&	—	18	229		ROD, connecting, assembly (Composed of: one — connecting ROD, forked end, assembly, one — connecting ROD, plain end, assembly.)	(6)	14.60
&	—	18	229		ROD, connecting, assembly (Composed of: one — connecting ROD, forked end, assembly, one — connecting ROD, plain end, assembly.)	(6)	46.08
&	—	6	229		ROD, control, front, assembly (Composed of: *one M576 control ROD, front (5) two — NUT, plain, U. S. Std., hexagon, ¾", For high speed (2); foot brake (2); clutch (1).)	(5)	5.58
&	—	6	229		ROD, control, front, assembly (Composed of: *one M576 control ROD, front (5) two — NUT, plain, U. S. Std., hexagon, ¾", For high speed (2); foot brake (2); clutch (1).)	(5)	5.50

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&	8333	15				PARTS—Continued ROD, distributor control connecting, assembly (Composed of: one LQ318A adjustable CLEVIS, S. A. E., ¼", round head, threaded, *one LQ315A distributor control connecting ROD (1) *one LQ317A rod END, ¼" one (A8035) rod end PIN, ¼" x 51/64", assembly, *one LQ65F CLEVIS, male two — NAIL, wire, 2d. one LQ319A NUT, special jam.) ROD, engine control, assembly (Composed of: *one SH993A engine control ROD (1) one — NUT, plain, S. A. E., hexagon, 5/16"*) ROD, foot brake, center, assembly (Composed of: *one M579 foot brake ROD, center (2) two — NUT, plain, U. S. Std., hexagon, ¾") ROD, foot brake, rear, assembly (Composed of: *one M578 foot brake ROD, rear (2) two — NUT, plain, U. S. Std., hexagon, ¾") ROD, foot brake connecting, rear, assembly (Composed of: *one SH946D foot brake connecting ROD, rear (2) two — NUT, plain, U. S. Std., hexagon, ¾") ROD, front control connecting, assembly (Composed of: *one M789A front control connecting ROD (length 10%*) two — NUT, plain, U. S. Std., hexagon, ¾") ROD, governor control spring 1	(1)	\$1.35
			B8469 8472					.10 .06 .51
		12					(1)	.90
		6			218		(2)	.88 5.17
		6			218		(2)	5.09 5.58
&							(2)	5.50 1.03
		2			946		(3)	.95
		6			216			1.08
&		12			SH993F			1.00 .68

&					ROD, high and low speed control lever trigger, assembly (Composed of: *one M743 high and low speed control lever trigger ROD (2) one — NUT, plain, U. S. Std., hexagon, ¼",)	(2)	.73
&		6	—	224	ROD, high speed, brake, rear, assembly (Composed of: *one M575 high speed brake ROD, rear (2) two — NUT, plain, U. S. Std., hexagon, ¾")	(2)	.72
&		6	—	229	ROD, low speed brake, front (length 49½"), assembly (Composed of: *one M574 low speed brake ROD front (2) two — NUT, plain, U. S. Std., hexagon, ¾")	(2)	12.43
&		6	—	229	ROD, low speed brake, rear, assembly (Composed of: *one M573 low speed brake ROD, rear (2) two — NUT, plain, U. S. Std., hexagon, ¾")	(2)	12.35
&		6	—	229	ROD, low speed brake connecting, assembly (Composed of: *one SH946E low speed brake connecting ROD (2) two — NUT, plain, U. S. Std., hexagon, ¾")	(2)	5.16
&		6	—	229	ROD, reverse operating lever trigger, assembly (Composed of: *one M778 reverse operating lever trigger ROD (1) one — NUT, plain, U. S. Std., hexagon, ¼")	(1)	5.08
&		6	—	211	ROD, reversing, center, assembly (Composed of: *one M566 reversing ROD, center (1) two — NUT, pipe lock, ¾")	(1)	10.43
&		6	—	218	ROD, reversing, front, assembly (Composed of: *one M571 reversing ROD, front (1) two — NUT, pipe lock, ¾")	(1)	10.35
&		6	—	230	ROD, reversing, rear (Composed of: *one SH968D spark control ROD, length 24" (1) two — NUT, plain, S. A. E., hexagon, ¾")	(1)	.66
&		6	—	230	ROD, spark control, length 24", assembly (Composed of: *one SH968D spark control ROD, length 24" (1) two — NUT, plain, S. A. E., hexagon, ¾")	(1)	.58
&		6	—	230	ROD, spark control, length 24", assembly (Composed of: *one SH968D spark control ROD, length 24" (1) two — NUT, plain, S. A. E., hexagon, ¾")	(1)	.79
&		6	—	230	ROD, spark control, length 24", assembly (Composed of: *one SH968D spark control ROD, length 24" (1) two — NUT, plain, S. A. E., hexagon, ¾")	(1)	.78
&		6	—	230	ROD, spark control, length 24", assembly (Composed of: *one SH968D spark control ROD, length 24" (1) two — NUT, plain, S. A. E., hexagon, ¾")	(1)	2.00
&		6	—	230	ROD, spark control, length 24", assembly (Composed of: *one SH968D spark control ROD, length 24" (1) two — NUT, plain, S. A. E., hexagon, ¾")	(1)	1.92
&		6	—	230	ROD, spark control, length 24", assembly (Composed of: *one SH968D spark control ROD, length 24" (1) two — NUT, plain, S. A. E., hexagon, ¾")	(1)	1.06
&		6	—	230	ROD, spark control, length 24", assembly (Composed of: *one SH968D spark control ROD, length 24" (1) two — NUT, plain, S. A. E., hexagon, ¾")	(1)	.98
&		6	—	230	ROD, spark control, length 24", assembly (Composed of: *one SH968D spark control ROD, length 24" (1) two — NUT, plain, S. A. E., hexagon, ¾")	(1)	4.75
&		6	—	230	ROD, spark control, length 24", assembly (Composed of: *one SH968D spark control ROD, length 24" (1) two — NUT, plain, S. A. E., hexagon, ¾")	(1)	.62
&		6	—	230	ROD, spark control, length 24", assembly (Composed of: *one SH968D spark control ROD, length 24" (1) two — NUT, plain, S. A. E., hexagon, ¾")	(1)	.58

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&	—	12				PARTS—Continued		
						ROD, spark control, over all length 7', assembly (Composed of: *one SH968H spark control ROD, over all length 7' (1) one — NUT, plain, S. A. E., 5/16")	(1)	\$0.50
&						ROD, (spark) control, over all length 92½", assembly (Composed of: *one SH969C (spark) control ROD, over all length 92½" (1) two — NUT, plain, S. A. E., hexagon, ½")	(1)	.48
						ROD, spark and throttle control, over all length 21½" (vertical), assembly (Composed of: *one SH969D spark and throttle control ROD, over all length 21½" (2) two — NUT, plain, S. A. E., hexagon, ½")	(2)	2.04
&						ROD, spark and throttle control, over all length 60½", assembly (Composed of: *one SH969A spark and throttle control ROD, over all length 60½" (2) two — NUT, plain, S. A. E., hexagon, ½")	(2)	2.00
						ROD, spark and throttle control, over all length 60½", assembly (Composed of: *one SH969B spark and throttle control ROD, over all length 60½" (2) two — NUT, plain, S. A. E., hexagon, ½")	(2)	.52
&						ROD, throttle control, over all length 22½", assembly (Composed of: *one SH993K throttle control ROD, over all length 22½" (1) one — NUT, plain, S. A. E., hexagon, ¾")	(1)	.48
						ROD, throttle control, over all length 22½", assembly (Composed of: *one SH968A spark and throttle control ROD, over all length 60½" (2) two — NUT, plain, S. A. E., hexagon, ¾")	(1)	1.39
&	—	12				ROD, throttle control, over all length 91", assembly (Composed of: *one SH969B throttle control ROD, over all length 91" (1) two — NUT, plain, S. A. E., hexagon, ½")	(1)	1.35
						ROD, throttle control, over all length 91", assembly (Composed of: *one SH968A throttle control ROD, length 51¾" (1) two — NUT, plain, S. A. E., hexagon, ¾")	(1)	.97
&						ROD, throttle control, over all length 91", assembly (Composed of: *one SH969B throttle control ROD, over all length 91" (1) two — NUT, plain, S. A. E., hexagon, ½")	(1)	.95
						ROLLER, cam shaft rocker lever ROLLER, sliding door	(1)	1.19
&						ROLLER, cam shaft rocker lever ROLLER, sliding door	(1)	1.15
						ROLLER, cam shaft rocker lever ROLLER, sliding door	(1)	2.04
&						ROLLER, cam shaft rocker lever ROLLER, sliding door	(1)	2.00
						ROLLER, cam shaft rocker lever ROLLER, sliding door	(1)	.33
&						ROLLER, cam shaft rocker lever ROLLER, sliding door	(1)	.69
						ROLLER, cam shaft rocker lever ROLLER, sliding door	(1)	.69

X	—	29	M2848	478	ROLLER, spousoon shaft	2	1.50
% (gp) X	15	2			ROLLER, track, with flange, assembly	(gp) (28)	70.20
					(Composed of:		
					one — track ROLLER, assembly,		
					one M1336 track roller SPRING,		
					*two M1334 track roller spring PLATE (56)		
	2	29		59	ROLLER, track, assembly	(gp) (58)	6.50
% (gp) X	—	29					52.20
	14	2			(Composed of:		
					*two M1332 track ROLLER (116)		8.25
					two M1335 track roller spring split RING,		
					*one M1333 track roller TUBE (58)		
	5	29		57	ROLLER, track roller pinion		35.00
% X	2	25	M1542	53	ROTOR, distributor, assembly	36	.85
% X					(Composed of:	(2)	.49 P
					*one D13691 distributor ROTOR (2),		
					one D29616 distributor rotor attaching SCREW,		
					one D14182 distributor rotor BRUSH, with spring, assembly,		
					*one D29621 distributor rotor high tension CONNECTOR,		
					one D30060 WASHER, lock, .195" x .453" x .046",		
					one D25116 WASHER, plain, .147" x .313" x .022")		
				501	SADDLE, louvre	4	.68
% X					SCREEN, crank case breather	1	.02
&				LQ235A	SCREEN, crank case oil filler, assembly	(2)	.15
% X	8366		M996		(Composed of:		
					*one LQ226A crank case oil filler SCREEN (2)		.10
	8521				*one LQ227A crank case oil filler screen RING (2)		.05
&	8522			LQ204A	SCREEN, crank case oil sump oil strainer, side	1	.15
&	8528			LQ205A	SCREEN, crank case oil sump oil strainer, top	1	.15
&	8529			LQ451A	SCREEN, oil pump, side	2	.50
&	8533			LQ452A	SCREEN, oil pump lower, top	1	.50
&	B8465			LQ457A	SCREEN, oil pump upper, top	1	.50
% X	8532				SCREEN, airplane watch mat, assembly	(4)	.04 P
					(Composed of:		
					one — NUT, machine screw, No. 8 (5/32")—30,		
					*one — SCREW, machine, round head, No. 8 (5/32")—30 x 13/8" (4),		
					two SH979E WASHER, plain, I. D. .18", O. 1/2", thick .05")		
% X				637	SCREW, (ball mount) splash ring	2	.08
	H/20793			LQ33A	SCREW, cam shaft bearing lock	14	.30
	B8108						

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
%(sh)R						SCREW, cap, fillister head, $\frac{3}{8}$ " x $\frac{1}{2}$ ". (For bracket SH994D (2); bracket SH994E (2).)	4	\$0.03 P
&(sh)R						SCREW, cap, U. S. Std., flat head, $\frac{1}{8}$ " x $\frac{1}{2}$ ". (For ring SH861E (2).)	2	.02 P
&(sh)R						SCREW, cap, U. S. Std., flat head, $\frac{3}{16}$ " x $\frac{3}{8}$ ". (For disk X267 (4).)	4	.03 P
&(sh)R						SCREW, cap, U. S. Std., flat head, $\frac{1}{4}$ " x $\frac{3}{4}$ ". (For container LQ392A (1).)	1	.03 P
%(sh)R						SCREW, cap, U. S. Std., flat head, $\frac{1}{4}$ " x 1". (For rest SH573K (3).)	3	.03 P
%(sh)R						SCREW, cap, U. S. Std., flat head, $\frac{5}{16}$ " x $\frac{3}{4}$ ". (For box SH373A (2).)	2	.03 P
%(sh)R						SCREW, cap, U. S. Std., flat head, $\frac{5}{16}$ " x $\frac{7}{8}$ ", with plain nut and lock washer. (For fastener SH445E (1).)	(1)	.05 P
%(sh)R						SCREW, cap, U. S. Std., flat head, $\frac{5}{16}$ " x 1", with plain nut and lock washer. (For channel SH485B (6); angle SH485B (6).)	(18)	.05 P
%(sh)R						SCREW, cap, U. S. Std., flat head, $\frac{3}{8}$ " x $\frac{1}{2}$ ". (For plate SH608B (4).)	4	.06 P
%(sh)R						SCREW, cap, U. S. Std., flat head, $\frac{3}{8}$ " x $1\frac{1}{8}$ ", with plain nut and lock washer. (For plate M2065 (10); plate SH575A (4).)	(24)	.07 P
%(sh)R						SCREW, cap, U. S. Std., flat head, $\frac{3}{8}$ " x $1\frac{5}{16}$ ", with plain nut and plain washer. (For rest M2842 (3).)	(6)	.07 P
%(sh)R						SCREW, cap, U. S. Std., flat head, $\frac{3}{8}$ " x $1\frac{1}{2}$ ", with plain nut and lock washer. (For water can bracket, inner, assembly (2); outer, assembly (2).)	(4)	.06 P
%(sh)R						SCREW, cap, U. S. Std., flat head, $\frac{1}{2}$ " x 1". (For plate M2034 (4).)	12	.05 P
%(sh)R						SCREW, cap, U. S. Std., flat head, $\frac{5}{8}$ " x $1\frac{1}{2}$ ", with plain nut and lock washer. (For plate M1004 (4).)	(16)	.06 P
%(sh)R						SCREW, cap, U. S. Std., flat head, $\frac{5}{8}$ " x $1\frac{3}{4}$ ", with plain nut and lock washer. (For handle M3131 (1); angle M2792B (4); angle M2792A (4).)	(14)	.07 P
%(sh)R						SCREW, cap, U. S. Std., flathead, $\frac{5}{8}$ " x $1\frac{1}{8}$ ", with plain nut and lock washer. (For angle M2792B (2); M2792A (2).)	(4)	.07 P
%(sh)R						SCREW, cap, U. S. Std., flathead, $\frac{5}{8}$ " x $2\frac{1}{8}$ ", with plain nut and lock washer. (For plate M2800 (7); plate M2802 (7); angle M2791B (3); M2791A (3); angle M2792B (2); M2792A (2).)	(24)	.07 P
%(sh)R						SCREW, cap, U. S. Std., flathead, $\frac{5}{8}$ " x $2\frac{3}{16}$ ", with plain nut and lock washer. (For plate M2799 (7).)	(7)	.07 P

% (sh) R				SCREW, cap, U. S. Std., flathead, $\frac{5}{8}$ " x $2\frac{1}{4}$ ", with plain nut and lock washer. (For hinge M2826 (1).)	(4)	.07 P
% (sh) R				SCREW, cap, U. S. Std., flathead, $\frac{5}{8}$ " x $2\frac{3}{8}$ ", with plain nut and lock washer. (For hinge M2826 (1).)	(4)	.07 P
% (sh) R				SCREW, cap, U. S. Std., flathead, $\frac{5}{8}$ " x $2\frac{1}{2}$ ", with plain nut and lock washer. (For hinge M2826 (1).)	(4)	.07 P
% (sh) R				SCREW, cap, U. S. Std., flathead, $\frac{5}{8}$ " x $2\frac{3}{8}$ ", with plain nut and lock washer. (For angle M2791B (1); M2791A (1).)	(2)	.07 P
% (sh) R				SCREW, cap, U. S. Std., flathead, $\frac{5}{8}$ " x $2\frac{3}{8}$ ", with plain nut and lock washer. (For angle M2791B (1); angle M2791A (1).)	(2)	.07 P
% (sh) R				SCREW, cap, U. S. Std., flathead, $\frac{5}{8}$ " x $3\frac{1}{2}$ ", with plain nut and lock washer. (For hinge M2826 (1).)	(4)	.07 P
% (sh) R				SCREW, cap, U. S. Std., flathead, $\frac{5}{8}$ " x $3\frac{3}{8}$ ", with plain nut and lock washer. (For angle M2792B (1); M2792A (1).)	(2)	.08 P
% (sh) R				SCREW, cap, U. S. Std., flathead, $\frac{3}{4}$ " x $3\frac{9}{16}$ ", with plain nut and lock washer. (For bracket M2382 (1).)	(2)	.08 P
% (sh) R				SCREW, cap, U. S. Std., hexagon head, $\frac{1}{4}$ " x $7\frac{1}{16}$ ". (For guide M2155A (7); guide M2155B (7); guide M2208 (6).)	20	.02 P
% (sh) R				SCREW, cap, U. S. Std., hexagon head, $\frac{1}{4}$ " x $\frac{1}{2}$ ". (For cover SH146B (4); plate M1126 (4).)	12	.02 P
% (sh) R				SCREW, cap, U. S. Std., hexagon head, $\frac{1}{4}$ " x $\frac{5}{8}$ ". (For fastener SH445H (2); guide M2156 (9).)	11	.02 P
% X			SH424E	SCREW, cap, U. S. Std., hexagon head, $\frac{1}{4}$ " x $\frac{3}{4}$ ", slotted head. (For four clips M2437 (2).)	8	.03 P
% (sh) R				SCREW, cap, U. S. Std., hexagon head, $\frac{1}{4}$ " x $\frac{7}{8}$ ", drilled head. (For plate M1047 (4).)	4	.02 P
% (sh) R				SCREW, cap, U. S. Std., hexagon head, $5\frac{1}{16}$ " x $\frac{3}{8}$ ". (For guide M2165 (8); guide M2166 (6).)	22	.02 P
% (sh) R				SCREW, cap, U. S. Std., hexagon head, $5\frac{1}{16}$ " x $\frac{1}{2}$ ". (For holder SH443A (2).)	2	.02 P
% (sh) R				SCREW, cap, U. S. Std., hexagon head, $5\frac{1}{16}$ " x $\frac{5}{8}$ ". (For securing bracket M2170 (6).)	6	.02 P
% (sh) R				SCREW, cap, U. S. Std., hexagon head, $5\frac{1}{16}$ " x $\frac{3}{4}$ ". (For cylinder SH900C (2); securing funnel rack, assembly (1).)	9	.02 P
% (sh) R				SCREW, cap, U. S. Std., hexagon head, $5\frac{1}{16}$ " x $\frac{7}{8}$ ". (For cover SH399A (4).)	4	.02 P
% (sh) R				SCREW, cap, U. S. Std., hexagon head, $5\frac{1}{16}$ " x $2\frac{1}{2}$ ". (For cover SH399A (2).)	2	.02 P
% (sh) R				SCREW, cap, U. S. Std., hexagon head, $\frac{3}{8}$ " x $\frac{1}{2}$ ". (For plate SH608A (4); bracket SH980D (2); bracket B5924 (2); bracket B5929 (2); bracket B5926 (2); securing accessories or ration box (7); support B5930 (2).)	30	.03 P

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
% (sh)R	13	21				SCREW, cap, U. S. Std., hexagon head, $\frac{3}{8}$ " x $\frac{5}{8}$ ". (For plate M880 (4); plate M995A (9); plate M995B (9); flange SH951B (8).)	50	\$0.03 P
% (sh)R						SCREW, cap, U. S. Std., hexagon head, drilled, $\frac{3}{8}$ " x $\frac{5}{8}$ ". (For collar SH999A (6).)	6	.04 P
% (sh)R						SCREW, cap, U. S. Std., hexagon head, $\frac{3}{8}$ " x $\frac{3}{4}$ ". (For generator (3); catch M2153 (1); bearing SH900A (3); plate M1033 (19); plate M1035A (8); cover M1038 (8); securing duct M1036 (between radiator and roof) (23); securing pyrene refill bracket, assembly (3).)	72	.03 P
% (sh)R						SCREW, cap, U. S. Std., hexagon head, $\frac{3}{8}$ " x 1". (For strip SH978T (1); bracket SH971A (2); bracket SH971B (2); brace SH920F (2); bracket SH293B (1); bracket SH293A (1); cover M1124 (2).)	11	.03 P
% (sh)R						SCREW, cap, U. S. Std., hexagon head, $\frac{3}{8}$ " x 1 $\frac{5}{16}$ ". (For bracket M1048 (2).)	2	.03 P
% (sh)R						SCREW, cap, U. S. Std., hexagon head, $\frac{3}{8}$ " x 1 $\frac{1}{2}$ ". (For cover M1124 (2).)	2	.04 P
% (sh)R						SCREW, cap, U. S. Std., hexagon head, $\frac{1}{2}$ " x $\frac{1}{2}$ ". (For housing SH957A (4).)	4	.05 P
% (sh)R						SCREW, cap, U. S. Std., hexagon head, $\frac{1}{2}$ " x $\frac{3}{4}$ ". (For holder SH959B (4).)	4	.05 P
% (sh)R						SCREW, cap, U. S. Std., hexagon head, $\frac{1}{2}$ " x $\frac{3}{4}$ ". (For plate M1411 (1).)	4	.05 P
% (sh)R						SCREW, cap, U. S. Std., hexagon head, $\frac{1}{2}$ " x $\frac{7}{8}$ ". (For flange B40B (6).)	18	.05 P
% (sh)R						SCREW, cap, U. S. Std., hexagon head, $\frac{1}{2}$ " x 1". (For cone SH959A (1); connection M1231 (3).)	4	.05 P
% (sh)R						SCREW, cap, U. S. Std., hexagon head, $\frac{1}{2}$ " x 1 $\frac{1}{4}$ ". (For cradle B39A (2).)	10	.06 P
% (sh)R						SCREW, cap, U. S. Std., hexagon head, $\frac{1}{2}$ " x 1 $\frac{1}{2}$ ". (For bracket M184 (2).)	2	.07 P
% (sh)R						SCREW, cap, U. S. Std., hexagon head, $\frac{1}{2}$ " x 1 $\frac{3}{8}$ ". (For bracket M4148 (4).)	4	.07 P
% (sh)R						SCREW, cap, U. S. Std., hexagon head, $\frac{1}{2}$ " x 2". (For bracket M639 (2).)	6	.08 P
% (sh)R						SCREW, cap, U. S. Std., hexagon head, $\frac{5}{8}$ " x $\frac{3}{4}$ ". (For tank M1193 (2).)	2	.09 P
% (sh)R						SCREW, cap, U. S. Std., hexagon head, $\frac{5}{8}$ " x $\frac{7}{8}$ ". (For angle M2087 (3); angle M2088 (4).)	14	.09 P
% (sh)R						SCREW, cap, U. S. Std., hexagon head, $\frac{5}{8}$ " x 1". (For tee SH975A (3); connection M1231 (3); socket M1230 (3); flange B20793 through A20793 (12).)	21	.09 P
% (sh)R						SCREW, cap, U. S. Std., hexagon head, $\frac{3}{8}$ " x 1 $\frac{1}{4}$ ". (For rail M2009B (5); rail M2009A (6); rail (outer) M2011B (2); rail (outer) M2011A (2); rail (inner) M2011B		

[illegible]

Note symbol	Identification No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&						PARTS—Continued		
						SCREW, carburetor channel, assembly	(4)	\$0.03
						(Composed of: *one LQ525A carburetor channel SCREW (4) *one LQ527A carburetor channel screw WASHER.)		.02
&			13376		LQ540A	SCREW, carburetor gear sector adjusting	2	.09
&			13293		LQ508A	SCREW, carburetor (gear sector adjusting screw clamping)	2	.01
&			253		LQ558A	SCREW, carburetor gear sector set	4	.03
&			13538		LQ564A	SCREW, carburetor priming plug	12	.02
&			13405		LQ557A	SCREW, carburetor throttle shaft end (machine screw, No. 10 x 7/16" drilled)	8	.05
&			13416		LQ557A	SCREW, carburetor to intake header, long	1	.15
&			B12429		LQ420A	SCREW, carburetor to intake header, short	1	.12
&			B13152		LQ419A	SCREW (clutch sliding collar), key	8	
&					SH861H	SCREW, clutch throwout lever pin locking set, assembly	(2)	.10
%X					955	(Composed of: *one M4175 clutch throwout lever pin locking set SCREW (2)		.08
						one — NUT, plain, U. S. Std., hexagon, 7/16".)		
&	8520	14	8520		LQ276A	SCREW, crank shaft thrust bearing retaining nut lock	1	.04
%X						SCREW, distributor contact, assembly	(6)	.38 P
						(Composed of: *one D13687 distributor contact SCREW (6), one D21748 NUT, plain, No. 5—50 x 7/32" x 7/64" thick.)		
&						SCREW, distributor contact arm spring, assembly	(4)	.07 P
						(Composed of: one D29573 NUT, castle, No. 6—32 x .218" x .188" thick, one D30816 PIN, wire, .031" x .625", *one D29574 SCREW, hexagon head, No. 2—36 x .345", one D29576 WASHER, plain, .144" x .469" x .022".)		
&						SCREW, distributor contact arm spring	4	.02 P
%X			D29574 D29616			SCREW, distributor rotor	2	.03 P

&			SCREW, distributor terminal nut, assembly (Composed of: *one D31012 distributor terminal nut SCREW (4), one D30996 distributor terminal screw NUT (round, brass, No. 10—35 x .360" x .171" thick))	(4)	.07 P
&			SCREW, governor arm bushing set	1	.12
&			SCREW, hand starter (machine, A. S. M. E., No. 10, drilled head)	4	.09
&			SCREW, hemispherical turret	18	.08
&			SCREW, ignition switch ammeter terminal connector	1	.03 P
&			SCREW, ignition switch cover plate	2	.02 P
&			SCREW, ignition switch cover plate (center)	1	.04 P
&			SCREW, ignition switch lever	2	.02 P
&			SCREW, ignition switch resistance unit, assembly	(2)	.10 P
&			(Composed of: *one D30362 ignition switch resistance unit SCREW one D29864 NUT, castle, No. 10—30 x .437" x .218" thick, one — PIN, split, brass, 1/16" x %".)		.07
&			SCREW, key	8	.04
&			SCREW, locking. (For bracket M3121 (1); hemispherical turret, assembly (3).)	9	.08
&(sh)R			SCREW, machine, flathead, No. 10 (3/16")—24 x %". (For key SH136B (1).)	1	.01 P
&(sh)R			SCREW, machine, flathead, No. 14 (%")—20 x %", brass. (For band M360 (1).)	2	.01 P
&(sh)R			SCREW, machine, headless, No. 7 (5/32")—32 x 1/4". (For header SH103A (1).)	6	.01 P
&(sh)R			SCREW, machine, round head, No. 8 (5/32")—30 x 3/16". (For hood SH105D (2).)	2	.01 P
&(sh)R			SCREW, machine, round head, No. 8 (5/32")—30 x 5/16". (For cover SH105A (12).)	12	.01 P
&(sh)R			SCREW, machine, round head, No. 8 (5/32")—30 x %". (For box SH102C (6).)	6	.01 P
&(sh)R			SCREW, machine, round head, No. 8 (5/32")—30 x %", with machine screw nut, (For tachometer (4).)	(4)	.01 P
&(sh)R			SCREW, machine, round head, No. 8 (5/32")—30 x 1", with machine screw nut and plain washer. (For switch C5261 (2).)	(6)	.01 P
&(sh)R			SCREW, machine, round head, brass, No. 8 (5/32")—32 x 7/16". (For unilet, type T (2).)	2	.01 P
% (sh)R			SCREW, machine, round head, No. 10 (3/16")—32 x %". (For clip SH373M (2).)	2	.01 P
&(sh)R			SCREW, machine, round head, No. 10 (3/16")—24 x 1/4". (For tube SH101B (1).)	6	.01 P
&(sh)R			SCREW, machine, round head, brass, No. 10 (3/16")—24 x 1/4". (For header SH103A (1).)	6	.01 P
&(sh)R			SCREW, machine, round head, No. 10 (3/16")—24 x 5/16". (For securing Liberty Ordnance engine name plate to upper crank case (4).)	4	.01 P
&(sh)R			SCREW, machine, round head, No. 10 (3/16")—24 x %" brass. (For terminal LQ380A (1); terminal LQ381A (1).)	2	.01 P

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
% (sh)R						SCREW, machine, round head, brass, No. 10 (3/16")—32 x 3/8". (For unilet, type L (2).)	(2)	\$0.01 P
% (sh)R						SCREW, machine, round head, No. 10 (3/16")—24 x 1/2", with machine screw nut and lock washer. (For support SH585B (2).)	(2)	.03 P
% (sh)R						SCREW, machine, round head, No. 10 (3/16")—24 x 3/4", with machine screw nut, plain washer and lock washer. (For support SH962A (2).)	(2)	.01 P
% (sh)R						SCREW, machine, round head, No. 10 (3/16")—24 x 1", with machine screw nut and lock washer. (For distance recorder (3).)	(3)	.01 P
% (sh)R						SCREW, machine, round head, No. 14 (1/4")—20 x 1/2". (For cover SH281A (4); plate SH281C (4).)	8	.01 P
%X					SH574G	SCREW, platform ammunition storage (locking strip) thumb	1	
%X					SH801B	SCREW, senaphore locking	1	
& (sh)R						SCREW, set, headless, 5/16" x 1/2". (For bushing M261 (1).)	2	.02 P
% (sh)R						SCREW, set, square head, cone point, 3/8" x 3/4". (For bracket M2382 (1).)	2	.02 P
& (sh)R						SCREW, set, square head, cup point, 1/4" x 1/4". (For collar SH101F (1).)	2	.01 P
& (sh)R						SCREW, set, square head, cup point, 1/4" x 3/8". (For collar SH102K (1).)		.01 P
% (sh)R						SCREW, set, square head, cup point, 1/4" x 5/8". (For pulley SH102A (1), con- nection SH964G (1).)	3	.01 P
% (sh)R						SCREW, set, square head, cup point, 5/16" x 1". (For fan SH960A (2).)	2	.01 P
% (sh)R						SCREW, set, square head, cup point, 1/2" x 2", with plain nut. (For plate M982 (2); plate M989 (2).)	(4)	.08 P
% (sh)R						SCREW, set, square head, cup point, 3/8" x 7/8". (For lever M4162 (1).)	1	.06 P
% (sh)R						SCREW, set, square head, round point, 1/8" x 5/8". (For holder SH950H (1).)	1	.01 P
&			D30108			SCREW, slotted head, No. 2—64 x 215". (For voltage regulator, assembly D5718 (2).)	2	.01 P
&			D26948			SCREW, slotted head, No. 6—38 x 1/4". (For ignition switch, assembly D1120 (1).)	1	.10 P
&			D26598			SCREW, slotted head, No. 8—32 x 391". (For distributor cup, assembly D14180 (2).)	4	.01 P
&			D25673			SCREW, slotted head, 5/16"—24 x .562"	8	.01 P
&			B215		LQ418A	SCREW, special 5/16" x 11/16". (For elbow LQ308A (2).)	24	.37

	8101	13	8101 8219 W-S1021			LQ27A LQ30A	
&	54	2		M1473	60	SCREW, special, No. 8 x 1/2"	.01
&	11	28				SCREW, special, No. 10 x 5/16"	.06
%X	7	10				SCREW, starting and lighting battery wood	.01 P
%X	5	28				SCREW, tension adjusting (track)	6.79
%X				M1475	60	SCREW, track adjusting screw locking	.40
%X	3	31		MX60	712	SCREW, transmission brake anchor bracket end stop	.12
%X	3	32		MX38	712	SCREW, transmission brake band adjusting	2.00
%X				MX76	712	SCREW, transmission brake band anchor to end	.06
%X	9	31, 32				SCREW, transmission brake band to anchor bracket	.10
						SCREW, transmission brake band stop, assembly	(4)
						(Composed of:	
						*one M343 transmission brake band stop SCREW (4)	.10
						one — NUT, plain, S. A. E., hexagon, 1/2"	
%X						SCREW, transmission brake stop bar set, assembly	.14
						(Composed of:	
						*one MX88 transmission brake stop bar set SCREW (4)	.12
						one — NUT, plain, S. A. E., hexagon, 1/2"	
&				M390	669	SCREW, transmission frame holding	1.12
%X	9	30		M358	698	SCREW, transmission high speed brake adjusting	1.15
%X	4	30				SCREW, transmission high speed brake stop set, assembly	.07
						(Composed of:	
						*one M400 transmission high speed brake stop set SCREW (6)	.05
						one — NUT, plain, S. A. E., %"	
&						SCREW, voltage regulator armature regulating spring adjusting, assembly	.11 P
						(Composed of:	
						one D30531 voltage regulator armature regulating SPRING.	
						*one D30141 voltage regulator armature regulating spring adjusting	
						SCREW (1),	
						one D30142 NUT, plain, brass, No. 8—36 x 19/64" x .125" thick.)	
&						SCREW, voltage regulator contact, assembly	.11 P
						(Composed of:	
						*one D13795 voltage regulator contact SCREW.	
						one D21748 NUT, plain, No. 5—50 x 7/32" x 7/64" thick.)	
&						SCREW, voltage regulator mounting terminal, with thick bushing, assembly	.06 P
						(Composed of:	
						one D25469 voltage regulator mounting terminal screw insulating	
						BUSHING, thick,	

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
&						SCREW, voltage regulator mounting terminal, with thick bushing assembly—Con. (Composed of: *one D30143 SCREW, slotted head, No. 6—40 x .358", one D24336 WASHER, plain, brass, .147" x .312" x .0254")	(6)	\$0.06 P
						SCREW, voltage regulator mounting terminal, with thin bushing, assembly (Composed of: one D25468 voltage regulator mounting terminal screw insulating BUSHING, thin, *one D30143 SCREW, slotted head, No. 6—40 x .358", one D24336 WASHER, plain, brass, .147" x .312" x .0254")		
&	41	14	154	LQ165A		SCREW, water pump bevel driver housing (3/8" x 3/4")	1	.20
						SCREW, wood, flathead, No. 6 (9/64—" x 1/2". (For clip SH373J (2), rest SH550E (5); rest SH573K (5).)		
						SCREW, wood, flathead, brass, No. 8 (5/32+" x 1/2". (For hinge M2444 (3).)		
						SCREW, wood, flathead, No. 8 (5/32+" x 3/4". (For bracket A3997 (2); bracket A3998 (2); securing funnel rack, assembly (6).)		
						SCREW, wood, flathead, No. 8 (5/32+" x 7/8". (For funnel rack, assembly (2).)		
						SCREW, wood, flathead, No. 8 (5/32+" x 1". (For funnel rack, assembly (2).)		
						SCREW, wood, flathead, No. 8 (5/32+" x 1 1/2". (For funnel rack, assembly (22).)		
						SCREW, wood, flathead, No. 9 (11/64+" x 3/8". (For hasp SH568M (8).)		
						SCREW, wood, flathead, No. 10 (3/16+" x 3/8". (For ammunition storage lid, assembly (14); packing M1753A (18).)		
						SCREW, wood, flathead, No. 10 (3/16+" x 3/4". (For batten SH579B (3); plate SH571C (16).)		
						SCREW, wood, flathead, No. 10 (3/16+" x 1 1/4". (For batten SH568F (9); extension B5877 (2).)		
						SCREW, wood, flathead, No. 12 (7/32—" x 1". (For securing spare parts container to strip SH278C (4).)		
						SCREW, wood, flathead, No. 14 (1/4—" x 2". (For block M3064B (1); block M3064A (1).)		
							2	.01 P

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&						PARTS—Continued SEAT, sponson, left, assembly—Continued. (Composed of: one M2819 sponson seat SUPPORT, four — RIVET, button head, 7/16" x 1", two — RIVET, button head, 7/16" x 1½")		
						SEAT, sponson, right, assembly (Composed of: *one M2818A sponson SEAT, right (1) two M2815 sponson seat HINGE, male, one M2819 sponson seat SUPPORT, four — RIVET, button head, 7/16" x 1", two — RIVET, button head, 7/16" x 1½")	(1)	\$3.76
& &			13392		474	SECTOR, carburetor gear SEMAPHORE, assembly (Composed of: two — semaphore ARM, assembly, two X261 semaphore arm WASHER, one — semaphore bottom bearing BLOCK, grooved, assembly, one — semaphore bottom bearing BLOCK, assembly, one X248 semaphore bottom bearing block BUSHING, one X252 semaphore bottom CAP, one — semaphore bottom SHAFT, assembly, one X264 semaphore bottom SPROCKET, near side, one X265 semaphore bottom SPROCKET, off side, one SH802A semaphore CHAIN, one X249 semaphore control RATCHET, one X287 semaphore control ratchet SPRING, one SH801B semaphore locking SCREW, one — semaphore POST, assembly, one X310 semaphore ratchet spring WASHER.		1.08
					LQ539A		2 (1)	.28 62.34

%X %X					LQ327A	one X267 semaphore register DISK, two SH801A semaphore roller CHAIN, one — semaphore sprocket HANDLE, near side, assembly, one — semaphore sprocket HANDLE, off side, assembly, one X253 semaphore STIRRUP, two X256 semaphore top bearing BLOCK, one X250 semaphore top CAP, one X258 semaphore top SHAFT, two — semaphore top SPROCKET, assembly, four — SCREW, cap, U. S. Std., flathead, 3/16" x 5/8", two — SCREW, cap, U. S. Std., round head, 3/16" x 5/8") SEPARATOR, high tension cable SEPARATOR, jockey pulley arm, assembly	2 (1)	.14 P 1.36
						(Composed of: *one SH234G jockey pulley arm SEPARATOR (1) two — NUT, crown, U. S. Std., 1/2", two — PIN, split, 1/8" x 1") SEPARATOR, starting and lighting battery SHACKLE, towing SHAFT, air pressure pump, assembly (Composed of: *one SH900D air pressure pump SHAFT (1) one — NUT, plain, U. S. Std., hexagon, 1/2") SHAFT, cam, left, with bearings, assembly	72 4 (1)	.04 P 4.08 7.54
& %X &				W-J50 D14/21202		(Composed of: one — cam SHAFT, left, assembly, one — cam shaft BEARING, No. 1, assembly, one — cam shaft BEARING, No. 2, assembly, one — cam shaft BEARING, No. 3, assembly, one — cam shaft BEARING, No. 4, assembly, one — cam shaft BEARING, No. 5, assembly, one — cam shaft BEARING, No. 6, assembly, one — cam shaft BEARING, flywheel end, assembly.) SHAFT, cam, left, assembly	(1)	7.52 37.05
						(Composed of: *one LQ7A cam SHAFT, left (1) *one LQ8A cam shaft PLUG (2).)	(1)	25.93 25.83 .10

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&						PARTS—Continued		
						SHAFT, cam, right, with bearings, assembly (Composed of: one — cam SHAFT, right, assembly, one — cam shaft BEARING, No. 1, assembly, one — cam shaft BEARING, No. 2, assembly, one — cam shaft BEARING, No. 3, assembly, one — cam shaft BEARING, No. 4, assembly, one — cam shaft BEARING, No. 5, assembly, one — cam shaft BEARING, No. 6, assembly, one — cam shaft BEARING, flywheel end, assembly.)	(1)	\$37.05
						SHAFT, cam, right, assembly (Composed of: *one LQ6A cam SHAFT, right (1) *one LQ8A cam shaft PLUG (2).)	(1)	25.93
&	12104	13	C12104			SHAFT, cam shaft driving, lower, with container, assembly (Composed of: two (S. K. F. 1204) BEARING, ball radial, dia. 1.8504", bore .7874", height .5512", (or equal) one — cam shaft driving SHAFT, lower, assembly, one LQ104A cam shaft driving shaft GEAR, lower, one LQ97A cam shaft driving shaft lower bearing CONTAINER, one LQ103A cam shaft driving shaft lower bearing SPACER, two LQ105A cam shaft lower driving KEY.)	(2)	25.83 .10 24.63
						SHAFT, cam shaft driving, lower, assembly (Composed of: *one LQ94A cam shaft driving SHAFT, lower (2) one LQ106A cam shaft lower driving shaft NUT, one — PIN, split, 1/8" x 1".)	(2)	5.36
								5.00

8102	13	B8102	SHAFT, cam shaft driving, upper, assembly (Composed of: *one LQ73A cam shaft driving SHAFT, upper (2) one LQ77A cam shaft driving shaft GEAR, upper, two LQ78A cam shaft upper driving shaft KEY, one — PIN, steel, 1/8" x 1 5/16")	(2)	2.88
&			SHAFT, carburetor butterfly, long, assembly (Composed of: three LQ522A carburetor butterfly set SCREW, *one LQ521A carburetor butterfly SHAFT, long (2).)	(2)	2.56
&		13371	SHAFT, carburetor butterfly, short, assembly (Composed of: three LQ522A carburetor butterfly set SCREW, *one LQ520A carburetor butterfly SHAFT, short (2) one — PIN, split, 1/16" x 1/2")	(2)	.75
&		13372	SHAFT, carburetor throttle control, assembly (Composed of: one LQ116A carburetor throttle control tube END, *one LQ65H carburetor throttle TUBE (1) *one LQ65G tube END, short (3) two — NAIL, wire, 2d.)	(1)	.57
%		L12499	SHAFT, carburetor throttle control connecting, assembly (Composed of: *one LQ110A carburetor throttle control connection TUBE (1) *two LQ65G tube END, short (3) two — NAIL, wire, 2d.)	(1)	.32
&			SHAFT, center control intermediate, assembly (Composed of: *one M638 (center control) intermediate SHAFT (1) two — PIN, split, 3/16" x 2")	(1)	5.80
&	24	21	171 SHAFT, clutch cardan	1	5.78
&			SH1000A SHAFT (clutch control) swing link	1	24.50
&	22	2	SH944D SHAFT, clutch throwout	1	.78
&		M4150	955 SHAFT, clutch throwout auxiliary operating	1	18.50
&			SH953C SHAFT, crank, with gear and nut, assembly (Composed of: one — crank SHAFT, assembly, one LQ275A crank shaft flywheel hub thrust bearing retainer NUT, two LQ274A crank shaft flywheel thrust bearing SLEEVE,	(1)	2.79
					386.94

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&						PARTS—Continued SHAFT, crank, with gear and nut, assembly—Continued. (Composed of: one LQ258A crank shaft GEAR, six (LQ262A) crank shaft gear BOLT, assembly, (gu) LQ260A crank shaft gear SHIM, medium, (gu) LQ261A crank shaft gear SHIM, thick, (gu) LQ259A crank shaft gear SHIM, thin, one SH136A crank shaft NUT, one LQ276A crank shaft thrust bearing retaining nut lock SCREW, *one LQ277A crank shaft thrust bearing retaining nut lock WIRE one SH136B flywheel KEY, one LQ273A flywheel thrust BEARING, one — PIN, split, 1/4" x 3", one — SCREW, machine, flathead, No. 10 (3/16")—24 x 3/4" .)		\$0.01
			8519			SHAFT, crank, assembly (Composed of: twelve LQ366A crank pin PLUG, *one LQ255A crank SHAFT (1) one LQ263A crank shaft gear end PLUG, one LQ264A crank shaft gear end plug GASKET, one (LQ269A) crank shaft gear end plug STUD, assembly, eleven LQ265A crank shaft main bearing PLUG, *six LQ257A crank shaft oil hole PLUG, small (6) one LQ256A crank shaft propeller end PLUG, twelve — GASKET, copper, asbestos, 1 1/4", eleven — GASKET, copper, asbestos, 1 3/8", five LQ271A STUD, 3/8" x 4 1/32", threaded U. S. Std., 11/16" and S. A. E. 1/2", assembly, six (LQ270A) STUD, 3/8" x 4 17/32", threaded U. S. Std., 11/16" and S. A. E. 1/2", assembly.)	(1)	355.05
&								345.58
								.10

(gy)& (gy)& &	S30A S372A D13899	586 586	SHAFt, distance recorder drive cable, with gear SHAFt, distance recorder drive pinion, with gear SHAFt, distributor, with oil thrower, assembly (Composed of: *one D30539 distributor SHAFt (2), one D30565 distributor shaft oil THROWER, one D26824 RIVET, button head, .107" x .157".)	1 1 (2)	1.50 1.50 1.09 P
& &	SH965B	216	SHAFt, engine control rocker SHAFt, front control swing link, assembly (Composed of: *one M783 front control swing link SHAFt (1) two M314 small planet pinion NUT, two — PIN, split, 3/16" x 2")	2 (1)	.78 10.22
&		216	SHAFt, fulcrum, assembly (Composed of: *one M782 fulcrum SHAFt (1) two M313 large planet pinion NUT, two — PIN, split, 3/16" x 1½")	(1)	12.87 12.37
	39 14 34 — 8210		SHAFt, generator drive, assembly (Composed of: (H. B. 206) BEARING, ball, radial, dia. 2.4410", bore 1.1811", height one {for equal} .6299", four LQ78A cam shaft upper driving shaft KEY, one — generator drive shaft BEARING, lower, with container, assembly, one LQ388A generator driving PLUG, *one LQ386A generator driving SHAFt (1) one LQ399A generator driving shaft ball bearing oil retaining WASHER, one LQ390A generator driving shaft ball bearing RETAINER, (gu) LQ391A generator driving shaft ball bearing SHIM, one LQ400A generator driving shaft GEAR, lower, one LQ395A generator driving shaft GEAR, upper, one LQ396A generator driving shaft gear SPACER, long, one LQ394A generator driving shaft gear SPACER, short, one LQ401A generator driving shaft NUT, one LQ392A generator driving shaft upper ball bearing CONTAINER, one — PIN, taper, type A, No. 2 x 1½")	(1)	34.07
&	33 B8184 —	8146 16	SHAFt, oil pump driving LQ444A	1	.70

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&					803	PARTS—Continued SHAFT, semaphore bottom, assembly (Composed of: *one X286 semaphore bottom SHAFT (1) one — NUT, crown, U. S. Std., 7/16", one — PIN, split, 1/8" x 5/8".)	(1)	\$1.29
						SHAFT, semaphore top SHAFT, spomson roller SHAFT, starting crank, assembly	1 2 (1)	1.25 1.12 4.90
						(Composed of: one SH65L hand starter WASHER, *one SH66C starting crank SHAFT (1) one — NUT, castle, S. A. E., 5/8", one — PIN, split, 1/8" x 1 1/2"		4.82
						SHAFT, tachometer drive, assembly (Composed of: *one D29847 tachometer drive SHAFT (1), one D29845 tachometer drive shaft GEAR, one D29846 tachometer drive shaft gear attaching PIN.)	(1)	.95 P
% (GY)X	—	12			585 SH966D	SHAFT, tachometer driving, with casing (Johns-Manville Co. type, New Rochelle, N. Y.) SHAFT, throttle control rocker SHAFT, track adjusting wheel, assembly	1 1 (2)	11.39 102.32
						(Composed of: two M1477 shaft NUT, two M1475 track adjusting screw locking SCREW, one M1474 track adjusting wheel SHAFT, two M1409 BUSHING, bronze, O. D. 5.118", I. D. 4 7/16", over all-length, 8", two Q52C PLUG, pipe, square head, 3/4".)		
&	8	28		M1474		SHAFT, track adjusting wheel	2	75.00

&						SHAFT, track driving wheel, assembly (Composed of: two M1477 shaft NUT, one M1402 track driving wheel SHAFT, two M1409 BUSHING, bronze, O. D. 5.118", I. D. 4 7/16", over-all length 8", one 20297/D89 KEY, 1/2" x 3/4" x 1 13/16", one Q52C PLUG, pipe, square head, 3/4".)	(2)	98.61
						SHAFT, track driving wheel		
&	M1402	61				SHAFT, track roller pinion, assembly	2	72.00
						SHAFT, track roller pinion, assembly		
&		53				(Composed of: *one M1544 track roller pinion SHAFT (2) one 20297/D89 KEY, 1/2" x 3/4" x 1 13/16", two Q52E PLUG, pipe, square head, 3/4".)	(2)	75.20
						SHAFT, transmission bevel pinion, assembly		
&						(Composed of: *one M247 transmission bevel pinion SHAFT (1) one MX33 transmission bevel pinion shaft NUT, one M248 transmission bevel pinion shaft WASHER, one — PIN, split, 3/16" x 2 1/2".)	(1)	85.49
						SHAFT, transmission cross		
&	M255	702				SHAFT, transmission mechanical lubricator cam	1	158.00
						SHAFT, transmission mechanical lubricator drive		
&						SHAFT, transmission shifter fork, assembly	(1)	6.95
						(Composed of: one M314 small planet pinion NUT, *one M302 transmission shifter fork SHAFT (1) one — PIN, split, 3/16" x 2".)		
&	M289	706				SHAFT, transmission sprocket	2	135.00
						SHAFT, transmission vertical shifter, assembly		
&						(Composed of: one M304 transmission vertical shaft LEVER, bottom, one M303 transmission vertical shaft LEVER, top, *one M305 transmission vertical shifter SHAFT (1) two — KEY, Woodruff, No. C.)	(1)	15.16
						SHAFT, transmission vertical shifter, assembly		
&		714				SHAFT, transmission vertical shifter, assembly	2	8.50
						SHAFT, transmission vertical shifter, assembly		

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&	8079	17	B8079			PARTS—Continued	(1)	\$5.49
						SHAPT, water pump, with gear, assembly (Composed of: one LQ105A cam shaft lower driving KEY, *one LQ138A water pump SHAFT (1) one LQ147A water pump shaft NUT, one — PIN, split, bronze, 3/32" x 5/8") SHELF, battery, assembly (Composed of: one SH992C battery SHELF, one SH992E battery shelf retaining STRIP, seven — SCREW, wood, No. 10 (3/16+") x 1 1/2") SHELF, battery SHELL, runner SHIELD (peep hole cover) spring SHIM, cam shaft driving shaft housing flange, medium SHIM, cam shaft driving shaft housing flange, thick SHIM, cam shaft driving shaft housing flange, thin SHIM, cam shaft driving shaft lower bearing container, medium SHIM, cam shaft driving shaft lower bearing container, thick SHIM, cam shaft driving shaft lower bearing container, thin SHIM, cam shaft gear, medium SHIM, cam shaft gear, thick SHIM, cam shaft gear, thin SHIM, cam shaft housing cylinder, medium SHIM, cam shaft housing cylinder, thick SHIM, cam shaft housing cylinder, thin SHIM, cam shaft rocker lever tappet, medium SHIM, cam shaft rocker lever tappet, thick SHIM, cam shaft rocker lever tappet, thin SHIM, cam shaft rocker lever tappet, solid, .032" thick		
%X					SH992C		(1)	1.50
&					SH278A		1	22.15
%X				8X00	633		20	.18
&			L14988		LQ86A		(gu)	.08
&			L14987		LQ85A		(gu)	.08
&			L14989		LQ87A		(gu)	.08
&			L13444		LQ101A		(gu)	.01
&			L13426		LQ100A		(gu)	.01
&			L13238		LQ99A		(gu)	.01
&			L13419		LQ38A		(gd) 2	.15
&			L13420		LQ39A		(gd) 2	.12
&			8509		LQ37A		(gu)	.01
&			L14991		LQ504A		(gu)	.01
&			L14992		LQ505A		(gu)	.01
&			L14990		LQ503A		(gd) 24	.01
%X			8086		LQ68A		(gd) 24	.01
%X			8089		LQ70A		(gd) 24	.01
%X			8087		LQ69A		(gd) 24	.01
%X					LQ65K		(gd) 24	.01

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
X					A6578	SOCKET, surface toggle switch plug	1	
&			8144		LQ103A	SPACER, cam shaft driving shaft lower bearing	2	\$1.50
%X					SH586H	SPACER (distance recorder gear) (steel, 13/32" x 5/8" x 1/4")	3	.08 P
%X					SH154G	SPACER, exhaust manifold guard, 3/8" x 3/8"	4	.03 P
%X					SH154H	SPACER, exhaust manifold guard, 3/8" x 5/8"	4	.03 P
&	8150	16	8150		LQ396A	SPACER, generator driving shaft gear, long	1	1.50
&	8149	16	8149		LQ394A	SPACER, generator driving shaft gear, short	1	1.00
&					SH142F	SPACER, governor bearing	1	.98
%X				MX82	SH1021D	SPACER, intensifier board	16	.01 P
&					682	SPACER, low speed brake band bracket (I. D. .189", O. D. 1/2", thickness 3/8")	2	.05
%X					SH119C	SPACER, starting crank housing (bulk head to housing)	(gd) 6	.48
&			W-AF179			SPACER, starting and lighting battery	6	.15 P
&					SH687A	SPACER, transmission (brake adjusting spring) (W. I., 1" x 1 1/4")	4	.08
&					SH282A	SPIDER, radiator cooling fan housing	1	17.50
&	10	20				SPINDLE, chain wheel, assembly	(1)	3.54
						(Composed of: one SH196C bevel gear WASHER, *one M1131 chain wheel SPINDLE		3.45
					196	one SH196B NUT, special, one — PIN split, 1/8" x 3/4"		
&				M721	545	SPINDLE, door lock. (For door lock, left, assembly (1); door lock, right, assem- bly (1))	6	.48
&						SPINDLE, fan bevel gear box pulley, assembly	(1)	4.21
						(Composed of: one SH196C bevel gear WASHER, *one M1132 fan bevel gear box pulley SPINDLE (1)		4.12
	1	20			196	one SH196B NUT, special, one — PIN split, 1/8" x 1 1/4"		
&						SPINDLE, governor, assembly	(1)	8.85
						(Composed of:		

Note symbol	Identification No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&			D13803			PARTS—Continued SPRING, distributor contact (straight) arm, assembly—Continued. (Composed of: two D29767 RIVET, flathead, .061" x .141", two D29766 WASHER, plain, .0635" x 5/32" x .02")		
&			D30534			SPRING, distributor cup	8	\$0.01 P
&			D30111			SPRING, distributor head clamp	8	.02 P
&					SH537D	SPRING, gasoline tank cover hinge	2	.28
&			D29818			SPRING, generator brush arm (large)	4	.03 P
&			D30193			SPRING, generator brush arm (small)	4	.03 P
%X	—	12				SPRING, governor	1	.75
%X					SH993H	SPRING, gun hanger compression	5	.04
%X					SH395G	SPRING, gun retaining	1	.51
%X					SH395K	SPRING, gun retaining	1	.51
%X					SH65D	SPRING, hand starter lock plunger	1	.08
&					SH434D	SPRING, hemispherical turret antisplash. (For retainer SH434B (6); retainer SH434C (5).)	33	.22
%X	—	6		M563	219	SPRING, high speed brake rod	2	1.12
&	—	12	8191		LQ447A	SPRING, oil pressure relief valve	1	.06
%X				9X90	633	SPRING (peep hole cover) (wire, 6 coils, free length ¾")	20	.04
&			D42/2121		642	SPRING, revolver hole cover handle	9	.08
%X				X287	801	SPRING, semaphore control ratchet	1	.28
%X				X274	802	SPRING, semaphore detent	1	.08
%X			Q38/21192		551	SPRING, shell holder	44	.08
&			D29844			SPRING, tachometer drive shaft	1	.15 P
%X	—	6		M564	219	SPRING, tension. (For control rod (4); fan jockey pulley (1).)	5	.58
%X					SH922B	SPRING, terminal cover	6	.10
%X	—	12			SH993E	SPRING, throttle release	1	.28
&	3	29		M1336	62	SPRING, track roller	28	5.00
%X	4	31		M335	687	SPRING, transmission brake adjusting	4	.78
%X	4	32				SPRING, transmission high speed brake adjusting	2	.24
%X	8	30		M369	698			

&				SH101J	SPRING, transmission mechanical lubricator flat	12	.05
&				SH104C	SPRING, transmission mechanical lubricator suction tube	6	.02
&	8357			LQ295A	SPRING, valve, exhaust, outside	12	.25
&	8254			LQ294A	SPRING, valve, inlet, outside	12	.12
&	8253			LQ293A	SPRING, valve, inside	24	.17
&	D80531				SPRING, voltage regulator armature regulating	1	.03 P
&	8058	17		LQ143A	SPRING, water pump shaft gland	1	.04
&		20	M308	714	SPRING, wire, O. D. 11/16", length 1 1/2". (For clutch.)	2	.08 P
&		12		SH193C	SPROCKET, fan bevel gear box chain	1	6.72
&		20		SH193A	SPROCKET, fan double drive	1	7.27
&		6	X264	801	SPROCKET, semaphore bottom, near side	1	3.00
&			X265	801	SPROCKET, semaphore bottom, off side	1	1.75
&					SPROCKET, semaphore top, assembly	(2)	2.30
					(Composed of:		
				801	*one X257 semaphore top SPROCKET (2)		2.25
					one — NUT, crown, U. S. Std., 7/16",		
					one — PIN, split, 1/8" x 1",		
					one — WASHER, plain, 1/2".)		
&				SH193B	SPROCKET, ventilating fan	1	1.95
&				GB5K	STAPLE. (For outside tool chest.)	2	.05
%X		8			STAPLE, track roller pin, assembly	(116)	.31
					(Composed of:		
				53	*one M1338 track roller pin STAPLE (116)		.25
					two — NUT, plain, U. S. Std., hexagon, 1/2",		
					two — WASHER, lock, 1/2".)		
%		31	2		STARTER, hand, assembly	(1)	27.85 P
					(Composed of:		
					two SH65F hand starter (housing) DOWEL,		
					one SH65C hand starter lock PLUNGER,		
					one SH65H hand starter lock plunger GUIDE,		
					one SH65D hand starter lock plunger SPRING,		
					two SH65K hand starter retaining PLATE,		
					four SH65A hand starter SCREW,		
					two SH65E hand starter (shaft) KEY,		
					one — starting CRANK, assembly,		
					one SH66A starting crank counter shaft GEAR,		
					one SH399B starting crank HOUSING,		
					one SH399A starting crank housing COVER,		
					one SH119B starting crank JAW,		

TANK, MARK VIII

222

&	1	30	M398	698	*one A6900 selector lever STOP (2)	18
	12	30	M366	697	one B5397 selector lever stop NUT.)	2
	2	30	M399	697	STOP, transmission high speed brake band	1.00
					STOP, transmission high speed brake band, bottom	2
&	2	30			STOP, transmission high speed brake band, top	1.50
					STOP, water can, assembly	1.38
&	32	2			(Composed of:	
					four (NB1B) FASTENER, strap, No. 2, assembly,	
					*one SH293E water can STOP (4)	.62
					eight — RIVET, button head, $\frac{1}{4}$ " x $\frac{5}{8}$ "	
					STORAGE, ammunition (above rear shall storage), assembly	87.50
					(Composed of:	
					*twelve SS577B ammunition storage ANGLE, No. 1 (12)	.85
					*two SS577D ammunition storage ANGLE, No. 2, left (2)	.85
					*two SS577C ammunition storage ANGLE, No. 2, right (2)	.85
					*eight SS577E ammunition storage ANGLE, No. 3 (8)	.28
					*one SH576L ammunition storage hinge PLATE (1)	.58
					*two SH576J ammunition storage hinge plate REINFORCE (2)	.58
&	18	2			two — ammunition storage LID, assembly.	
					*one SH576C ammunition storage PARTITION, with hole (1)	1.95
					*six SH576B ammunition storage PARTITION, without hole (6)	1.95
					*one SH575A ammunition storage PLATE, bottom (1)	7.50
					*one SH577F ammunition storage PLATE, bottom side (1)	12.85
					*one SH577G ammunition storage PLATE, end, front (1)	1.82
					*one SH577H ammunition storage PLATE, end, rear (1)	1.82
					*three SH576A ammunition storage PLATE, middle and side (3)	3.48
					*two SH577A ammunition storage PLATE, top (2)	3.62
					eighteen — RIVET, button head, $\frac{3}{16}$ " x $\frac{1}{2}$ ",	
					fifty-two — RIVET, countersunk head, $\frac{3}{16}$ " x $\frac{1}{2}$ ",	
					four hundred	
&	18	2			and twenty- — RIVET, countersunk head, $\frac{3}{16}$ " x $\frac{5}{8}$ ".	
					six	
					STORAGE, platform ammunition (Browning machine gun), assembly	66.47
					(Composed of:	
&					*eight SH574A platform ammunition STOP, end (8)	.28
					one SH571B platform ammunition storage BATTEN, left,	
					one SH571A platform ammunition storage BATTEN, right,	
					*one SH573G platform ammunition storage bearing PLATE, left (1)	.32
&					*one SH573F platform ammunition storage bearing PLATE, right (1)	.32

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&	48	2				PARTS—Continued STORAGE, platform ammunition (Browning machine gun), assembly—Contd. (Composed of: *two SH573M platform ammunition storage connecting ANGLE (2) *eight SH574C platform ammunition storage front cross BRACE (8) one SH573B platform ammunition storage front support FOOT, left, one SH573A platform ammunition storage front support FOOT, right, one SH574K platform ammunition storage locking STRIP, one SH574L platform ammunition storage locking strip RIVET, one SH574G platform ammunition storage (locking strip) SCREW, one SH574M platform ammunition storage PARTITION, center, *one SH571C platform ammunition storage PLATE (1) *one SH572D platform ammunition storage PLATE, front (1) *one SH572B platform ammunition storage PLATE, middle (1) *one SH572A platform ammunition storage PLATE, rear (1) two SH574B platform ammunition storage rear center shell SUP- PORT, *sixteen SH574N platform ammunition storage rear cross BRACE (16) *one SH572E platform ammunition storage shelf PLATE, front *one SH572C platform ammunition storage shelf PLATE, rear one SH574D platform ammunition storage SUPPORT, center, one SH573D platform ammunition storage SUPPORT, front, one — platform ammunition storage thumb screw CHAIN, assembly, *one SH573E platform ammunition storage top plate ANGLE (1) four — BOLT, U. S. Std., hexagon head, 5/8" x 1 1/2", with plain nut and lock washer, one — RIVET, button head, 3/16" x 5/8", four — RIVET, button head, 1/2" x 1 1/2", six — RIVET, button head, 1/2" x 1 1/2", thirty-one — RIVET, countersunk head, 3/16" x 1 1/2",		\$0.12 .55
								24.75 2.35 3.48 3.48 .16 2.65 1.82 1.08

	three hundred and eighty-eight	)— RIVET, countersunk head, 3/16" x 5/8", RIVET, countersunk head, 3/16" x 7/8", RIVET, countersunk head, 3/16" x 1", RIVET, countersunk head, 1/4" x 7/8", RIVET, countersunk head, 1/4" x 1", SEW, wood, flathead, No. 10 (3/16+" x 3/4".)	(1)	41.68
	three —	STORAGE, removable platform, assembly		
	six —	(Composed of:		
	two —	two SH569P Officer's chest fastening STRAP,		.38
	seven —	*sixteen SH578A removable platform ammunition storage ANGLE, No. 1 (16)		.28
	sixteen —	*four SH578B removable platform ammunition storage ANGLE, No. 2 (4)		.89
		two SH579B removable platform ammunition storage BATTEN,		3.72
		*two SH579G removable platform ammunition storage PARTITION (2)		3.72
		*one SH579D removable platform ammunition storage PLATE, middle and bottom (1)		3.48
		*one SH579E removable platform ammunition storage PLATE, middle and bottom (1)		14.32
		*two SH579F removable platform ammunition storage PLATE, side (2)		
		*one SH579A removable platform ammunition storage PLATE, top (1)		
	four —	BOLT, U. S. Std., hexagon head, 1/4" x 7/8", with plain nut and lock washer;		
	twelve —	RIVET, countersunk head, 3/16" x 1/2",		
	two hundred and fifty	)— RIVET, countersunk head, 3/16" x 5/8", RIVET, countersunk head, 3/16+" x 3/4".)	(1)	167.95
	six —	SEW, wood, flathead, No. 10 (3/16+" x 3/4".)		.80
		STORAGE, shell, rear, assembly		2.00
		(Composed of:		
551	*two M3019	intermediate shaft bracket STRIP (2)		
	two M3022	rear shell storage BAR, length 21 9/16",		
	four M3030	rear shell storage BAR, length 25 5/8",		
552	*one M3031	rear shell storage BLOCK (1)		
	six M3032	rear shell storage BRACKET,		
	four M3026	rear shell storage BRACKET,		
548	*one M3017	rear shell storage cover PLATE (1)		12.48
549	*one M3016	rear shell storage end PLATE (1)		12.48
553	*one M3018	rear shell storage end PLATE (1)		12.74
548	*one M3015B	rear shell storage side PLATE, left (1)		8.04
548	*one M3015A	rear shell storage side PLATE, right (1)		8.04

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
%X						PARTS—Continued STORAGE, shell, rear, assembly—Continued. (Composed of: *one SH550B removable platform ammunition storage SUPPORT (1) ----- one SH550E removable platform REST, rear, twelve — shell holder PIN, assembly, twelve M3023 shell holder PLUNGER, twelve Q38/21, 192 shell holder plunger SPRING, twelve M3020 shell holder spring CASE, sixty B37/21, 191 6-pdr. shell expansion TUBE, sixty A37/21, 191 6-pdr. shell TUBE, twenty-four — BOLT, carriage, ¼" x 1 9/16", with nut and lock washer, three — BOLT, U. S. Std. hexagon head, ½" x 3 9/16", with plain nut and lock washer, twenty-four — RIVET, button head, ¼" x 7/8", eight — RIVET, button head, ¼" x 1½", eighteen — RIVET, button head, 7/16" x 1", thirty-nine — RIVET, button head, 7/16" x 1½", eight — RIVET, button head, 7/16" x 1¾", five — SCREW, wood, round head, No. 6 (9/64—") x ½") STRAINER, crank case oil filler, assembly ----- (Composed of: *one LQ223A crank case oil filler strainer RING (2) ----- *one LQ224A crank case oil filler strainer SCREEN (2).) ----- STRAINER, crank case oil sump, assembly ----- (Composed of: *one LQ203A crank case oil sump strainer HOUSING (1) ----- one LQ204A crank case oil sump strainer SCREEN, side, one LQ205A crank case oil sump strainer SCREEN, top.) ----- STRAINER, gasoline tank, assembly ----- (Composed of:	(2)	\$1.20
							(1)	.35
							(3)	.15
%X							(1)	.20
							(1)	1.30
							(3)	1.00
%X							(3)	2.10

[illegible]

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
*				M2422	417	STRAP, butt, main turret, side	(4)	\$0.68
*				M2099B	350	STRAP, butt, mud chute, left	(1)	2.40
*				M2099A	350	STRAP, butt, mud chute, right	(1)	2.40
*				M2783B	475	STRAP, butt, sponson floor, rear, left	(1)	1.75
*				M2783A	475	STRAP, butt, sponson floor, rear, right	(1)	1.75
*				M2784B	479	STRAP, butt, sponson, left (lower front)	(1)	1.92
*				M2784A	479	STRAP, butt, sponson, right (lower front)	(1)	1.92
*				M2784C	479	STRAP, butt, sponson, upper front	(2)	.40
*				M2782	479	STRAP, butt, sponson, upper rear	(2)	.28
*				M2788	475	STRAP, butt, sponson vertical, front, left	(1)	2.38
*				M2787	475	STRAP, butt, sponson vertical, front, right	(1)	2.38
*				M2781B	479	STRAP, butt, sponson vertical, rear, left	(1)	4.60
*				M2781A	479	STRAP, butt, sponson vertical, rear, right	(1)	4.60
*				M2786B	479	STRAP, butt, sponson vertical, left (lower rear)	(1)	1.08
*				M2786A	479	STRAP, butt, sponson vertical, right (lower rear)	(1)	1.08
*				M2789	476	STRAP, butt, sponson vertical, front, left	(1)	2.48
*				M2780	479	STRAP, butt, sponson vertical, intermediate	(2)	3.22
*		7		M2046	335	STRAP, butt, vertical, left side (between engine room plates 1 and 2)	(1)	5.65
*		7		M2177	385	STRAP, butt, vertical, rear	(2)	4.36
*				M2043	336	STRAP, butt, No. 2 and 3 engine room plate, right	(1)	2.80
%X						STRAP, funnel rack, buckle end, assembly	(1)	.20
(Composed of:								
*one A3990 funnel rack STRAP, buckle end (1)								
one ZA1HCADA BUCKLE, barrel roller, 2"								
two — RIVET, belt, copper, No. 10 (.134") x 1/2", with burr.)								
STRAP, funnel rack, plan end, assembly								
(Composed of:								
*one B5900 funnel rack STRAP (cotton webbing) (1)								
one B4024 funnel rack strap ENID,								
nine — RIVET, belt, copper, No. 10 (.134") x 1/2", with burr.)								
%X							(1)	.71
								.30

&			M367	699	STRAP, high speed brake	2	8.20
&					STRAP, hot food container bracket, buckle end, assembly	(1)	.78
&					(Composed of: *one SH239F hot food container bracket STRAP, buckle end (1)		.68
&					one — one ZA1GAABA BUCKLE, barrel roller, 1½", KEEPER, fixed, 1", for 1½" strap.)		
&					STRAP, hot food container bracket, plain end	1	.68
&					STRAP, ignition battery negative plate connecting	4	.16 P
*					STRAP, ignition battery positive plate connecting	4	.16 P
*					STRAP, inner skirting plate rear connecting	(2)	1.84
&					STRAP, outside and inside skirting plates connecting	(6)	1.74
&					STRAP, medical outfit bracket, buckle end, assembly	(1)	.79
&					(Composed of: *one SH365A medical outfit bracket STRAP, buckle end (1)		.74
&					one B6496F BUCKLE, barrel roller, 1¼", STRAP, medical outfit bracket, plain end (lower)	1	1.08
%X					STRAP, Officer's chest fastening	2	.15
*					STRAP, packing (above roller pinion)	(2)	1.00
&					STRAP, spare fan belt holder, buckle end, assembly	(1)	.54
&					(Composed of: *one SH285D spare fan belt holder STRAP, buckle end (1)		.47
&					one B6496F BUCKLE, barrel roller, 1¼", one — KEEPER, fixed, ⅝", for 1¼" strap.)		
&					STRAP, spare fan belt holder, plain end (upper)	1	.52
&					STRAP, starting and lighting battery negative plate connecting	6	.16 P
&					STRAP, starting and lighting battery positive plate connecting	6	.16 P
&					STRAP, water bucket holder, buckle end, assembly	(1)	.58
&					(Composed of: *one SH443C water bucket holder STRAP, buckle end (1)		.50
&					one B6496F BUCKLE, barrel roller, 1¼", one — KEEPER, fixed, ⅝", for 1¼" strap.)		
&					STRAP, water bucket holder, plain end	1	.28
*					STRIP, battery shelf retaining	1	.38
*					STRIP, bottom guide, left (outer left or inner right)	(2)	49.75
&					STRIP, bottom guide, right (inner left or outer right)	(2)	49.75
&					STRIP, drive chain casing angle cleat packing	4	.22
&					STRIP (engine), oil tank fastening	1	.48
&					STRIP (engine), oil tank supporting	1	.85
&					STRIP (engine oil tank), vertical fastening	2	.75

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
*				M2150	522	STRIP, engine room (sliding) door wedging	(2)	\$0.28
&					655	STRIP, felt, 4½" x 24½" x ¼". (For packing M1753M (3).)	3	.20
&					655	STRIP, felt, 4½" x 25" x ¼". (For packing M1753J (1).)	3	.20
&					654	STRIP, felt, 4½" x 35" x ¼". (For packing M1753A (1).)	3	.30
&					655	STRIP, felt, 4½" x 36" x ¼". (For packing M1753H (1).)	3	.30
&					653	STRIP, felt, 4½" x 38" x ¼". (For piece M1753C (1), piece M1753B (1).)	2	.30
&					655	STRIP, felt, 5" x 26½" x ¼". (For packing M1753L (1); packing M1753K (1).)	2	.25
&					655	STRIP, felt, 5" x 30½" x ¼". (For packing M1753L (1); packing M1753K (1).)	2	.30
&					655	STRIP, felt, 5" x 36" x ¼". (For packing M1753L (1); packing M1753K (1).)	2	.35
&					654	STRIP, felt, 9" x 41½" x ¼". (For packing M1753G (1).)	3	.60
*				M1923	530	STRIP (front mud chute side plate), stiffener packing	(2)	.87
*				M1788	536	STRIP, gasoline tank cover plate	(1)	1.23
&			D30521			STRIP, generator field coil insulating	4	.03 P
*				M1005	500	STRIP, inlet louvre packing	(1)	.85
&						STRIP, Officer's map board hinge, assembly	(1)	1.44
					413	(Composed of: *one M2446 Officer's map board hinge STRIP (1)		.48
						two M2158 HINGE, butt, 2" x 4¼", six — RIVET, countersunk head, ¼" x ¾")		
*				M2064	332	STRIP, packing (back floor plate)	(2)	.70
*				M1920	528	STRIP, packing (rear of gasoline tank roof)	(1)	1.70
&					SH574K	STRIP, platform ammunition storage locking	1	.35
&					SH278C	STRIP, radiator cooling fan foot filler	2	.78
&					SH606D	STRIP, radiator reinforcing, left (rear)	1	5.00
&					SH606C	STRIP, radiator reinforcing, right (front)	1	5.00
*				M1915B	526	STRIP (rear roof left plate), tapping, long (under track)	(1)	1.68
*				M1915C	526	STRIP (rear roof left plate), tapping, short (under track)	(1)	.60
*				M1904D	526	STRIP (rear roof right plate), tapping (under track)	(1)	1.35
*				M1904C	526	STRIP (rear roof right plate), tapping, medium (under track)	(1)	1.68
*				M1904B	526	STRIP (rear roof right plate), tapping, short	(1)	.60

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&						PARTS—Continued STUD, crank shaft gear end plug, assembly—Continued. (Composed of: one LQ272A NUT, special, one — PIN, split, 3/32" x 5/8", one LQ166A WASHER, special, 3/8")		
&						STUD, cylinder to crank case, with collar nut, assembly (Composed of: one LQ248A cylinder to crank case NUT, *one LQ247A STUD, special, 3/4" x 1 1/4")	(28)	\$0.25
&						STUD, cylinder to crank case, with plain nut, assembly (Composed of: *one LQ247A STUD, special, 3/4" x 1 1/4" (72) one LQ248A NUT, special, 3/8")	(72)	.19 .25
&			B151			STUD, distributor advance lever attaching, assembly (Composed of: *one D29896 distributor advance lever attaching STUD (4), one D29864 NUT, castle, No. 10—30 x .437" x .218" thick, one — PIN, split, brass, 1/16" x 3/8")	(4)	.09 P
&						STUD, distributor condenser and breaker plate, assembly (Composed of: *one D29595 distributor condenser and breaker plate STUD (2), one D30646 NUT, castle, No. 10—30 x .437" x .406" thick, one — PIN, split, brass, 1/16" x 3/8", one D30060 WASHER, lock, .195" x .453" x .046", one D26503 WASHER, plain, .221" x .468" x .031")	(2)	.09 P
&						STUD, distributor condenser and breaker plate attaching, assembly (Composed of: one D29784 distributor condenser and breaker plate attaching STUD (6), one D29785 distributor condenser and breaker plate stud BUSHING, one D29780 distributor condenser and breaker plate stud SPRING,	(6)	.05 P

&				one — PIN, split, brass, 1/16" x 3/8", two D29777 WASHER, plain, .194" x .375" x .031") STUD, distributor contact arm dismounting, assembly (Composed of: *one D29602 distributor contact arm dismounting STUD (6), one D29596 distributor contact arm dismounting stud insulating BUSH- ING, two D30146 distributor contact arm dismounting stud insulating WASH- ER, one D29494 distributor contact arm dismounting stud NUT.) STUD, distributor cup, assembly	(6)	.20 P
				(Composed of: one D30373 distributor cup insulating WASHER, one D30534 distributor cup SPRING, *one D30536 distributor cup STUD (8), one D30535 distributor cup stud NUT, one — PIN, split, brass, 1/16" x 3/8", one D26503 WASHER, plain, .221" x .468" x .031") STUD, distributor ignition coil and distributor head, with two plain washers, as- sembly	(8)	.06 P
&				(Composed of: *one D29635 distributor ignition coil and distributor head STUD (2), one D29632 distributor ignition coil and distributor head stud INSULA- TOR, one D30274 distributor ignition coil and distributor head stud insulator GASKET, one D29765 distributor ignition coil and distributor head stud insulating WASHER, (large) (.26" x .875" x .062"), one D20791 distributor ignition coil and distributor head stud lock WASHER, one D29917 NUT, castle, 1/4" — 28 x .437" x .281" thick, one — PIN, split, brass, 1/16" x 3/8", two D29662 WASHER, plain, .257" x .5" x .031") STUD, distributor ignition coil and distributor head, assembly	(2)	.23 P
				(Composed of: *one D29635 distributor ignition coil and distributor head STUD (2), one D29632 distributor ignition coil and distributor head stud INSULA- TOR,	(2)	.23 P

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&						PARTS—Continued STUD, distributor ignition coil and distributor head, assembly—Continued. (Composed of: one D30274 distributor ignition coil and distributor head stud insulator GASKET, one D29577 distributor ignition coil and distributor head stud insulator WASHER, (small) (.265" x .562" x .062"), one D29917 NUT, castle, ¼"—28 x .437" x .281" thick, one — PIN, split, brass, 1/16" x ¾", one D21717 WASHER, lock, .256" x .429" x .062", one D29662 WASHER, plain, .257" x .5" x .031".) STUD, distributor resistance unit mounting, assembly		
						(Composed of: *one D29663 distributor resistance unit mounting STUD (2), one D29578 distributor resistance unit mounting stud insulating WASHER, one D29573 NUT, castle, No. 6—32 x .218" x .188" thick, one D25116 WASHER, plain, .147" x .313" x .022", two D29576 WASHER, plain, .144" x .469" x .022".) STUD, engine control bell crank lever, assembly	(2)	\$0.09 P
&						(Composed of: *one SH966G engine control bell crank lever STUD (1) one — NUT, plain, U. S. Std., hexagon, ½".) STUD, generator brush arm mounting (grounded), assembly	(1)	.08 P
		12				(Composed of: *one D30070 generator brush arm mounting STUD, grounded (2), one — PIN, split, brass, 1/16" x ¾".) STUD, generator brush and mounting (long terminal), assembly	(2)	.07 P
&						(Composed of: *one D29811 generator brush arm mounting STUD (long terminal) (1), one D29869 generator brush arm mounting stud EYELET,	(1)	.36 P

&			one D30136 generator brush arm mounting stud insulating BUSHING, one D29868 generator brush arm mounting stud insulating BUSHING, one D29862 generator brush arm mounting stud insulating WASHER, .437" x .75" x .062", one D29917 NUT, castle, 1/4"—28 x .437" x .281" thick, one D29991 NUT, plain, 1/4"—28 x .437" x .125" thick, one — PIN, split, brass, 1/16" x 3/8", one D21717 WASHER, lock, .256" x .429" x .062", one D20915 WASHER, plain, .314" x .625" x .031". STUD, generator brush arm mounting, assembly (Composed of: *one D30135 generator brush arm mounting STUD (1), one D30079 generator brush arm mounting stud insulating BUSHING, one D26715 NUT, plain, No. 10—30 x .437" x .125" thick, one — PIN, split, brass, 1/16" x 3/8", one D20495 WASHER, lock, .195" x .393" x .046".) STUD, generator brush arm spring STUD, generator field coil, long, assembly (Composed of: one D30262 generator field coil long stud BUSHING, *one D29829 generator field coil STUD, long (1), one D30140 generator field coil stud insulating BUSHING, two D30085 generator field coil stud insulating WASHER, one D30313 generator field coil stud spacing COLLAR, one D22616 generator field coil stud WASHER (large), one D29864 NUT, castle, No. 10—30 x .437" x .218" thick, one D26715 NUT, plain, No. 10—30 x .437" x .125" thick, one — PIN, split, brass, 1/16" x 3/8", two D20495 WASHER, lock, .195" x .393" x .046", one D30139 WASHER, plain, .194" x .406" x .031".) STUD, generator field coil, short, assembly (Composed of: *one D30383 generator field coil STUD, short (1), one D30140 generator field coil stud insulating BUSHING, one D30085 generator field coil stud insulating WASHER, one D29864 NUT, castle, No. 10—30 x .437" x .218" thick, one — PIN, split, brass, 1/16" x 3/8", one D20495 WASHER, lock, .195" x .393" x .046".)	(1)	.17 P
	D29855 (D29829)			4 (1)	.01 P .37 P
&					
	D30383			(1)	.20 P

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&			D13890			PARTS—Continued STUD, ignition switch handle, with lever, left, assembly (Composed of: *one D13772 ignition switch handle STUD (2), *one D29752 ignition switch handle stud LEVER (2), one D23745 ignition switch lever SCREW)	(1)	\$0.66 P
						STUD, ignition switch handle, with lever, right, assembly (Composed of: *one D13772 ignition switch handle STUD (2) *one D29752 ignition switch handle stud LEVER (2) one D23745 ignition switch lever SCREW)	(1)	.66 P
						STUD, radiator cooling fan housing spider, assembly (Composed of: *one SH279D radiator cooling fan housing spider STUD (7) one — NUT, plain, U. S. Std., hexagon, 1/2", one — WASHER, lock, 1/2".)	(7)	.18 .46 .21 .18
						STUD, spark and throttle control lever, assembly (Composed of: *one SH964E spark and throttle control lever STUD (2) one — NUT, plain, U. S. Std., hexagon, 3/8", two — NUT, plain, U. S. Std., hexagon, 3/4", one — PIN, steel, 3/16" x 1")	(2)	.90 .78
(ge)& (ge)& (gf)& (gi)& (gj)& %X					LQ483A LQ484A LQ485A LQ486A LQ487A	STUD, special, oversize 1/4" x 1 3/16" STUD, special, oversize 1/4" x 1 17/32" STUD, special, oversize 3/8" x 1 1/4" STUD, special, oversize 3/8" x 1 1/2" STUD, special, oversize 3/8" x 1 15/16" STUD, switch and voltage regulator, assembly (Composed of: one D30385 switch and voltage regulator retaining WASHER, *one D30369 switch and voltage regulator STUD (2),	(ge) (ge) (gf) (gi) (gj) (2)	.04 .04 .05 .19 .05 .16 P

&					one D30360 switch and voltage regulator stud NUT, one D20495 WASHER, lock, .195" x .393" x .046".) STUD, voltage regulator terminal, large, assembly (Composed of: *one D30380 voltage regulator terminal STUD, large (1), one D29917 NUT, castle, ¼" —28 x .437" x .281" thick, one D29991 NUT, plain, ¼" —28 x .437" x .125" thick, one — PIN, split, brass, 1/16" x ⅝", one D21717 WASHER, lock, .256" x .429" x .062".) STUD, voltage regulator terminal, small, assembly (Composed of: *one D30366 voltage regulator terminal STUD, small (2), one D29864 NUT, castle, No. 10-30 x .437" x .218" thick, one D29991 NUT, plain, ¼" —28 x .437" x .125" thick, one — PIN, split, brass, 1/16" x ⅝", one D21717 WASHER, lock, .256" x .429" x .062", one D20495 WASHER, lock, .195" x .393" x .046".) STUD, ¼" x 1 3/16", threaded U. S. Std., 7/16" and S. A. E., 9/16", assembly (Composed of: *one LA88A STUD, ¼" x 1 3/16", threaded U. S. Std. 7/16" and S. A. E. 9/16" (28) one LQ89A NUT, special, S. A. E., ¼", one — PIN, split, 1/16" x ½". For water pump body, assembly (8); crank case, upper half, assembly (12); to secure cam shaft driving shaft upper housing, assembly (4).) STUD, ¼" x 1 9/16", threaded U. S. Std. 7/16" and S. A. E. 9/16", assembly (Composed of: *one LQ196A STUD, ¼" x 1 9/16", threaded U. S. Std. 7/16" and S. A. E. 9/16" (21) one LQ89A NUT, special, S. A. E., ¼", one — PIN, split, 1/16" x ½". For crank case, lower half, assembly (10); crank case, upper half, assembly (3); intake header, assembly (2)) STUD, ¼" x 2½", threaded U. S. Std. 1 15/16" and S. A. E. 9/16", assembly (Composed of: *one LQ229A STUD, ¼" x 2½", threaded U. S. Std. 1 15/16" and S. A. E. 9/16" (4) B13154	(1)	.23 P
&						(2)	.22 P
&	131	13	17	131	132	(28)	.08
							.05
&	3	14				(21)	.07
							.04
&	13154	15				(4)	.13
							.05

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&	1354	15				PARTS—Continued STUD, ¼" x 2½", threaded U. S. Std. 1 5/16" and S. A. E. 9/16", assembly—Con. (Composed of: two LQ89A NUT, special, S. A. E., ¼", two — PIN, split, 1/16" x ½", two LQ113A WASHER, special, ¼". For securing filler LQ214A and plate LQ230A (4).) STUD, 5/16" x 2½", threaded U. S. Std. ½" and S. A. E. ¾", assembly (Composed of: *one LQ301A STUD, 5/16" x 2½", threaded U. S. Std. ½" and S. A. E. ¾" (12) one LQ51A NUT, special, S. A. E., 5/16", one — PIN, split, 1/16" x ¾". For cylinder, assembly (1).) STUD, 5/16" x 4½", threaded U. S. Std. ½" and ¾", assembly (Composed of: one X251 STUD, 5/16" x 4½", threaded U. S. Std. ½" and ¾" (2) one — NUT, plain, U. S. Std., hexagon, 5/16") STUD, 5/16" x 4¾", threaded U. S. Std. ½" and S. A. E. ¾", assembly (Composed of: *one LQ302A STUD, 5/16" x 4¾", threaded U. S. Std. ½" and S. A. E. ¾" (12) one LQ51A NUT, special, S. A. E., 5/16", one — PIN, split, 1/16" x ¾". For housing LQ45A (6).) STUD, ¾" x 1 7/16", threaded U. S. Std. 13/32" and S. A. E. ¾", assembly (Composed of: *one LQ303A STUD, ¾" x 1 7/16", threaded U. S. Std. 13/32" and S. A. E. ¾" (24) one LQ305A NUT, special, S. A. E. ¾", bronze, one — PIN, split, 3/32" x ¾". For securing exhaust manifold (24).)	(12)	\$0.16
								.13
&			301		803		(2)	.14
								.12
&			180				(12)	.17
								.14
&			162				(24)	.21
								.15

&					STUD, $\frac{3}{8}$ " x $1\frac{1}{2}$ ", threaded U. S. Std. $\frac{1}{2}$ ", assembly (Composed of: *one SH194D STUD, $\frac{3}{8}$ " x $1\frac{1}{2}$ ", threaded U. S. Std. $\frac{1}{2}$ " (2) one — NUT, plain, U. S. Std., hexagon, $\frac{3}{8}$ ", one — WASHER, lock, $\frac{3}{8}$ ") STUD, $\frac{3}{8}$ " x $1\frac{1}{2}$ ", threaded S. A. E. 13/32" and 21/32", assembly (Composed of: *one LQ304A STUD, $\frac{3}{8}$ " x $1\frac{1}{2}$ ", threaded S. A. E. 13/32" and 21/32" (24) one LQ198A NUT, special, S. A. E., $\frac{3}{8}$ ", one — PIN, split, 3/32" x $\frac{3}{8}$ ". For header LQ408A (2). STUD, $\frac{3}{8}$ " x $1\frac{1}{16}$ ", threaded U. S. Std. 11/16" and S. A. E. 27/32", assembly (Composed of: *one LQ233A STUD, $\frac{3}{8}$ " x $1\frac{1}{16}$ ", threaded U. S. Std. 11/16" and S. A. E. 27/32" (6) one LQ198A NUT, special, S. A. E., $\frac{3}{8}$ ". For securing governor in lower crank case (3); securing governor in upper crank case (3).) STUD, $\frac{3}{8}$ " x $1\frac{1}{32}$ ", threaded U. S. Std. 21/32" and S. A. E. $\frac{5}{8}$ ", assembly (Composed of: *one LQ197A STUD, $\frac{3}{8}$ " x $1\frac{1}{32}$ ", threaded U. S. Std. 21/32" and S. A. E. $\frac{5}{8}$ " (4) one LQ198A NUT, special, S. A. E., $\frac{3}{8}$ ", one — PIN, split, 3/32" x $\frac{5}{8}$ ", one LQ166A WASHER, special, $\frac{3}{8}$ ". For securing water pump in lower crank case (4).) STUD, $\frac{3}{8}$ " x $4\frac{1}{32}$ ", threaded U. S. Std. 11/16" and S. A. E. $\frac{1}{2}$ ", assembly (Composed of: *one LQ271A STUD, $\frac{3}{8}$ " x $4\frac{1}{32}$ ", threaded U. S. Std. 11/16" and S. A. E. $\frac{1}{2}$ " (5) two — GASKET, copper, asbestos, $\frac{3}{8}$ ", one LQ198A NUT, special, S. A. E., $\frac{3}{8}$ ", one LQ272A NUT, special, S. A. E., $\frac{3}{8}$ ", one — PIN, split, 3/32" x $\frac{5}{8}$ ", one LQ166A WASHER, special, $\frac{3}{8}$ ". For plug LQ265A (2 plug per stud).)	(2)	.10
							.07
&							.22
					B163		.15
&							.08
					B263		.05
&							.10
					140	43 14	.05
&							.41
					B13489		.25

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&			13488			PARTS—Continued STUD, $\frac{3}{8}$ " x 4 17/32", threaded U. S. Std. 11/16" and S. A. E. $\frac{1}{2}$ ", assembly (Composed of: *one LQ270A STUD, $\frac{3}{8}$ " x 4 17/32", threaded U. S. Std. 11/16" and S. A. E. $\frac{1}{2}$ " (6) two — GASKET, copper, asbestos $\frac{3}{8}$ ", one LQ198A NUT, special, S. A. E., $\frac{3}{8}$ ", one LQ272A NUT, special, S. A. E., $\frac{3}{8}$ ", one — PIN, split, 3/32" x $\frac{5}{8}$ ", one LQ166A WASHER, special, $\frac{5}{8}$ ". Used with plug LQ266A (1 for 2 plugs).) STUD, $\frac{1}{2}$ " x 1 11/16", threaded U. S. Std. $\frac{1}{2}$ " and S. A. E. $\frac{7}{8}$ ", assembly (Composed of: *one MX14 STUD, $\frac{1}{2}$ " x 1 11/16", threaded U. S. Std. $\frac{1}{2}$ " and S. A. E. $\frac{7}{8}$ " (4) one — NUT, castle, S. A. E., $\frac{1}{2}$ ", one — PIN, split, 3/32" x 1". For case M263 (4).) STUD, $\frac{1}{2}$ " x 2 17/32", threaded U. S. Std. 1" and S. A. E. $\frac{7}{8}$ ", assembly (Composed of: *one MX25 STUD, $\frac{1}{2}$ " x 2 17/32", threaded U. S. Std. 1" and S. A. E. $\frac{7}{8}$ " (4) one — NUT, castle, S. A. E., 1", one — PIN, split, 3/32" x 1". For housing M250 to cover M264 (2).) STUD, $\frac{1}{2}$ " x 2 $\frac{1}{8}$ ", threaded U. S. Std. 1" and S. A. E. $\frac{7}{8}$ ", assembly (Composed of: *one MX98 STUD, $\frac{1}{2}$ " x 2 $\frac{1}{8}$ ", threaded U. S. Std. 1" and S. A. E. $\frac{7}{8}$ " (2) one — NUT, castle, S. A. E., $\frac{1}{2}$ ", one — PIN, split, 3/32" x 1". For air pressure pump (2).)	(6)	\$0.41
								.25
&				711			(4)	.14
								.10
&				711			(4)	.35
								.31
&				711			(2)	.37
								.33

&					711	STUD, $\frac{1}{2}$ " x $3\frac{7}{8}$ ", threaded U. S. Std. 13/16" and S. A. E. $\frac{7}{8}$ ", assembly (Composed of: *one MX12 STUD, $\frac{1}{2}$ " x $3\frac{7}{8}$ ", threaded U. S. Std. 13/16" and S. A. E. $\frac{7}{8}$ " (2) one — NUT, castle, S. A. E., $\frac{1}{2}$ ", one — PIN, split, 3/32" x 1". For securing bearing M306 to case M263.) STUD, $\frac{5}{8}$ " x $2\frac{1}{4}$ ", threaded U. S. Std. 1" and S. A. E. 1", assembly (Composed of: *one A7681 STUD, $\frac{5}{8}$ " x $2\frac{1}{4}$ ", threaded U. S. Std. 1" and S. A. E. 1" (2) one — NUT, castle, S. A. E., $\frac{5}{8}$ ", one — PIN, split, $\frac{1}{8}$ " x $1\frac{1}{4}$ ". For securing cap A7679 to bracket B6205.) STUD, $\frac{3}{4}$ " x $3\frac{3}{8}$ ", threaded U. S. Std. $1\frac{1}{2}$ " and S. A. E. $1\frac{1}{8}$ ", assembly (Composed of: *one MX9 STUD, $\frac{3}{4}$ " x $3\frac{3}{8}$ ", threaded U. S. Std. $1\frac{1}{2}$ " and S. A. E. $1\frac{1}{8}$ " (8) one — NUT, castle, S. A. E., $\frac{3}{4}$ ", one — PIN, split, $\frac{1}{8}$ " x $1\frac{1}{8}$ ". For bracket M297 (4).) STUD, $\frac{3}{4}$ " x $4\frac{7}{8}$ ", threaded U. S. Std. $1\frac{1}{2}$ " and S. A. E. $1\frac{1}{8}$ ", assembly (Composed of: *one MX10 STUD, $\frac{3}{4}$ " x $4\frac{7}{8}$ ", threaded U. S. Std. $1\frac{1}{2}$ " and S. A. E. $1\frac{1}{8}$ " (4) one — NUT, castle, S. A. E., $\frac{3}{4}$ ", one — PIN, split, $\frac{1}{8}$ " x $1\frac{1}{8}$ ". For bracket M293 (2).) STUD, $\frac{3}{4}$ " x $5\frac{1}{2}$ ", threaded U. S. Std. $1\frac{1}{2}$ " and S. A. E. $1\frac{1}{8}$ ", assembly (Composed of: *one MX36 STUD, $\frac{3}{4}$ " x $5\frac{1}{2}$ ", threaded U. S. Std. $1\frac{1}{2}$ " and S. A. E. $1\frac{1}{8}$ " (4) one — NUT, castle, S. A. E., $\frac{3}{4}$ ", one — PIN, split, $\frac{1}{8}$ " x $1\frac{1}{8}$ ". For bracket M293 (2).) STUD, $\frac{3}{4}$ " x $5\frac{5}{8}$ ", threaded U. S. Std. $1\frac{1}{2}$ " and S. A. E. $1\frac{1}{8}$ ", assembly (Composed of: *one MX5 STUD, $\frac{3}{4}$ " x $5\frac{5}{8}$ ", threaded U. S. Std. $1\frac{1}{2}$ " and S. A. E. $1\frac{1}{8}$ " (4) one — NUT, castle, S. A. E., $\frac{3}{4}$ ",	(2)	.41
						one —		.37
&							(2)	.36
								.31
&					711		(8)	.45
								.40
&							(4)	.50
					711		(4)	.45
&							(4)	.55
					711		(4)	.50
&							(4)	.55
					711			.50

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
& & & &						PARTS—Continued		
						STUD, 3/4" x 5 5/8", threaded U. S. Std. 1 1/2" and S. A. E. 1 1/8", assembly—Contd. (Composed of: one — PIN, split, 1/4" x 1 3/8". For case M263 (4).)		
			B180		SH992D	SUPPORT, battery shelf SUPPORT, driver's switch SUPPORT, engine, assembly (Composed of: one M184 engine double point suspension BRACKET, one M182 engine double point suspension BRACKET, left, one M183 engine double point suspension BRACKET, right, one M187 engine single point suspension PACKING, two M188 engine single point suspension PACKING, four M190 engine suspension bevel WASHER, one M179 engine suspension longitudinal SUPPORT, left, one M178 engine suspension longitudinal SUPPORT, right, one — engine transverse CHANNEL, front, assembly, one — engine transverse CHANNEL, rear, assembly, ten — BOLT, U. S. Std., hexagon head, 1/2" x 1 3/4", with plain nut and lock washer, four — BOLT, U. S. Std., hexagon head, 3/4" x 2 1/2", with plain nut and lock washer, one — BOLT, U. S. Std., hexagon head, 3/4" x 2 1/2", with plain nut and lock washer, two — SCREW, cap. U. S. Std., hexagon head, 1/2" x 1 1/2", two — WASHER, lock, 1/2")	1 1 (1)	\$1.36 .72 42.45
						SUPPORT, engine suspension longitudinal, left SUPPORT, engine suspension longitudinal, right SUPPORT, floor, inner, left (inside skirting plate) SUPPORT, floor, inner, right (inside skirting plate)	1 1 (1) (1)	4.07 4.07 35.65 35.65

				SUPPORT, floor, outer, left (inside skirting plate)	(1)	29.60
				SUPPORT, floor, outer, right (inside skirting plate)	(1)	29.60
				SUPPORT, gasoline tank cover	2	.48
	B5930			SUPPORT (machine gun) cleaning rod	1	.85
				SUPPORT, machine gunner's strut	2	.65
	B181			SUPPORT, mechanic's switch	1	.38
				SUPPORT, periscope spring clip		
	M2820			SUPPORT, radiator, rear, No. 1	4	.24
	M898			SUPPORT, radiator, rear, No. 2	1	.78
	M899			SUPPORT (radiator) outlet pipe	1	.78
				SUPPORT, regulating tank	1	.77
				SUPPORT, regulating tank relief valve	2	.78
				SUPPORT, spare barrel (left sponson)	1	.40
				SUPPORT, spare barrel (main hull)	1	.38
				SUPPORT, spare parts container	4	.25
				SUPPORT, spouson seat	2	.08
				SUPPORT, switch panel box	2	.62
	M2819			SUPPORT, tachometer	1	1.00
			C69	SUPPORT, tank commander's switch	1	.98
				SWITCH, driver's telephone (complete)	1	.90
				SWITCH, gunner's telephone (complete)	1	7.50 P
				SWITCH, ignition, assembly	2	6.00 P
			D1120	(Composed of:	(1)	9.00 P
				one D30370 ignition switch ammeter terminal CONNECTOR (left),		
				one D30620 ignition switch ammeter terminal connector SCREW,		
				one D13741 ignition switch BASE, assembly,		
				one D30052 ignition switch contact INSULATOR,		
				one D13817 ignition switch COVER, with ammeter, assembly,		
				one D30168 ignition switch cover plate SCREW (center),		
				two D30169 ignition switch cover SCREW (side),		
				two D30056 ignition switch handle contact ARM, left (lower), assembly,		
				two D30053 ignition switch handle contact ARM, left (upper), assembly,		
				two D30054 ignition switch handle contact ARM, right, assembly,		
				one D13890 ignition switch handle STUD, with lever, left, assembly,		
				one D13889 ignition switch handle STUD, with lever, right, assembly,		
				two D30808 ignition switch resistance stud plain WASHER,		
				one D13780 ignition switch resistance UNIT, left, assembly,		
				one D13743 ignition switch resistance UNIT, right, assembly,		

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
%X			D1120			PARTS—Continued SWITCH, ignition, assembly—Continued. (Composed of: one D30057 ignition switch terminal CONNECTOR (between anne- ter and contact stud), one D30055 ignition switch terminal CONNECTOR (between contact stud), one D30363 ignition switch terminal PLATE, nine D29864 NUT, castle, No. 10—30 x .437" x .218" thick, seven — PIN, split, brass, 1/16" x 3/8", two — PIN, split, brass, 1/16" x 3/8", one D26948 SCREW, slotted head, No. 6—38 x 1/4", one D27132 WASHER, lock, .140" x 5/16" x .031", nine D20495 WASHER, lock, .195" x .393" x .046".) SWITCH, mechanic's telephone (complete) SWITCH, panel box (telephone) (complete) SWITCH, starting (Bijur Co. type T461) SWITCH, surface toggle, assembly (Composed of: *one A16054 surface toggle SWITCH, two — SCREW, machine, round head, No. 8 (5/32")—30 x 1", with machine screw nut and plain washer.) SWITCH, surface toggle, with base, assembly (Composed of: one — surface toggle switch BASE, assembly, three — surface toggle SWITCH, assembly, one A6578 surface toggle switch plug SOCKET.) SWITCH, tank commander's telephone (complete) TACHOMETER, (Johns-Manville Co. type) TANK, engine oil, assembly (Composed of:	1 1 1 (3)	\$7.50 P 10.00 P 4.00 P
(gy)& (gy)& %(gy)X &			C64 C63	SH81A				
%X			C5261				(1)	
(gy)X %(gy)X (gb)&			C67	A&B	SH585D		1 1 (1)	9.00 P 28.50 P 43.18

19	*one M3292 engine oil tank BODY (1) ----- one SH978S engine oil tank BUSHING, (bottom), ----- one M3301 engine oil tank delivery PIPE, ----- one M3294 engine oil tank filler CAP, ----- one M3295 engine oil tank filler cap GASKET, ----- one SH978N engine oil tank filler flange PLUG, ----- one SH978M engine oil tank filler plug FLANGE, ----- one M3293 engine oil tank filling cover FLANGE, ----- one — engine oil tank FILTER, assembly, ----- one M3305B engine oil tank indicator flange CAP, ----- one M3307 engine oil tank indicator float TUBE, ----- two M3315 engine oil tank suction and delivery FLANGE, ----- four M3310 engine oil tank support CLEAT, ----- one M3304 indicator FLANGE, ----- *one M3311 FLANGE, drain cock (2) ----- one Q52B PLUG, pipe, square head, $\frac{1}{4}$" ----- one Q52D PLUG, pipe, square head, $\frac{1}{4}$" ----- one Q52E PLUG, pipe, square head, $\frac{3}{4}$" ----- twenty-four — RIVET, button head, $\frac{1}{4}$" x $\frac{3}{4}$", ----- eighteen — RIVET, button head, $\frac{1}{4}$" x $\frac{1}{2}$", ----- twelve — RIVET, button head, $\frac{1}{4}$" x 1" ----- TANK, gasoline, assembly ----- (Composed of: ----- *one M1755 gasoline TANK (3) ----- one E152/21255 gasoline tank drain PLUG, ----- one M1757 gasoline tank drain plug FLANGE, ----- one — gasoline tank filler cap FLANGE, assembly, ----- *one M1756 gasoline tank filler cap flange stiffening RING (inside tank) (3) ----- *one M1761 gasoline tank filler cap flange stiffening RING (3) ----- one M1766 gasoline tank filler flange JOINT, ----- one — gasoline tank STRAINER, assembly, ----- one B153/21256 gasoline tank strainer CAP, ----- one M1758 gasoline tank strainer drain plug WASHER, ----- one D153/21256 gasoline tank strainer flange WASHER, ----- one M1765 gasoline tank suction PIPE, ----- six — RIVET, button head, $\frac{1}{4}$" x $\frac{1}{2}$" ----- eight — RIVET, button head, $\frac{3}{8}$" x $1\frac{1}{2}$", ----- eight — SCREW, cap. U. S. Std., hexagon head, $\frac{3}{8}$" x $\frac{3}{4}$", -----	26.66
165		.49
238	8 1	90.24
235		.85
235		1.50

TANK, MARK VIII

246

	one SH104G transmission mechanical lubricator cover GASKET, one SH101H transmission mechanical lubricator drive SHAFT, one — transmission mechanical lubricator oil TANK, assembly, one SH102A transmission mechanical lubricator PULLEY, one SH102K transmission mechanical lubricator shaft stop COLLAR (large), one SH101F transmission mechanical lubricator shaft stop COLLAR (small), one — transmission mechanical lubricator sight feed HOOD, assembly, one SH104A transmission mechanical lubricator stuffing box GASKET, one SH101D transmission mechanical lubricator stuffing box gland NUT, one SH102C transmission mechanical lubricator tank stuffing BOX, one SH103C transmission mechanical lubricator tank stuffing box GLAND, one SH103D transmission mechanical lubricator WORM, one — COCK, drain, ½", tee handle, one — KEY, Woodruff, No. 2, one — PIN, taper, type A, No. 0 x ⅝", two — SCREW, machine, round head, No. 8—30 x 3/16", twelve — SCREW, machine, round head, No. 8—30 x 5/16", six — SCREW, machine, round head, No. 8—30 x ⅜", one — SCREW, set, square head, cup point, ¼" x ¼", one — SCREW, set, square head, cup point, ¼" x ⅜", one — SCREW, set, square head, cup point, ¼" x ⅝") TANK, transmission mechanical lubricator oil, assembly (Composed of: *one M3311 drain cock FLANGE (1) one M3304 indicator FLANGE, *two SH558D oil tank reinforcing PLATE one M3305A transmission mechanical lubricator oil indicator flange CAP, *one SH559A transmission mechanical lubricator oil tank BODY (1) *one SH558B transmission mechanical lubricator oil tank BOTTOM (1) *one SH558C transmission mechanical lubricator oil tank bracket BRACE (1) *one SH558A transmission mechanical lubricator oil tank COVER (1)
--	--

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&						PARTS—Continued		
						TANK, transmission mechanical lubricator oil, assembly—Continued. (Composed of: *one SH559B transmission mechanical lubricator oil tank reinforcing FRAME, top.)		\$1.25
						TANK, water, assembly	(1)	24.03
&						(Composed of: one M1195 radiator pipe FLANGE, *one M1193 water TANK (1)		18.00
		24		175		one M1194 water tank filler pipe FLANGE, *one M1196 water tank flow pipe flange stiffening PLATE (1)		.85
				167		one M1231 water tank outlet CONNECTION, one M1240 water tank outlet pipe GASKET, eight — RIVET, button head, 5/16" x 1", four — RIVET, button head, 5/16" x 1½", three — RIVET, button head, ¾" x 1¼",)		
%X						TAPPET, cam shaft rocker lever, assembly	(24)	.39 P
			8085			(Composed of: *one LQ67A cam shaft locker lever TAPPET (24)		.35
						one LQ51A NUT, special, S. A. E., 5/16", one — PIN, split, 1/16" x ¾",)		
%&(pf)R				Q51DB		TEE, plain, ¼" pipe thread (M. I.). (For tube C8012 (1).)	3	.04 P
						TEE, M. I., beaded, ¾" x ¾" x ½". (For regulating tank flexible tube con- nection (1).)		
						TEE, M. I., beaded, 1". (For pipe M1229 (1).)	1	.07 P
%X				Q51UB B101971A		TEE, soldering, ¼" brass. (For tube C8013 (2).)	1	.18 P
				B101963A		TEE, ½"—24 with ½"—27 pipe thread. (For tubes C8014A, C8014B, and C8014C.)	2	.33 P
		24		SH975A		TEE, radiator outlet	3	.40 P
&(pf)R						TEE, reducing, M. I., beaded, ¾" x ¼" x ¼". (For combination valve to flexible tube connection (1).)	1	3.25 P
						TEE, reducing, M. I., beaded, ½" x ¾" x ¼". (For combination valve to flexible tube connection (1).)	1	.04 P
						tee connection (1).)	1	.05 P

&(pf)R & & &(ee)R	LQ381A LQ380A B7028J		TEE, reducing, M. I., beaded, 1" x 3/4" x 1". (For pipe M1229 (1).)	1	.09 P
			TERMINAL, battery, negative. (For ignition battery cable, Willard No. Q179).	1	.05 P
			TERMINAL, battery, positive. (For ignition battery cable, Willard No. Q178).	1	.05 P
			TERMINAL, cable. (For starting motor to starting switch cable (2); starting motor to battery negative terminal cover cable (2); starting switch to starting battery positive terminal cover cable (2); three ground wires cable (1); starting and lighting battery positive terminal cable (1); starting and lighting battery negative terminal cable (1).)	11	.08 P
&(ee)R	LQ328A	D13698 8332	TERMINAL, cable, S. A. E., A5. (For starting battery to fuze box (2); starting battery positive to ground (1); 12-volt ammeter to battery, negative (1).)	6	.05 P
			TERMINAL, distributor head high tension, assembly	24	.08 P
&	LQ329A	8397	TERMINAL, high-tension cable (distributor end) (seamless tubing, O. D. 1/8", length 1 9/16". (For cable LQ328A (1); cable LQ360A (1); cable LQ332A (1); cable LQ334A (1); cable LQ336A (1); cable LQ338A (1); cable LQ342A (1); cable LQ340A (1); cable LQ346A (1); cable LQ344A (1); cable LQ350A (1); cable LQ348A (1); cable LQ352A (1); cable LQ354A (1); cable LQ356A (1); cable LQ362A (1); cable LQ366A (1); cable LQ364A (1); cable LQ370A (1); cable LQ368A (1); cable LQ374A (1); cable LQ372A (1); cable LQ378A (1); cable LQ376A (1).)	24	.01 P
			TERMINAL, high-tension cable (spark plug end) (1/8" x 1 23/32" snap type.) (For cable SH1021N (1); cable SH1021M (1); cable SH102L (1); cable LQ358A (1); cable LQ360A (1); cable LQ332A (1); cable LQ334A (1); cable LQ336A (1); cable LQ338A (1); cable LQ342A (1); cable LQ340A (1); cable LQ346A (1); cable LQ344A (1); cable LQ350A (1); cable LQ348A (1); cable LQ352A (1); cable LQ354A (1); cable LQ356A (1); cable LQ362A (1); cable LQ366A (1); cable LQ364A (1); cable LQ370A (1); cable LQ368A (1); cable LQ374A (1); cable LQ372A (1); cable LQ378A (1); cable LQ376A (1).)	48	.10 P
% (ee)R			TERMINAL, low-tension cable, with threaded ferrule, 3/16" hole. (For distributor to ignition switch cable, left (2); distributor to ignition switch cable, right (2); 12-volt regulator cable (1); 8-volt regulator to ground terminal cable (1); 12-volt ammeter to battery negative cable (1); 8-volt generator field to 8-volt regulator field cable (2); ignition battery positive to ignition switch cable (1); starting battery to fuze-box cable (2); fuze box to lighting-switch cable (2); 8-volt generator voltage regulator armature terminal to ignition switch (1); lead A266 (2).)	28	.05 P
			TERMINAL, low-tension cable, with threaded ferrule, 1/4" hole. (For 8-volt generator armature to 8-volt regulator armature cable (2); 8-volt generator voltage regulator armature terminal to ignition switch (1).)	3	.05 P
&	D30565		THROWER, distributor shaft oil	2	.45 P

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
%X						PARTS—Continued THROWOUT, clutch, assembly (Composed of: one SH953C clutch throwout auxiliary operating SHAFT, one — clutch throwout auxiliary ROD, rear, assembly, four SH943C clutch throwout ball bearing WASHER, two SH943B clutch throwout bearing retainer WASHER, one M4153 clutch throwout bell crank carrier PLATE, one — clutch throwout bell crank PIN, assembly, one M4162 clutch throwout LEVER, left, one M4163 clutch throwout LEVER, right, five M4172 clutch throwout lever feather KEY, two — clutch throwout lever PIN, assembly, two — clutch throwout lever pin locking set SCREW, assembly, one M4164 clutch throwout operating LEVER, one M4150 clutch throwout SHAFT, one M4148 clutch throwout shaft BRACKET, one — clutch throwout shaft BRACKET, (left), assembly, one — clutch throwout stop BAND, assembly, one — clutch throwout stop band PIN, assembly, one SH87A clutch throwout stop bell CRANK, one — clutch throwout stop ROD, assembly, one — clutch throwout stop rod EYEBOLT, assembly, one — clutch throwout stop rod PIN, assembly, one SH955C clutch throwout stop SPRING, two SH953E control rod fork END, two (SH953F) fork end PIN, assembly, two SKF1207 BEARING, ball, radial, dia. 2.8346", bore 1.378", height .6693", one — PIN, split, 5/32" x 1", one — SCREW, set, square head, cup point, 5/8" x 7/8".)		\$78.32

&	SH104D	TOP, transmission mechanical lubricator suction tube screen	6	.06
		TRACK, sponson roller, left, assembly	(1)	6.06
&	522	(Composed of:		
	522	*one M1944B sponson roller TRACK, left (1)		3.15
&	522	*one M1946B sponson roller track CLEAT, center, left (1)		.95
	522	*one M1945B sponson roller track CLEAT, inside, left		.95
&	522	*one M1947 sponson roller track CLEAT, outside (2)		.95
		six — RIVET, button head, 11/16" x 2 3/8")		
&		TRACK, sponson roller, right, assembly	(1)	6.06 P
		(Composed of:		
&	522	*one M1944A sponson roller TRACK, right (1)		3.15
	522	*one M1946A sponson roller track CLEAT, center, right (1)		.95
&	522	*one M1945A sponson roller track CLEAT, inside, right (1)		.95
	522	*one M1947 sponson roller track CLEAT, outside (2)		.95
(gq)&		six — RIVET, button head, 11/16" x 2 3/8")		
		TRANSMISSION, assembly	(1)	3,649.77
(gq)&		(Composed of:		
		one MX101 air pressure pump BRACKET, left,		
(gq)&		one MX100 air pressure pump BRACKET, right,		
		two (Fafnir BEARING, ball, single thrust, dia. 6.1024", bore 4.1339",		
(gq)&		two 1821 } height 1.5748",		
		four M337 brake band suspension LINK,		
(gq)&		two (M363) high speed brake anchor PIN, assembly,		
		two — high speed brake BAND, long, assembly,		
(gq)&		two — high speed brake BAND, short, assembly,		
		four M356 high speed free end brake band PIN,		
(gq)&		six M272 large planet pinion BUSHING, bronze,		
		six M283 large planet pinion BUSHING, steel,		
(gq)&		two M286 large planet pinion DISK,		
		six (M284) large planet pinion PIN, assembly,		
(gq)&		two M285 large planet pinion RING,		
		six (M318) large planet pinion ring BOLT, assembly,		
(gq)&		two M348 low speed brake anchor PIN,		
		one — low speed brake BAND, lower half, left, assembly,		
(gq)&		one — low speed brake BAND, lower half, right, assembly,		
		one — low speed brake BAND, upper half, left, assembly,		
(gq)&		one — low speed brake BAND, upper half, right, assembly,		
		eight (M336) low speed free end brake PIN, assembly,		
(gq)&		two M339 low speed and track brake suspension PIN, assembly		

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
(gq)&						PARTS—Continued TRANSMISSION, assembly—Continued. (Composed of: - six M280 planet PINION, large, - six M270 planet PINION, small, - six M290 retaining RING, - six M282 small planet pinion BUSHING, bronze, - six M271 small planet pinion BUSHING, steel, - six (M274) small planet pinion PIN, assembly, - two M273 small planet pinion RING, - six (M317) small planet pinion ring BOLT, assembly, - two (MX12) STUD, 1/2" x 3/8", threaded U. S. Std. 13/16" and S. A. E. 1/4", assembly, - two M353 track brake anchor PIN, - one — track brake BAND, lower half, left, assembly, - one — track brake BAND, lower half, right, assembly, - one — track brake BAND, upper half, left, assembly, - one — track brake BAND, upper half, right, assembly, - two M292 track brake DRUM, - two — transmission bevel GEAR, assembly, - one — transmission bevel gear case COVER, assembly, - fourteen — transmission bevel gear case cover to case BOLT, assembly, - two M326 transmission bevel gear case GASKET, - two M260 transmission bevel gear SHIM, laminated, - sixteen M254 transmission bevel gear SHIM, - four M332 transmission brake adjusting NUT, - four M335 transmission brake adjusting SPRING, - four SH687A transmission brake adjusting spring SPACER, - four M331 transmission brake adjusting swivel PIN, - ten MX60 transmission brake anchor bracket and stop SCREW, - four MX76 transmission brake to anchor bracket SCREW.		

four M333 transmission brake band adjusting SCREW,
 twelve MX38 transmission brake band anchor to end SCREW,
 two — transmission brake band stop BRACKET, assembly,
 four — transmission brake band stop SCREW, assembly,
 two M265 transmission brake bearing BUSHING,
 two — transmission brake bearing CAP, assembly,
 four M330 transmission brake LEVER,
 four (MX88) transmission brake stop bar set SCREW, assembly,
 two M291 transmission chain sprocket PINION,
 one M255 transmission cross SHAFT,
 two M256 transmission cross shaft retaining RING,
 two M262 transmission flanged sleeve BUSHING, outer,
 two M310 transmission flanged sleeve outer bushing oil RETAINER,
 one — transmission FRAME, with brackets and caps, assembly,
 two M278 transmission gear CASE, brake drum half,
 two M277 transmission gear CASE, plain half,
 thirty-two — transmission gear case to brake BOLT, assembly,
 four M315 transmission gear case GASKET,
 one M311B transmission gear case oil filling PLUG, bronze,
 two M311A transmission gear case oil filling PLUG, C. I.,
 three M316 transmission (gear case) oil filling plug GASKET,
 two M365 transmission high speed brake band CLIP,
 two M357 transmission high speed brake adjusting NUT,
 two M358 transmission high speed brake adjusting SCREW,
 two M369 transmission high speed brake adjusting SPRING,
 two MX78A transmission high speed brake adjusting spring WASHER,
 I. D. 11/16",
 two MX78B transmission high speed brake adjusting spring WASHER,
 I. D. 13/16",
 two M362 transmission high speed brake anchor BRACKET,
 two M366 transmission high speed brake band bottom STOP,
 two M398 transmission high speed brake band STOP,
 two M399 transmission high speed brake band top STOP,
 two M269 transmission high speed brake DRUM,
 two — transmission high speed brake LEVER, assembly,
 six — transmission high speed brake stop set SCREW, assembly,
 one — transmission pinion shaft bearing HOUSING, assembly,
 two M288 transmission planet disk WASHER,
 one M301 transmission shifter FORK,

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
(gq)&						PARTS—Continued TRANSMISSION, assembly—Continued. (Composed of: one — transmission shifter fork SHAFT, assembly, one M257A transmission shifter GEAR, one M307 transmission shifter shaft detent PLUNGER, one M309 transmission shifter shaft plunger CAP, two — transmission sprocket bearing BUSHING, inside, assem- bly, two — transmission sprocket bearing BUSHING, outside, assem- bly, two M289 transmission sprocket SHAFT, two M279 transmission spur RING, large, two — transmission spur RING, small, assembly, two M287 transmission sun PINION, large, two — transmission sun PINION, small, assembly, one — transmission vertical shifter SHAFT, two M306 transmission vertical shifter shaft BEARING, two (MX11) transmission vertical shifter shaft bearing to bevel-gear case BOLT, assembly. two Q52PA COUPLING, pipe, 1/8", two — CUP, grease, No. 0 x 1/4", one — CUP, grease, No. 4 x 1/2", one Q51QD ELBOW, M. I., 45°, beaded, 1/2", one — NIPPLE, pipe, W. I., close, 1/2" x 1 3/4", two SH671A PIPE, W. I., 1/8" x 7", one M308 SPRING, wire, O. D. 11/16", length 1 1/2", twelve — WASHER, lock, 3/8", four — WASHER, lock, 1/2", ten — WASHER, lock, 5/8".) TRIGGER, hand lever. (For lever M738A (1), lever M738B (1), lever M177 (1).) -----	3	\$0.58
&				M739	228			

%X	6	8	M3122	428 SH981C	TRUNNION, hemispherical turret TUBE, air, combination valve to center gasoline tank, assembly (Composed of: two B101910A ADAPTER, ½" —14 pipe thread, with ½" —14 male pipe thread end, two B5932C COUPLING, soldering, ½" —14 pipe thread, *one B101911A flexible metal TUBING, w/braid, ½" I. D. x 10½")	6 (1)	.72 2.70 P
					TUBE, air, combination valve to left gasoline tank, assembly (Composed of: two B101910A ADAPTER, ½" —14 pipe thread, with ½" —14 male pipe thread end, two B5932C COUPLING, soldering, ½" —14 pipe thread, *one B101911B flexible metal TUBING, w/braid, ½" I. D. x 25")		
					TUBE, air, combination valve to right gasoline tank, assembly (Composed of: two B101910A ADAPTER, ½" —14 pipe thread, with ½" —14 male pipe thread end, two B5932C COUPLING, soldering, ½" —14 pipe thread, *one B101911C flexible metal TUBING, w/braid, ½" I. D. x 33¾")		
%X	5	8		SH981A	TUBE, air, combination valve to tee, assembly (Composed of: two B101910A ADAPTER, ½" —14 pipe thread, with ½" —14 male pipe thread end, two B5932C COUPLING, soldering, ½" —14 pipe thread, *one B101911C flexible metal TUBING, w/braid, ½" I. D. x 25½")	(1)	1.60 3.95 P
					TUBE, air, combination valve to tee, assembly (Composed of: two B101910A ADAPTER, 9/16" —24 S. A. E., with ¼" —18 male pipe thread end, two B101911L flexible metal TUBING, w/braid, ¼" I. D. x 25½")		
					TUBE, air, gages to hand pressure pump, assembly (Composed of: one B101972A ADAPTER, ½" —24 S. A. E., with ¼" —27 male pipe thread end, four B101966B GLAND, soldering, 5/16" O. D. x ½" over all (brass), one Q52PA pipe COUPLING, ½", WL, three B101964A soldering COCK, ¼" (brass), two B101971A soldering TEE, ¼" (brass), *one B101960A TUBING, copper, ¼" O. D. x ¾" *one B101960B TUBING, copper, ¼" O. D. x 2" *one B101960C TUBING, copper, ¼" O. D. x 4" *one B101960D TUBING, copper, ¼" O. D. x 11" *one B101960E TUBING, copper, ¼" O. D. x 12"		
%X	17	8		C8013	TUBE, air, gages to hand pressure pump, assembly (Composed of: one B101972A ADAPTER, ½" —24 S. A. E., with ¼" —27 male pipe thread end, four B101966B GLAND, soldering, 5/16" O. D. x ½" over all (brass), one Q52PA pipe COUPLING, ½", WL, three B101964A soldering COCK, ¼" (brass), two B101971A soldering TEE, ¼" (brass), *one B101960A TUBING, copper, ¼" O. D. x ¾" *one B101960B TUBING, copper, ¼" O. D. x 2" *one B101960C TUBING, copper, ¼" O. D. x 4" *one B101960D TUBING, copper, ¼" O. D. x 11" *one B101960E TUBING, copper, ¼" O. D. x 12"	(1)	1.00 5.35 P
					TUBE, air, gages to hand pressure pump, assembly (Composed of: one B101972A ADAPTER, ½" —24 S. A. E., with ¼" —27 male pipe thread end, four B101966B GLAND, soldering, 5/16" O. D. x ½" over all (brass), one Q52PA pipe COUPLING, ½", WL, three B101964A soldering COCK, ¼" (brass), two B101971A soldering TEE, ¼" (brass), *one B101960A TUBING, copper, ¼" O. D. x ¾" *one B101960B TUBING, copper, ¼" O. D. x 2" *one B101960C TUBING, copper, ¼" O. D. x 4" *one B101960D TUBING, copper, ¼" O. D. x 11" *one B101960E TUBING, copper, ¼" O. D. x 12"		
					TUBE, air, gages to hand pressure pump, assembly (Composed of: one B101972A ADAPTER, ½" —24 S. A. E., with ¼" —27 male pipe thread end, four B101966B GLAND, soldering, 5/16" O. D. x ½" over all (brass), one Q52PA pipe COUPLING, ½", WL, three B101964A soldering COCK, ¼" (brass), two B101971A soldering TEE, ¼" (brass), *one B101960A TUBING, copper, ¼" O. D. x ¾" *one B101960B TUBING, copper, ¼" O. D. x 2" *one B101960C TUBING, copper, ¼" O. D. x 4" *one B101960D TUBING, copper, ¼" O. D. x 11" *one B101960E TUBING, copper, ¼" O. D. x 12"		

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
%X	17	8				PARTS—Continued TUBE, air, gages to hand pressure pump, assembly—Continued. (Composed of: *one B101960G TUBING, copper, ¼" O. D. x 15" *one B101960H TUBING, copper, ¼" O. D. x 18" four B101965B UNION (brass) 29/64"—28.)		\$0.20 .24
	20	8		C8011		TUBE, air, pressure pump to regulating tank, assembly (Composed of: two B101972B ADAPTER, 9/16"—24 S. A. E., with ¼"—18 male pipe thread end, one B101363A COUPLING, soldering, 9/16"—24 S. A. E., one B101364A COUPLING, soldering elbow, 9/16"—24 S. A. E. (brass), *one B101911P flexible metal TUBING, w/braid, ¼" I. D. x 88.25".)	(1)	3.90 P
	18	8		SH981E		TUBE, air, pressure pump to tee, assembly (Composed of: two B101972B ADAPTER, 9/16"—24 S. A. E., with ¼"—18 male pipe thread end, two B101363A COUPLING, soldering, 9/16"—24 S. A. E., *one B101911M flexible metal TUBING, w/braid, ¼" I. D. x 26.5".)	(2)	2.50 2.05 P
%X	19	8		SH981F		TUBE, air, pressure pump to tee, assembly (Composed of: two B101972B ADAPTER, 9/16"—24 S. A. E., with ¼"—18 male pipe thread end, one B101363A COUPLING, soldering, 9/16"—24 S. A. E., one B101364A COUPLING, soldering elbow, 9/16"—24 S. A. E. (brass), *one B101911N flexible metal TUBING, w/braid, ¼" I. D. x 30" long.)	(1)	.85 2.30
	21	8		C8016		TUBE, air, regulating tank to pressure gage, front half, assembly (Composed of: one B101972A ADAPTER, ½"—24 S. A. E., with ¼"—27 male pipe thread end, *one B101960Q copper TUBING, ¼" O. D. x 15½"	(1)	.90 1.40
								.25

%X	22	8	C8015	one Q51CC ELBOW, plain, 1/8" pipe (M. L.), two B101966B GLAND, soldering, 5/16" O. D. x 1/2" over all, two B101965B UNION, 29/64"—28.) (Composed of: one B101972A ADAPTER, 1/2"—24 S. A. E., with 1/8"—27 male pipe thread end, one — air COCK, 1/8" pipe thread, one B6495X BUSHING, pipe, 1/4" x 1/8" (M. L.), *one B101960S copper TUBING, 1/4" O. D. x 96", one B101958A COUPLING, soldering, 29/64"—28, one Q51EA CROSS, plain, 1/4" (M. L.), one B101966B GLAND, soldering, 5/16" O. D. x 1/2" over all, one B101964A horizontal check VALVE, 1/4" pipe thread, one B6498B NIPPLE, pipe, close, 1/4" x 1/8", one B101965B UNION, 29/64"—28.) TUBE, air, tee to pressure gage, front half, assembly (Composed of: *one B101960E copper TUBING, 1/4" O. D. x 12" one Q51CC ELBOW, plain, 1/8" pipe thread (M. L.), two B101966B GLAND, soldering, 5/16" O. D. x 1/2" over all, one B101963A TEE, 1/2"—24 with 1/8"—27 pipe thread, two B101965B UNION, 29/64"—28 (brass).) TUBE, air, tee to pressure gage, front half, assembly (Composed of: *one B101960Q copper TUBING, 1/4" O. D. x 15 1/2" one Q51CC ELBOW, plain, 1/8" pipe thread (M. L.), two B101966B GLAND, soldering, 5/16" O. D. x 1/2" over all, one B101963A TEE, 1/2"—24 with 1/8"—27 pipe thread, two B101965B UNION, 29/64"—28.) TUBE, air, tee to pressure gage, front half, assembly (Composed of: *one B101960R copper TUBING, 1/4" O. D. x 19" one Q51CC ELBOW, plain, 1/8" pipe thread (M. L.), two B101966B GLAND, soldering, 5/16" O. D. x 1/2" over all, one B101963A TEE, 1/2"—24 with 1/8"—27 pipe thread, two B101965B UNION, 29/64"—28 (brass).)	(1)	1.35 P .25 1.40 1.45 .25
%X	23	8	C8014A		(1)	
%X	24	8	C8014B		(1)	
%X	25	8	C8014C		(1)	

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
%X	26	8			C8012	PARTS—Continued TUBE, air, tee to pressure gage, rear half, assembly (Composed of: one B101972A ADAPTER, 1/2" —24 S. A. E., with 1/8" —27 male pipe thread end, one B6495X BUSHING, pipe, 1/4" x 1/8" (M. I.), *one B101960P copper TUBING, 1/4" O. D. x 132" one B101958A COUPLING, soldering, 29/64" —28, one B101966B GLAND, soldering, 5/16" O. D. x 1/2" over all, one B6498QA NIPPLE, short, 1/4" x 1 1/2" (G. I.), one Q51DB TEE, plain, 1/4" pipe thread (M. I.), one B101965B UNION, 29/64" —28, one B101941A vertical check VALVE, 1/4" pipe thread.) TUBE, crank case drain, assembly (Composed of: *one LQ209A crank case drain TUBE (1) *one LQ210A crank case drain tube CUP (1) *one LQ211A crank case drain tube FLANGE (1).) TUBE, crank case to cam shaft housing oil, assembly (Composed of: *one LQ461A crank case to cam shaft housing oil TUBE (2) two LQ463A CONE, male union, two LQ462A NUT, tube union, 1/4".) TUBE, engine to oil gage, assembly (Composed of: two A16323 COLLET, pipe, 1/4", *one B101960M seamless copper TUBING, 1/4", length 116" (1) two B101965C UNION, brass, 7/16" —20-NF2A.) TUBE, engine oil tank indicator float TUBE, engine oil tank return (armored flexible brass tubing, 3/4", length 42") TUBE, engine oil tank suction (armored flexible brass tubing, 3/4", length 66")	(3)	\$4.65 P
&	—	34	8217 8394 8212				(1)	1.90 P
%X			L8460				(2)	1.40 .25 .25 .30 P .10
%X					B101992A		(1)	1.34 P
&				M3307	165 SH207A SH207B			.84
%X							1	1.42 P
%X							1	6.70 P
%X							1	7.30 P

& & %X	8 9 3	20 20 8	M1128 M1127	196	TUBE, fan bevel gear box long distance	1	.18
				196	TUBE, fan bevel gear box short distance	1	.12
				SH984B	TUBE, gasoline, center tank to combination valve, assembly (Composed of: two B101910A ADAPTER, 1/2"-14 pipe thread, with 1/2"-14 male pipe thread end, two B5932C COUPLING, soldering, 1/2"-14 pipe thread, *one B101911E flexible metal TUBING, w/braid, 1/2" I. D. x 14-1/2")	(1)	3.00 P
%X	10	8		SH984D	TUBE, gasoline, combination valve to regulating tank, assembly (Composed of: two B101910A ADAPTER, 1/2"-14 pipe thread, with 1/2"-14 male pipe thread end, two B5932C COUPLING, soldering, 1/2"-14 pipe thread, *one B101911G flexible metal TUBING, w/braid, 1/2" I. D. x 81")	(1)	1.10 7.65 P
				SH984C	TUBE, gasoline, left tank to combination valve, assembly (Composed of: two B101910A ADAPTER, 1/2"-14 pipe thread, with 1/2"-14 male pipe thread end, two B5932C COUPLING, soldering, 1/2"-14 pipe thread, *one B101911F flexible metal TUBING, w/braid, 1/2" I. D. x 27")	(1)	5.75 4.00 P
%X	8	8		SH984F	TUBE, gasoline, regulating tank to front carburetor, assembly (Composed of: two B101972B ADAPTER, 9/16"-24 S. A. E., with 1/4"-18 male pipe thread end, two B101363A COUPLING, soldering, 9/16"-24 S. A. E., *one B101911R flexible metal TUBING, w/braid, 1/4" I. D. x 15-1/4")	(1)	2.10 1.75
				SH984E	TUBE, gasoline, regulating tank to rear carburetor, assembly (Composed of: two B101972B ADAPTER, 9/16"-24 S. A. E., with 1/4"-18 male pipe thread end, one B101363A COUPLING, soldering, 9/16"-24 S. A. E., one B101364A COUPLING, soldering elbow, 9/16"-24 S. A. E., *one B101911Q flexible metal TUBING, w/braid, 1/4" I. D. x 20-1/2")	(1)	.55 2.15
%X	2	8		SH984A	TUBE, gasoline, right tank to combination valve, assembly (Composed of: two B101910A ADAPTER, 1/2"-14 pipe thread, with 1/2"-14 male pipe thread end, two B5932C COUPLING, soldering, 1/2"-14 pipe thread, *one B101911D flexible metal TUBING, w/braid, 1/2" I. D. x 11")	(1)	.75 2.80 P
							.90

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
%X						PARTS—Continued TUBE, high tension cable, with cables, assembly (Composed of: one — high tension CABLE, (distributing left) to spark plug #1, left, assembly, one — high tension CABLE, (distributor left) to spark plug #1, right, assembly, one — high tension CABLE, (distributor left) to spark plug #2, left, assembly, one — high tension CABLE, (distributor left) to spark plug #2, right, assembly, one — high tension CABLE, (distributor left) to spark plug #3, left, assembly, one — high tension CABLE, (distributor left) to spark plug #3, right, assembly, one — high tension CABLE, (distributor left) to spark plug #4, left, assembly, one — high tension CABLE, (distributor left) to spark plug #4, right, assembly, one — high tension CABLE, (distributor left) to spark plug #5, left, assembly, one — high tension CABLE, (distributor left) to spark plug #5, right, assembly, one — high tension CABLE, (distributor left) to spark plug #6, left, assembly, one — high tension CABLE, (distributor left) to spark plug #6, right, assembly, one — high tension CABLE, (distributor right) to spark plug #1, left, assembly, one — high tension CABLE, (distributor right) to spark plug #1, right, assembly,	(1)	\$23.10 P

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
& X					B101982D	PARTS—Continued TUBE, oil, mechanical lubricator to left inner sprocket bearing, assembly (Composed of: one A16309 ADAPTER, elbow, 7/16"-22-NPS, with 1/8"-27 NPT, *one B101976D armor TUBING, 5/16" I. D. x 120 1/2" (1) one A16323 COLLET, pipe, 1/4", *one B101960T seamless copper TUBING, 1/4" O. D. x 122" (1) one SH102E UNION, brass, 7/16"-22.) TUBE, oil, mechanical lubricator to right inner sprocket bearing, assembly (Composed of: one A16309 ADAPTER, elbow, 7/16"-22-NPS, with 1/8"-27 NPT, *one B101976B armor TUBING, 5/16" I. D. x 38 1/2" one A16323 COLLET, pipe, 1/4", *one B101960X seamless copper TUBING, 1/4" O. D. x 40" (1) one SH102E UNION, brass, 7/16"-22.) TUBE, oil, mechanical lubricator to right outer sprocket bearing, assembly (Composed of: one A16309 ADAPTER, elbow, 7/16"-22-NPS with 1/8"-27-NPT, *one B101976A armor TUBING, 5/16" I. D. x 28 1/2" one A16323 COLLET, pipe, 1/4", *one B101960W seamless copper TUBING, 1/4" O. D. x 30" (1) one SH102E UNION, brass, 7/16"-22.) TUBE, oil, mechanical lubricator to right roller pinion shaft, assembly (Composed of: one A16309 ADAPTER, elbow, 7/16"-22-NPS, with 1/8"-27-NPT, *one B101976C armor TUBING, 5/16" I. D. x 73 1/2" one A16323 COLLET, pipe, 1/4", *one B101960K seamless copper TUBING, 1/4" O. D. x 75" (1) one SH102E UNION, brass, 7/16"-22.) TUBE, radiator TUBE, radiator cooling fan drive distance	(1)	\$4.09 P
					B101982B			2.50
							(1)	1.22
							(1)	1.58 P
							(1)	.81
							(1)	.40
					B101982A		(1)	1.27 P
							(1)	.60
					B101982C		(1)	.30
							(1)	2.66 P
& X					SH607C		(1)	1.54
					SH281D		606	.75
							1	.37 P
								1.28 P

&			X247	802	TUBE, semaphore handle, long	1	.06
&			X272	802	TUBE, semaphore handle, short	1	.09
%X				SH922C	TUBE, terminal cover (fiber, 1¾", length, 4½")	3	.20 P
&				SH104F	TUBE, transmission mechanical lubricator sight feed	6	.08 P
&				SH101B	TUBE, transmission mechanical lubricator suction	6	.12 P
&				551	TUBE, 6-pdr. shell (shell storage, rear)	182	1.05
&	55	2	A37/21191	551	TUBE, 6-pdr. shell expansion	182	.48
&			B37/21191	267	TUBE, 6-pdr. shell expansion (rear of left pedestal (7); right (7); side of left pedestal (6); right (6).)	26	1.25
&			C37/21191		TUBE, 6-pdr. shrapnel (rear of left pedestal (7); right (7); side of left pedestal (6); side of right pedestal (6).)	26	.78
(mh)X			M3817	266	TUBING, armor, 5/16" I. D., ft. (Pentflex type) (1 piece 28½" long required for tube B101982A; 1 piece 38½" long required for tube B101982B; piece 73½" long required for tube B101982C; 1 piece 135½" long required for tube B101982E; 1 piece 120½" long required for tube B101982D)	—	.25 P
(mh)X				—	TUBING, armor flexible, brass, ¾", ft. (Tieflex type) (1 piece 42" long required for tube SH207A, one piece 66" long required for tube SH207B)	—	1.20 P
(mh)X				—	TUBING, metal, flexible, with braid, ¼" I. D., ft. (Tieflex type) (1 piece 88¼" long required for tube C8011; 2 pieces 26½" long required for tube SH981E; 1 piece 30" long required for tube SH981F; 3 pieces 25½" long required for tube SH981G; 1 piece 20½" long required for tube SH984E; 1 piece 15¼" long required for tube SH984F)	—	.35 P
(mh)X				—	TUBING, metal, flexible, with braid, ½" I. D., ft. (Tieflex type) (1 piece 10½" long required for tube SH981C; 1 piece 25" long required for tube SH981B; 1 piece 33¾" long required for tube SH981A, one piece 11" long required for tube SH984A; 1 piece 14½" long required for tube SH984B; 1 piece 27" long required for tube SH984C; 1 piece 81" long required for tube SH984D)	—	.85 P
(mh)X					TUBING, seamless copper, ¼", ft. (3 pieces 132" long required for tube C8012; 1 piece 15½" long required for tube C8016; 1 piece 12" long required for tube C8014A; 1 piece 19" long required for tube C8014C; 1 piece 96" long required for tube C8015; 1 piece 15½" long required for tube C8014B; pieces ¾", 2", 4", 11", 12", 15" and 18" long required for tube C8013; 2 pieces 16½" long required for crank case to camshaft housing oil tube (LQ461A); 1 piece 30" long required for tube B101982A; 1 piece 40" long required for tube B101982B; 1 piece 122" long required for tube B101982D; 1 piece 75" long required for tube B101982C; 1 piece 137" long required for tube B101982E; 1 piece 116" long required for tube B101992A).	—	.30 P

264

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
&			D13743			PARTS—Continued UNIT, ignition switch resistance, right assembly—Continued. (Composed of: *one D29737 ignition switch resistance unit CONNECTOR, right (1), *one D29742 ignition switch resistance unit GUARD (2), *one D26145 ignition switch resistance unit INSULATOR (2) *one (D30362) ignition switch resistance unit SCREW, assembly (2), *one D30812 ignition switch resistance unit WASHER (fiber) (2), two D20495 WASHER, lock, .195" x .393" x .046", one D30813 WASHER, plain, .26" x 3/4" x .031".) VALVE, carburetor altitude, assembly (Composed of: one LQ368A carburetor air valve PLUG, one LQ514A carburetor altitude air valve and yoke end NUT, one LQ516A carburetor altitude air valve WASHER, *one LQ567A carburetor altitude VALVE (2) one — PIN, split, 1/16" x 1/2".) VALVE, carburetor needle, assembly (Composed of: *one LQ544A carburetor needle VALVE (2) *one LQ545A carburetor needle valve COLLAR (2).) VALVE, check, vertical, 1/4" pipe thread (bronze). (For tube SH982B (1).) VALVE, horizontal check, brass, 1/4". (For combination valve to flexible tube connection (3); tube C8015 (1).) VALVE (inlet or exhaust) VALVE, oil pump pressure relief VALVE, regulating tank VALVE, triple combination, assembly (Composed of: one SH951C triple combination tap BODY, three — triple combination tap PLUG, assembly,	(2)	\$1.63
			13361				(2)	1.49
			13398 13399		B101941A B101946A		(2)	.33
%pX %pX							3	.31 .02 1.00 P
& & & %X			B8021 8192		LQ292A LQ448A SH950E		4	1.00 P 3.10
	—	33					24	.82
	6	6					1	.78 P
	11	8					(1)	11.72

[illegible]

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
%X				M1758	188	WASHER, gasoline tank strainer drain plug (leather)	3	\$0.03 P
&			D153/21256		188	WASHER, gasoline tank strainer flange (leather)	3	.08
&			D29852			WASHER, generator armature shaft plain	1	.01 P
&			D29862			WASHER, generator brush arm mounting stud insulation	1	.01 P
&			D22645			WASHER, generator brush arm small spring plain	8	.01 P
&			D30152			WASHER, generator brush arm stud insulating (inner)	1	.01 P
&			D30138			WASHER, generator brush arm stud insulating	1	.01 P
%X					SH204B	WASHER, generator coupling	1	.88
&	8209	16	8209		LQ399A	WASHER, generator driving shaft ball bearing oil retaining	1	.02 P
&			D31239			WASHER, generator end cover oiler	1	.01 P
&			D30085			WASHER, generator field coil insulating (.312" x .5" x .062")	3	.02 P
&			D22616			WASHER, generator field coil stud (large)	2	.01 P
&			D27193			WASHER, generator insulating (.312" x .5" x .062")	1	.01 P
&					SH142G	WASHER, governor felt retaining	2	.24
&					SH142H	WASHER, governor oil retaining	1	.15
&					SH142D	WASHER, governor spindle	1	.04
&					SH65L	WASHER, hand starter (1/16" x 41/64" x 1 1/8")	1	.03
&			W-AD17			WASHER, ignition battery jar cover plate (soft rubber)	8	.03 P
%X			W-M8			WASHER, ignition battery vent plug	4	.01 P
&			D30808			WASHER, ignition switch resistance stud plain (brass, .195" x .344" x .078")	2	.01 P
&			D27132			WASHER, lock, .140" x 5/16" x .031", (For ignition switch screw D26948)	1	.01 P
%ghJR						WASHER, lock, 3/16". (For stove bolt, flathead, 3/16" x 1", stove volt, round head, 3/16" x 3/4"; screw, machine, round head, No. 10 (3/16")—24 x 1/2"; screw, machine, round head, No. 10 (3/16")—24 x 1"; screw, machine, round head, No. 10 (3/16")—32 x 5/16".)	13	.01 P
&			D20241			WASHER, lock, .195" x .33" x .046". (For distributor head D13725 (12).)	24	.01 P

&	D20495	WASHER, lock, .195" x .393" x .046". (For voltage regulator stud D30365; ignition switch and voltage regulator screw D30369; ignition switch castle nut D29864; generator field coil stud D29829 (2); generator field coil stud D30383; generator brush arm mounting stud D30135; ignition switch resistance unit D13780 (2); ignition switch resistance unit D13743 (2).)	21	.01 P
	D30060	WASHER, lock, .195" x .453" x .046". (For distributor rotor screw D29616; distributor condenser and breaker plate stud D29595.) WASHER, lock, ¼", (For bolt SH101Q; bolt, carriage, ¼" x 1 9/16"; stove bolt, round head, ¼" x 7/16"; stove bolt, round head, ¼" x ½"; stove bolt, round head, ¼" x ¾"; bolt, stove, round head, ¼" x ¾", for angle SH152D and angle SH152C (2); stove bolt, round head, ¼" x ¾"; stove bolt, round head, ¼" x 1"; stove bolt, round head, ¼" x ¾"; instrument board stove bolt, round head, ¼" x 1¼"; stove bolt, round head, ¼" x 2"; bolt, U. S. Std., hexagon head, ¼" x ¾"; bolt, U. S. Std., hexagon head, ¼" x ¾"; bolt, U. S. Std., hexagon head, ¼" x ¾"; bolt, U. S. Std., hexagon head, ¼" x ¾", for strap SH669P; bolt, U. S. Std., hexagon head, ¼" x 1"; bolt, U. S. Std., hexagon head, ¼" x 1¾"; bolt, U. S. Std., hexagon head, ¼" x 1 9/16"; bolt, U. S. Std., hexagon head, ¼" x 1¾"; screw, cap, U. S. Std., button head, ¼" x 2"; screw, cap, U. S. Std., round head, ¼" x ¾"; screw, SH424E; screw, cap, U. S. Std., hexagon head, ¼" x ¾"; screw, cap, U. S. Std., hexagon head, ¼" x 7/16"; bolt, U. S. Std., hexagon head, ¼" x ¾"; screw cap, U. S. Std., round head, ¼" x ½"; screw, machine, round head, No. 14—20 x ¼"; bolt, U. S. Std., hexagon head, ¼" x ½"; screw, cap, U. S. Std., hexagon head, ¼" x ½"; screw LQ310A.)	4	.01 P
&	D21717	WASHER, lock, .256" x .429" x .062". (For voltage regulator terminal stud D30380; voltage regulator terminal stud D30366; generator drive shaft end housing binding bolt D29848; generator brush arm mounting (long terminal) stud D29811; 2 distributor ignition coil and distributor head studs D29635.)	342	.01 P
	D24953	WASHER, lock, .275" x .454" x .031". (For voltage regulator mounting coil nut lock.) WASHER, lock, 5/16". (For bolt, U. S. Std., hexagon head, 5/16" x ¾"; bolt, U. S. Std., hexagon head, 5/16" x ¾"; bolt, U. S. Std., hexagon head, 5/16" x 1"; bolt, U. S. Std., hexagon head, 5/16" x 1¼"; screw, cap, U. S. Std., flathead, 5/16" x 1"; screw, cap, U. S. Std., round head, 5/16" x 1"; screw, cap, U. S. Std., hexagon head, 5/16" x ¾"; screw, cap, U. S. Std., hexagon head, 5/16" x ¾"; screw, cap, U. S. Std., hexagon head, 5/16" x ¾"; screw, cap, U. S. Std., hexagon head, 5/16" x ¾"; screw, cap, U. S. Std., hexagon head, 5/16" x ¾"; for funnel rack; screw, cap, U. S. Std., hexagon head, 5/16" x ½".)	9 1	.01 P .01 P
&			127	.01 P

Note symbol	Identification No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
% (sh) R						PARTS—Continued WASHER, lock, 3/8". (For stud SH194D; stud MX99 (2); stud LQ233A; bolt, S. A. E., 3/8" x 2 1/4"; bolt SH402L (2); bolt, U. S. Std., countersunk head, 3/8" x 1 1/8"; bolt, U. S. Std., countersunk head, 3/8" x 1 1/2"; bolt, U. S. Std., hexagon head, 3/8" x 3/4"; bolt, U. S. Std., hexagon head, 3/8" x 7/8"; bolt, U. S. Std., hexagon head, 3/8" x 1"; bolt, U. S. Std., hexagon head, 3/8" x 1 1/16"; bolt, U. S. Std., hexagon head, 3/8" x 1 1/4", for housing SH145A; bolt, U. S. Std., hexagon head, 3/8" x 1 1/4"; bolt, U. S. Std., hexagon head, 3/8" x 1 3/8"; bolt, U. S. Std., hexagon head, 3/8" x 1 5/8"; bolt, U. S. Std., hexagon head, 3/8" x 1 1/2"; bolt, U. S. Std., hexagon head, 3/8" x 1 5/4"; bolt, U. S. Std., hexagon head, 3/8" x 2"; bolt, U. S. Std., hexagon head, 3/8" x 2 1/4"; bolt, U. S. Std., hexagon head, 3/8" x 2 1/2"; bolt, U. S. Std., hexagon head, 3/8" x 2 3/4"; bolt, U. S. Std., square head, 3/8" x 1 1/4"; catch M2153; pin M2149; screw, cap, U. S. Std., flathead, 3/8" x 1 1/8"; screw, cap, U. S. Std., flathead, 3/8" x 1 1/2"; screw, cap, U. S. Std., hexagon head, 3/8" x 1 3/16"; screw, cap, U. S. Std., hexagon head, 3/8" x 3/8", (except for bearing SH900A); screw, cap, U. S. Std., hexagon head, 3/8" x 1"; screw, cap, U. S. Std., hexagon head, 3/8" x 1 1/2" (except for plate SH608A); screw, cap, U. S. Std., hexagon head, 3/8" x 3/8", for plates M995A and M995B; screw, cap, U. S. Std., fillister head, 3/8" x 1 1/2"; tap bolt SH586F; screw MX38.) WASHER, lock, 7/16". (For bolt, U. S. Std., hexagon head, 7/16" x 1"; bolt, U. S. Std., hexagon head, 7/16" x 1 1/8"; screw, cap, U. S. Std., round head, 7/16" x 1 1/4".)	373	\$0.01 P
						WASHER, lock, 1/2". (For stud SH279D; bolt SH550A; bolt SH942C; bolt SH586G; bolt, U. S. Std., hexagon head, 1/2" x 7/8"; bolt, U. S. Std., hexagon head, 1/2" x 1"; bolt, U. S. Std., hexagon head, 1/2" x 1 1/8"; bolt, U. S. Std., hexagon head, 1/2" x 1 1/4"; bolt, U. S. Std., hexagon head, 1/2" x 1 1/2"; bolt, U. S. Std., hexagon head, 1/2" x 1 3/4"; bolt, U. S. Std., hexagon head, 1/2" x 1 7/16"; bolt, U. S. Std., hexagon head, 1/2" x 1 1/2"; bolt, U. S. Std., hexagon head, 1/2" x 1 5/8"; bolt, U. S. Std., hexagon head, 1/2" x 2 1/8"; bolt, U. S. Std., hexagon head, 1/2" x 2 13/16"; bolt, U. S. Std., hexagon head, 1/2" x 2 7/8"; bolt, U. S. Std., hexagon head, 1/2" x 3"; bolt, U. S. Std., hexagon head, 1/2" x 3 1/2"; bolt, U. S. Std., hexagon head, 1/2" x 3 3/16"; bolt, U. S. Std., hexagon head, 1/2" x 3 5/8"; bolt, U. S. Std.,	27	.01 P
% (sh) R								

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordinance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
%X & &			E43/21220 D29766		SH220A 438	WASHER, low-speed connecting link	2	\$0.06
						WASHER, periscope hole cover (driver's turret)	1	.22
& &			D29576 D25116			WASHER, plain, .0635" x 5/32" x .02". (For distributor contact arm spring D13803 (2).)	8	.01 P
						WASHER, plain, .144" x .469" x .022". (For distributor resistance unit mounting stud D29663; distributor contact arm spring screw D29574.)	8	.01 P
& &			D26441 D30061			WASHER, plain, .147" x .313" x .022". (For distributor resistance unit mounting screw D29663; distributor rotor screw D29616.)	4	.01 P
						WASHER, plain, .173" x .344" x .025". (For distributor screw D29598.)	2	.01 P
% (sh)R &			D29777 D30139 D29654			WASHER, plain, .178" x .504" x .031". (For distributor.)	2	.01 P
						WASHER, plain, 3/16". (For screw, machine, round head, No. 10 (3/16")—24 x 3/4".)	2	.01 P
& &			D29655 D26503			WASHER, plain, .194" x .375" x .031". (For distributor condenser and breaker plate stud (2).)	12	.01 P
						WASHER, plain, .194" x .406" x .031". (For generator field coil.)	1	.01 P
& &						WASHER, plain, .202" x .296" x .015". (For distributor resistance unit, assembly D13747.)	2	.01 P
						WASHER, plain, .202" x .396" x .02". (For distributor resistance unit, assembly D13747.)	2	.01 P
% (sh)R & &						WASHER, plain, .221" x .468" x .031". (For distributor condenser and breaker plate stud D29595; distributor cup stud D39536.)	10	.01 P
						WASHER, plain, 1/4". (For stove bolt, round head, 1/4" x 2"; guide M2156 cap screw; handle C114E (4); screw, cap, button head, 1/4" x 2"; machine screw, NC, round head, No. 8 (1/64") x 1" (1).)	23	.01 P
& &			D29662 D30813			WASHER, plain, .257" x .5" x .031". (For distributor ignition coil and distributor head stud D29635; distributor head stud D29635 (2).)	8	.01 P
						WASHER, plain, .26" x 3/4" x .031". (For ignition switch resistance unit D13780; ignition switch resistance unit D13743.)	2	.01 P
% (sh)R &						WASHER, plain, 5/16". (For bolt SH996G; bolt SH996C; screw, cap, U. S. Std., flathead, 3/8" x 1 5/16"; handle pin X246; handle pin X271.)	14	.01 P

&	D20915		SH979E	WASHER, plain, .314" x .625" x .031". (For voltage housing, assembly (3); generator brush arm mounting stud D29811.)	4	.01 P
				WASHER, plain, %". (For bolt, carriage, %" x 1 1/2"; catch M2153; rest M2842 cap screw.)	10	.01 P
&	D26616			WASHER, plain, .380" x .875" x .032". (For generator armature shaft nut.)	1	.01 P
				WASHER, plain, 1/2". (For sprocket X257; bolt, U. S. Std., hexagon head, 1/2" x 2 13/16"; pin M2770.)	12	.01 P
&	D24336			WASHER, plain, %". (For bolt SH942C; pin M2430; 6-pdr. gun pedestal shell block bolt.)	7	.01 P
				WASHER, plain, 3/4". (For spindle SH282D (2); spindle SH144B.)	3	.01 P
&				WASHER, plain, 1". (For bolt, U. S. Std., hexagon head, 1/4" x 1 3/8".)	4	.01 P
				WASHER, plain, brass, 5/32". (For screw, wood, round head, brass, No. 8 x 3/4".)	10	.01 P
&				WASHER, plain, brass, .147" x .312" x .0254". (For voltage regulator mounting terminal screw D30143.)	7	.01 P
				WASHER, plain, I. D. .18", O. D. .5", .05" thick. (For airplane watch mat machine screw (2).)	8	.01 P
&				WASHER, semaphore arm	2	.04
				WASHER, semaphore ratchet spring	1	.12
&				WASHER, semaphore spring	1	.03
				WASHER, spark and throttle control friction	4	.18
&				WASHER, special, 1/4". (For bolt LQ112A (1); bolt LQ114A (1); stud LQ88A in crank case, upper half, assembly (1); stud LQ196A (1); stud LQ229A (1); bolt LQ164A (2); bolt LQ443A (2); stud LQ88A (water pump body) (1); bolt LQ243A (2).)	202	.01 P
				WASHER, special, 5/16". (For bolt LQ50A (2); stud LQ302A (1); stud LQ301A (1); screw LQ419A (1); screw LQ420A (1).)	98	.01 P
&				WASHER, special, %". (For screw LQ165A (1); stud LQ304A (1); stud LQ303A (1); bolt LQ246A (2); stud LQ269A (1); stud LQ270A (1); stud LQ197A (1); stud LQ271A (1); bolt LQ245 A (2).)	73	.01 P
				WASHER, special, I. D. .33/64", O. D. .15/16", 1/16" thick. (For bolt LQ189A (1); bolt LQ190A (1).)	16	.01 P
&				WASHER, special, I. D. .33/64", O. D. .1 1/16", 1/8" thick. (For bolt LQ189A (1); bolt LQ190A (1).)	16	.01 P
				WASHER, special, steel, O. D. .1 3/4" x .332" thick. (For cap screw, U. S. Std., flathead, 5/16" x 3/4" (1).)	2	.02
&				WASHER, sponson hinge pin	4	.20
				WASHER, starting and lighting battery terminal post	12	.01
&				WASHER, steel, I. D. .1 1/16", O. D. .1 3/4" x 1/8". (For 3/4" flexible conduit.)	1	.08
				WASHER, switch and voltage regulator retaining	2	.01

TANK, MARK VIII


Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
%X	66	22		M1483 M248 MX78A MX78B	60	WASHER, track adjusting shaft	4	\$0.88
&					705	WASHER, transmission bevel pinion shaft	1	.22
%X					698	WASHER, transmission high speed brake adjusting spring, I. D. 11/16"	2	.04
%X					SH101G	WASHER, transmission high speed brake adjusting spring, I. D. 13/16"	2	.05
&	{	22		M253 M288	703	WASHER, transmission mechanical lubricator center piece	6	.02
&					703	WASHER, transmission pinion shaft bearing housing oil retaining (felt)	1	.48
&					680	WASHER, transmission planet disk	2	.89
%X					SH951F	WASHER, triple combination valve plug, (% square hole)	3	.05
&	11	22		SH951G SH951A SH412B SH958D	SH951G	WASHER, triple combination valve plug, (13/32" round hole)	3	.01
%X					SH951A	WASHER, triple combination valve plug thackray	3	.18
%(gh)X					SH412B	WASHER (turret roof door fastener), thackray	2	.15
X					SH958D	WASHER, ventilating fan sprocket	1	.03
&	{	22		D29340 D24046		WASHER, voltage housing insulating	6	.01 P
&						WASHER, voltage regulator mounting terminal screw plain	7	.01
%(mb)R						WASTE, wool, oz. (For cap M294 (2); cap M298 (2).)	8	.01
&						WEDGE, starting and lighting battery (wood)	4	.01
&	15387		W-AF49 15387	LQ535A		WEIGHT, carburetor float	4	.03
&						WELL, carburetor secondary, assembly	(4)	.38
&						(Composed of: *one LQ562A carburetor secondary well restriction COLLAR (4)		.13
&						*one LQ561A carburetor secondary well TUBE (4)		.23
						one LQ509A GASKET, copper, asbestos, 17/64"		
						WHEEL, track adjusting, assembly	(2)	290.39
(Composed of:								
					52	*two M147 track adjusting wheel RIM (4)		65.75
					56	*one M1403 track wheel BOSS (4)		34.75
					58	*five M1405X track wheel DIAPHRAGM (20)		4.25
					59	*one M1405Y track wheel DIAPHRAGM (4)		4.25


	1	28	59	*two M1404 track wheel DISK (8) — RIVET, button head, $\frac{5}{8}$ " x 1 $\frac{7}{8}$ ". thirty-six twenty-four — RIVET, button head, $\frac{5}{8}$ " x 2 $\frac{3}{4}$ ". forty-eight — RIVET, button head, $\frac{3}{4}$ " x 2 $\frac{3}{4}$ ".	48.00
&	{ 18 — 5	{ 2 27 25	(2)	WHEEL, track driving, assembly	244.69
				(Composed of:	
	2	27	52	*two M1401 track driving wheel RIM (4)	93.00
	5	27	56	*one M1403 track wheel BOSS (4)	34.75
	3	27	59	*five M1405X track wheel DIAPHRAGM (20)	4.25
				*one M1405Y track wheel DIAPHRAGM (4)	4.25
	4	27	59	*two M1404 track wheel DISK (8) thirty-six — RIVET, button head, $\frac{5}{8}$ " x 1 $\frac{7}{8}$ ". twenty-four — RIVET, button head, $\frac{5}{8}$ " x 2 $\frac{3}{4}$ ". forty-eight — RIVET, button head, $\frac{3}{4}$ " x 2 $\frac{3}{4}$ ".	48.00
&		D30323	1	WICK, generator end cover oiler	.01 P
&		D30528	1	WIRE, copper, .0403" x 1 1/16". (For voltage regulator, assembly D5718 (1).)	.01 P
&(mh)R				WIRE, copper, B. & S. gage, No. 16, spool (2 pieces 10" long required for retainer SH434B; 2 pieces 10" long required for retainer SH434C.)	
&(mh)R			—	WIRE, lock, brass, No. 20 x 1 $\frac{1}{4}$ ". For (cover LQ532A)	.25
*			(2)	WIRE, lock, soft steel, W. & M. Ga. No. 16 x 4". (For screw LQ557A (2).)	.01 P
*	176	15	LQ31A	WIRE, lock, W. & M. Ga. No. 18 x 8". (For screw LQ419A and LQ420A (1); screw LQ418A (12); plug LQ428A (1); valve LQ446A (1); screw LQ33A (1).)	.01 P
&(mh)R		234	234	WIRE, lock, W. & M. Ga. No. 20, 10" long. (For plate M1047 cap screw (1).)	.10 P
&(mh)R			(1)	WIRE, screen, B. & S. Ga. #30, #20 mesh yd. (2 pieces 1 $\frac{1}{4}$ " x 14 13/16" for screen LQ451A; 1 piece 4 $\frac{3}{8}$ " dia.; 1 piece 4 $\frac{3}{8}$ " dia. pool (1 piece 10 $\frac{1}{2}$ " long required for crank shaft thrust bearing retaining nut; 1 piece 48" long required for clutch drum cap screw; 1 piece 26" long required for clutch sliding collar cap screw; 1 piece 30" long required for clutch spring plunger; 1 piece 4" long required for screw LQ557A (2).)	.01 P
*			—	WIRE, soft iron, W. & M. Ga. No. 16, length 30". (For clutch spring plunger SH861A.)	.75 P
			SH861K	WIRE, soft iron, W. & M. Ga. No. 16, length 30". (For clutch spring plunger SH861A.)	.08 P
*			(1)		.01 P

TANK, MARK VIII

Note symbol	Identi- fication No.	Plate No.	#Manufacturers' part No. or Signal Corps part No.	British piece mark	Ordnance piece mark or drawing No.	Item	Quantity per unit assembly	Unit price
PARTS—Continued								
&(mh)R						WIRE, soft iron, W. & M. Ga. No. 18, spool (1 piece 10" long required for hand starter screws (SH65A); 16 pieces 8" long required for cam shaft, bearing lock screws; 1 piece 8" long required for screw LQ419A and LQ420A; 1 piece 8" long required for screw LQ418A; 1 piece 10" long required for screw LQ165A; 1 piece 10" long required for plug LQ145A; 2 pieces 8" long required for plug LQ541A; 2 pieces 19" long required for screws LQ510A; 2 pieces 10" long required for bolts LQ526A; 4 pieces 5" long required for lock LQ559A; 2 pieces 4" long required for carburetor)	—	\$0.10 P
						WIRE, soft steel, W. & M. Ga. No. 16, length 2". (For oil box cover)	(4)	.01 P
*				713A SH999C		WIRE, soft steel, W. & M. Ga. No. 16, length 26". (For clutch sliding collar SH999A cap screws)	(1)	.01 P
						WIRE, soft steel, W. & M. Ga. No. 16, length 48". (For clutch drum cap screws.)	(1)	.02 P
&(mh)R				SH866C		WIRE, soft steel, W. & M. Ga. No. 20, spool (1 piece 10" long required for plate M1047 cap screws (1).)	—	.12 P
						WIRE, steel, 3/16", ft., (1 piece 92% long required for wire M2167B (1).)	—	.03 P
&				SH103D SH105C		WORM, transmission mechanical lubricator	1	.78
						YOKE, transmission mechanical lubricator lower plunger	6	.38
&					SH105B	YOKE, transmission mechanical lubricator (upper plunger)	6	.38


The Set of Spare Parts, Accessories, and Addendum covering basic spare parts will be published as Changes No. 1 to this list.

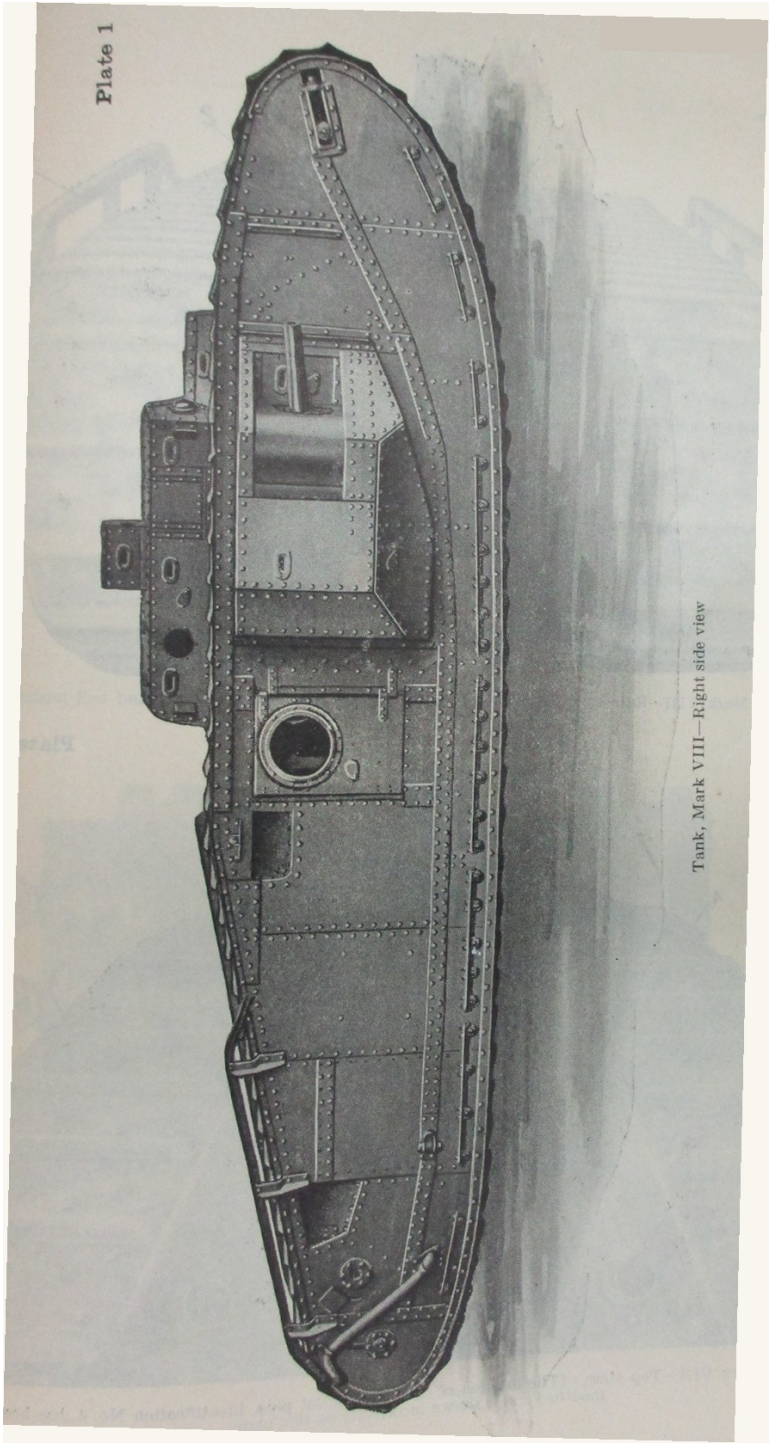

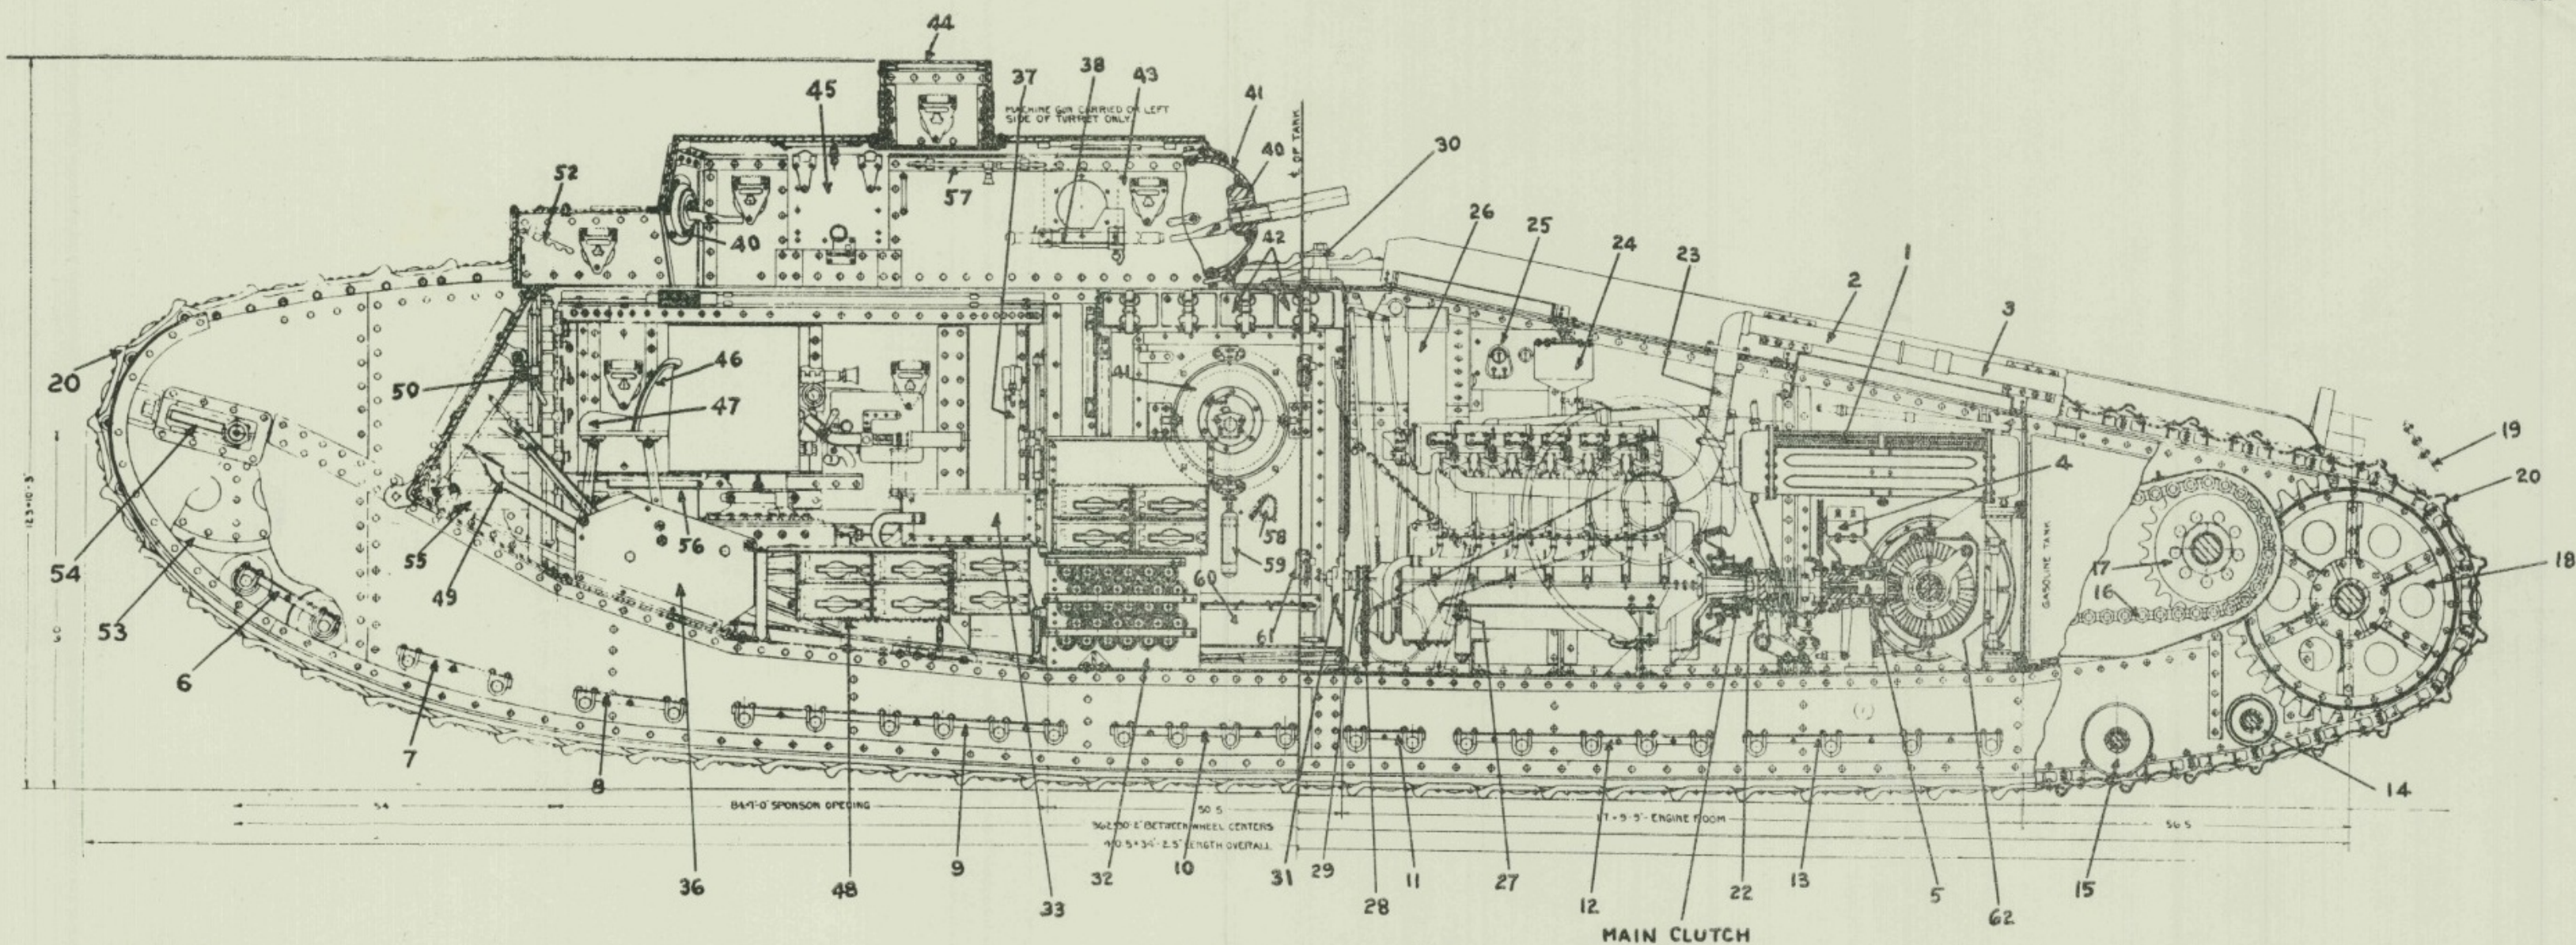


Tank, Mark VIII.—Longitudinal sectioned view

Plate 3

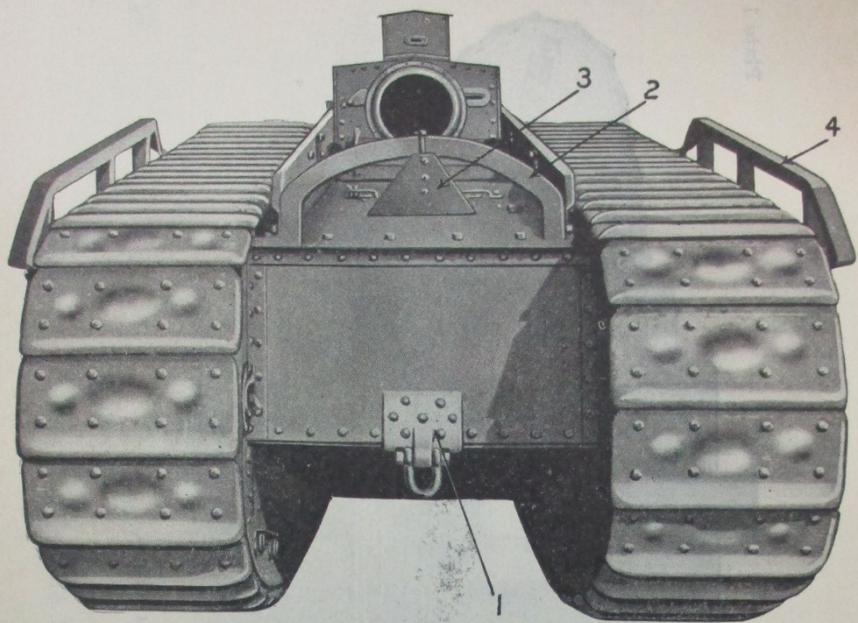


Tank, Mark VIII—Rear view (without outside tool chest, hemispherical turret and ball mount)

Plate 4

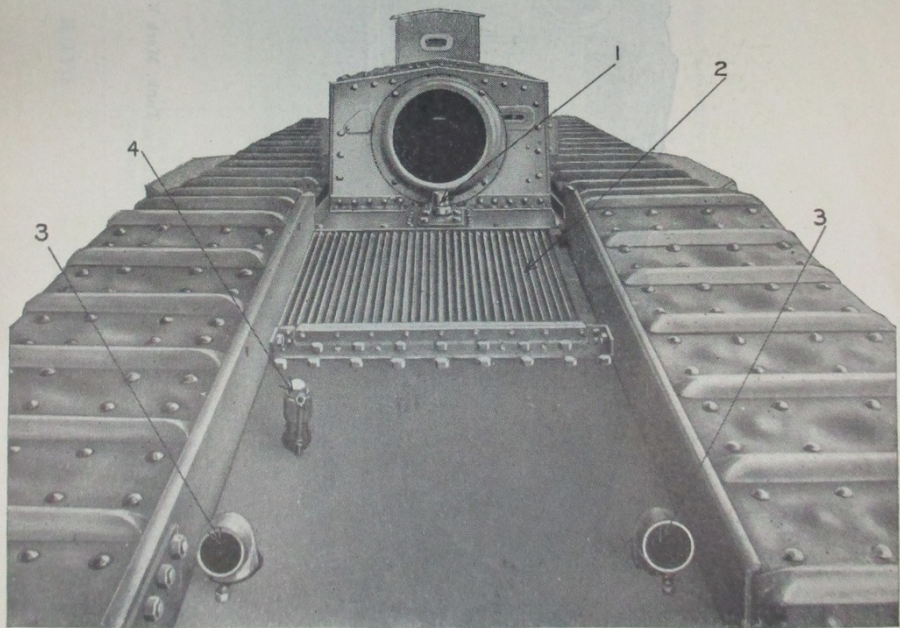


Tank, Mark VIII—Top view. (The location of the vapor outlet pipe, identification No. 4, has been modified and is shown incorrectly on this plate)

Plate 5

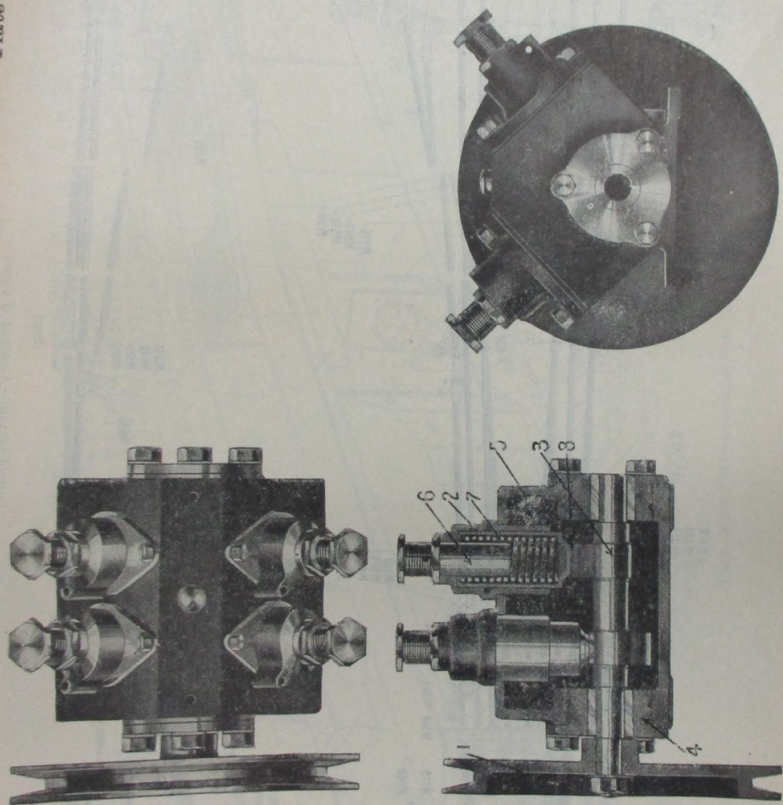


Air pressure pump—Assembled views

Plate 6

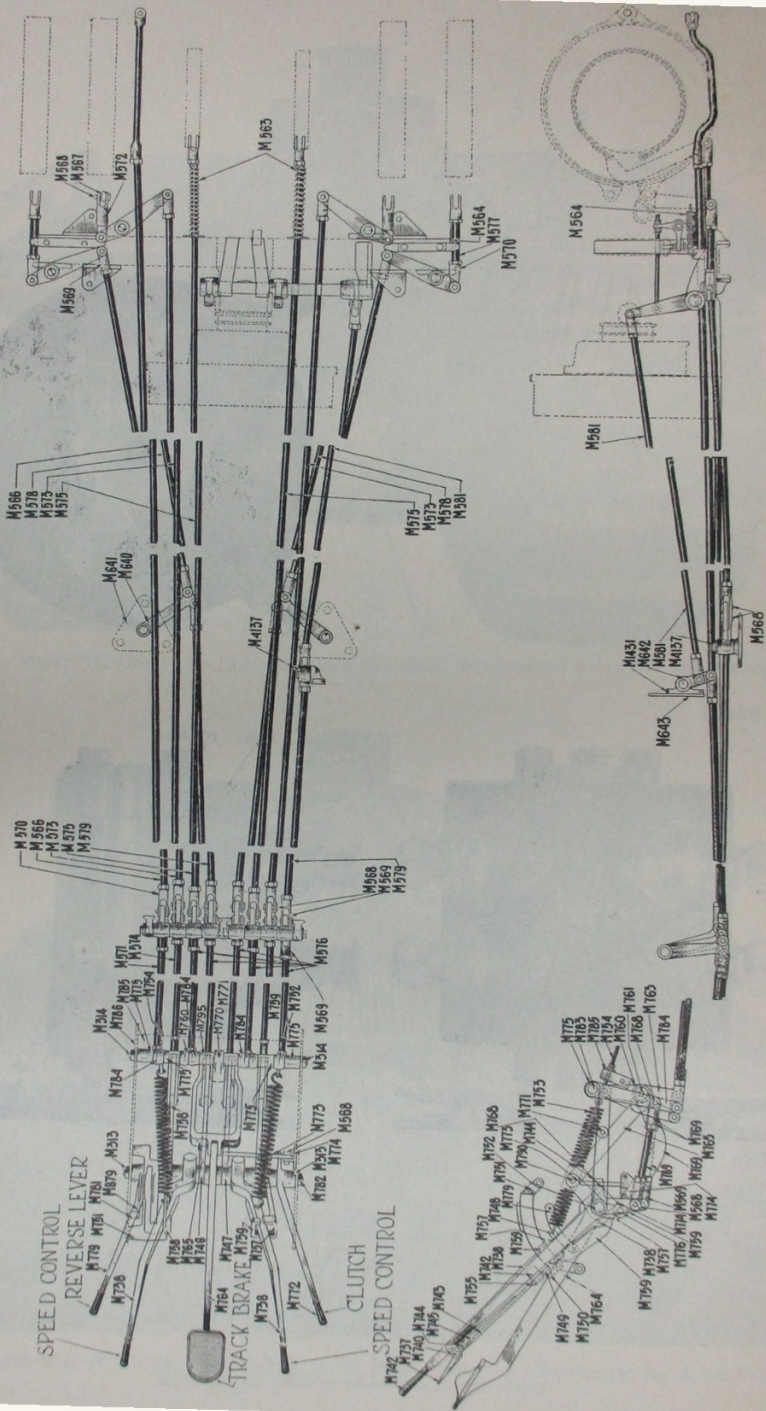


Control system—Assembled views


Plate 7

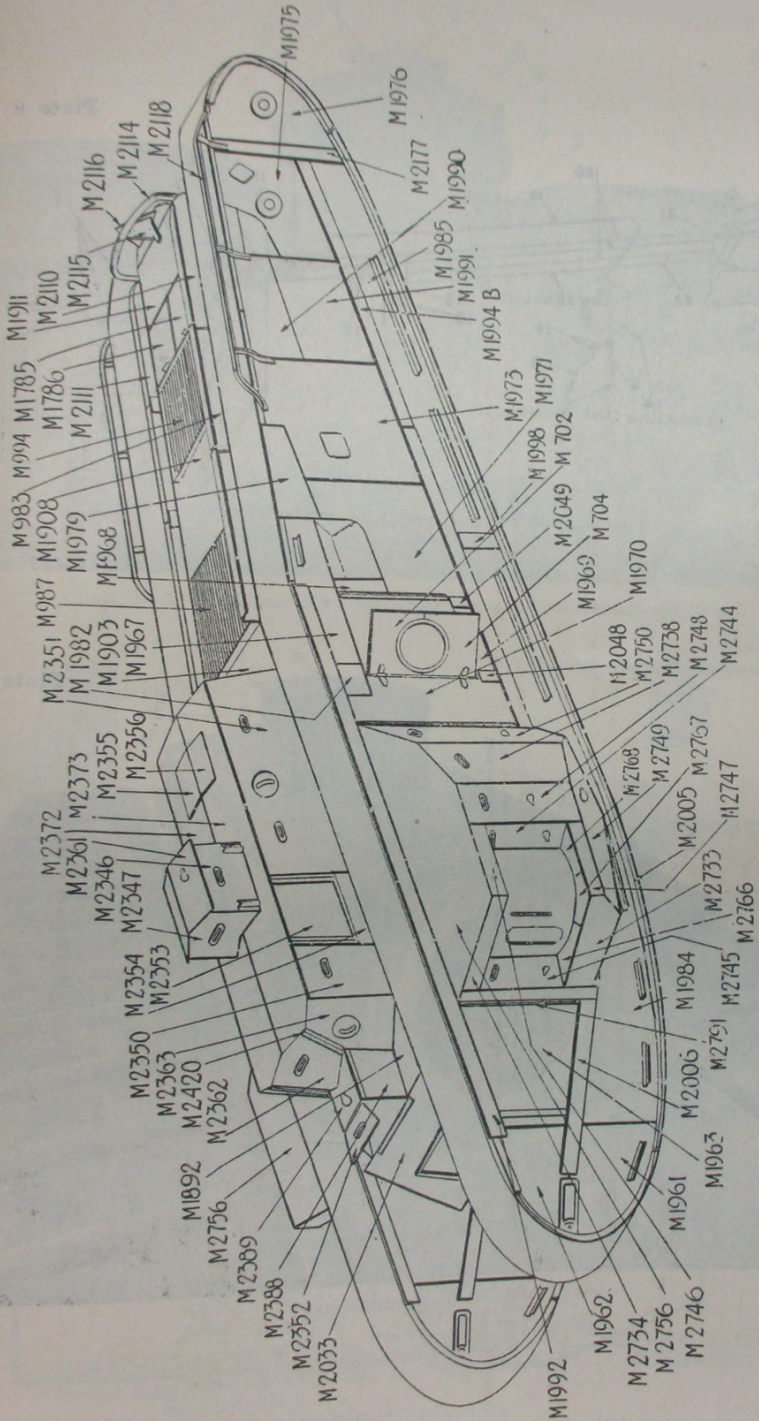

Tank, Mark VIII—Assembled view (showing armor)

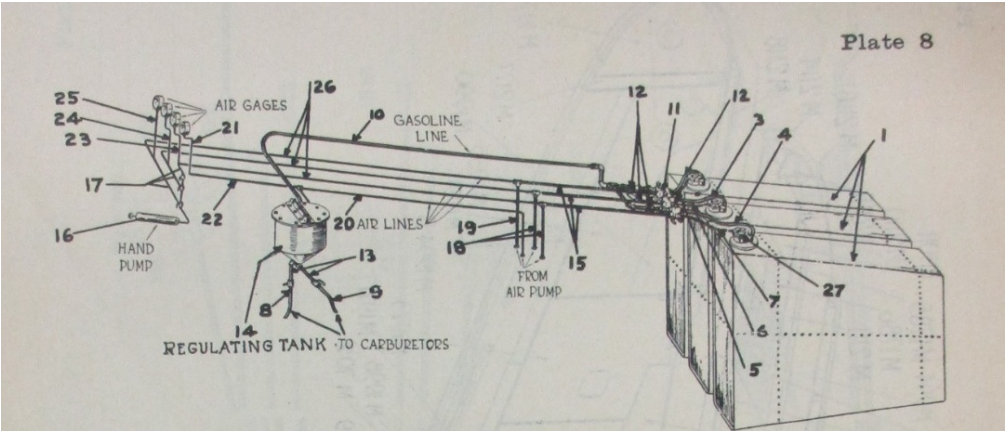

Gasoline tanks with pressure system—Assembled view

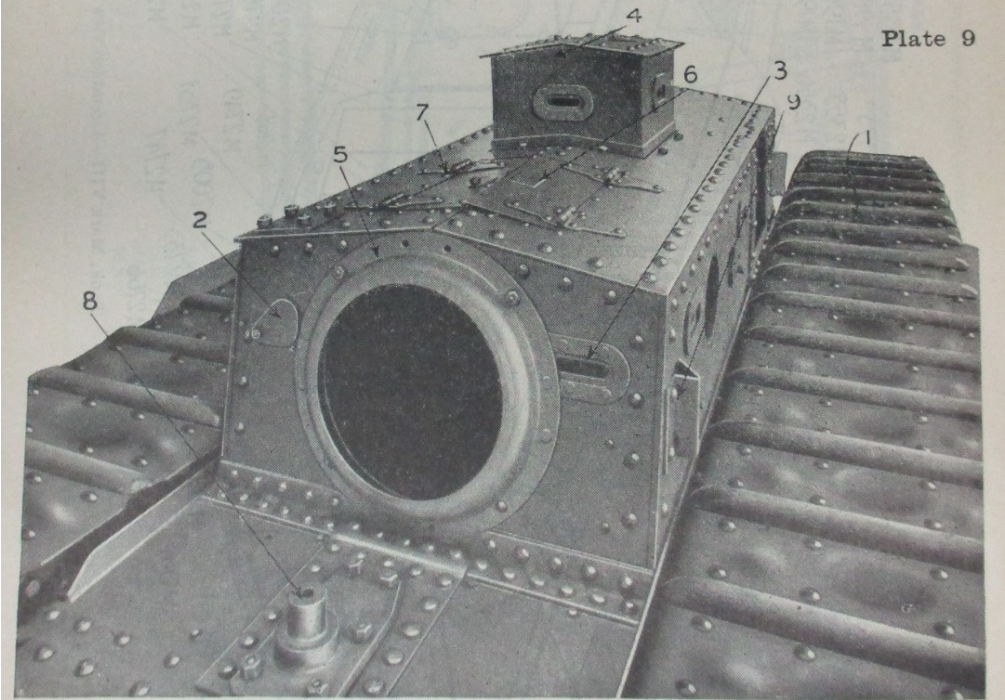

Main turret—Assembled view

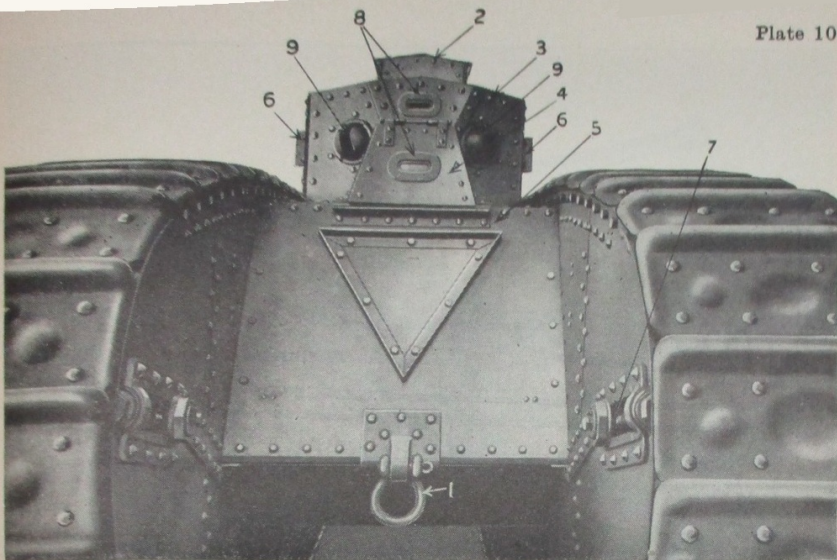


Plate 10

Tank, Mark VIII—Front view. (Browning tank machine gun mounts not shown)

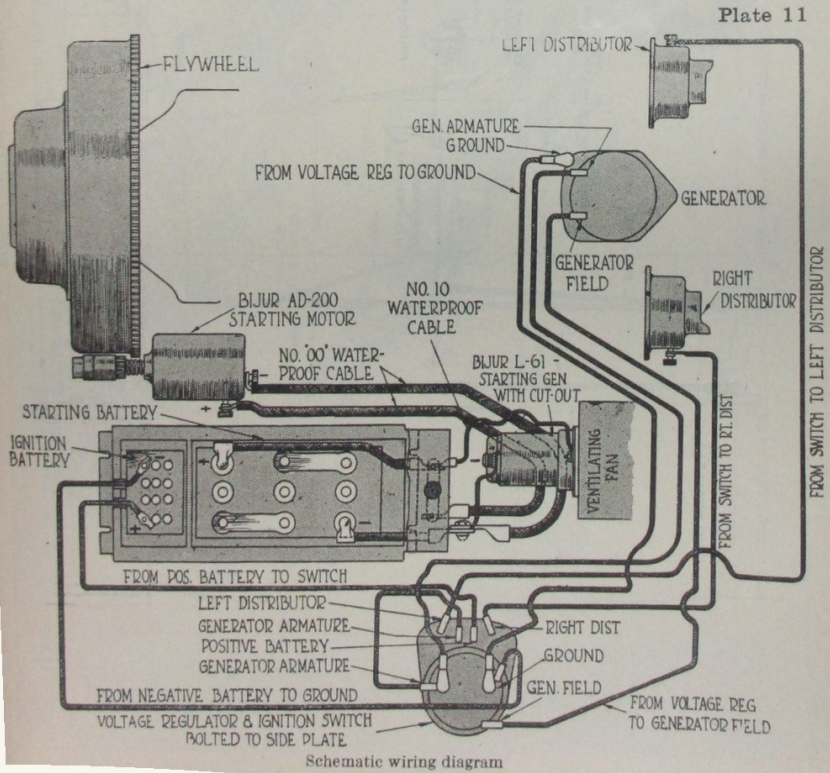


Plate 11

Schematic wiring diagram



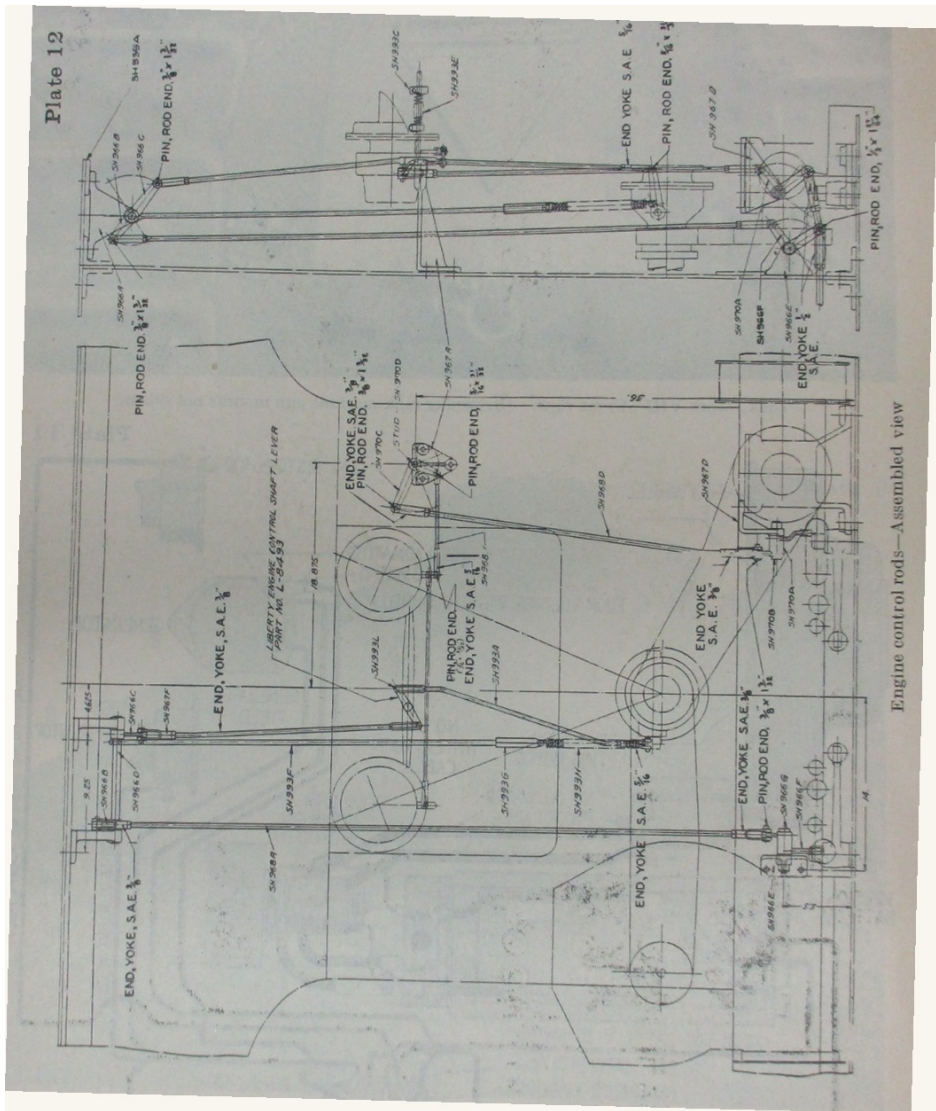


Plate 13

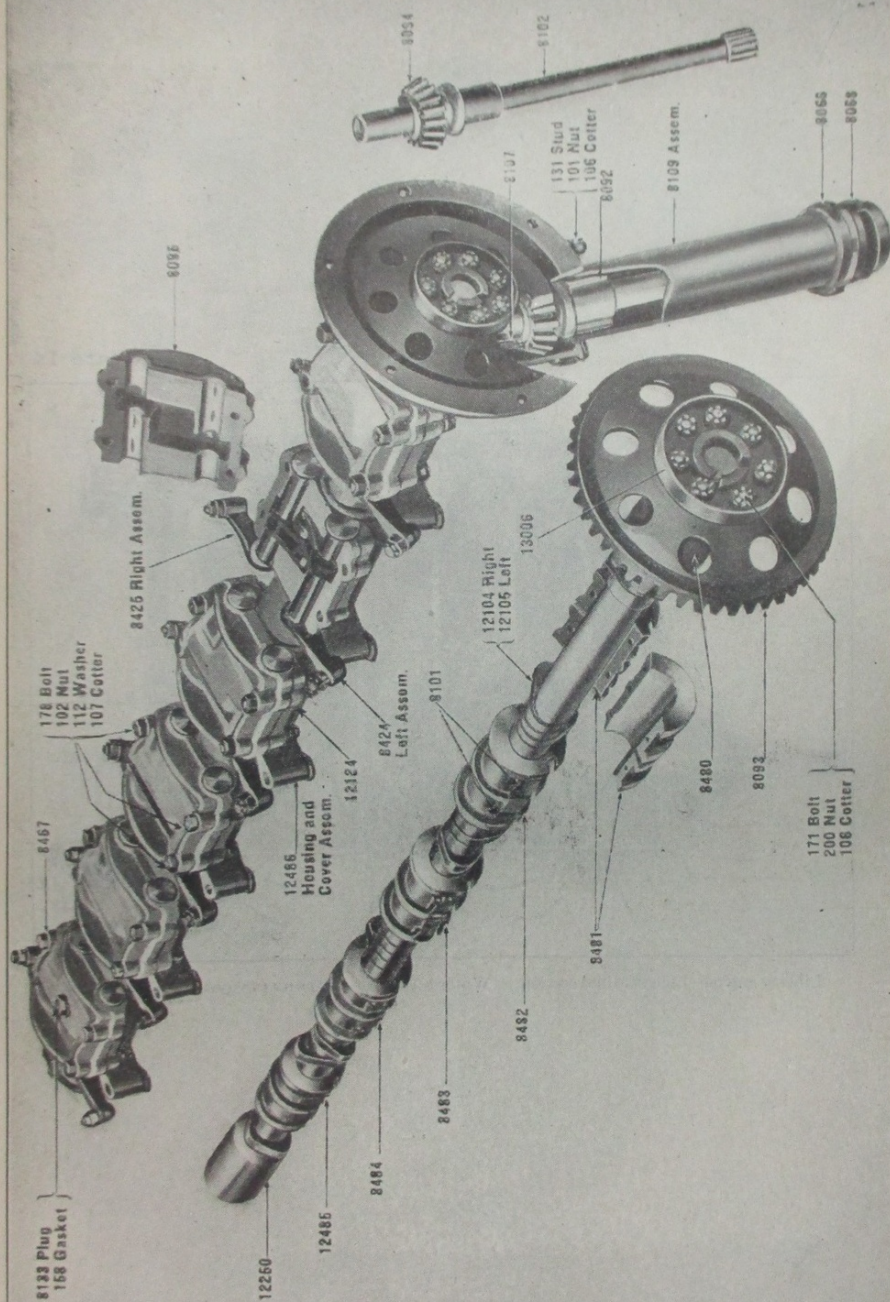


Camshaft—Assembled view


Plate 14

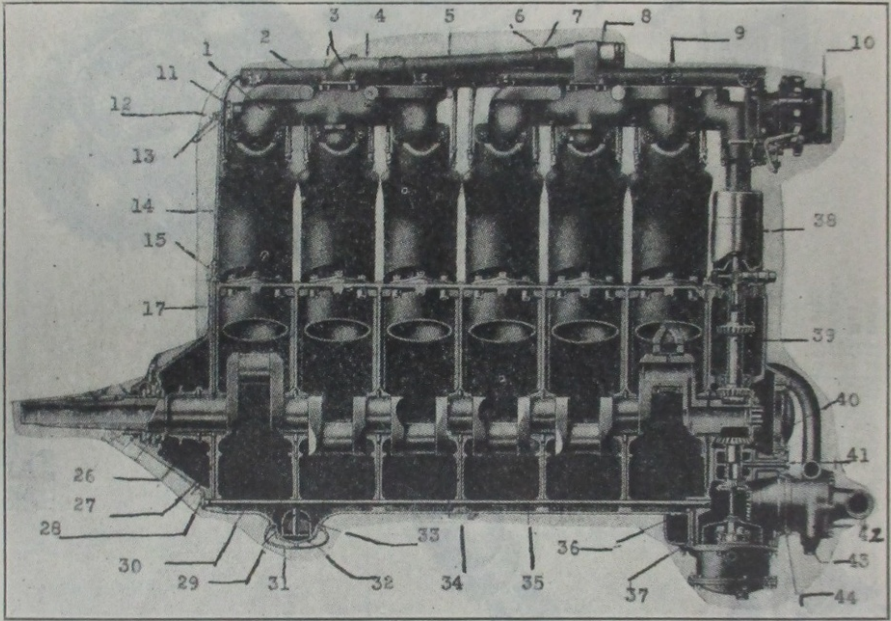

Liberty engine—Longitudinal section. (Water outlets are shown transposed in this plate)

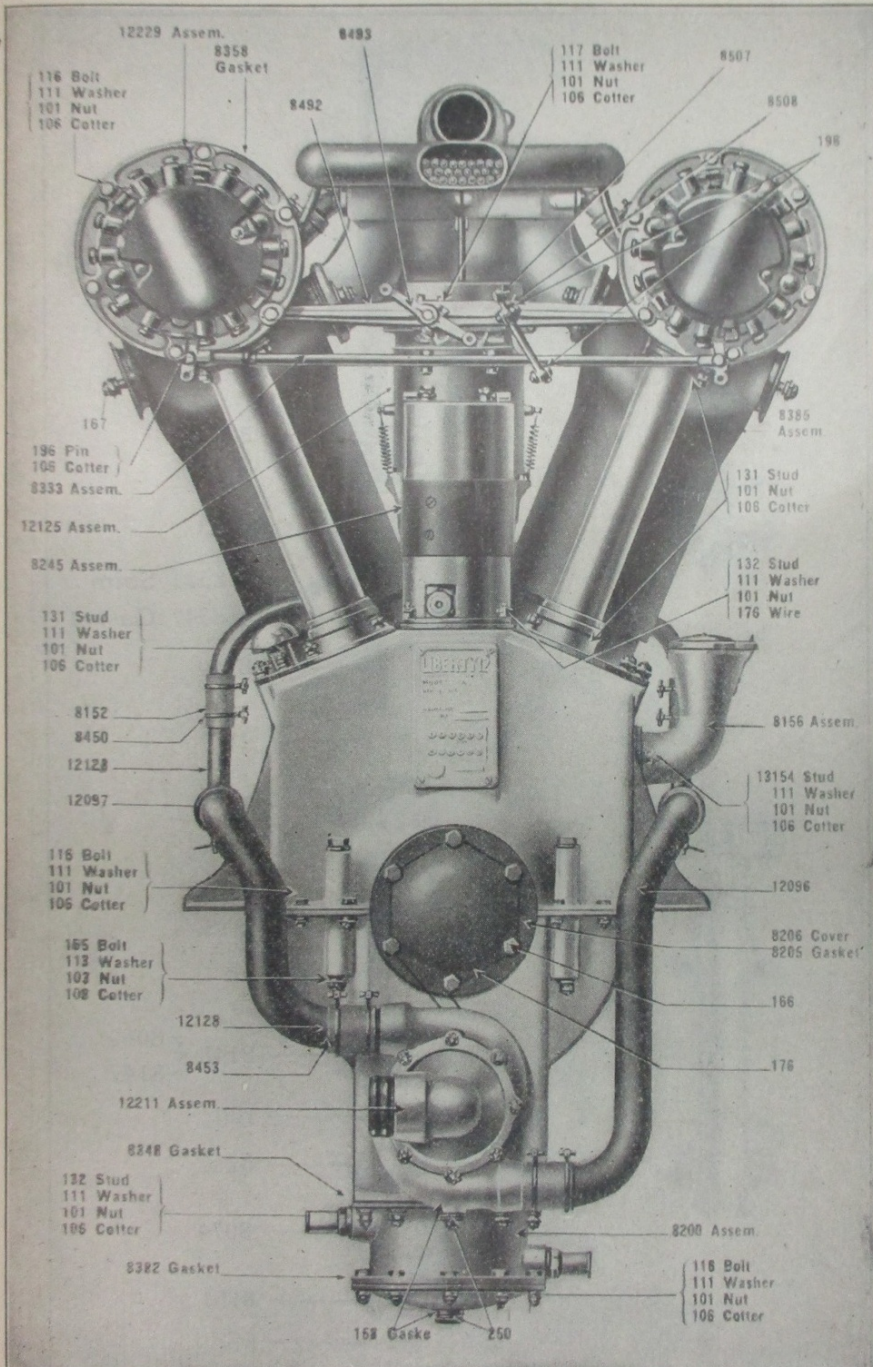


Liberty engine—Distributor end, assembled view. (Installation of governor eliminates the cover 8206)

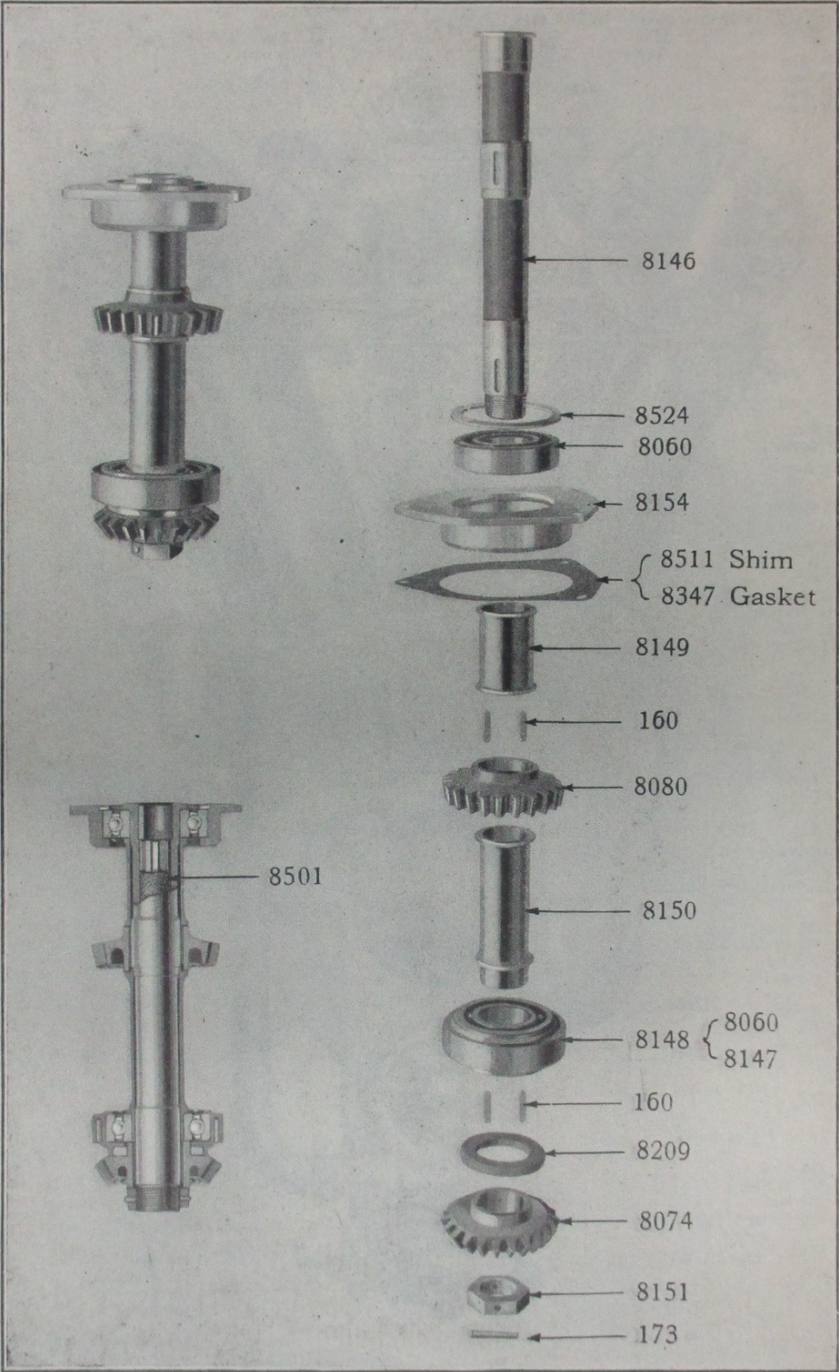

Generator drive shaft—Parts

Plate 17

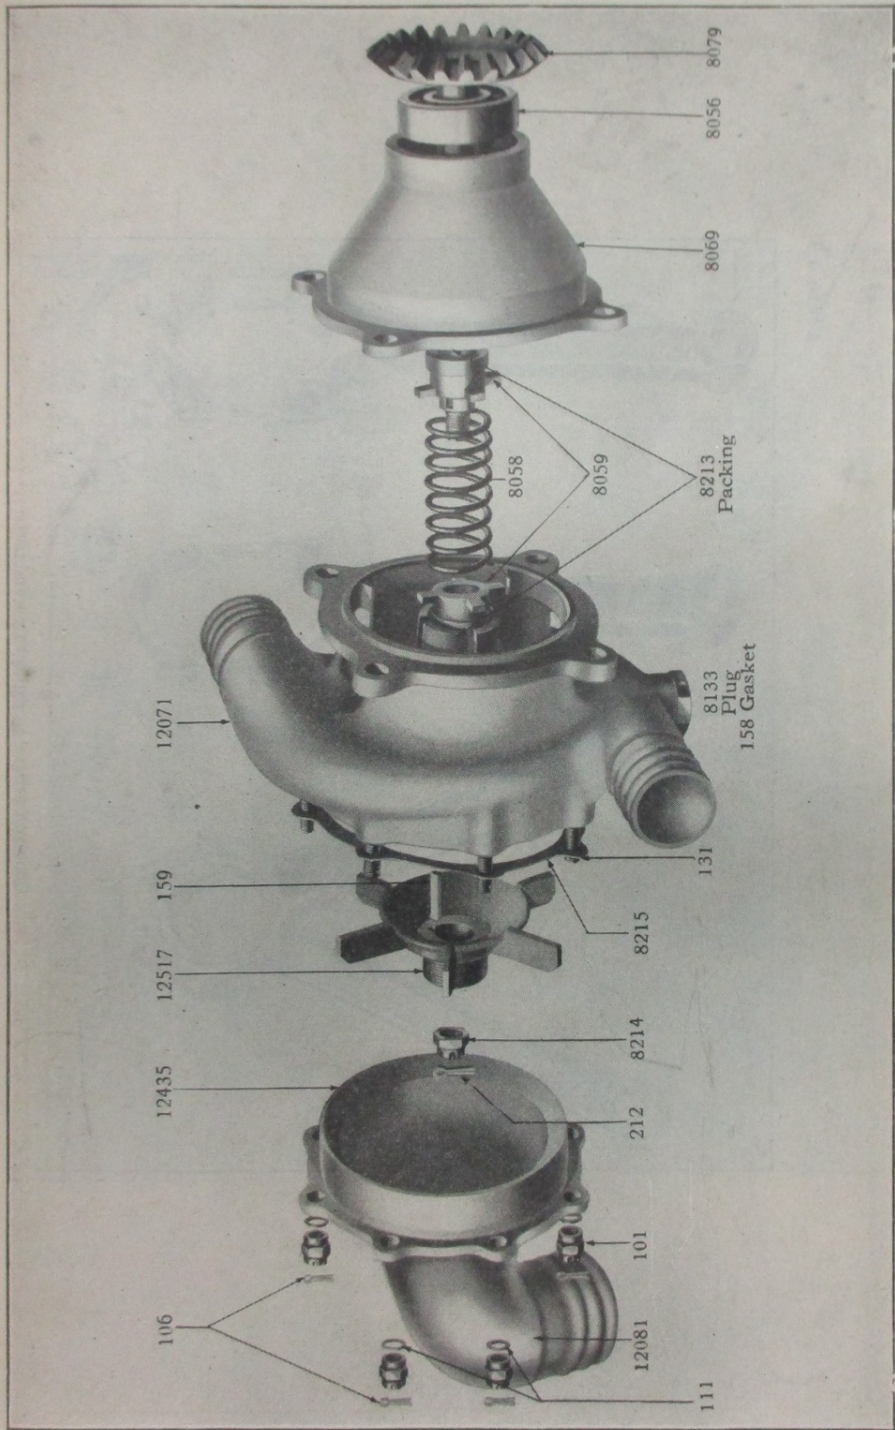

Water pump—Parts


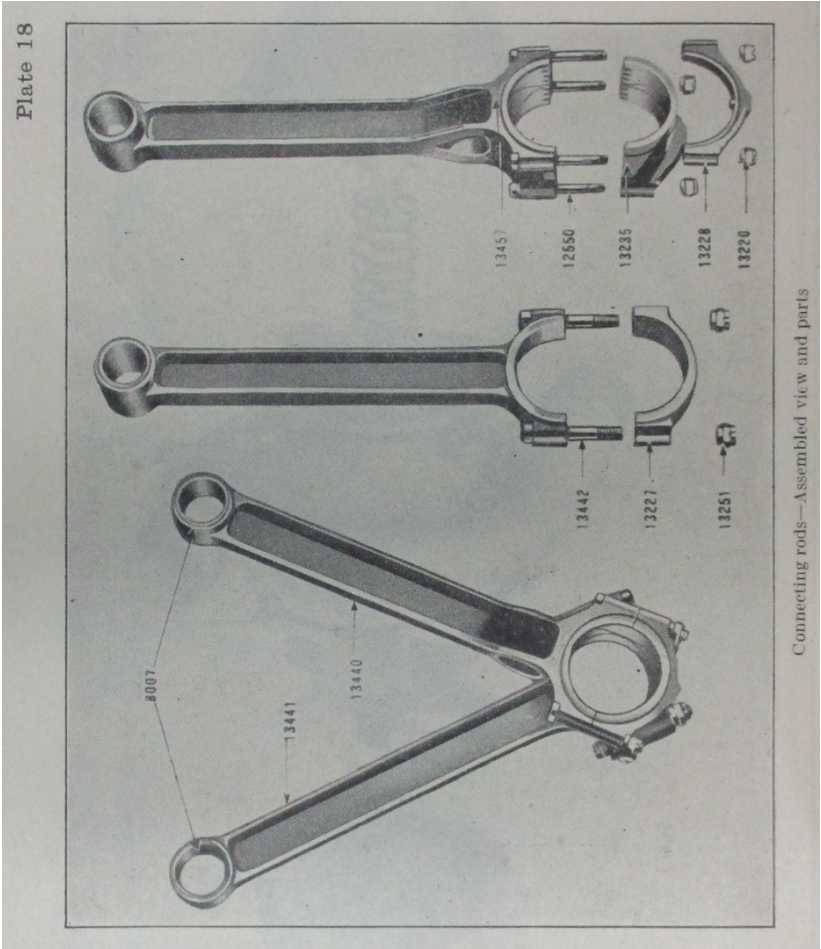


Plate 19

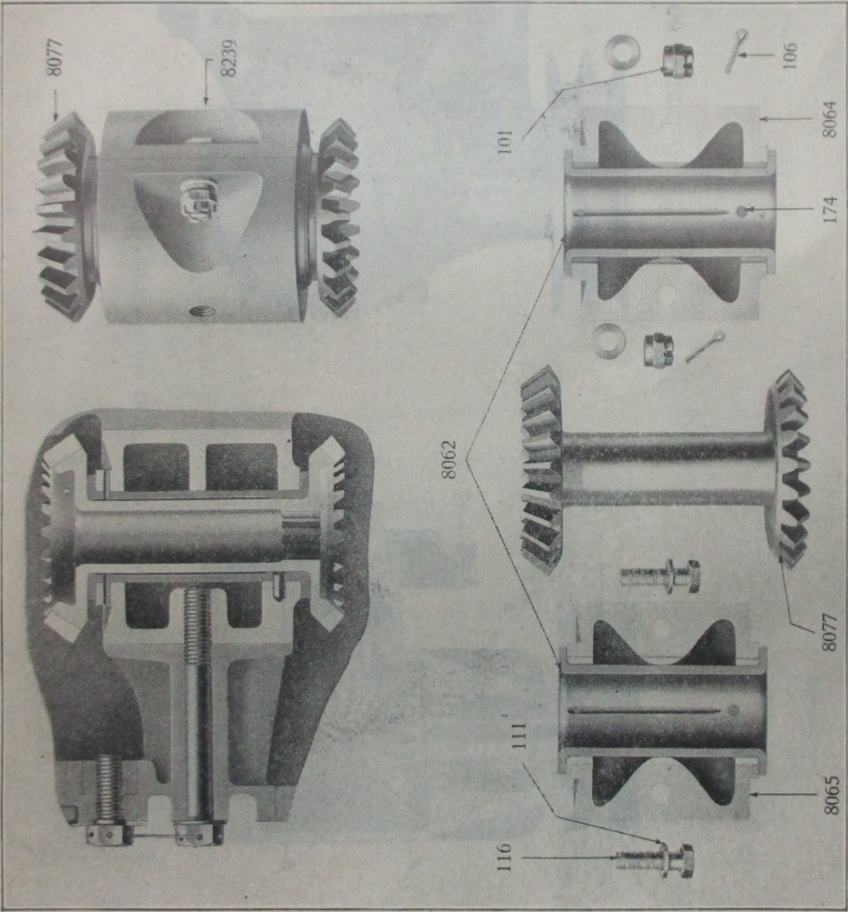

Fan bevel gear drive—Parts



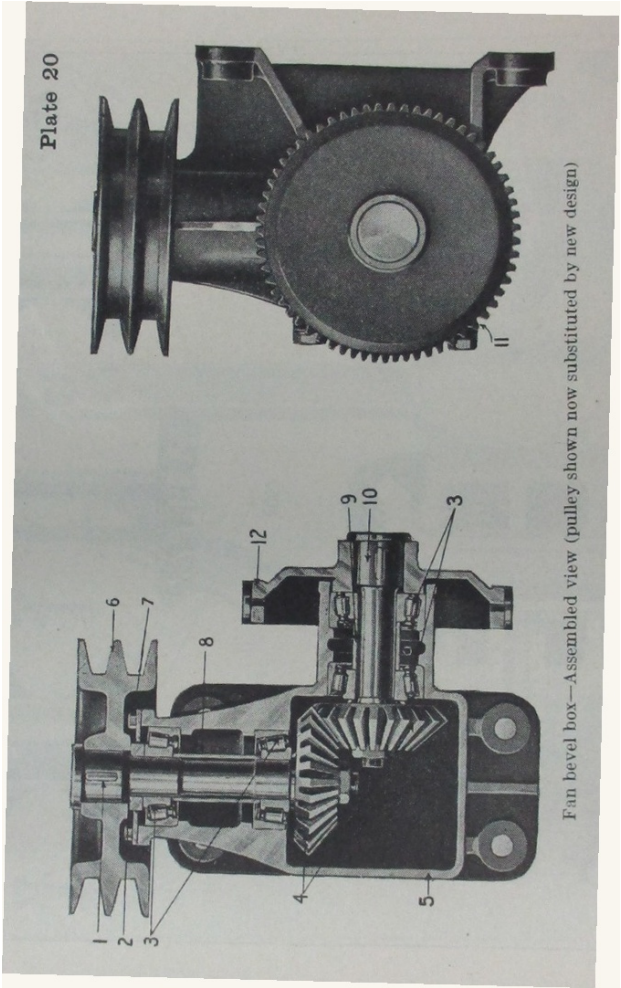


Plate 21

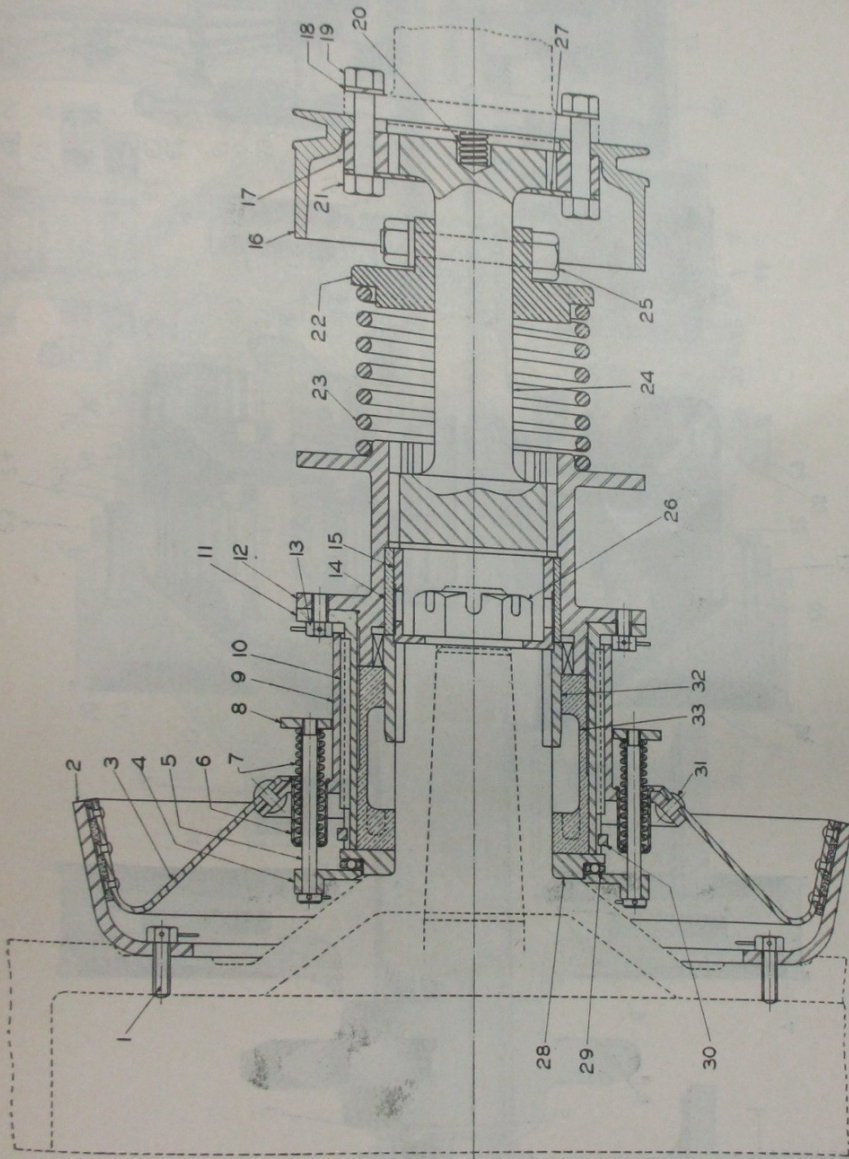

Clutch—Assembled view

Plate 22

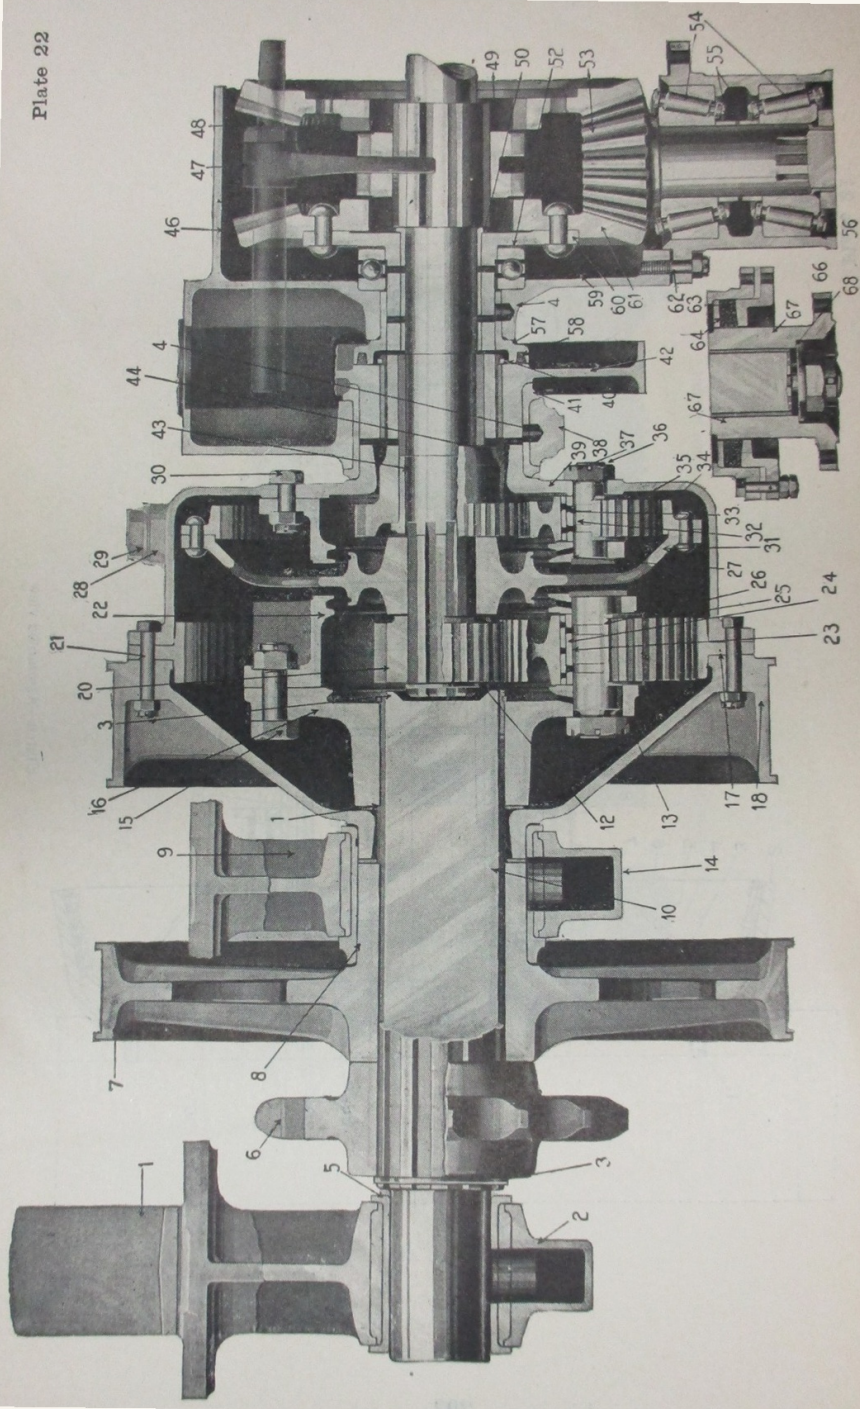

Transmission—Right half, sectional view



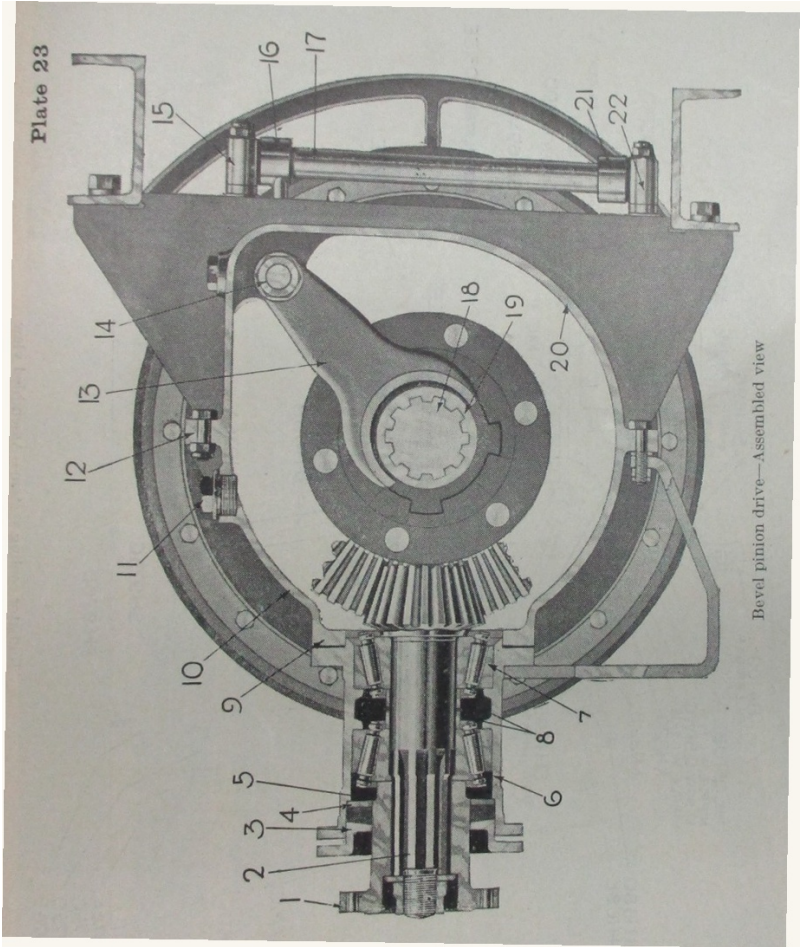


Plate 24

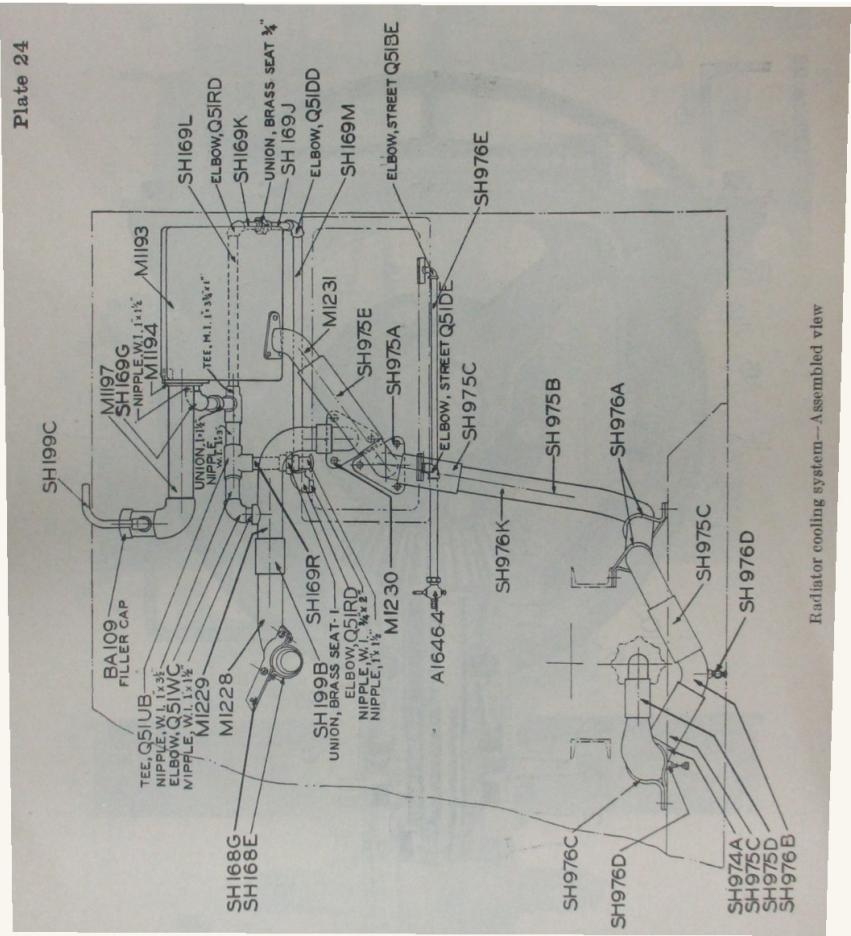


Radiator cooling system--Assembled view

Plate 25

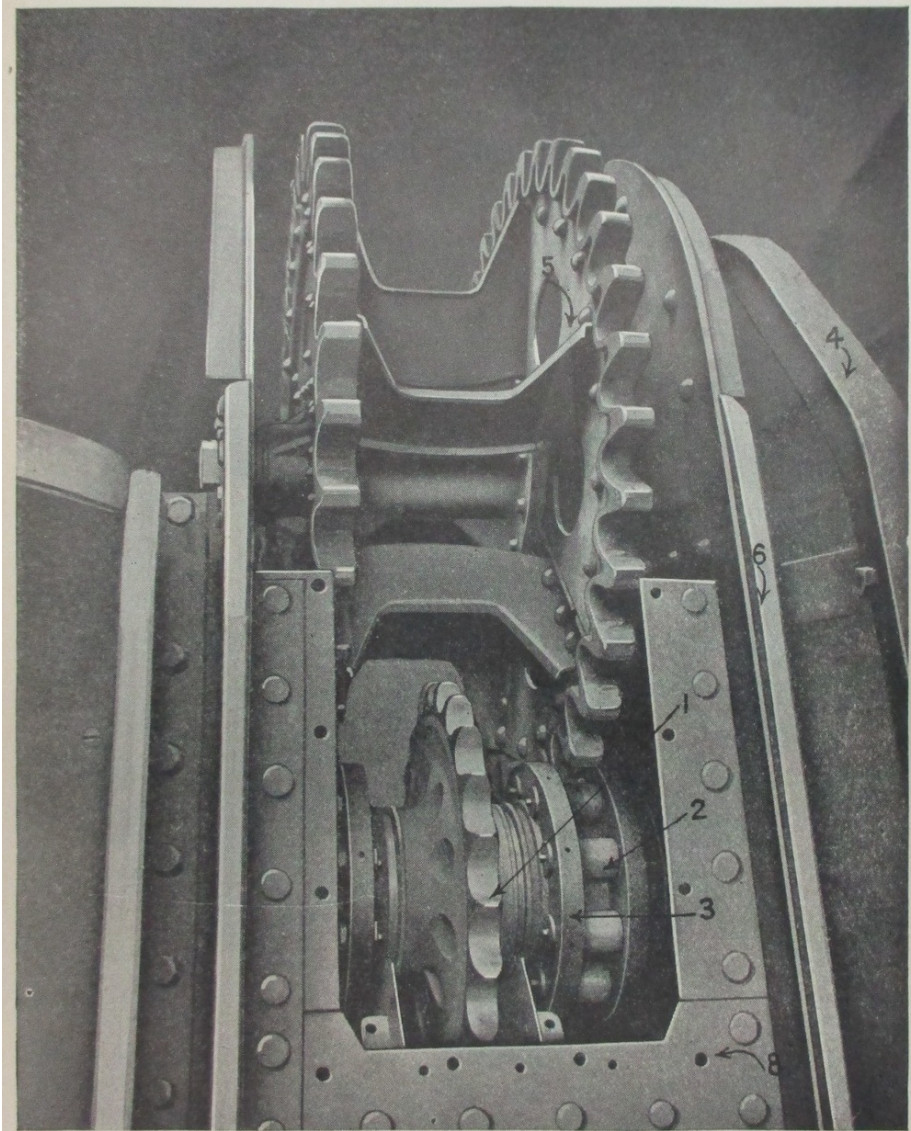

Roller pinion and track drive—Assembled view

Plate 26

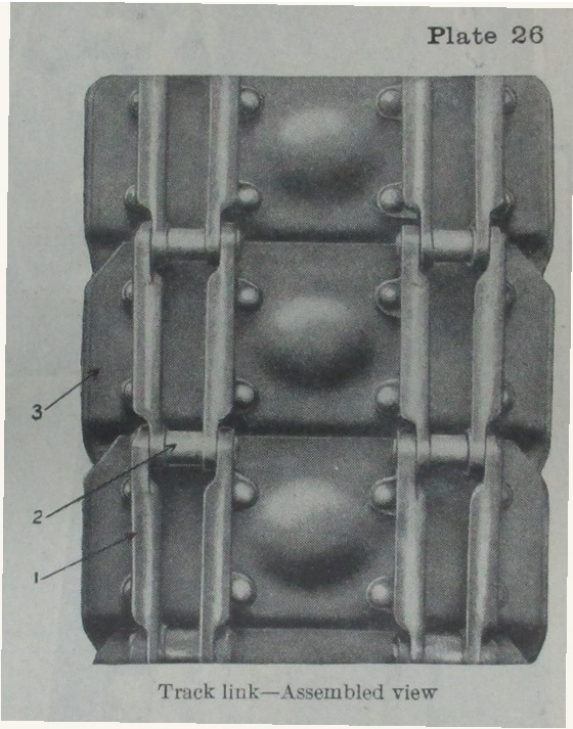

Track link—Assembled view



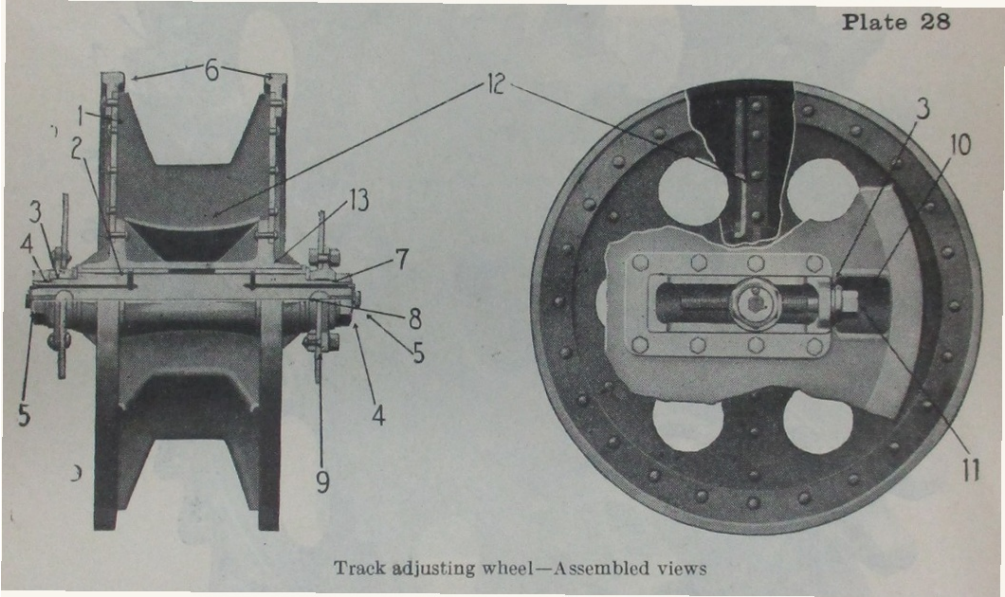
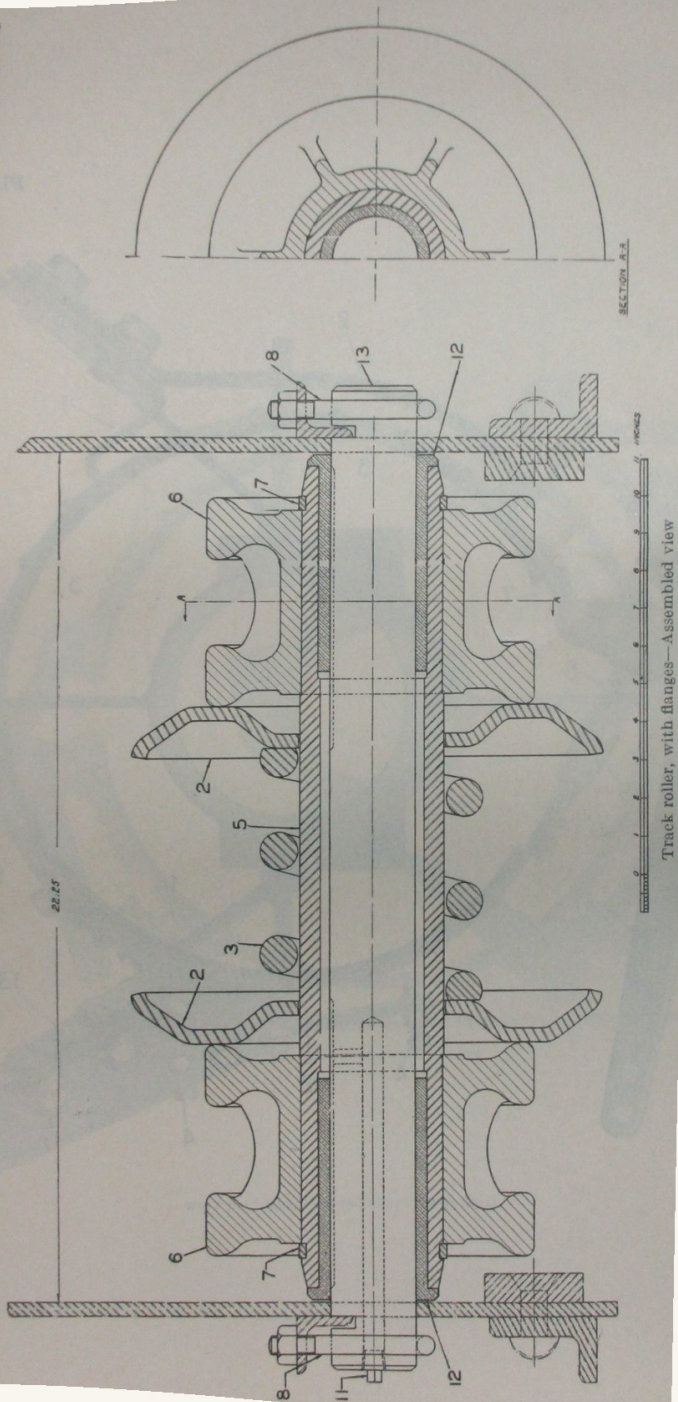


Plate 29






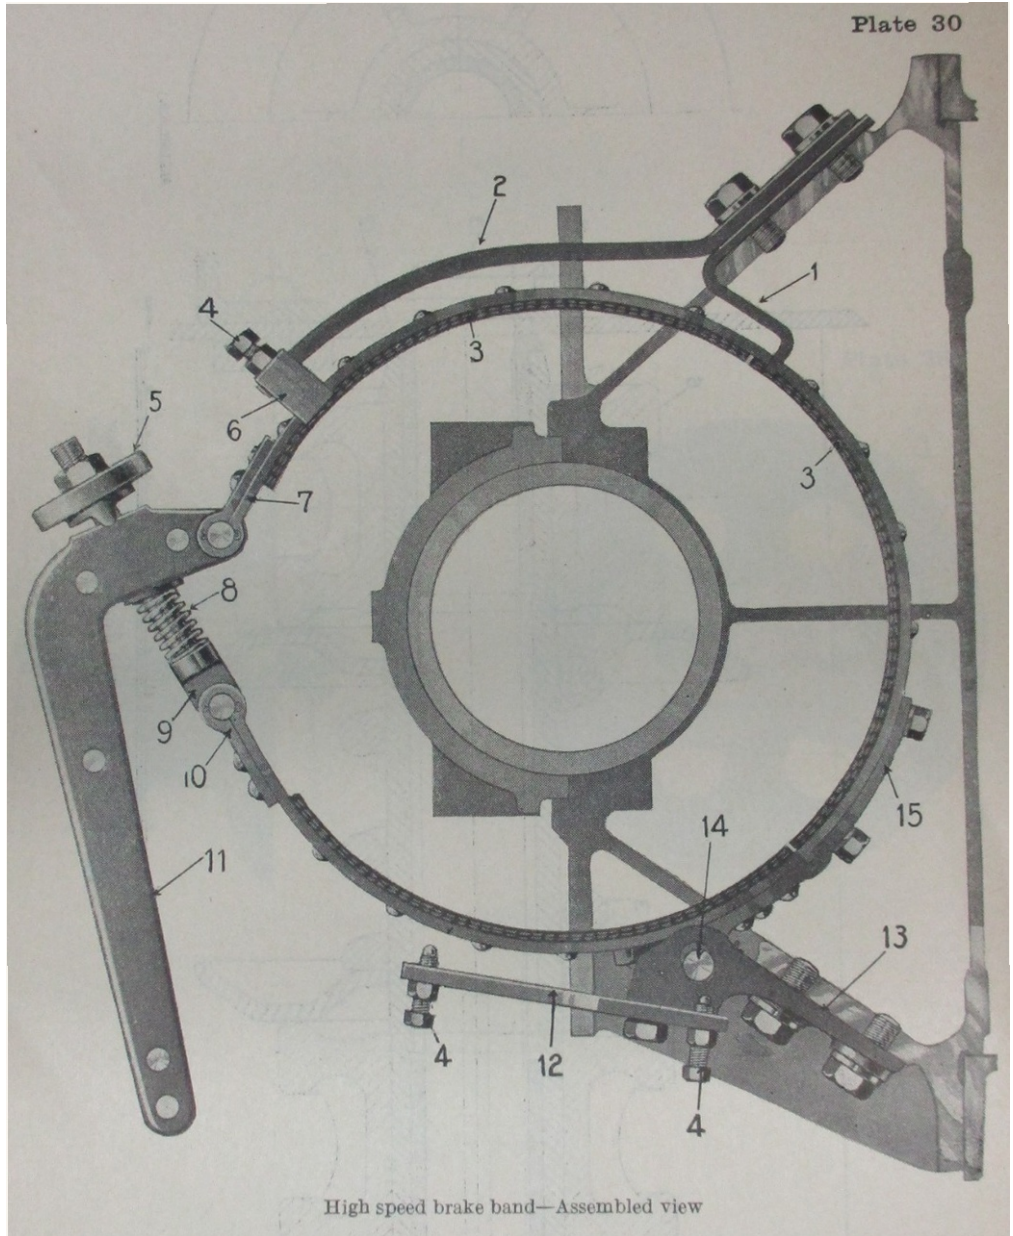


Plate 31

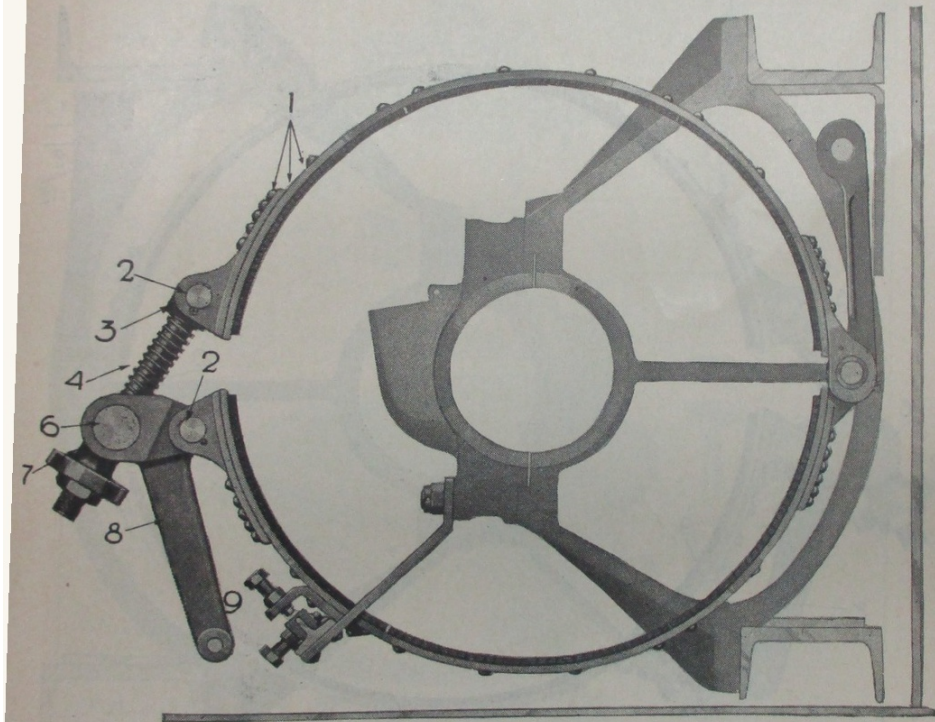


Track brake band—Assembled view

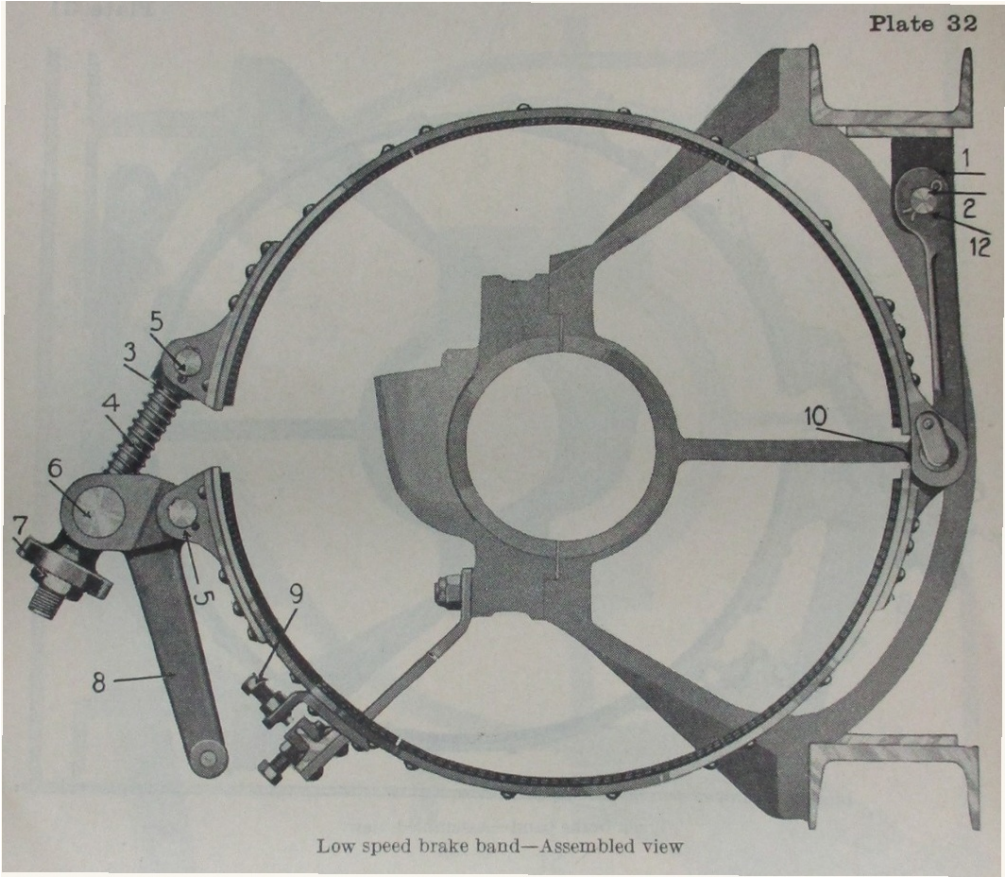

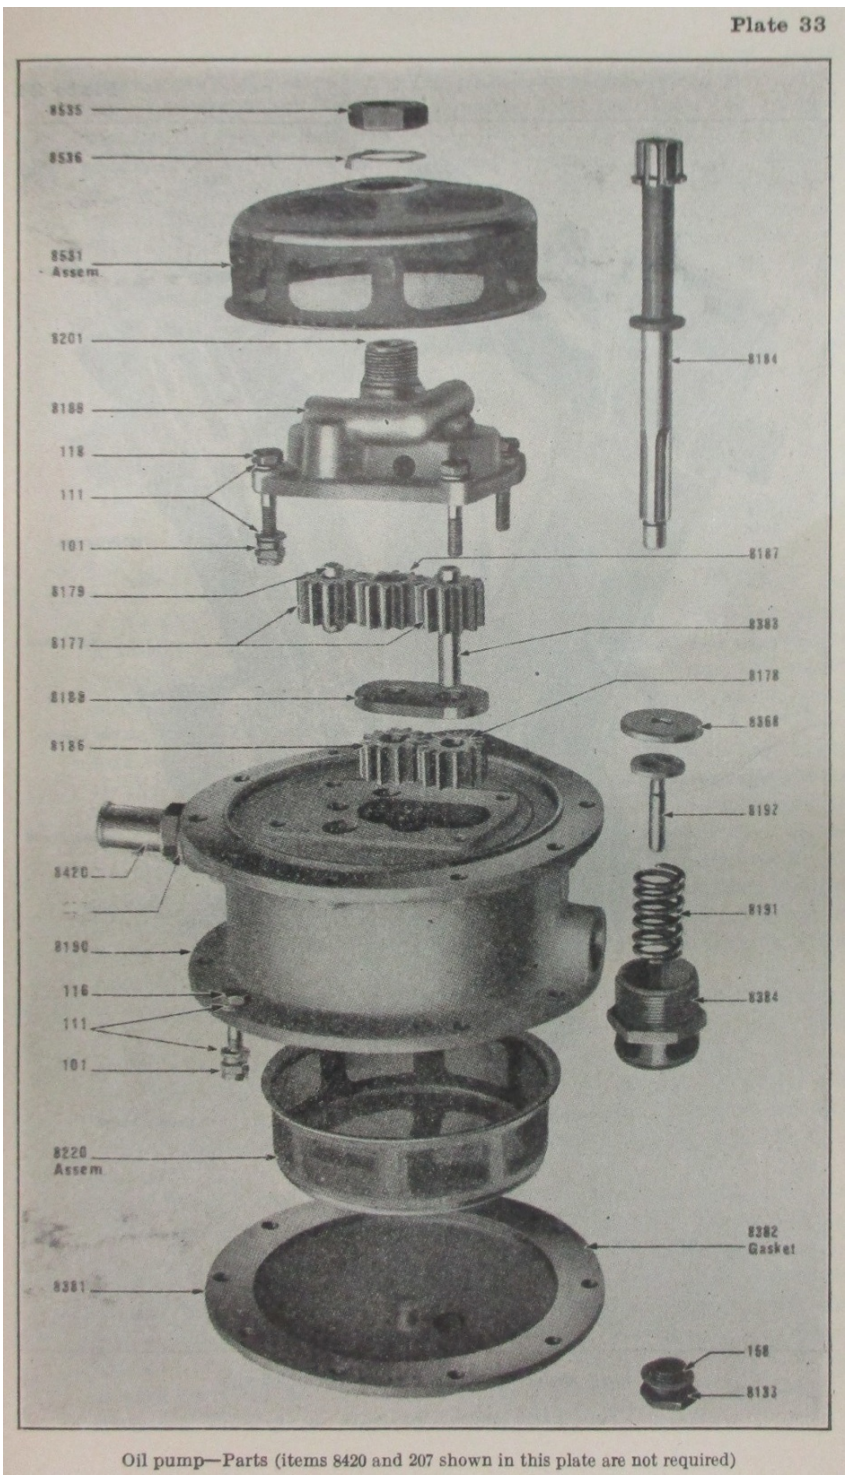

Oil pump—Parts (items 8420 and 207 shown in this plate are not required)

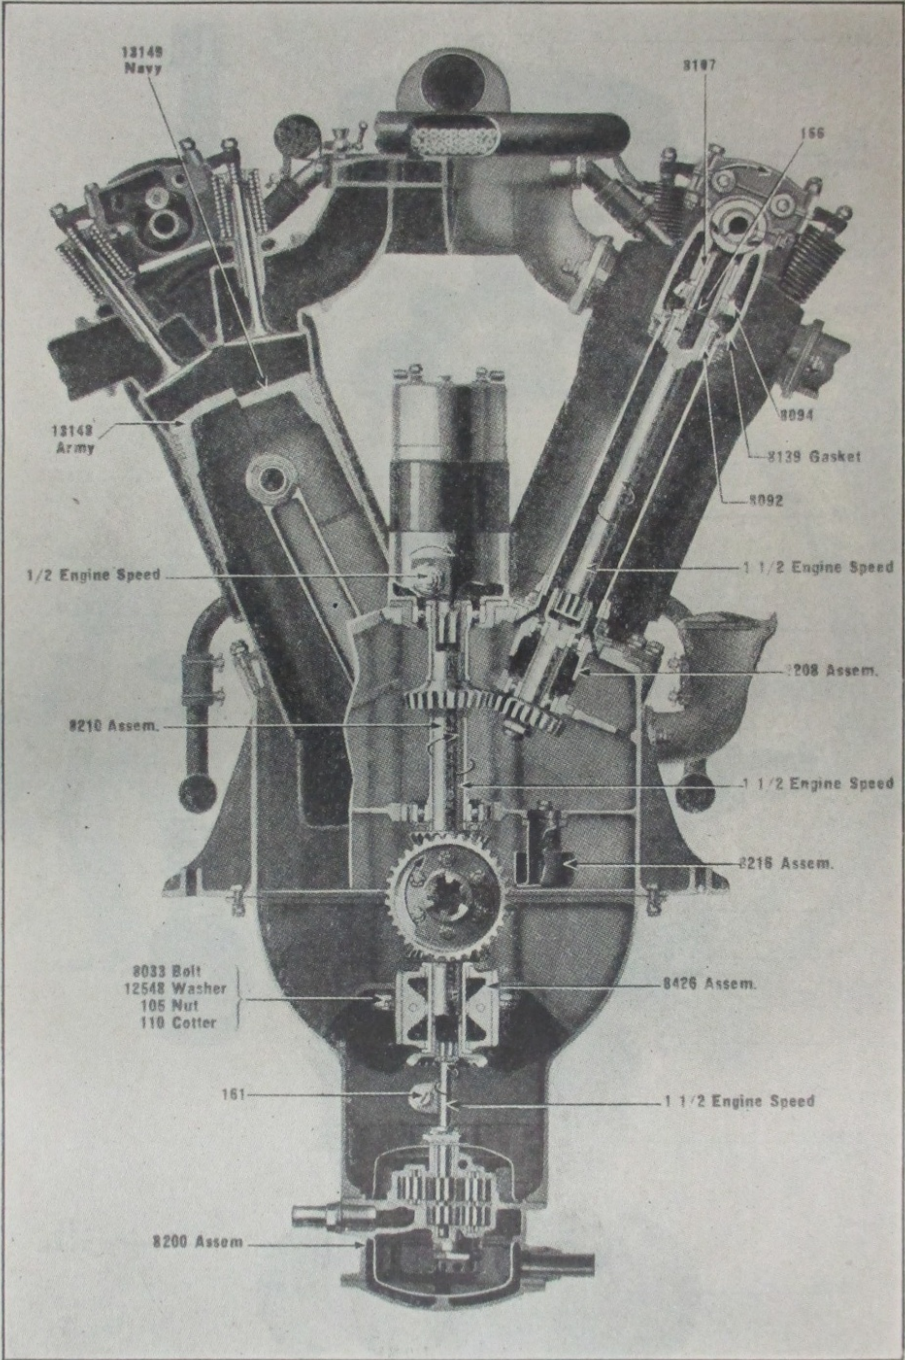

Liberty engine, transverse section—Assembled view

NOTES

- (ø) Major items indicated by (ø) are stored, issued, and reviewed under "Major Items," S. N. L. No. G-1. The standard list price given herein is for the Mk. VIII Tank without Equipment and Spare Parts and does not include the cost of handling, etc.
- (*) Items indicated by (*) are manufacturing components which are essential to the completion of the original unit assembly of the major product, but as it is not practicable nor advisable to replace such parts in the field as individual items, they will not be issued for field maintenance except as components of the authorized assemblies listed herein. Such items will not be reported to Field Service but will be held subject to disposition by the Manufacturing Service. The starred items included under assemblies as components thereof are not shown as individual parts in the list, but when such parts are not included as components of any assembly they are listed in their regular alphabetical arrangement. This method of listing starred items is for the purpose of showing all component parts necessary to complete the unit assembly and thereby establish a name for each and for checking purposes, etc. The total quantity of starred items required to complete the unit assembly is shown in parenthesis.
- (R) See (X) note.
- (X) Items are classified as directed in Army Regulations No. 35-6540, the letter (X) indicating expendable items, the letter (R) indicating repair material, and items not marked with either (X) or (R) are classified as nonexpendable. Expendable items, nonexpendable items, and repair material will be issued by Post, camp or station depots to organizations in accordance with the respective instructions embodied in the afore-said Army Regulations. Provisions of the regulations do not apply to the issue of items required in the repair and overhaul of supplies at Ordnance establishments, to intra-depot transfers, to shipments to camp, post or station depots, or to transactions between other establishments within the Ordnance Department. Also, owing to the necessary financial transactions between the Ordnance Department and the Militia Bureau when issues are made to National Guard not in active Federal Service, such issues are also exempted from provisions of the regulations.
- (%) Parts indicated by (%) are the only parts listed hereon which the using Service is authorized to requisition for replacement purposes. This limitation is necessary for the proper control and conservation of parts. In designating those parts which line organizations may draw the following factors were considered: The skill of the average man in line organizations, tools, equipment and facilities available, and the time element.
- (&) The parts listed hereon which the using services are authorized to draw are indicated by (%). These same parts, and in addition thereto, such as are indicated by (&) may also be drawn by Ordnance organizations such as Maintenance and Heavy Maintenance Companies and others whose facilities are equal thereto which would enable them to install the parts requisitioned. No other parts may be drawn by such organizations. All parts listed hereon except starred (*) items may be drawn by Field Service Shops such as are maintained in San Antonio, Panama, Philippines, Raritan Arsenal, Etc.

NOTES—Continued

- (#) Components of commercial parts not detailed on Ordnance drawings but required for field maintenance are listed in accordance with manufacturers' catalogue names and part number. Symbols composed of the first letter or letters of manufacturers' names are shown as a prefix with manufacturers' part numbers for the purpose of distinguishing those pertaining to the various commercial products used on the MK. VIII Tank, which are listed in this manner. Items, names of manufacturers, and symbols are as follows:

Item	Name of Manufacturer	Symbol
Ball-bearing	Fafnir	Fafnir.
	Gurney	Gurney.
	Monarch	Monarch.
	Hess Bright	H. B.
	S. K. F.	S. K. F.
Roller-bearing	Timken	Timken.
Ignition Switch	Delco	D-.
Voltage Regulator	Delco	D-.
Generator, 8-volt	Delco	D-.
Ignition Battery	Willard Storage Battery Co	W-.
Soldered Pipe Fittings	Titeflex Hose Co	T-.

- (b) Pieces which are components of subassemblies pertaining to commercial parts, not listed in manufacturers' catalog, are considered as starred items and are not listed under the various assemblies of which they are components.
- (c) Items indicated by (c) are included hereon to show complete list of parts and equipment, but will be considered as cross references only. They are common to two or more products handled by Group G, and, as such, are carried and reviewed under "Items common to two or more Group G products," S. N. L. No. G-9.
- (cp) Items indicated by (cp) are included hereon to show complete list of parts and equipment, but will be considered as cross references only. They are of standard Ordnance design and are common to products handled by two or more groups; and, as such, are stored and issued by Group H, and reviewed under "Standard chains and padlocks," S. N. L. No. H-6.
- (d) The various assemblies of the Ordnance Standard Chain are no longer authorized for issue for replacement purposes. Their use will be continued, however, for original manufacturer. For replacement purposes the welded chain ring has been superseded by an S hook, which is detailed on drawing A4478. The chain will be carried in bulk and cut and issued as required. The various chain assemblies may be issued until the present supply is exhausted.
- (e) The 40" crowbar (claw end) B465 will be issued until the supply is exhausted.
- (ee) Items indicated by (ee) are listed hereon to show complete list of parts and equipment, but will be considered as cross references only. They are either of standard commercial design or are common to products handled by two or more groups; and as such, are stored and issued by Group H, and reviewed under "Standard electrical equipment," S. N. L. No. H-5.

NOTES—Continued

- (ga) The items indicated by (ga) are required for use in shipping only.
- (gb) Items indicated by (gb) are used on the first 100 tanks only.
- (gd) A definite number is designated but number required differs in assembling.
- (ge) Items indicated by (ge) are required as oversize studs for service parts only.
LQ483A replaces LQ88A and LQ484A replaces stud LQ196A.
- (gf) Items indicated by (gf) are required only as oversize studs when holes in cylinder exhaust flange are worn or are tapped oversize and replace stud LQ303A.
- (gh) Thrackray washers are interchangeable with Belleville springs of the same inside diameter, one washer taking the place of 3 springs.
- (gi) Items indicated by (gi) are required as oversize studs for service only in place of stud LQ247A.
- (gj) Items indicated by (gj) are required as oversize studs for service only in place of stud LQ197A.
- (gk) In field work the roller support angles are checked by actual count which is made from the front to rear. They are counted by numbers consecutively, 1 to 8 on the outside and 1 to 9 on the inside. The one extra number on the inside is accounted for by the two roller inner skirting plate angles M2175 and M2176 which corresponds with roller support angle No. 5 M2082B or A.
- (gm) The outlook turret roof plate, M2361, can not be assembled with outlook turret assembly until assembled with tank.
- (go) The components of these assemblies are identical but when assembled at 61° angle form left and right assemblies which are not interchangeable.
- (gp) A total of 58 track roller assemblies are required but only 28 are required when assembled with flange.
- (gq) The assemblies indicated by (gq) require a babbitt lining which is poured in and around a mandrel after brackets and bevel gear case are bolted to channels, mandrel to pass through bevel gear case bearings to insure eight main bearings being in line after assembled as listed under Frame, with brackets and caps assembly. For that reason, the brackets and caps are issued as individual items without babbitt.
- (gt) Four (4) air-pressure gages and (12) wood screws, round head, No. 6 x ½", are required for first 100 tanks. For future production three gages and nine screws are required.
- (gu) No definite quantity can be designated as number required varies in assembling.
- (gv) Two accessory or ration boxes as detailed on 31-37-592 will be required for future production, but for the first 100 tanks one accessory or ration box and one smoke grenade box as detailed on obsolete drawing 31-37-593 with tray support removed, will be used.
- (gw) The first 100 tanks assembled at Rock Island Arsenal were fitted with engines assembled at Treco Motor Co., which carried pistons LQ466A. Therefore, the engine assembly is listed with piston LQ466A. The new design piston SH1020A, will be used, however, for all replacements.
- (gx) By action of the Ordnance Committee, Sept. 1, 1922, O. C. M. Item 2344, the Zenith carburetor will be substituted for the Ball and Ball carburetor. As the Ball and Ball carburetors now in service become unserviceable, they will be turned in to the Ordnance Officer, Tank School, Camp Meade, Md., where they will be disassembled and serviceable parts used in the repair of unserviceable carburetors now in tanks pending the installation of Zenith carburetor.

NOTES—Continued

- (gy) The commercial items indicated by (gy) were furnished by concerns which have been dissolved or no longer engaged in the manufacture of these items. Therefore, in cases where parts lists are not available the items are listed as a unit only, pending the adoption of substitutes which are now under study in the Manufacturing Service. Until substitutes are adopted, the tanks in current service will be maintained from the limited quantity of parts available or by the removal of parts from tanks in storage.
- (gaa) When the crank shaft becomes worn and has to be remachined, it then has to be refitted with undersize bearings as detailed on 31-ODL-127, 128, Pc. Mk. LQ127B and LQ148B.
- (gac) In order to avoid confusion, for the purpose of this list, a tap-bolt is defined as a U. S. Std. hexagon head bolt threaded either longer or shorter than the standard. As this threading is in accordance with special requirements, the tap-bolts are listed as special to this unit assembly.
- (gaf) A 2" cubical wood block is required for shipping and storage to prevent the expansion of the piston ring in the expansion chamber. Block to be inserted in cylinder prior to the insertion of the Piston, assembly.
- (gai) The camouflage net is now obsolete, but due to expense of modification, the brackets will not be removed.
- (gaj) The old standard piston detailed on LQ466A is now superseded by Piston detailed on SH1020A. The stock of pistons LQ466A will be retained, however, and issued when required for new work.
- (gak) According to standard practice fire extinguisher brackets should not be riveted on but in case of the Mk. VIII Tank they are riveted to armor plate, therefore are in reality components of the tanks. They will be reviewed as accessories.
- (gal) The first one hundred gasoline tanks which are marked for center position only will be issued until the supply is exhausted, for replacing center gasoline tank.
- (gam) The Set of Spare Parts, Accessories, Parts for Accessories, and Addendum covering basic spare parts will be published as Changes No. 1 to this list.
- (mh) Items indicated by (mh) are included hereon to show complete list of parts and equipment, but will be considered as cross references only. They are either of standard commercial design or are common to products handled by two or more groups; and as such, are stored and issued by Group H, and reviewed under "Miscellaneous hardware," S. N. L. No. H-2.
- (n) Items indicated by (n) are common only to the Artillery Reel, M1909MI, and the Mk. VIII Tank. They are never to be prorated between Groups, but the entire stock is stored and reviewed by Group C. Group G will requisition on Group C for such quantities only as may be required to fill requisitions.
- (pf) Items indicated by (pf) are included hereon to show complete list of parts and equipment, but will be considered as cross references only. They are either of standard commercial design or are common to products handled by two or more groups; and, as such, are stored and issued by Group H, and reviewed under "Standard pipe and pipe fittings," S. N. L. No. H-7.

NOTES—Continued

(sh) Items indicated by (sh) are included hereon to show complete list of parts and equipment, but will be considered as cross references only. They are either of standard commercial design or are common to products handled by two or more groups; and, as such, are stored and issued by Group H and reviewed under "Standard hardware," S. N. L. No. H-1.

USE OF PRICES

(See instructions under above heading in Introduction to The Ordnance Catalogue.)

(O. O. 140.2/1741)

C. C. WILLIAMS
Major General, Chief of Ordnance.