

MINTARCA

BRAND & ARTWORK SPECIFICATION
FOR MANUFACTURING PARTNERS

How to use this document

This document is the single source of truth for how the MintArca mark is applied to product. It is written for factories and decorating partners. Where a value is given as a tolerance, that tolerance is the accept/reject limit for production.

- Always use the supplied vector artwork. Never re-typeset, re-draw or trace the wordmark. The letterforms are supplied as outlines, so no font installation is required.
- Never scale artwork non-proportionally. Lock the aspect ratio in every step of your workflow.
- The mark is monochrome only. It is reproduced in black, in off-white, or as the natural tone of the substrate when laser etched. It is never printed in colour.
- Any placement, size or decoration method not described here must be approved in writing before tooling or mass production.
- Submit a physical pre-production sample for every new placement, substrate or decoration method. Photographs are not sufficient for approval.

Contents

The wordmark	3
Lockups and when to use them	4
Clear space and minimum size	5
Colour	6
Incorrect usage	7
Application — slab case lid	8
Application — PSA slab display	9
Decoration methods and tolerances	10
Supplied artwork files	11
Pre-production approval checklist	12

The wordmark

The MintArca wordmark is the primary and preferred expression of the brand. It is set in classical roman capitals with wide, even letterspacing. The spacing is part of the mark and must never be tightened or expanded.



CONSTRUCTION

ATTRIBUTE	SPECIFICATION
Letterforms	Supplied as vector outlines
Case	All capitals, always
Letterspacing	0.20 em, fixed
Aspect ratio	9.07 : 1 (width : cap height)
Word break	One word. Never MINT ARCA.

Lockups and when to use them

Three lockups are supplied. Use the horizontal wordmark unless the available area makes it illegible at the minimum size given on page 5.



HORIZONTAL WORDMARK — PRIMARY

Default for all applications. Use on the case lid, on packaging, on documents and on the website. This is the only lockup that may be used without prior approval.



STACKED LOCKUP — SECONDARY

For square or near-square areas only, such as a badge plate, a box seal or a hangtag. Do not use where the horizontal wordmark fits.



MA MONOGRAM — TERTIARY

For placements below the minimum width of the horizontal wordmark: screws, latch plates, small hardware, embossed foam. Never use the monogram as the only branding on a finished product.

Clear space and minimum size

Clear space is measured from the outer edge of the letterforms. Nothing may enter it: no text, no hardware, no seams, no edges, no other logos. The unit of measurement is X, the cap height of the wordmark.



X = CAP HEIGHT OF THE WORDMARK

MINIMUM REPRODUCTION SIZE

LOCKUP	ETCH / DEBOSS	PRINT	DIGITAL
Horizontal wordmark	40 mm wide	50 mm wide	160 px wide
Stacked lockup	22 mm wide	26 mm wide	90 px wide
MA monogram	10 mm wide	14 mm wide	48 px wide

Below these sizes the counters of the R, C and A fill in and the mark reads as a grey block. If a placement cannot meet the minimum, use the next lockup down rather than reducing further.

Colour

MintArca is a monochrome brand. There is no brand colour and none may be introduced. Three tones are permitted.




Ink Black

HEX #111111

PANTONE Pantone Black 6 C

CMYK 0 / 0 / 0 / 100

RAL RAL 9005 matt



Paper White

HEX #F2F3F2

PANTONE Pantone 11-0601 TCX

CMYK 0 / 0 / 0 / 0

RAL RAL 9003



Etch Graphite

HEX #8A8D8F

PANTONE Pantone Cool Gray 7 C

CMYK 0 / 0 / 0 / 45

RAL RAL 9007

- Etch Graphite is a reference for the natural tone produced when anodising is ablated. Do not attempt to match it with ink or paint — it is a result, not a specification.
- On black anodised aluminium the mark is either laser etched to Etch Graphite or screen printed in Paper White. On any light substrate the mark is Ink Black.
- Do not use pure #000000 for print. Ink Black is specified as 100 K only — no rich black, no four-colour build.

Incorrect usage

Each example below is a rejection reason at inspection.



MINTARCA

✗ Do not stretch or condense



MINTARCA

✗ Do not change the letterspacing



MINTARCA

✗ Do not add colour



MINTARCA

✗ Do not rotate or arc the mark



MINTARCA

✗ Do not add effects or outlines



MINTARCA

✗ Do not re-typeset in another font



MINTARCA

✗ Do not place on a busy surface




MINTARCA

✗ Do not enclose the mark in a box

Application — slab case lid

The horizontal wordmark is centred on the exterior lid of the case. This is the only branded surface on the case. The front panel, sides, base, locks, handle and hinges carry no branding of any kind.

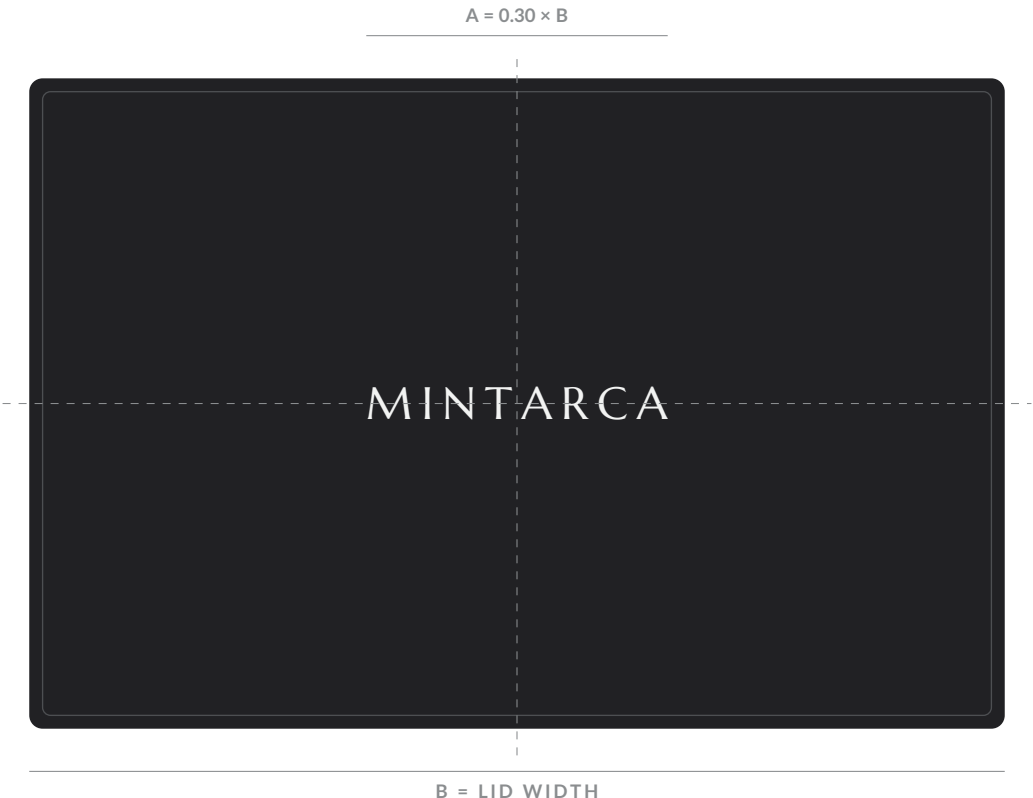

PLACEMENT RULE


PARAMETER	SPECIFICATION
Lockup	Horizontal wordmark, outlines, reversed (Paper White or Etch Graphite)
Horizontal position	Centred on lid width. Tolerance ±0.5 mm.
Vertical position	Centred on lid depth. Tolerance ±0.5 mm.
Width	30% of lid width, minimum 60 mm, maximum 120 mm
Rotation	0°. Reads left to right with the handle toward the viewer.
Clear space	Minimum 1X to any edge, seam, rivet, hinge or corner radius

WORKED EXAMPLES

LID WIDTH B	LOGO WIDTH A	CAP HEIGHT
380 mm	114 mm	12.6 mm
420 mm	120 mm (max)	13.2 mm
460 mm	120 mm (max)	13.2 mm

Application — PSA slab display

Displays hold a graded PSA holder in portrait orientation. The card is the subject; the branding is secondary and must never compete with it. The mark sits on the base or foot of the display, never on the face, never over the card.

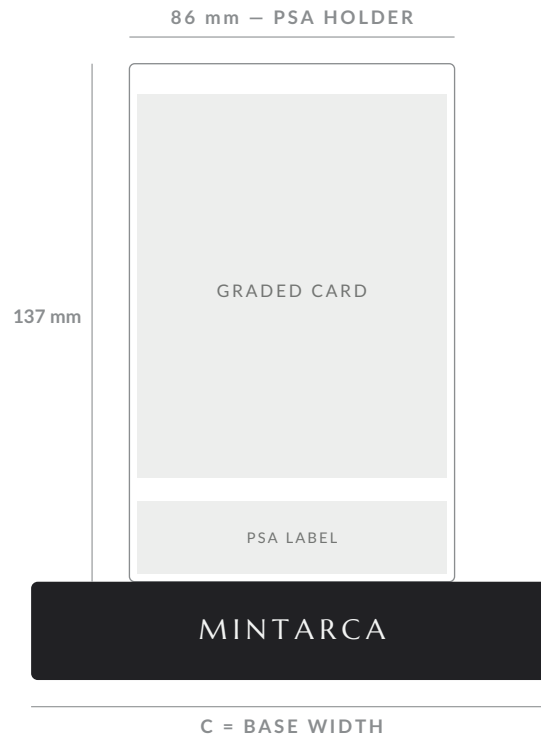

PLACEMENT RULE

PARAMETER	SPECIFICATION
Lockup	Horizontal wordmark. MA monogram if base width is under 70 mm.
Surface	Front face of the base only
Horizontal position	Centred on base width. Tolerance ± 0.4 mm.
Vertical position	Centred on base height. Tolerance ± 0.4 mm.
Width	45% of base width, minimum 40 mm
Slab reference	PSA holder $86 \times 137 \times 7$ mm nominal. Confirm against current PSA holder before tooling — dimensions have changed historically.
Fit	Slot depth to accept 7.6 mm to allow for holder tolerance and dust

Decoration methods and tolerances

All three methods below are approved. Quote each separately. Where a method cannot meet a tolerance, say so at quotation stage rather than at sampling.

○1 Laser etch on anodised aluminium

Result tone	Etch Graphite — natural, no ink
Min stroke width	0.15 mm
Min logo width	40 mm horizontal wordmark
Position tolerance	±0.5 mm in both axes
Rotation tolerance	±0.3°
Depth	Ablate anodising only. Do not cut into the substrate.
Finish	No discolouration, no halo, no heat bloom at the edges

○2 Silkscreen print, Paper White

Ink	Two-pass white for full opacity over black
Min stroke width	0.25 mm
Min logo width	50 mm horizontal wordmark
Position tolerance	±1.0 mm in both axes
Registration	Single colour, no trapping required
Adhesion	Must pass cross-hatch tape test, ISO 2409 class 0-1
Durability	No visible wear after 500 dry rub cycles

○3 Debossed metal badge

Material	Brushed stainless or anodised aluminium, 0.8-1.0 mm
Deboss depth	0.15-0.25 mm
Min logo width	60 mm horizontal wordmark
Position tolerance	±0.8 mm in both axes
Fixing	3M VHB or equivalent, full-face adhesive
Edge	Deburred, no sharp edge, corner radius to match lid
Pull test	No lift after 72 h at 60 °C and 90% RH

Supplied artwork files

The artwork pack accompanies this document. Use the vector files for all production. PNG files are for reference and digital use only and must never be sent to a laser, a screen or a die.

FILE	FORMAT	USE
mintarca-wordmark-black	SVG / PDF / EPS	Production — light substrates
mintarca-wordmark-white	SVG / PDF / EPS	Production — dark substrates
mintarca-stacked-black	SVG / PDF / EPS	Production — square areas
mintarca-stacked-white	SVG / PDF / EPS	Production — square areas, dark
mintarca-monogram-black	SVG / PDF / EPS	Production — small hardware
mintarca-monogram-white	SVG / PDF / EPS	Production — small hardware, dark
mintarca-wordmark-black	PNG, 4000 px	Reference and digital only
mintarca-wordmark-white	PNG, 4000 px	Reference and digital only

- All vector files contain outlined paths. No fonts are required and no font may be substituted. If your software asks for a missing font, the file has been altered — request a fresh copy.
- White artwork is drawn in white and will appear blank on a white screen. This is correct.
- Do not convert, redraw, auto-trace or re-export the artwork. Place the supplied file directly into your production file.
- Do not add a background, a bounding box, a registration mark or a filename inside the artwork area.

Pre-production approval checklist

Complete and return this checklist with the physical sample. A sample submitted without it will not be reviewed.

- ☐ Artwork used is the supplied vector file, unmodified
- ☐ Lockup is correct for the placement
- ☐ Logo width measured and within specification
- ☐ Position measured from both datums and within tolerance
- ☐ Rotation within tolerance
- ☐ Clear space respected on all four sides
- ☐ Minimum stroke width achieved with no fill-in of counters
- ☐ Tone matches the approved reference for the method used
- ☐ No colour introduced anywhere on the product
- ☐ Adhesion or durability test completed and passed
- ☐ Sample photographed against a neutral background under daylight
- ☐ Physical sample despatched with tracking reference

FACTORY

CONTACT NAME

DATE

SAMPLE REFERENCE

MINTARCA

Questions and approvals
semapashop@gmail.com