
Power flow: 24 V input -> fused/protected VIN -> 5 V buck -> 3V3 LDO

## INPUT • FUSE • REVERSE-POLARITY PROTECTION

## 5 V BUCK POWER STAGE

## 3V3 LDO • FILTER • STATUS

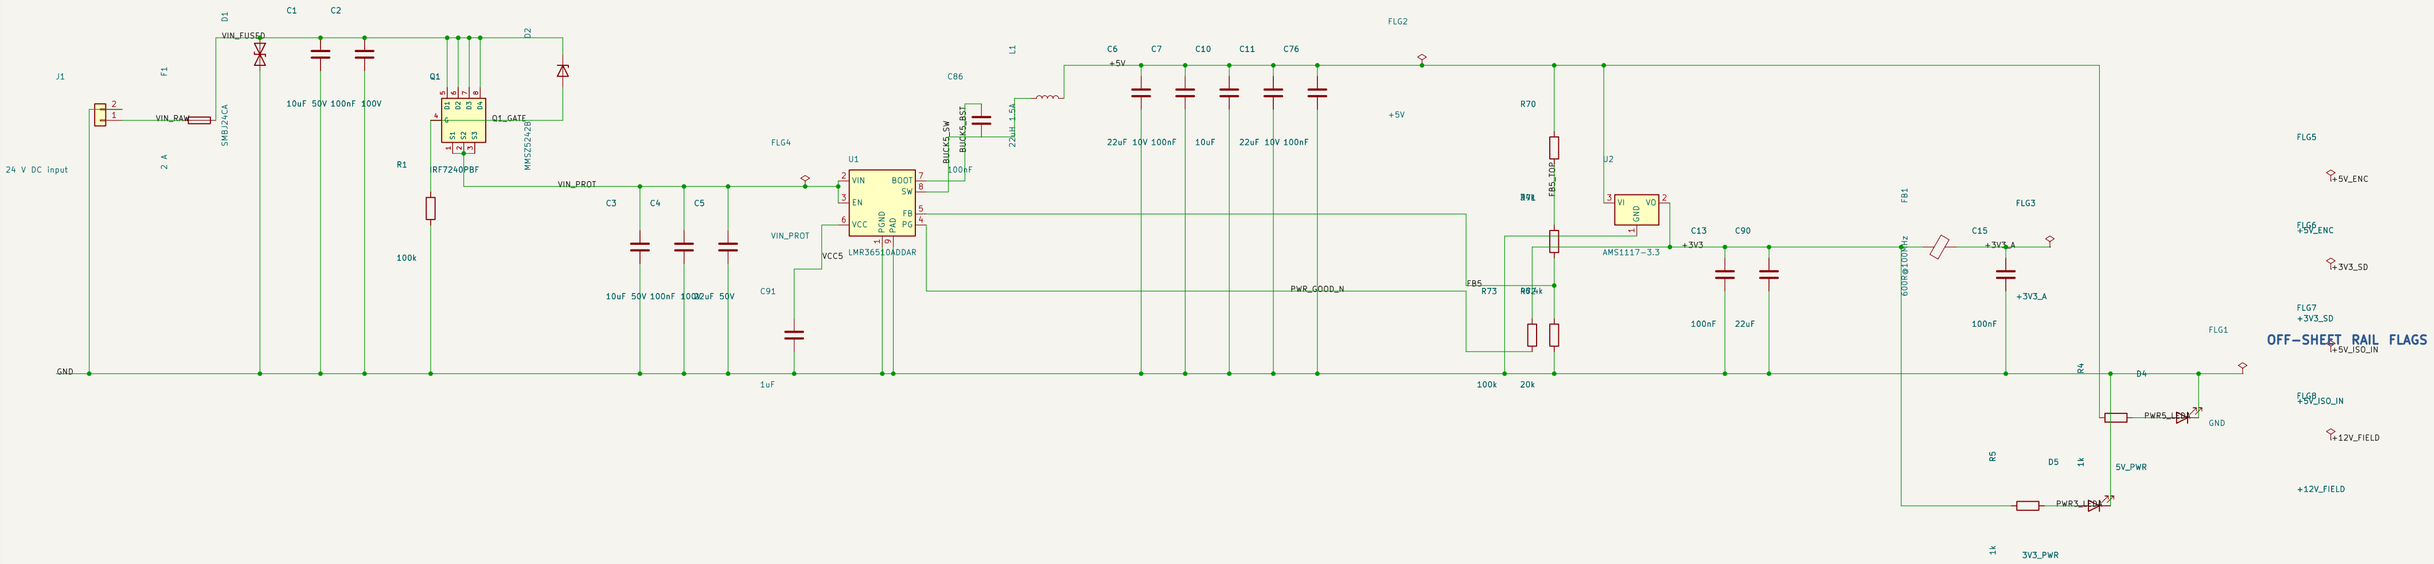


## OFF-SHEET RAIL FLAGS

| | |
|---|---|
| Method B: existing symbols, explicit orthogonal wiring | |
| **LeanCam / uCNC experiment** | |
| Sheet: / | |
| File: lean-power-b.kicad_sch | |
| ***Title: LeanCam NCC RP2350B – Power and Supervision (Python re-layo*** | |
| Size: A2 | Date: 2026-10-29 |
| KiCad E.D.A. 10.0.1 | **Rev:** Id: 1/1 |