

CUSTOMER TERMINAL RoHS LEAD(Pb)-FREE Sn96%, Ag4% Yes Yes



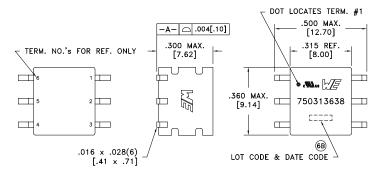

## ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER		TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3	@20°C	0.33 ohms max.
D.C. RESISTANCE	6-4	@20°C	0.33 ohms max.
INDUCTANCE	1-3	100kHz, 10mVAC, Ls	340uH min.
DIELECTRIC	1-6	6250Vrms, 1 second	5000Vrms, 1 minute
TURNS RATIO		(6-4):(1-3)	1.3:1, ±2%

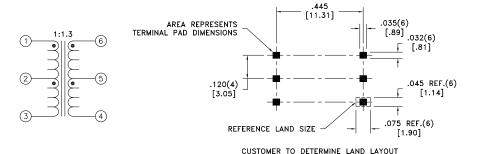

**GENERAL SPECIFICATIONS:** 

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

CURRENT RATING: 150mAAC

VOLTAGE-TIME: 11VuS

Designed to comply with the following requirements as defined by IEC60601-1:2006, - Providing two means of Patient Protection up to a working voltage of 250VAC.

COPLANARITY: All 6 terminals must lie on a plane within .004 [.10]

of Surface A after lead tinning.

Wire insulation & RoHS status not affected by wire color. Wire insulation color may vary depending on availability.

(6B) AGENCY NUMBER UL60950-1 E205930 UL60601-1 E358628

Packaging Specifications REV. DATE Method: Tape & Reel PKG-0948 www.we-online.com/midcom 6B 6A 10/13 SEE REVISION SHEET FOR REVISION LEVEL

CONVENTION PLACEMENT

Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Footprint: ±.005 [.13] Fractions: ±1/64

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE

**TRANSFORMER** 

eiSos p/n: 750313638



750313638

ROHS SPECIFICATION SHEET 1 OF 1

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Wurth Electronics: 750313638