DOORTRONIX, INC
5783 C.R. 1219
MALAKOFF, TX 75148
TEL: 888-453-5196
FAX: 888-579-4639
www.doortronix.com
THE NEXT GENERATION OF AUTOMATIC DOORS


DOORTRONIX LINEAR BEARING 2100 SERIES

P - X - X - P


BIPART ISA NO SIDELITES

PROJECT INFORMATION

PROJECT NAME:	
LOCATION:	
DOOR NUMBERS:	
DATE: SHEET:	SHEET: 1 OF 1

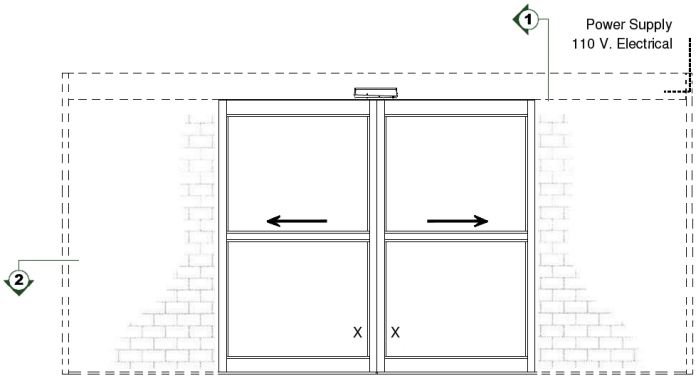


Exterior Elevation

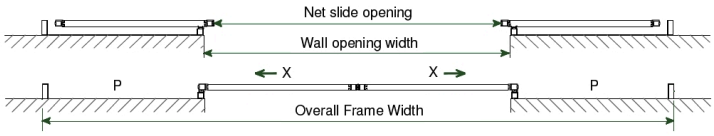


*** NO BREAK-AWAY FUNCTION ***

Elevation & floor plans
Exterior view elevation

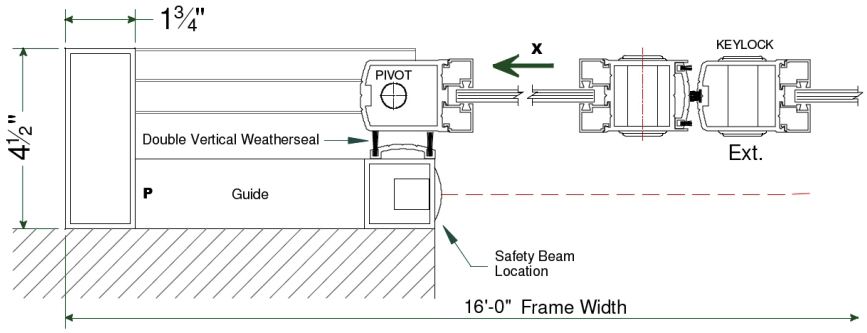

1 Horizontal Section
Type P-SX-SX-P

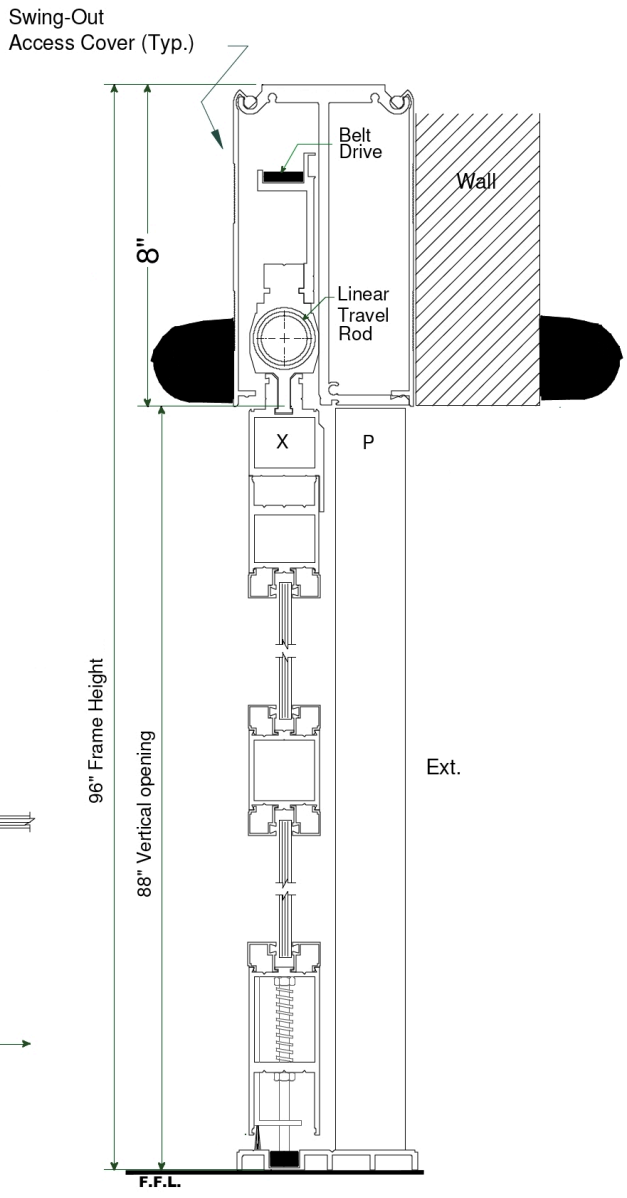

2 Vertical Section

NOTES
1. ELECTRICAL REQUIREMENTS: 120 VAC, 5 AMP MIN TO POWER OPERATOR BY ELECTRICAL CONTRACTOR.
2. ROUGH OPENING SHALL PROVIDE 1/4"[6] SHIM SPACE ON SIDES AND TOP OF PACKAGE.
3. LIMITS OF ACTIVATION AND SAFETY ZONES ARE FOR REFERENCE ONLY; SEE ANSI/BHMA A156.10 FOR DETAILED REQUIREMENTS.
4. SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.

Model	Frame Width	Frame Height	Clear Door Opening	Vertical Opening	Wall Opening Width
P-X-X-P	16'-0"	96"	84"	88"	96"

REVISION: 08/15/2016