DOORTRONIX, INC
5783 C.R. 1219
MALAKOFF, TX 75148
TEL: 888-453-5196
FAX: 888-579-4639
www.doortronix.com
THE NEXT GENERATION OF AUTOMATIC DOORS


**DOORTRONIX LINEAR BEARING 2100 SERIES**

# SX - P


## SINGLE SLIDE ISA RIGHT HAND NO SIDELITE

**PROJECT INFORMATION**


| | |
|---|---|
| **PROJECT NAME:** | |
| **LOCATION:** | |
| **DOOR** | |
| **NUMBERS:** | |
| **DATE: SHEET:** | **SHEET: OF** |

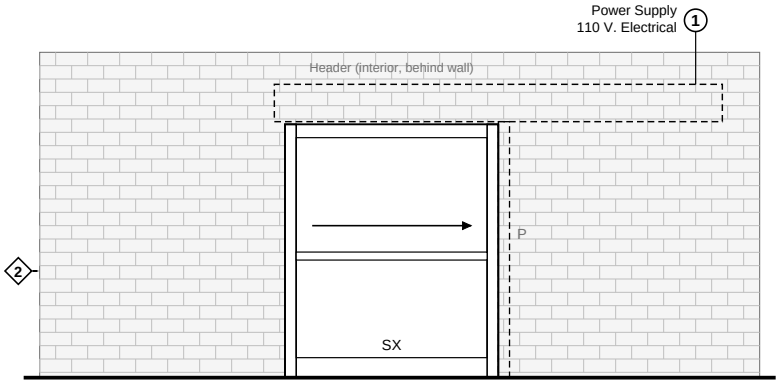



SX-P (R.H. Slide)
**Exterior Elevation**

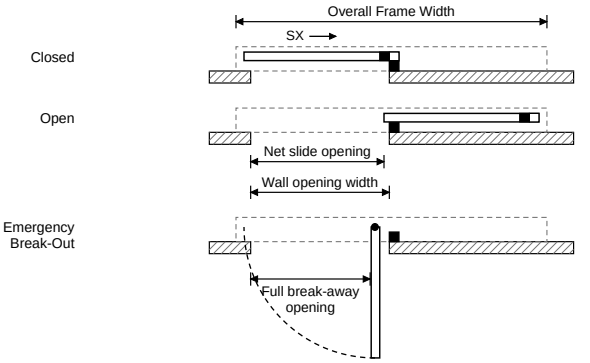


**Elevation & floor plans**
**Exterior view elevation**

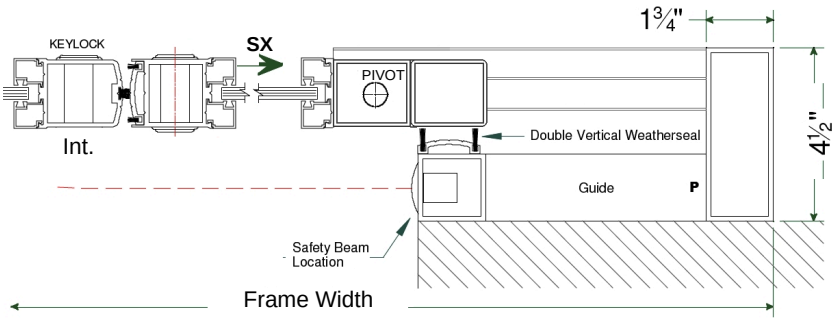


**1 Horizontal Section**
Type SX-P

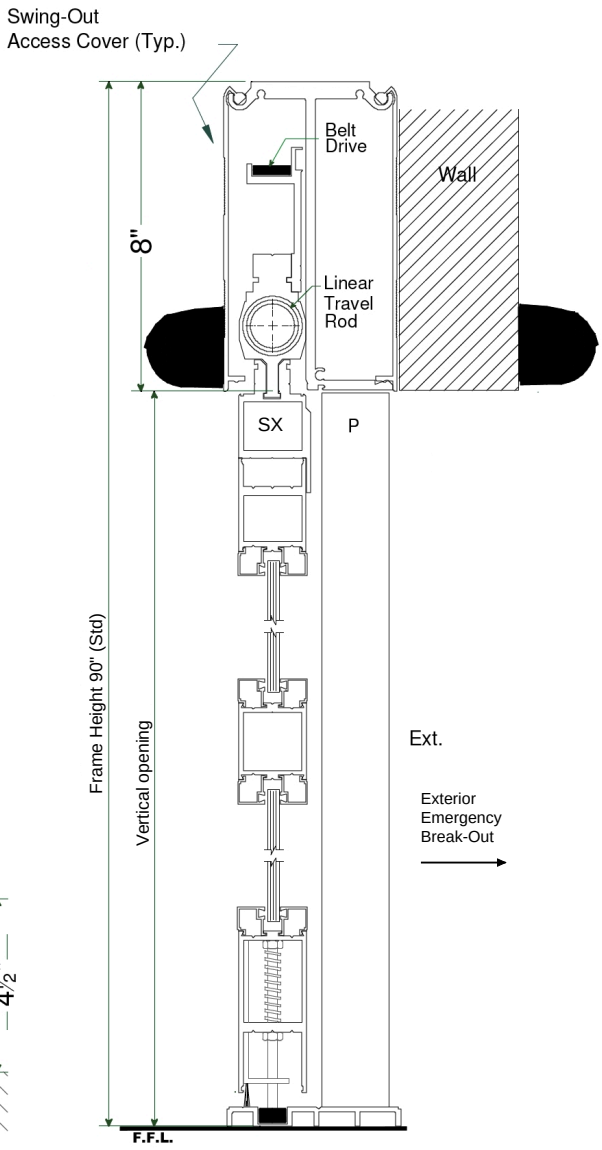


**2 Vertical Section**

**NOTES**

1. ELECTRICAL REQUIREMENTS: 120 VAC, 5 AMP MIN TO POWER OPERATOR BY ELECTRICAL CONTRACTOR.
2. ROUGH OPENING SHALL PROVIDE 1/4"[6] SHIM SPACE ON SIDES AND TOP OF PACKAGE.
3. LIMITS OF ACTIVATION AND SAFETY ZONES ARE FOR REFERENCE ONLY; SEE ANSI/BHMA A156.10 FOR DETAILED REQUIREMENTS.
4. SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.
5. INTERIOR MOUNTED. HEADER AND P STILES SET AGAINST THE INTERIOR FACE OF THE WALL. SERVICE ACCESS FROM THE INTERIOR.
6. EACH SX PANEL HAS TWO HEEL STILES: A CLOSURE STILE IN LINE WITH P AND A PIVOT STILE THAT BREAKS OUT THROUGH THE WALL OPENING.

| Model | Frame Width | Frame Height | Clear Door Opening | Vertical Opening | Full Breakout Opening |
|---|---|---|---|---|---|
| SX-P | 6'-6" (1981) | 90" (2286) | 33" (838) | 82" (2083) | 33-3/4" (857) |
| SX-P | 7'-0" (2134) | 90" (2286) | 36" (914) | 82" (2083) | 36-3/4" (933) |
| SX-P | 8'-0" (2438) | 90" (2286) | 42" (1067) | 82" (2083) | 42-3/4" (1086) |
| SX-P | 9'-0" (2743) | 90" (2286) | 48" (1219) | 82" (2083) | 48-3/4" (1238) |

*Imperial (Metric - mm) - Consult Factory For Custom Sizes

**REVISION: 10/26/2026**