DOORTRONIX, INC
5783 C.R. 1219
MALAKOFF, TX 75148
TEL: 888-453-5196
FAX: 888-579-4639
www.doortronix.com
THE NEXT GENERATION OF AUTOMATIC DOORS


DOORTRONIX LINEAR BEARING 2100 SERIES

O - SX - SX - O


BIPART FIXED SIDELITE

PROJECT INFORMATION


PROJECT NAME:	
LOCATION:	
DOOR NUMBERS:	
DATE:	SHEET: OF

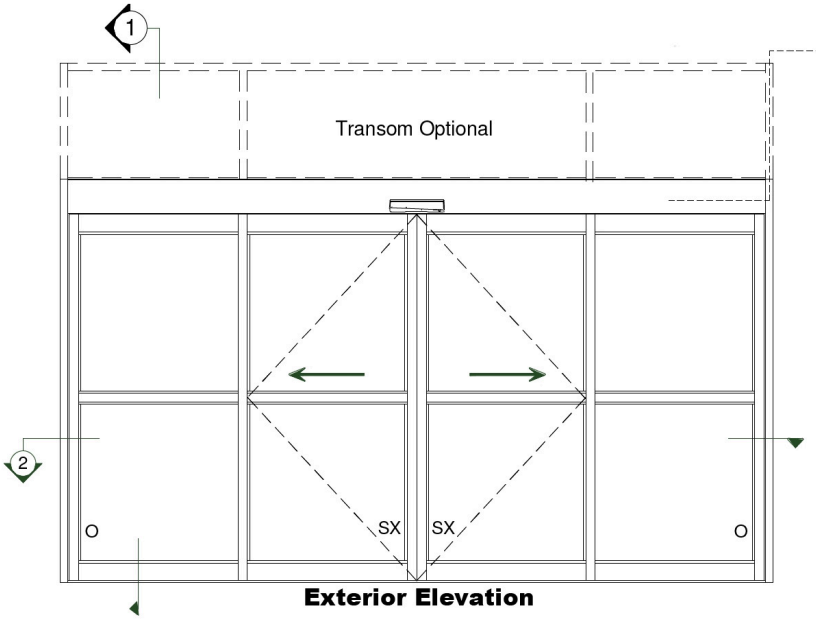


Exterior Elevation

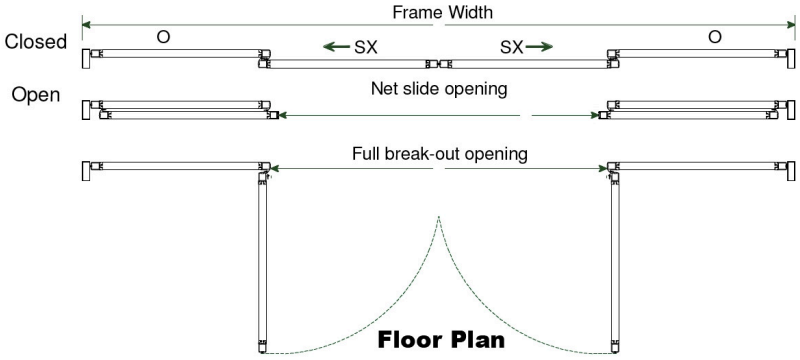

Floor Plan

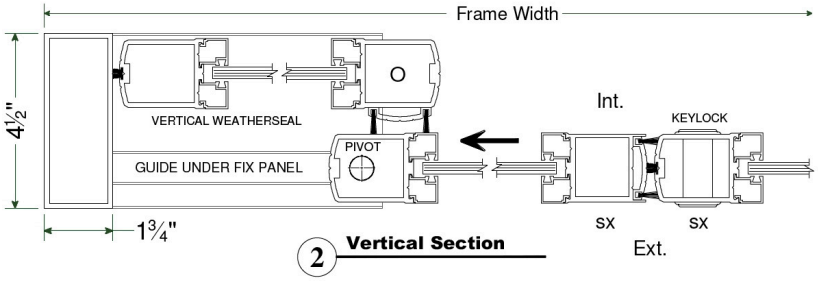

2 Vertical Section

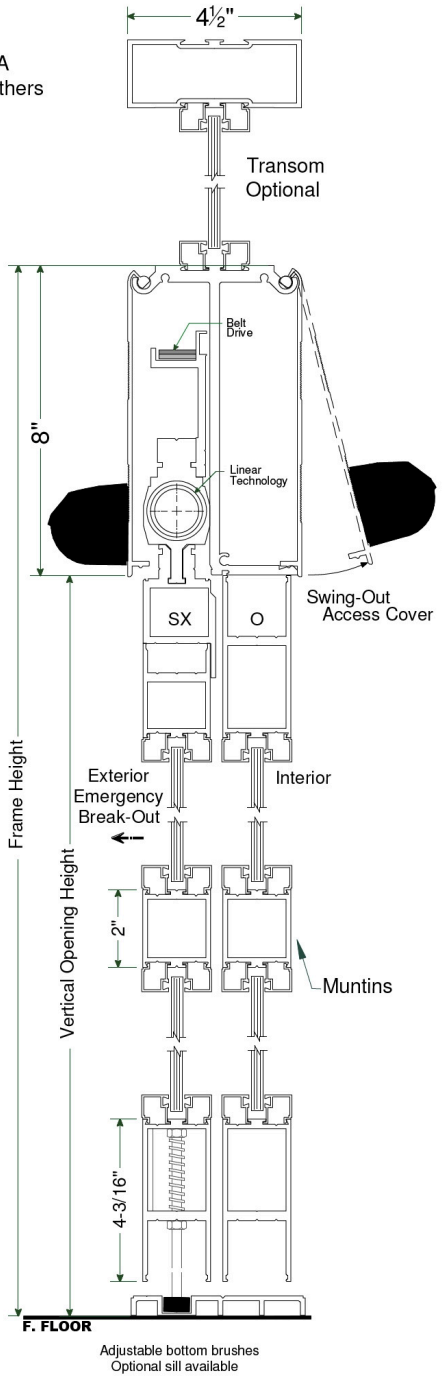

1 Vertical Section

NOTES
1. ELECTRICAL REQUIREMENTS: 120 VAC, 5 AMP MIN TO POWER OPERATOR BY ELECTRICAL CONTRACTOR.
2. ROUGH OPENING SHALL PROVIDE 1/4"[6] SHIM SPACE ON SIDES AND TOP OF PACKAGE.
3. LIMITS OF ACTIVATION AND SAFETY ZONES ARE FOR REFERENCE ONLY; SEE ANSI/BHMA A156.10 FOR DETAILED REQUIREMENTS.
4. SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.

Model	Frame Width	Frame Height	Clear Door Opening	Vertical Opening Height	Full Breakout Opening	Rough Opening Width	Rough Opening Height
O-SX-SX-O	9'-0" (2743)	90" (2286)	42" (915)	82" (2083)	50" (1260)	108-1/2" (2756)	90-1/2" (2299)
O-SX-SX-O	10'-0" (3048)	90" (2286)	48" (1067)	82" (2083)	56" (1412)	120-1/2" (3061)	90-1/2" (2299)
O-SX-SX-O	12'-0" (3658)	90" (2286)	60" (1219)	82" (2083)	68" (1717)	144-1/2" (3670)	90-1/2" (2299)
O-SX-SX-O	14'-0" (4267)	90" (2286)	72" (1524)	82" (2083)	80" (2022)	168-1/2" (4280)	90-1/2" (2299)
O-SX-SX-O	16'-0" (4877)	90" (2286)	84" (1829)	82" (2083)	92" (2326)	192-1/2" (4890)	90-1/2" (2299)

* Imperial (Metric - mm) - Consult Factory For Custom Sizes

REVISION: 08/15/2016