



THE NEXT GENERATION OF AUTOMATIC DOORS

DOORTRONIX, INC
5783 C.R. 1219
MALAKOFF, TX 75148
TEL: 888-453-5196
FAX: 888-579-4639
www.doortronix.com

DOORTRONIX AUTMATIC SWINGING ENTRANCES

AUTOMATIC OHC SINGLE SWING

PROJECT INFORMATION

PROJECT NAME:


LOCATION:

DOOR


NUMBERS:

DATE:


SHEET: OF

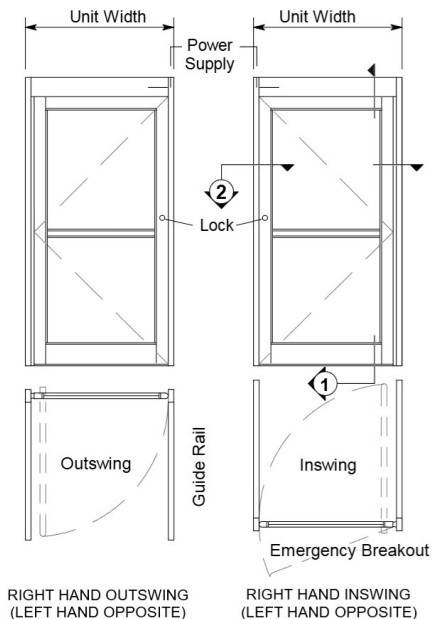

Exterior Elevations and Floor Plans

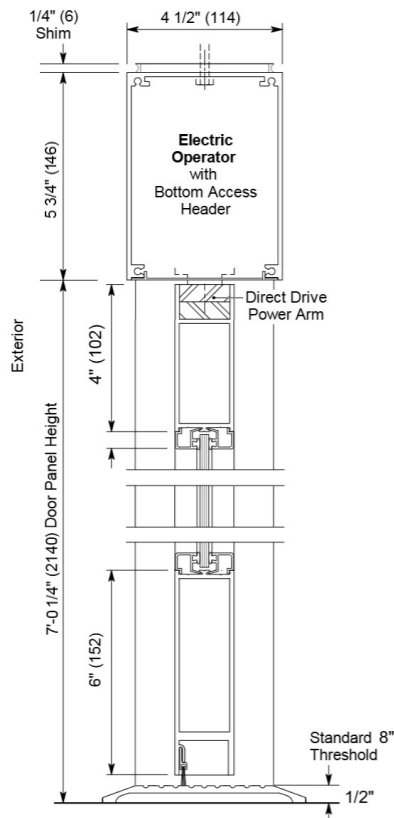

Vertical Section '1'

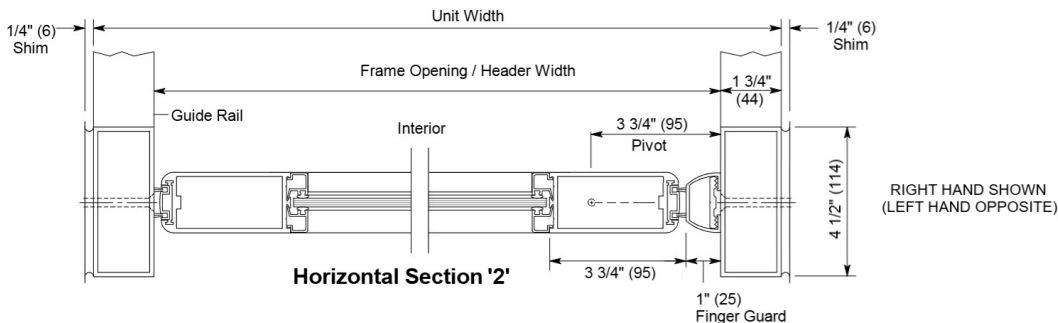

Horizontal Section '2'

NOTES

1. ELECTRICAL REQUIREMENTS: 120 VAC, 5 AMP MIN TO POWER OPERATOR BY ELECTRICAL CONTRACTOR.
2. ROUGH OPENING SHALL PROVIDE 1/4"[6] SHIM SPACE ON SIDES AND TOP OF PACKAGE.
3. LIMITS OF ACTIVATION AND SAFETY ZONES ARE FOR REFERENCE ONLY; SEE ANSI/BHMA A156.10 FOR DETAILED REQUIREMENTS.
4. SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.

Door Width	Frame Opening Width	Unit Width	Rough Opening Width	Unit Height	Rough Opening Height
3'-0" (914)	3'-1" (940)	3'-4 1/2" (1029)	3'-5" (1041)	7'-6" (2286)	7'-6 1/4" (2292)
3'-6" (1067)	3'-7" (1092)	3'-10 1/2" (1181)	3'-11" (1194)	7'-6" (2286)	7'-6 1/4" (2292)

Glazing: Standard unit prep'd for 1/4" (6) glass. Glass provided by others.

Anodized Finish: Clear or Dark Bronze