



THE NEXT GENERATION OF AUTOMATIC DOORS

DOORTRONIX, INC  
5783 C.R. 1219  
MALAKOFF, TX 75148  
TEL: 888-453-5196  
FAX: 888-579-4639  
www.doortronix.com

## DOORTRONIX AUTMATIC SWINGING ENTRANCES

### AUTOMATIC OHC SWING PAIR

## PROJECT INFORMATION

PROJECT NAME:


LOCATION:

DOOR


NUMBERS:

DATE:


SHEET: OF

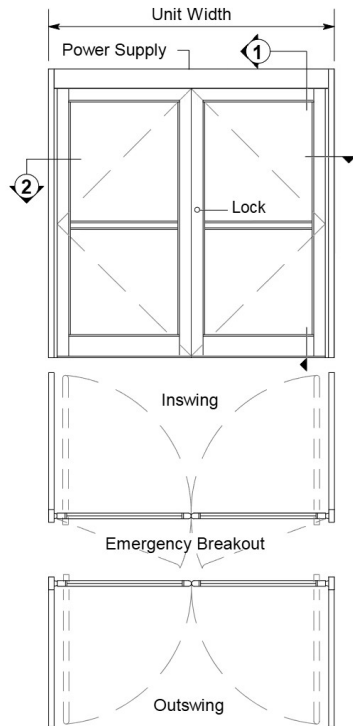

Exterior Elevation and Floor Plan

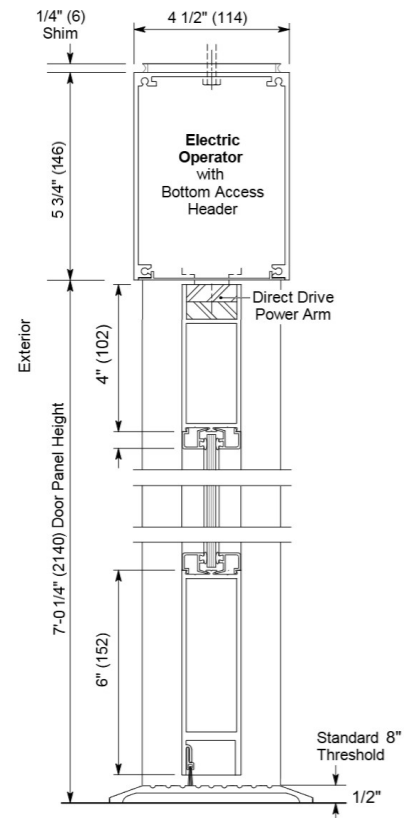

Vertical Section '1'

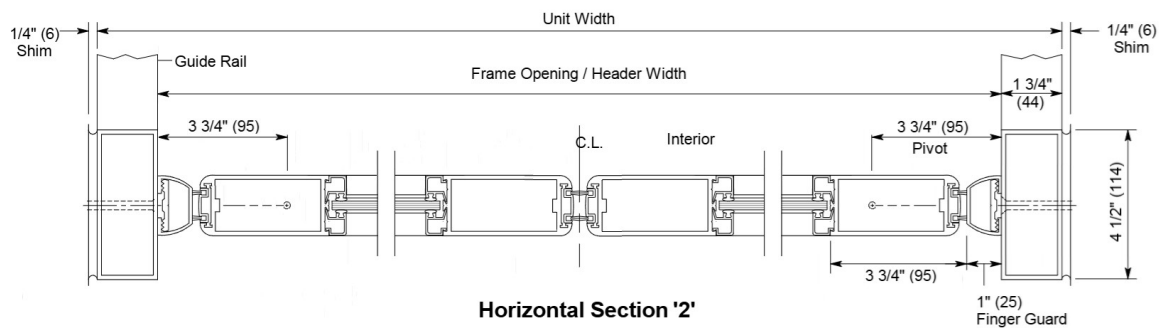

Horizontal Section '2'

#### NOTES

1. ELECTRICAL REQUIREMENTS: 120 VAC, 5 AMP MIN TO POWER OPERATOR BY ELECTRICAL CONTRACTOR.
2. ROUGH OPENING SHALL PROVIDE 1/4"[6] SHIM SPACE ON SIDES AND TOP OF PACKAGE.
3. LIMITS OF ACTIVATION AND SAFETY ZONES ARE FOR REFERENCE ONLY; SEE ANSI/BHMA A156.10 FOR DETAILED REQUIREMENTS.
4. SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.

| Door Width   | Frame Opening Width | Unit Width        | Rough Opening Width | Unit Height  | Rough Opening Height |
|--------------|---------------------|-------------------|---------------------|--------------|----------------------|
| 5'-0" (1524) | 5'-2" (1575)        | 5'-5 1/2" (1664)  | 5'-6" (1676)        | 7'-6" (2286) | 7'-6 1/4" (2292)     |
| 6'-6" (1829) | 6'-8" (1981)        | 6'-11 1/2" (2121) | 7'-0" (2134)        | 7'-6" (2286) | 7'-6 1/4" (2292)     |
| 7'-6" (2133) | 7'-8" (2337)        | 7'-11 1/2" (2426) | 8'-0" (2438)        | 7'-6" (2286) | 7'-6 1/4" (2292)     |

**Glazing:** Standard unit prep'd for 1/4" (6) glass. Glass provided by others.

**Anodized Finish:** Clear or Dark Bronze