DOORTRONIX, INC
5783 C.R. 1219
MALAKOFF, TX 75148
TEL: 888-453-5196
FAX: 888-579-4639
www.doortronix.com
THE NEXT GENERATION OF AUTOMATIC DOORS


DOORTRONIX LINEAR BEARING 2100 SERIES

P - SX - SX - P


BIPART ISA NO SIDELITES

PROJECT INFORMATION


PROJECT NAME:	
LOCATION:	
DOOR NUMBERS:	
DATE: SHEET:	SHEET: OF

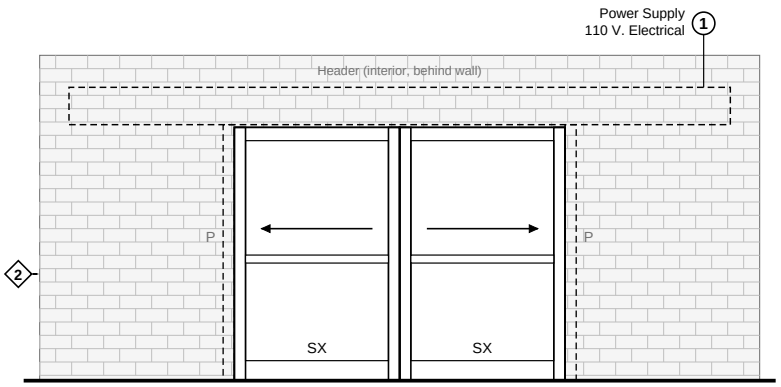


Exterior Elevation

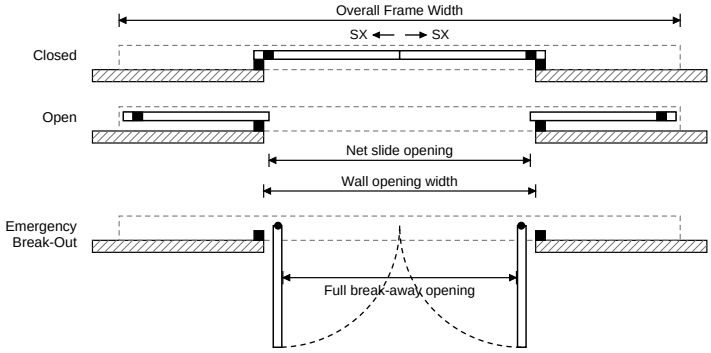

Elevation & floor plans
Exterior view elevation

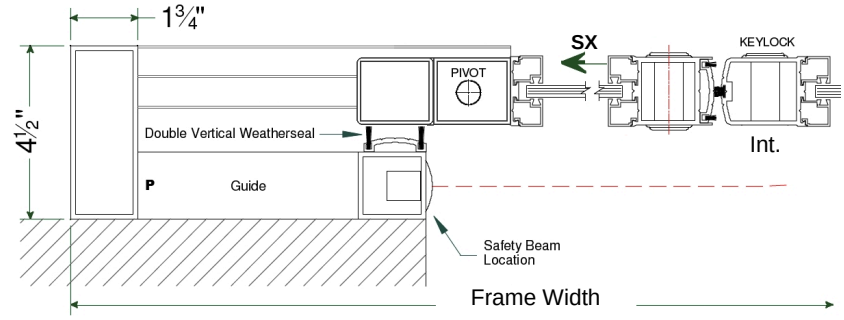

1 Horizontal Section
Type P-SX-SX-P

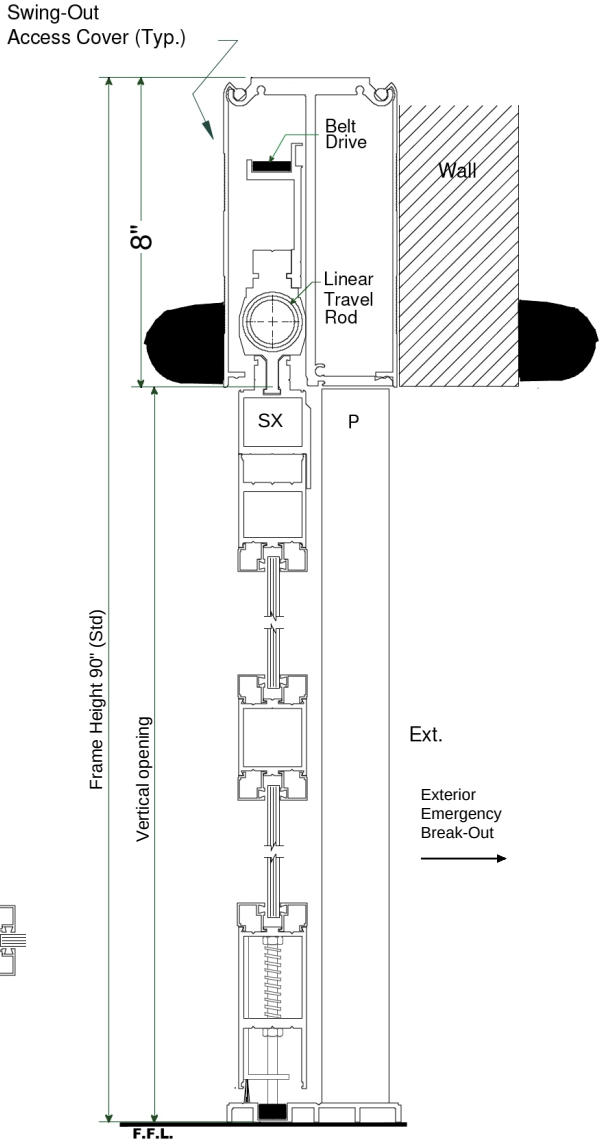

2 Vertical Section

NOTES

1. ELECTRICAL REQUIREMENTS: 120 VAC, 5 AMP MIN TO POWER OPERATOR BY ELECTRICAL CONTRACTOR.
2. ROUGH OPENING SHALL PROVIDE 1/4"[6] SHIM SPACE ON SIDES AND TOP OF PACKAGE.
3. LIMITS OF ACTIVATION AND SAFETY ZONES ARE FOR REFERENCE ONLY; SEE ANSI/BHMA A156.10 FOR DETAILED REQUIREMENTS.
4. SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.
5. INTERIOR MOUNTED. HEADER AND P STILES SET AGAINST THE INTERIOR FACE OF THE WALL. SERVICE ACCESS FROM THE INTERIOR.
6. EACH SX PANEL HAS TWO HEEL STILES: A CLOSURE STILE IN LINE WITH P AND A PIVOT STILE THAT BREAKS OUT THROUGH THE WALL OPENING.

Model	Frame Width	Frame Height	Clear Door Opening	Vertical Opening	Full Breakout Opening	Wall Opening Width
P-SX-SX-P	9'-0" (2743)	90" (2286)	42" (1067)	82" (2083)	45-1/2" (1156)	48" (1219)
P-SX-SX-P	10'-0" (3048)	90" (2286)	48" (1219)	82" (2083)	51-1/2" (1308)	55" (1397)
P-SX-SX-P	12'-0" (3658)	90" (2286)	60" (1524)	82" (2083)	63-1/2" (1613)	67" (1702)
P-SX-SX-P	14'-0" (4267)	90" (2286)	72" (1829)	82" (2083)	75-1/2" (1918)	79" (2007)
P-SX-SX-P	16'-0" (4877)	90" (2286)	84" (2134)	82" (2083)	87-1/2" (2222)	91" (2311)

*Imperial (Metric - mm) - Consult Factory For Custom Sizes

REVISION: 10/26/2026