
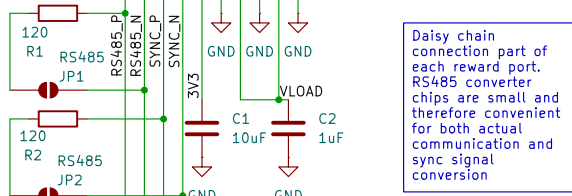



J2  
SM10B-GHS-TB

J3  
SM10B-GHS-TB


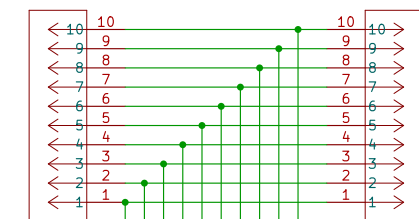


Daisy chain connection part of each reward port. RS485 converter chips are small and therefore convenient for both actual communication and sync signal conversion





PWR\_FLAG PWR\_FLAG PWR\_FLAG





Minimum size STM32G071 board with everything required, swd programmer is annoying but required

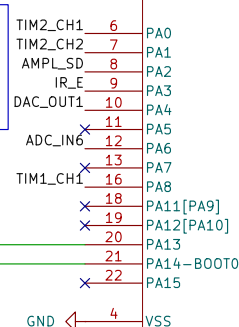


U4  
STM32G071GBU6

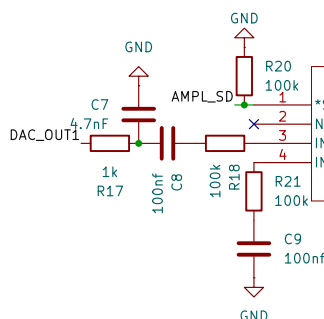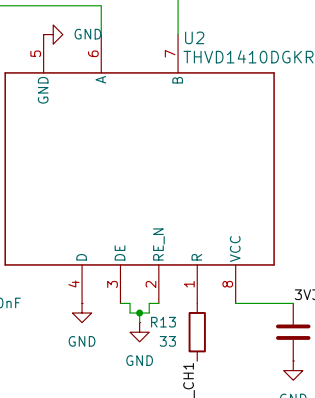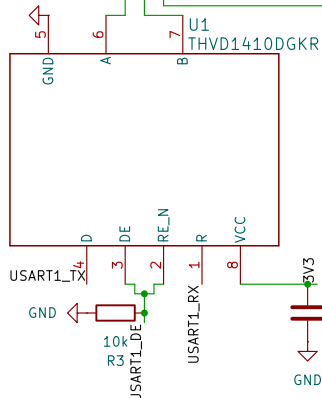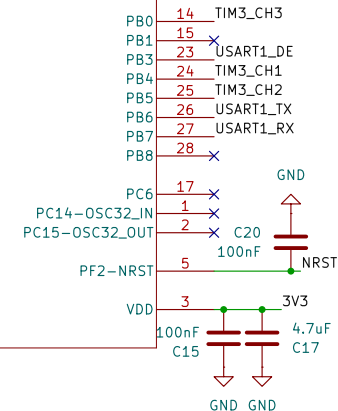

Audio amplifier for the speaker (AS02808MR-LW152-R)

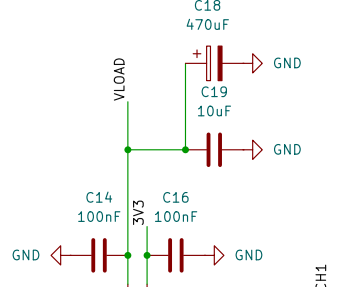
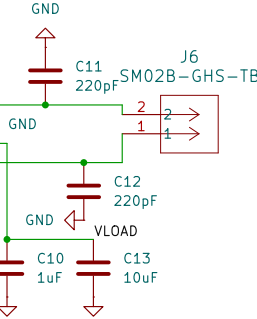


H-Bridge controller for solenoid valve, grounds IN2 since it's only one way control

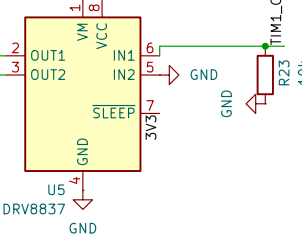

J1  
SM04B-GHS-TB

LED controller using common anode and 3 cathodes for rgb (red does not add too much complexity)

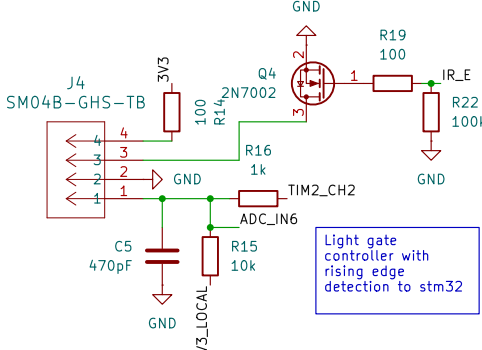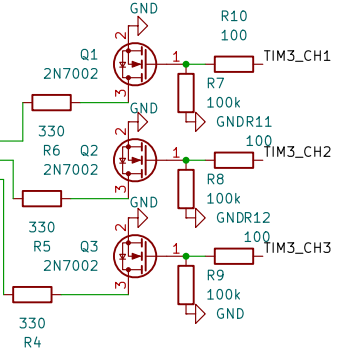

Light gate controller with rising edge detection to stm32