


Lezione 4

Introduction to FPGAs and Xilinx devices

Stefan Cristi Zugravel
20/01/2026

Early times of digital electronics

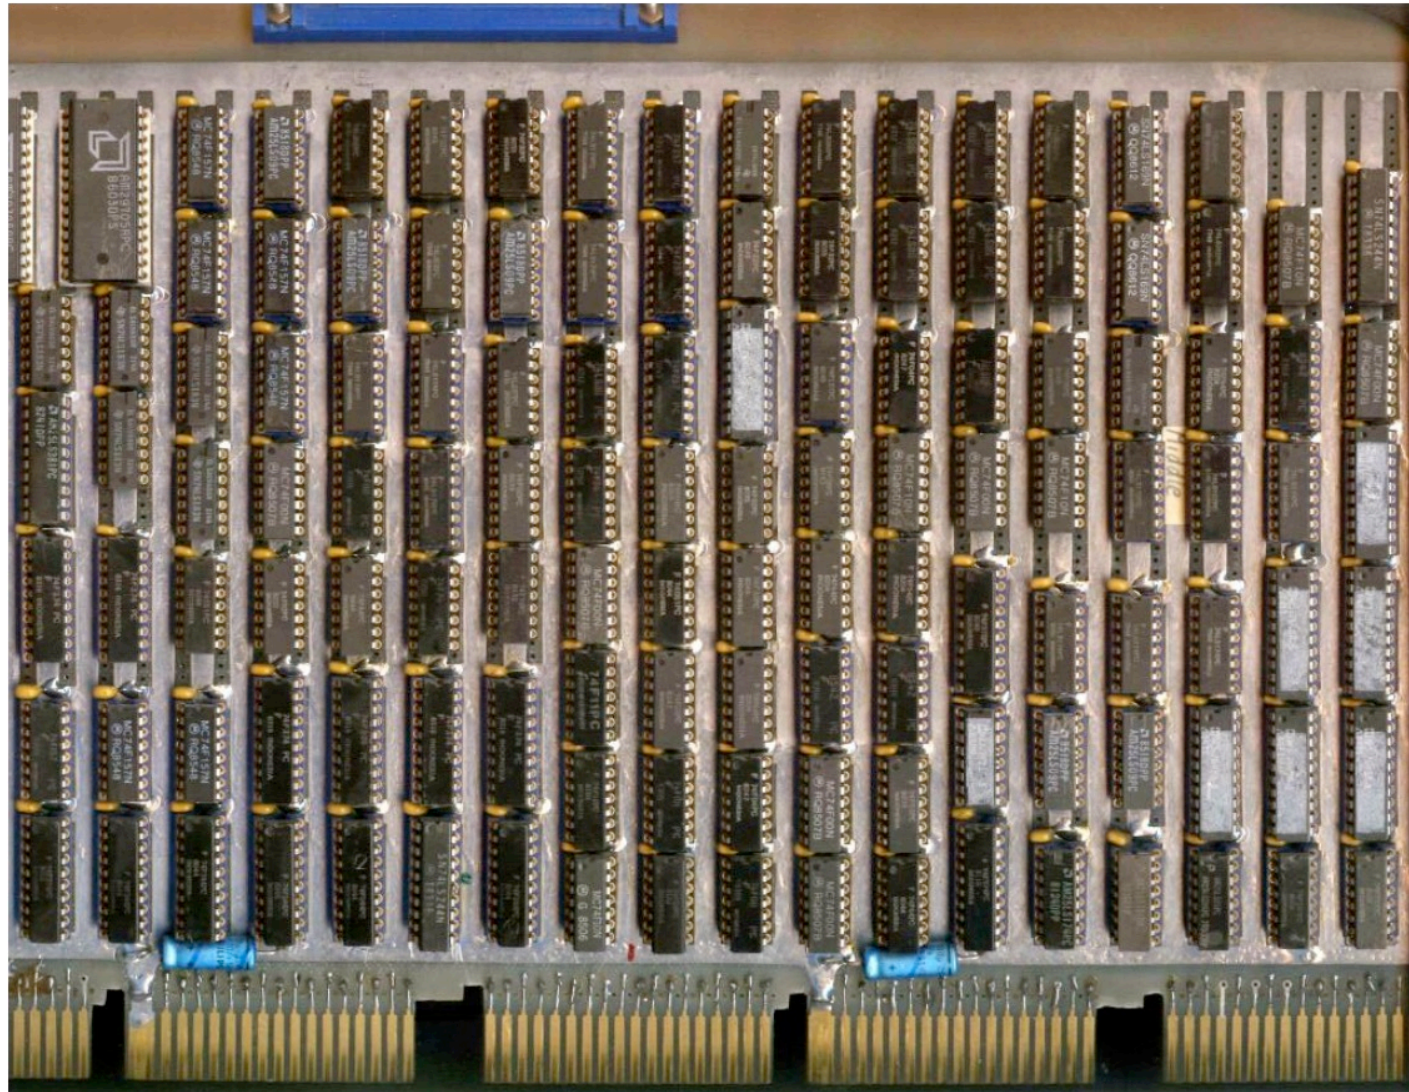

Why programmable ICs?

- Producing a Chip costs much more than producing a PCB
- Using one Chip on many PCBs increases Number of Chips and reduces Costs per Chip
- If a Chip is programmable, it can be used on many PCBs in different situations
- Producing one wafer costs ~ 10k€
 - Not included manpower to design wafer & packaging
- Saving space on a PCB

History of Programmable Logic Devices

- **1960th**

- Fuse Configurable Diode Matrix

- **1971**

- Programmable ROM

- **1978**


- Programmable Array Logic **PAL**
- Gate Array Logic **GAL** (reprogrammable)
- Complex Programmable Logic Device **CPLD** (In circuit programmable)
Configured during programming → keep configuration

- **1989**

- Field Programmable Gate Array **FPGA**

PLA Programmable Logic Array every boolean operation fixed logic gates and programmable interconnections (matrix)
OTP (one time programmable)

Development process CLPD & FPGA is almost the same

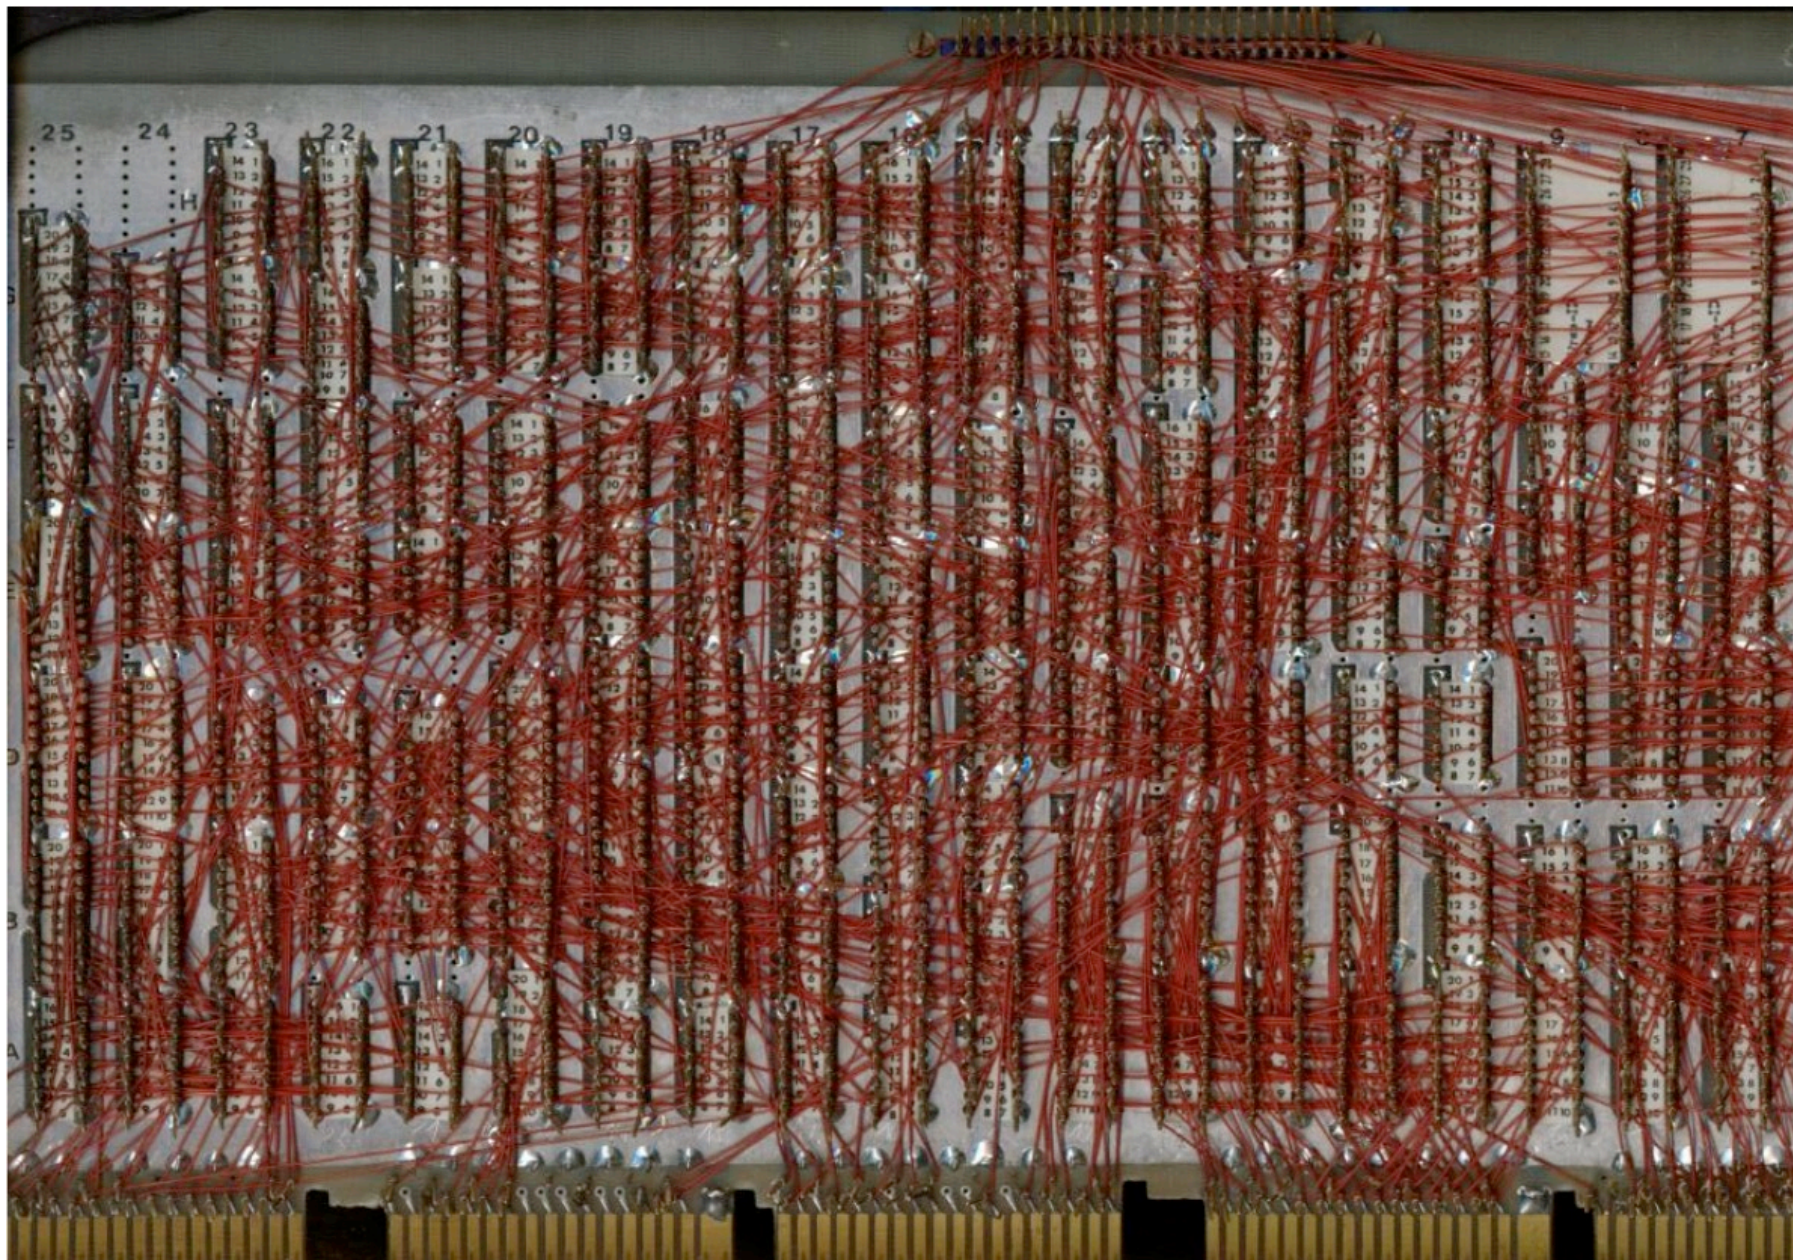


What are FPGAs?

Field Programmable Gate Array

- Simple:
 - Programmable Logic Devices
- More detailed:
 - Programmable Logic Devices
 - With lot of additional function-block (e.g. RAM, DSP)
 - Flexible configuration
 - Can host microcontroller


Kinds of FPGA

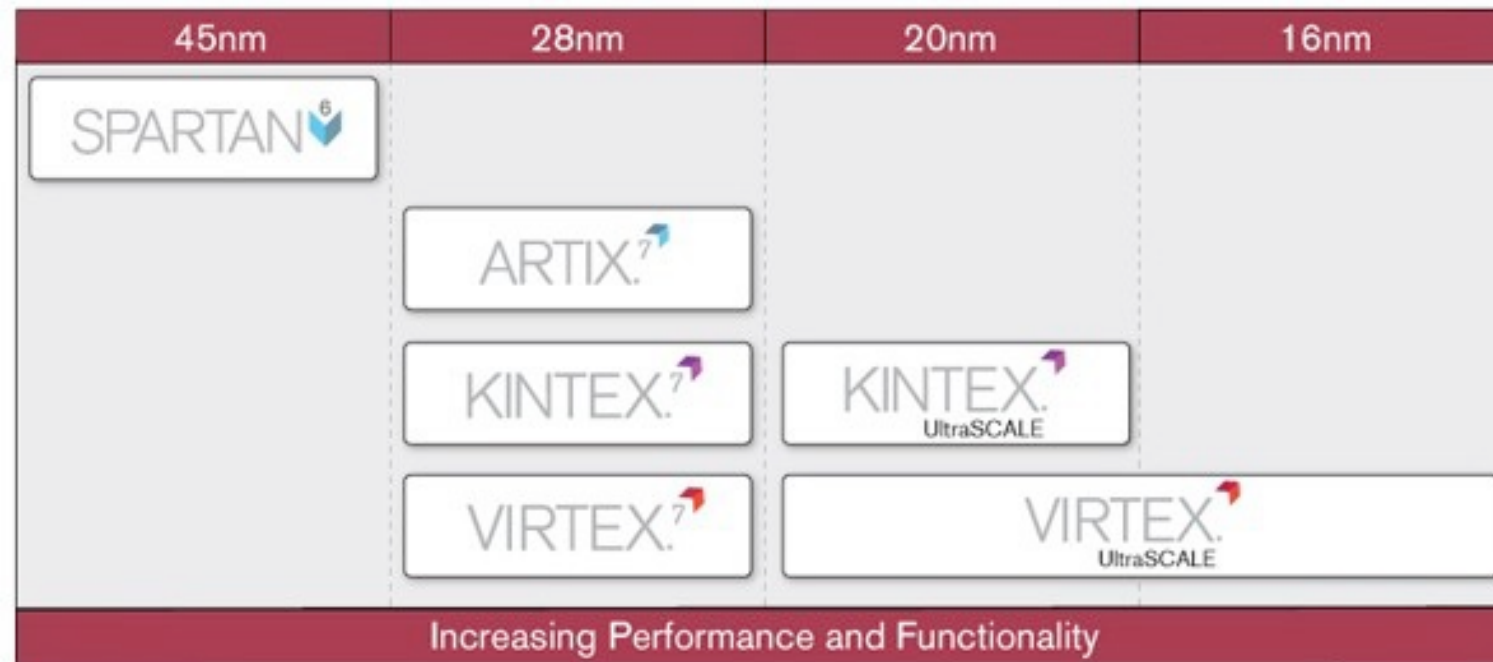

Price point

	Produttore Codice prodotto ICE40UL640-CM36AI	Lattice	FPGA - Array di gate programmabile su campo FPGA ICE40-UltraLite 1.2V CBGA PKG	Scheda dati	243 A magazzino	1 2,58 €
	Codice Mouser 842-ICE40UL640CM36AI			Confezione alternativa		25 2,24 €
			Maggiori informazioni			100 2,12 €
	Produttore Codice prodotto ICE40UL1K-CM36AI	Lattice	FPGA - Array di gate programmabile su campo FPGA ICE40-UltraLite 1.2V CBGA PKG	Scheda dati	722 A magazzino	1 2,67 €
	Codice Mouser 842-ICE40UL1K-CM36AI			Confezione alternativa		25 2,32 €
			Maggiori informazioni			100 2,24 €
	Produttore Codice prodotto ICE40LP384-CM49	Lattice	FPGA - Array di gate programmabile su campo ICE40LP Ultra LowPwr 384 LUTs 1.2V	Scheda dati	836 A magazzino	1 2,67 €
	Codice Mouser 842-ICE40LP384CM49			Confezione alternativa		25 2,32 €
			Maggiori informazioni			100 2,24 €
	Produttore Codice prodotto ICE40LP384-CM36TR	Lattice	FPGA - Array di gate programmabile su campo ICE40LP Ultra LowPwr 384 LUTs 1.2V	Scheda dati	Tempo di consegna, se non a magazzino 24 settimane	Nastro continuo 20.000 2,68 €
	Codice Mouser 842-ICE40LP384CM36TR			Confezione alternativa		


	Produttore Codice prodotto AGIA035R39A2I3V	Aglilex	FPGA - Array di gate programmabile su campo	Scheda dati	Tempo di consegna diretta 16 settimane	3 38.140,14 €
	Codice Mouser 989-AGIA035R39A2I3V			Confezione alternativa		
	Produttore Codice prodotto 1ST210E2F50I1VG	Stratix	FPGA - Array di gate programmabile su campo	Scheda dati	Tempo di consegna diretta 16 settimane	3 37.496,86 €
	Codice Mouser 989-1ST210E2F50I1VG			Maggiori informazioni		
	Produttore Codice prodotto AGIA035R39A2E2VB	Aglilex	FPGA - Array di gate programmabile su campo	Scheda dati	Tempo di consegna diretta 16 settimane	3 37.080,62 €
	Codice Mouser 989-AGIA035R39A2E2VB					
	Produttore Codice prodotto AGIA035R39A2E3E	Aglilex	FPGA - Array di gate programmabile su campo	Scheda dati	Tempo di consegna diretta 16 settimane	3 37.080,62 €
	Codice Mouser 989-AGIA035R39A2E3E					
	Produttore Codice prodotto XCVU7P-L2FLVB2104E	AMD / Xilinx	FPGA - Array di gate programmabile su campo XCVU7P-L2FLVB2104E	Scheda dati	Tempo di consegna, se non a magazzino 37 settimane	1 38.475,97 €
	Codice Mouser 217-VU7P-L2FLVB2104E					
	Produttore Codice prodotto XCVU7P-2FLVB2104I	AMD / Xilinx	FPGA - Array di gate programmabile su campo XCVU7P-2FLVB2104I	Scheda dati	Tempo di consegna, se non a magazzino 37 settimane	1 38.475,97 €
	Codice Mouser 217-CVU7P-2FLVB2104I					

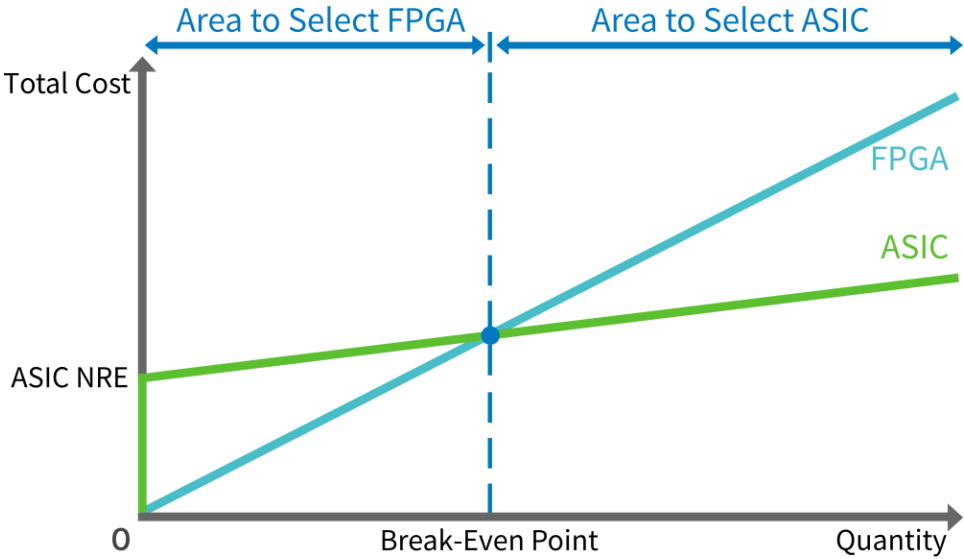



Comparing FPGA and Dedicated ICs

	FPGA	Dedicated IC
Up-front cost	Smaller	Larger
Per-unit cost	Larger	Smaller
Time to market	Shorter	Longer
Speed	Slower	Faster
Power consumption	Greater	Smaller
Update in the field	Straightforward	Very difficult
Density	Lesser	Greater
Design Flow	Simpler	More complex
Granularity	Logic blocks	Individual cells
Need for gate-level verification	Little	Much
Technology upgrade path	Easier	Harder
Additional features	Many	Fewer


Fundamental FPGA components

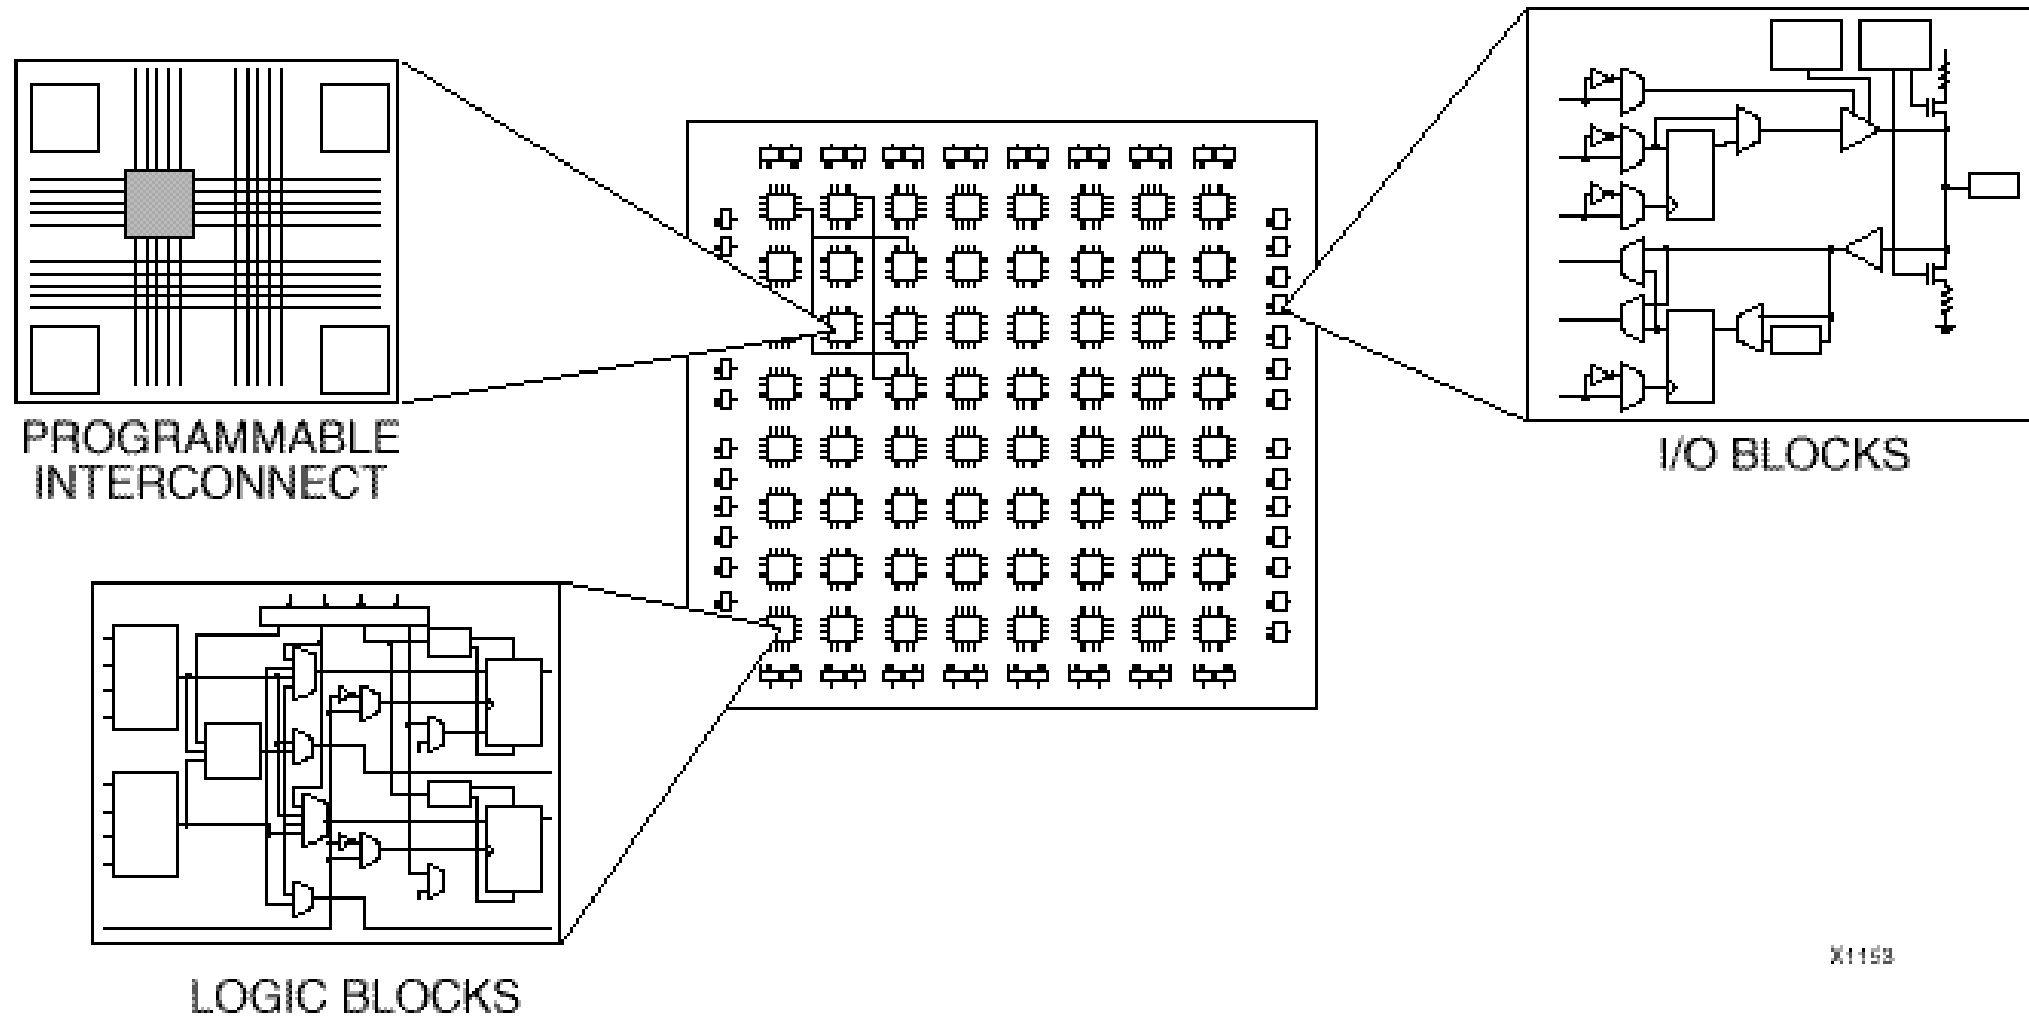

Programmable interconnections /1

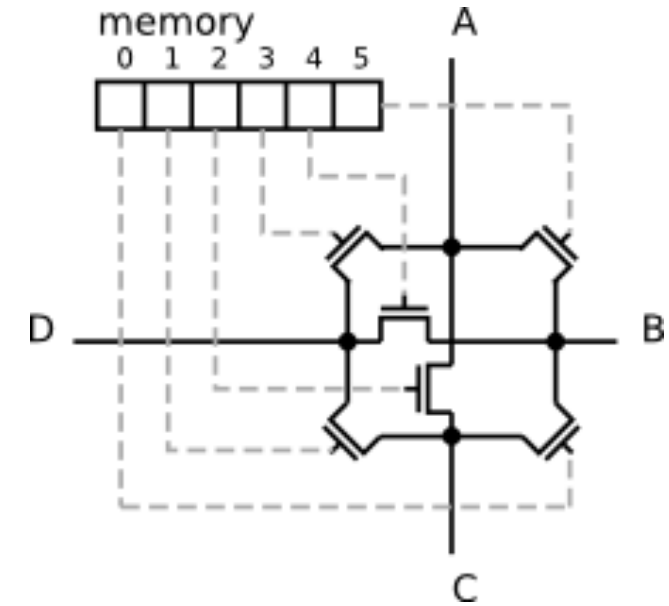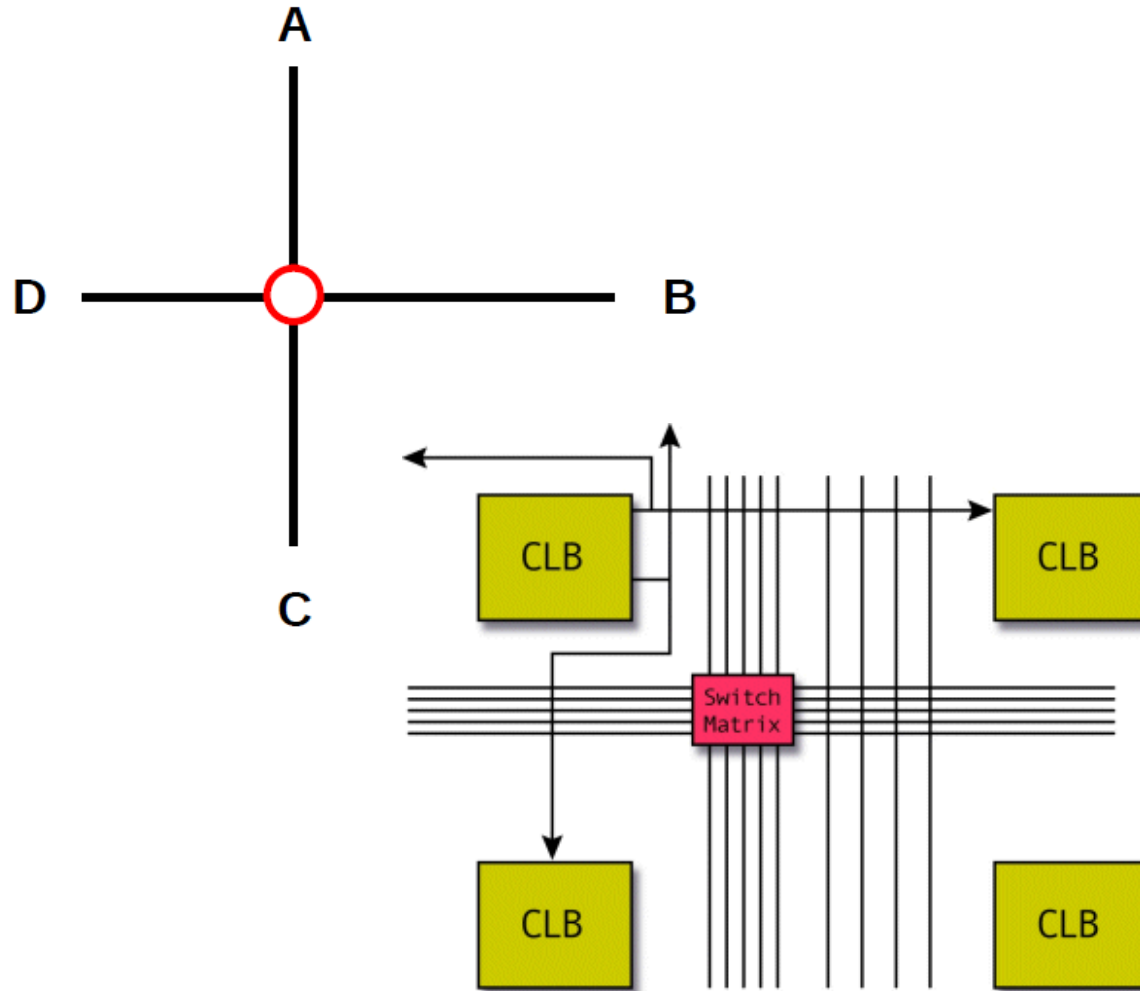


Programmable interconnections /2

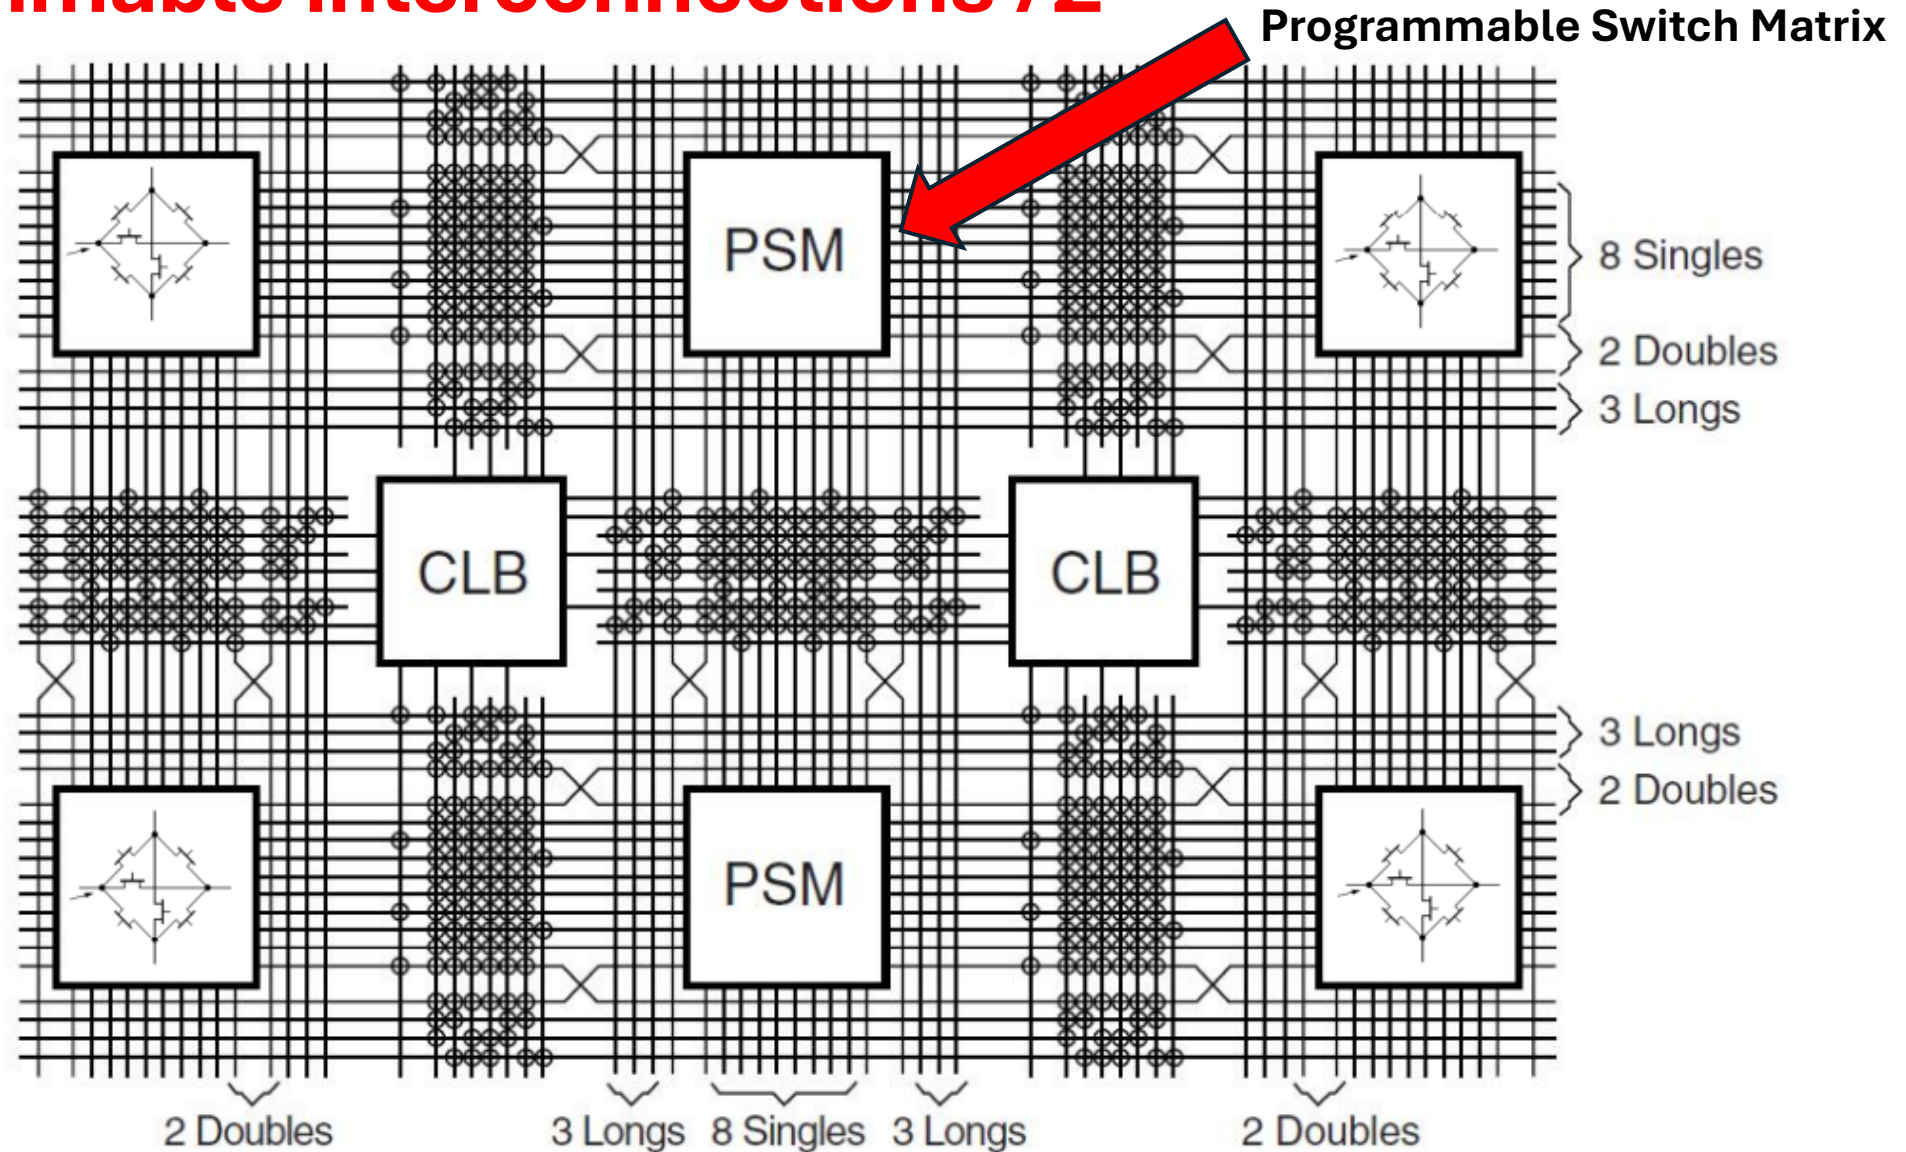

Look-up tables (LUT) /1


How to implement a 2-bit truth table (boolean logic) ?

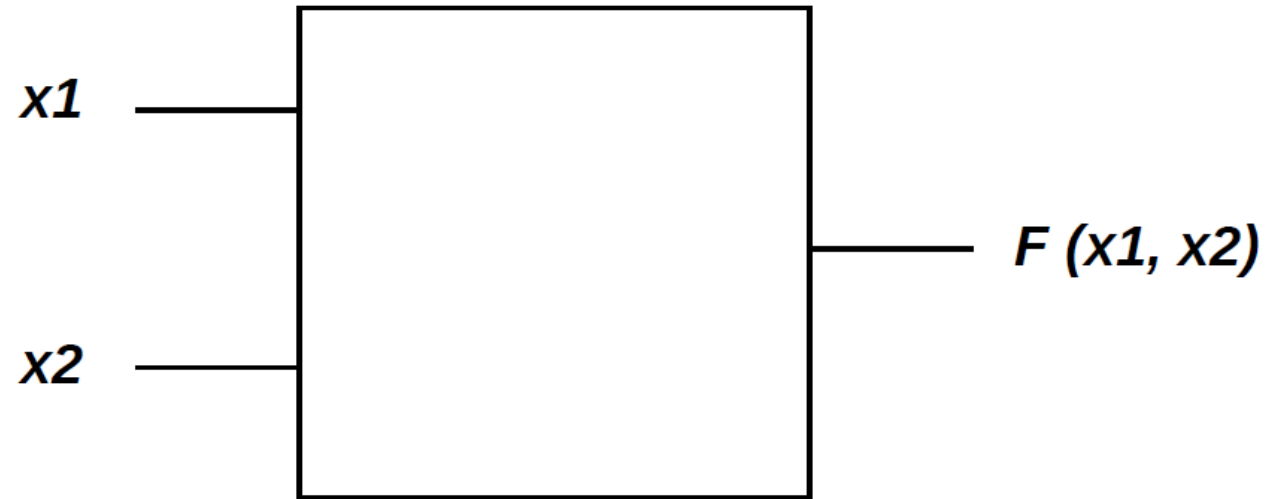


$x1$	$x2$	F
0	0	1
0	1	0
1	0	0
1	1	1

Look-up tables (LUT) /2

FPGA solution: write the truth table into a RAM !

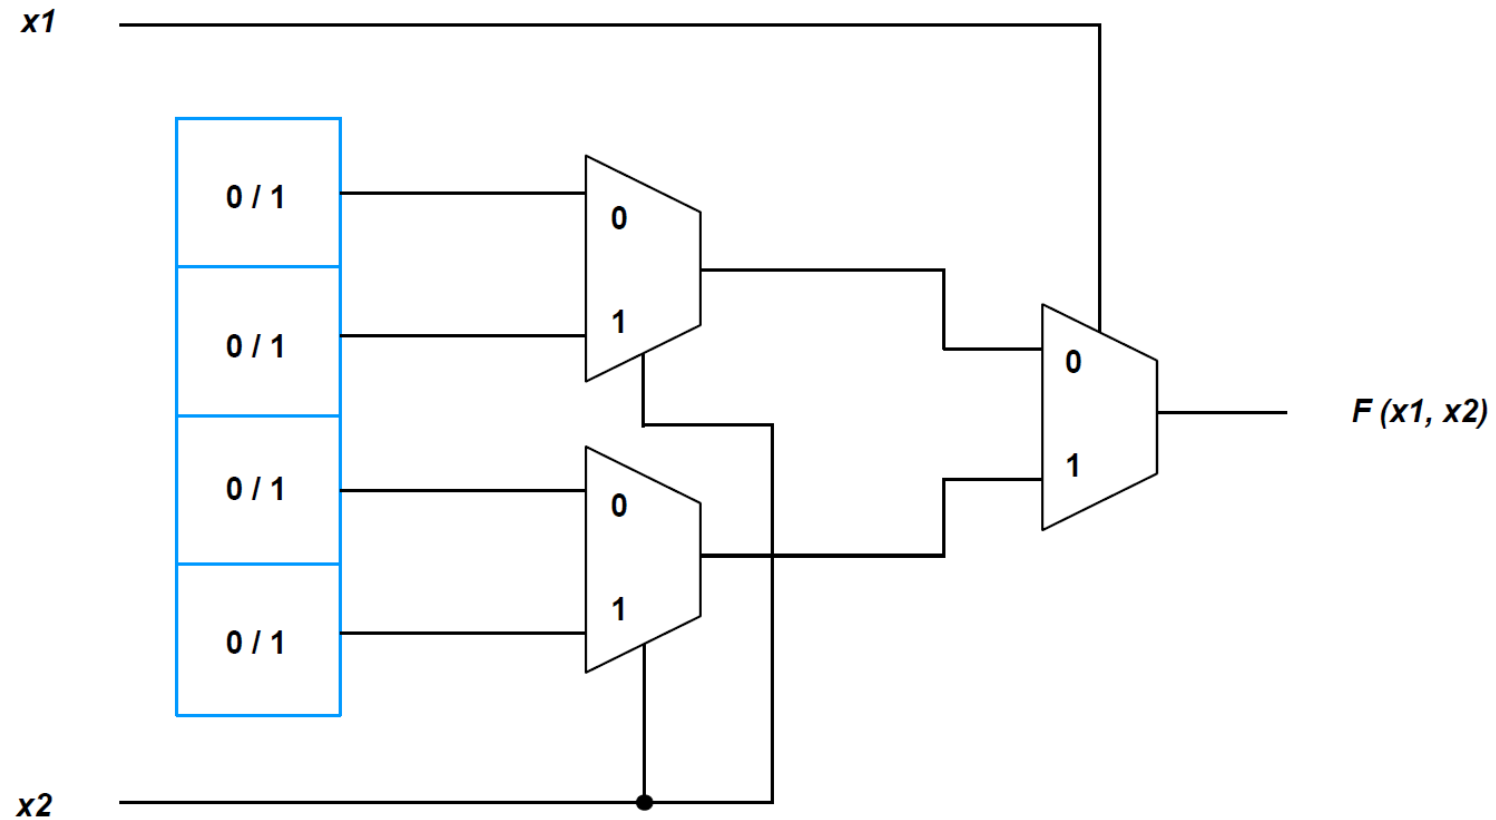

Look-up tables (LUT) /3

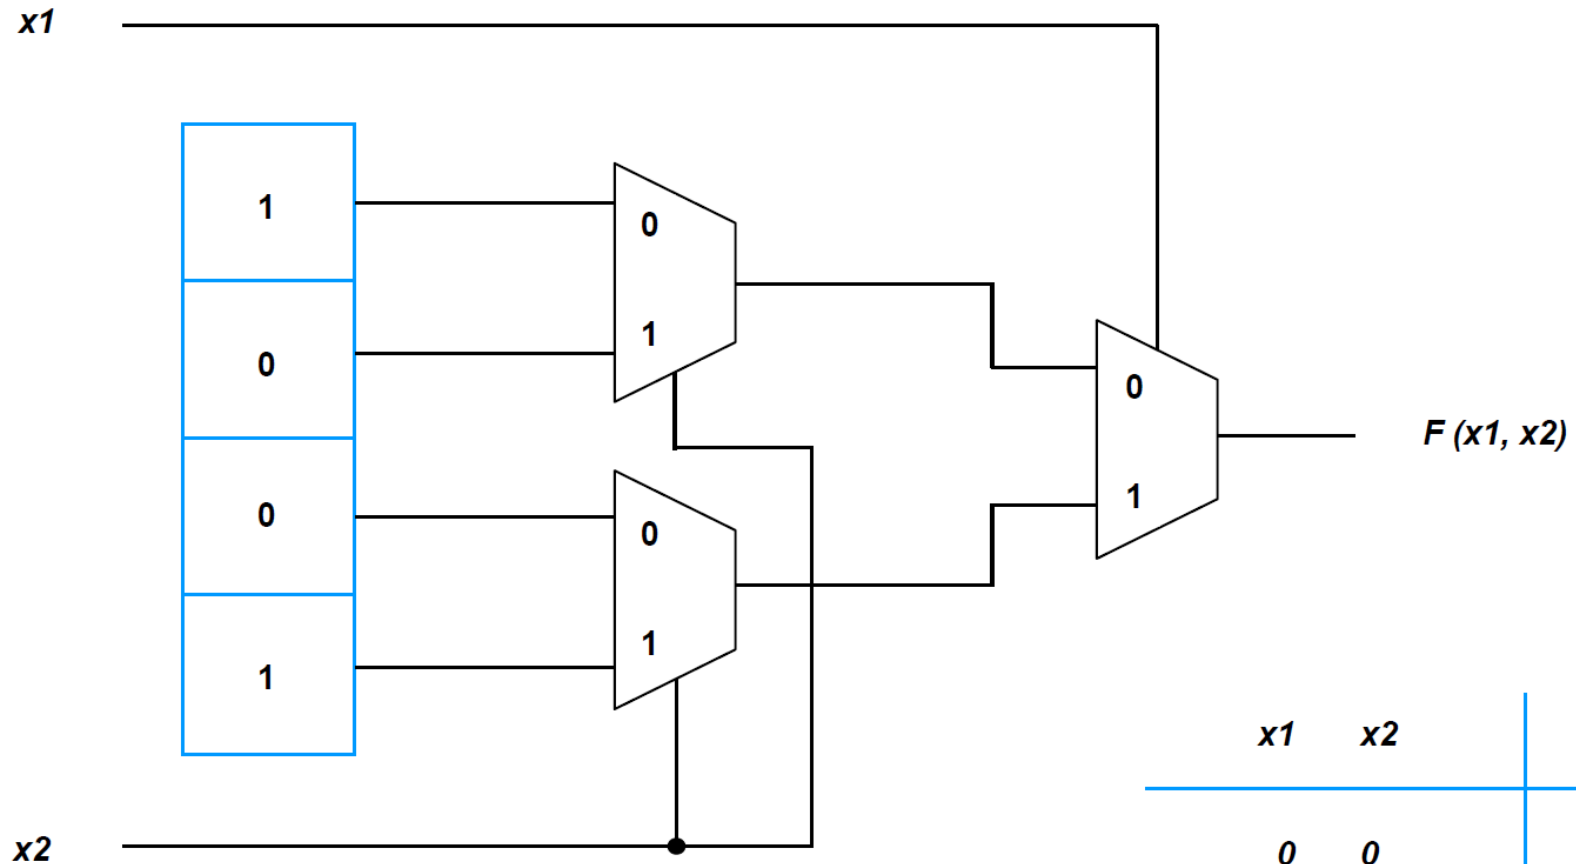


<i>x1</i>	<i>x2</i>	<i>F</i>
0	0	1
0	1	0
1	0	0
1	1	1

Logic Cell (LC)

Xilinx terminology :


- **Logic Cell (LC)** = 1x LUT + 1 register (FF) + programmable MUX
- **LUT** implemented as 6-inputs, 64-bit RAM ← WHY?
- slice = 4x LUTs + 8 registers (FFs) + MUXs + fast-carry chain (CLA)
- **Congurable Logic Block (CLB)** = 2x slices
- Basic Element (BEL) = any device primitive

carry-lookahead adder

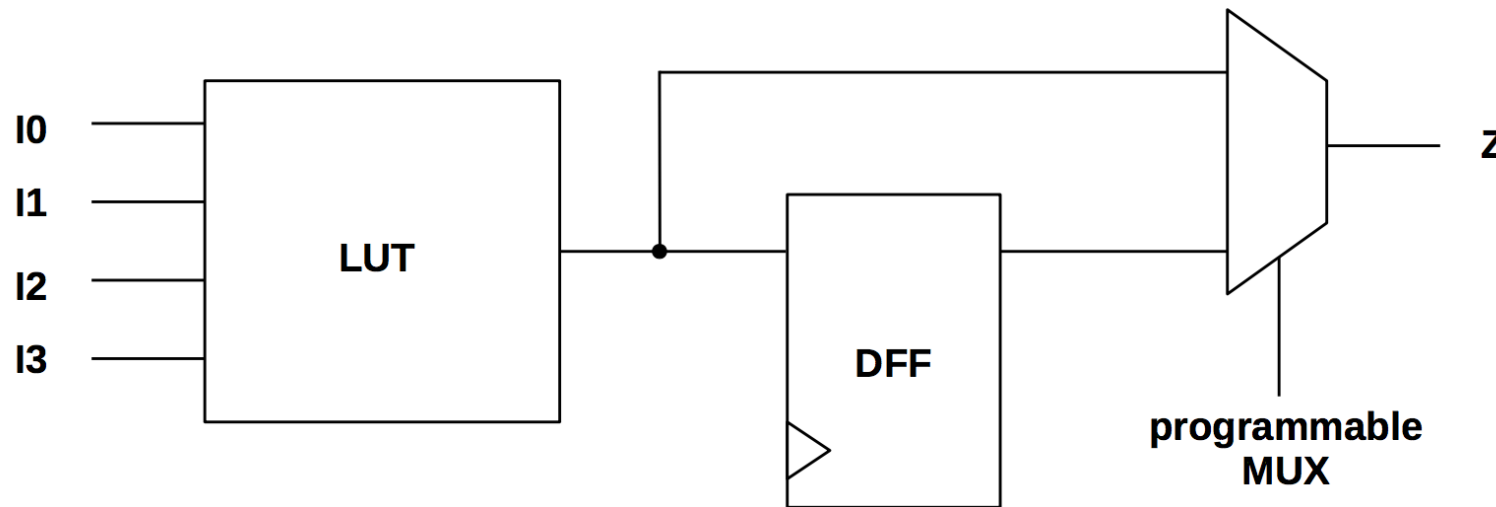

Programmable I/O pads

I/O BLOCK

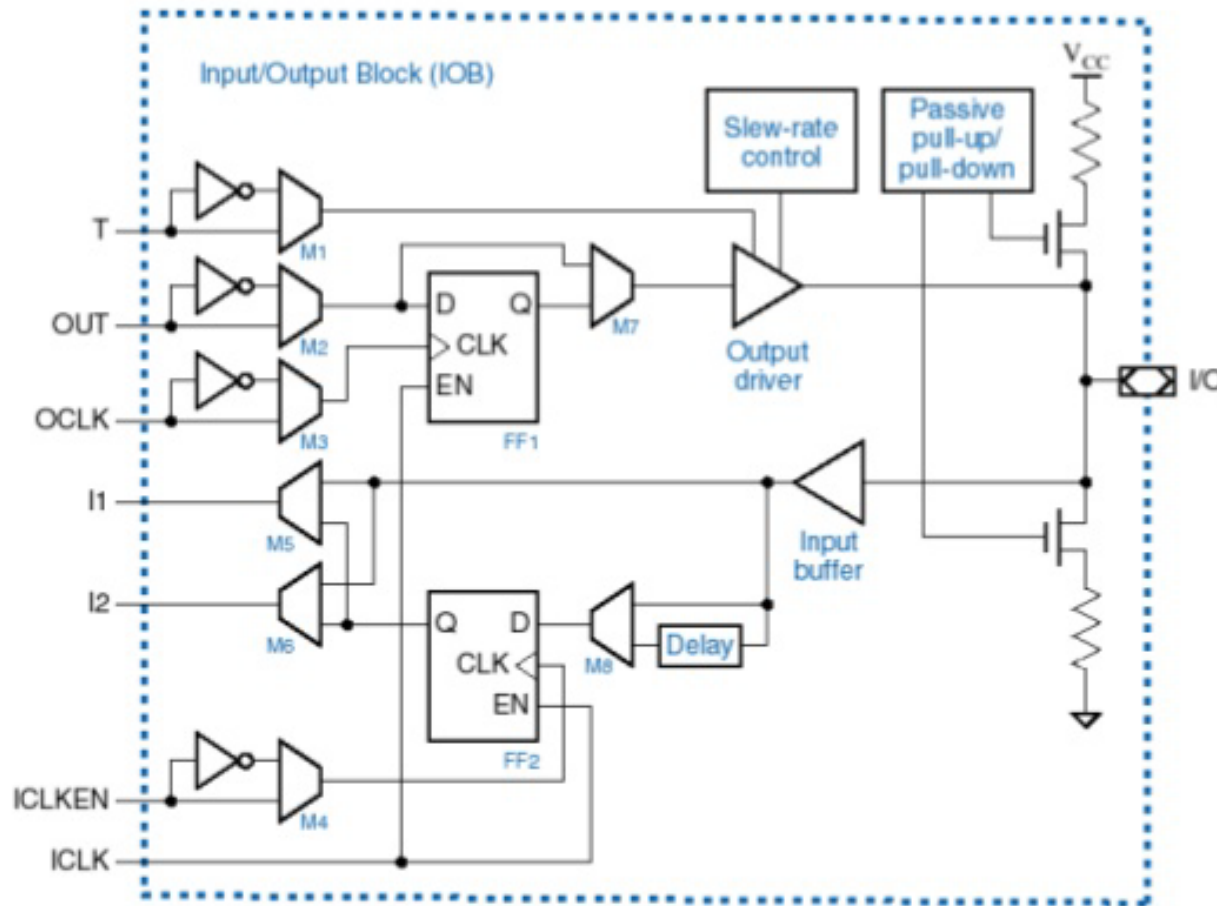

**Programmable
pad**

44

Xilinx 7-series family comparison

Different size, number of programmable logic cells, I/O capabilities, performance and cost depending on the chosen device family :

- Spartan 7 : lowest-cost, lowest-power, good I/O performance, lowest number of resources
- Artix 7 : low-power, medium number of resources and I/O, good choice for DSP
- Kintex 7 : best compromise between number of resources, I/O, speed, power and cost
- Virtex 7 : highest system performance (resources, speed, I/O) but also largest power consumption and highest cost

Max. Capability	Spartan-7	Artix-7	Kintex-7	Virtex-7
Logic Cells	102K	215K	478K	1,955K
Block RAM	4.2 Mb	13 Mb	34 Mb	68 Mb
DSP Slices	160	740	1,920	3,600
DSP Performance	176 GMAC/s	929 GMAC/s	2,845 GMAC/s	5,335 GMAC/s
MicroBlaze CPU	260 DMIPs	303 DMIPs	438 DMIPs	441 DMIPs
Transceivers	–	16	32	96
Transceiver Speed	–	6.6 Gb/s	12.5 Gb/s	28.05 Gb/s
Serial Bandwidth	–	211 Gb/s	800 Gb/s	2,784 Gb/s
PCIe Interface	–	x4 Gen2	x8 Gen2	x8 Gen3
Memory Interface	800 Mb/s	1,066 Mb/s	1,866 Mb/s	1,866 Mb/s
I/O Pins	400	500	500	1,200
I/O Voltage	1.2V–3.3V	1.2V–3.3V	1.2V–3.3V	1.2V–3.3V
Package Options	Low-Cost, Wire-Bond	Low-Cost, Wire-Bond, Bare-Die Flip-Chip	Bare-Die Flip-Chip and High- Performance Flip-Chip	Highest Performance Flip-Chip

How “programming” a FPGA?

Hardware Description HDL	Describe what the hardware should do.
Syntax Check	Check Syntax
Synthesis	“compiles” the design to transform HDL source into an architecture-specific design netlist. (connections)
Translate	Merges incoming netlists and constraints into a Xilinx design file → connections are merged with timing
Map	Fits the design into the available resources → tell the FPGA which gate structures should be used
Place & Route	Places and routes the design to the timing constraints → decide, which gate is used for which function
Programming	Write configuration into the FPGA or configuration memory

Xilinx XDC – Xilinx Design Constraints file

XDC constraints are based on the standard **Synopsys Design Constraints (SDC)** format. SDC has been in use and evolving for more than 20 years, making it the most popular and proven format for describing design constraints.

```
C:/Users/jcolvin/Documents/VivadoPrj/SwitchesAndLEDs/SwitchesAndLEDs.srcs/constrs_1/imports/VivadoXDCfiles/Arty_Master.xdc
1 ## This file is a general .xdc for the ARTY Rev. B
2 ## You can uncomment the lines by removing the two pound signs corresponding to used pins
3 ## You can rename the used ports (after "get_ports" in the curly braces) according to the names in your module
4 ## You can delete the pins you don't need for Project 2 since this XDC is a copy of the master one,
5 ## and not the original, or just leave them commented out
6 ## You might want to try out some of the other ports for yourself (depending on what board you have)
7 ## I uncommented and renamed the first switch and first LED for the beginning project
8
9 ##Switches
10 set_property -dict { PACKAGE_PIN A8      IOSTANDARD LVCMOS33 } [get_ports { sw }]; #IO_L12N_T1_MRCC_16 Sch=sw[0]
11 #set_property -dict { PACKAGE_PIN C11    IOSTANDARD LVCMOS33 } [get_ports { sw[1] }]; #IO_L13P_T2_MRCC_16 Sch=sw[1]
12 #set_property -dict { PACKAGE_PIN C10    IOSTANDARD LVCMOS33 } [get_ports { sw[2] }]; #IO_L13N_T2_MRCC_16 Sch=sw[2]
13 #set_property -dict { PACKAGE_PIN A10    IOSTANDARD LVCMOS33 } [get_ports { sw[3] }]; #IO_L14P_T2_SRCC_16 Sch=sw[3]
14
15 ##RGB LEDs
16 #set_property -dict { PACKAGE_PIN E1     IOSTANDARD LVCMOS33 } [get_ports { led0_b }]; #IO_L18N_T2_35 Sch=led0_b
17 #set_property -dict { PACKAGE_PIN F6     IOSTANDARD LVCMOS33 } [get_ports { led0_g }]; #IO_L19N_T3_VREF_35 Sch=led0_g
18 #set_property -dict { PACKAGE_PIN G6     IOSTANDARD LVCMOS33 } [get_ports { led0_r }]; #IO_L19P_T3_35 Sch=led0_r
19
20 ##LEDs
21 set_property -dict { PACKAGE_PIN H5      IOSTANDARD LVCMOS33 } [get_ports { led }]; #IO_L24N_T3_35 Sch=led[4]
22 #set_property -dict { PACKAGE_PIN J5     IOSTANDARD LVCMOS33 } [get_ports { led[1] }]; #IO_25_35 Sch=led[5]
23 #set_property -dict { PACKAGE_PIN T9     IOSTANDARD LVCMOS33 } [get_ports { led[2] }]; #IO_L24P_T3_A01_D17_14 Sch=led[6]
24 #set_property -dict { PACKAGE_PIN T10    IOSTANDARD LVCMOS33 } [get_ports { led[3] }]; #IO_L24N_T3_A00_D16_14 Sch=led[7]
25
26 ##Buttons

C:/Users/jcolvin/Documents/VivadoPrj/SwitchesAndLEDs/SwitchesAndLEDs.srcs/constrs_1/imports/VivadoXDCfiles/SwitchesAndLEDs.xdc
1 `timescale 1ns / 1ps
2 //Vivado automatically included our timescale
3 // Company: Digilent
4 // Engineer: James Colvin
5
6 // We can now edit our Vivado module. Here we can add our own constraints
7 //Vivado included most of this already for us
8 //What we need to add is the assign statement
9
10 module top(
11     input sw,
12     output led
13 );
14
15 assign led = sw; //this is the only line we need to add
16
17 endmodule
```

The names of the input and output in this module match the choose pins I want to use in the XDC file.

Recommended Constraints Sequence

```
## Timing Assertions Section # Primary clocks  
# Virtual clocks  
# Generated clocks # Clock Groups  
# Bus Skew constraints  
# Input and output delay constraints
```

```
## Timing Exceptions Section # False Paths  
# Max Delay / Min Delay # Multicycle Paths  
# Case Analysis # Disable Timing
```

```
## Physical Constraints Section  
# located anywhere in the file, preferably before or after the timing  
constraints # or stored in a separate constraint file
```


Example: Digilent Arty-A7 evaluation board

Device: Xilinx Artix-7

