

- ◆ I was responsible for:
 - ◆ This migration scenario (and these slights)
 - ◆ The hardware configurations of all the z196 mainframes in PLM and Windhof during the startup fase
 - ◆ The hardware configurations of all the z196 mainframes in PLM, Windhof and Kayl during the transition fase
 - ◆ The hardware configurations of all the z196 mainframes in Windhof and Kayl during the final fase
 - ◆ The hardware configurations of all the z196 Ficon Directors in PLM and Windhof during the startup fase
 - ◆ The hardware configurations of all the z196 Ficon Directors in PLM, Windhof and during the transition fase
 - ◆ The hardware configurations of all the z196 Ficon Directors in Windhof and Kayl during the final fase

- ◆ Deze informatie beschouw ik niet als bedrijfskritisch en strikt vertrouwelijk:
 - ◆ Dit scenario is meer dan 10 jaar oud, er wordt nu gewerkt met nieuwe mainframes en storage suites
 - ◆ Er worden geen interne configuraties getoond
 - ◆ Dexia bestaat niet meer
 - ◆ IS4F bestaat niet meer
 - ◆ Een deel van deze oude informatie is reeds beschikbaar op het internet



New SAN

Renewal of San Switch combined
with DC move from PLM to Kayl

Preferred scenario

1. Order + install Directors + Temporary Switches
2. Order + install Tape
3. Start migration Tape
4. Order + install DASD
5. Start migration DASD (cascading)
6. Order + install MF
7. Wait Swap MF until finish TAPE migration
8. Swap MF + DASD simultaneously PLEX by PLEX

ISL:

- Starting with 2x8 8Gbit shortwave (upgradable to 16Gbit links after 2016)
- Fiber length ADVA-ADVA between Windhof and Kayl: **24,2 and 23,6km**
- **PLM > LW-SM > Hitec > SW-MM > Kayl (tape)**
- Performance july 2014 / per director: avg 746MB/s ; max 1.565 MB/s

Infiniband :

- 2x8 5Gbit longwave(SM) connections

DISKS:

- DS8870: Still 8Gbps (16Gbps Q1 2015?)
- DS8800-2: 4Gbps
- DMW205: 46 x 2107 CU; DMW206: 30 x 2107 CU; DMW222: 12 x 2107 CU

VSM:


- 400TB compressed (non duplexed)
- Target: each site 2xTS7720 (or 1xTS7720+expansion frame)

Ficon Directors AS-IS:

- SMW103 avg: 2880 MB/s; Max: 6500 MB/s
- SMW204 avg: 2850 MB/s; Max: 6400 MB/s
- SMP105 avg: 1700 MB/s; Max: 3400 MB/s
- SMP206 avg: 1700 MB/s; Max: 3400 MB/s
- 110 ports/director in use

Ficon Directors Target:


- 2x2xSAN384B-2
- SAN384B-2
 - 4x32x16Gbps port blades (128ports)
16Gbit + 8Gbit
 - 4 blades with 2xISL ports (or 2 blades for 4xISL trunking)
 - CUP
 - Local switching (ex. MFR1 > DS8870: x'00' + x'01')
 - npiv for AS400

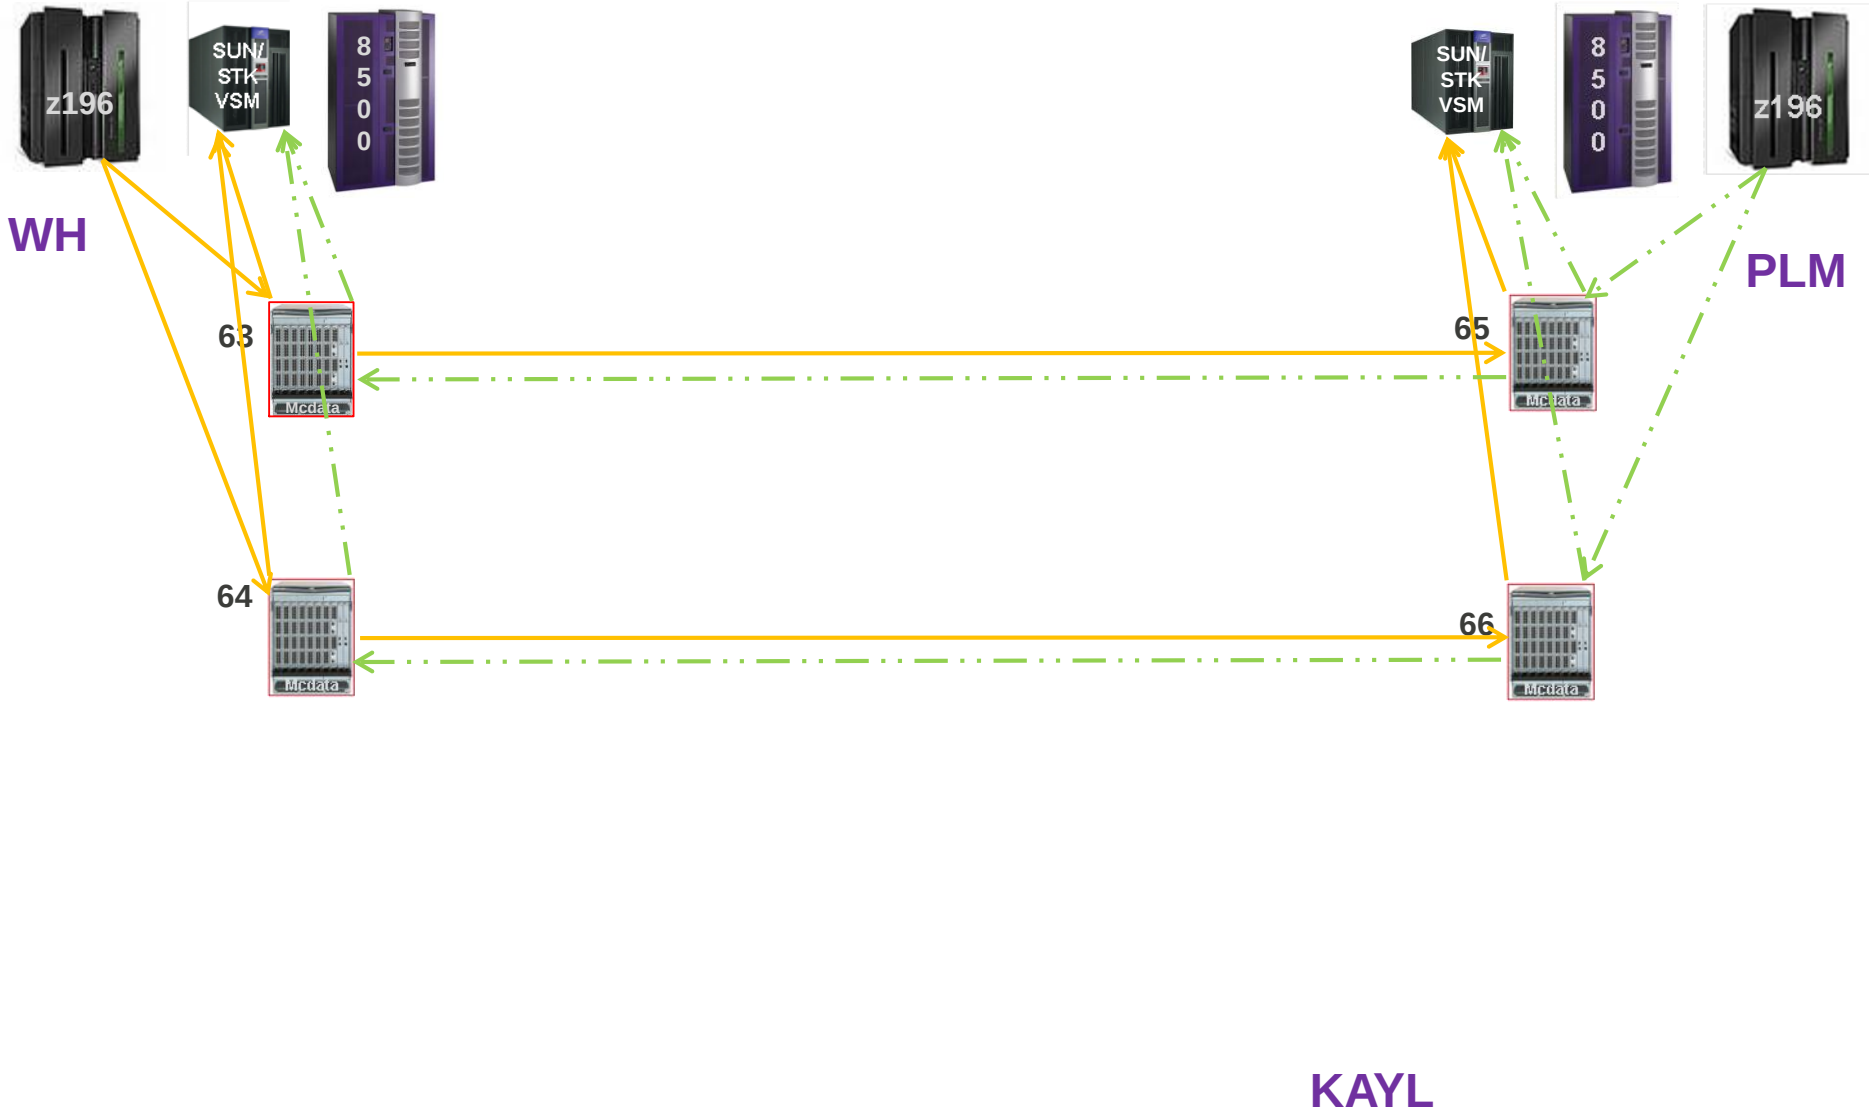

AS IS (TAPE)


→ data path from MF1

→ data path from MF2

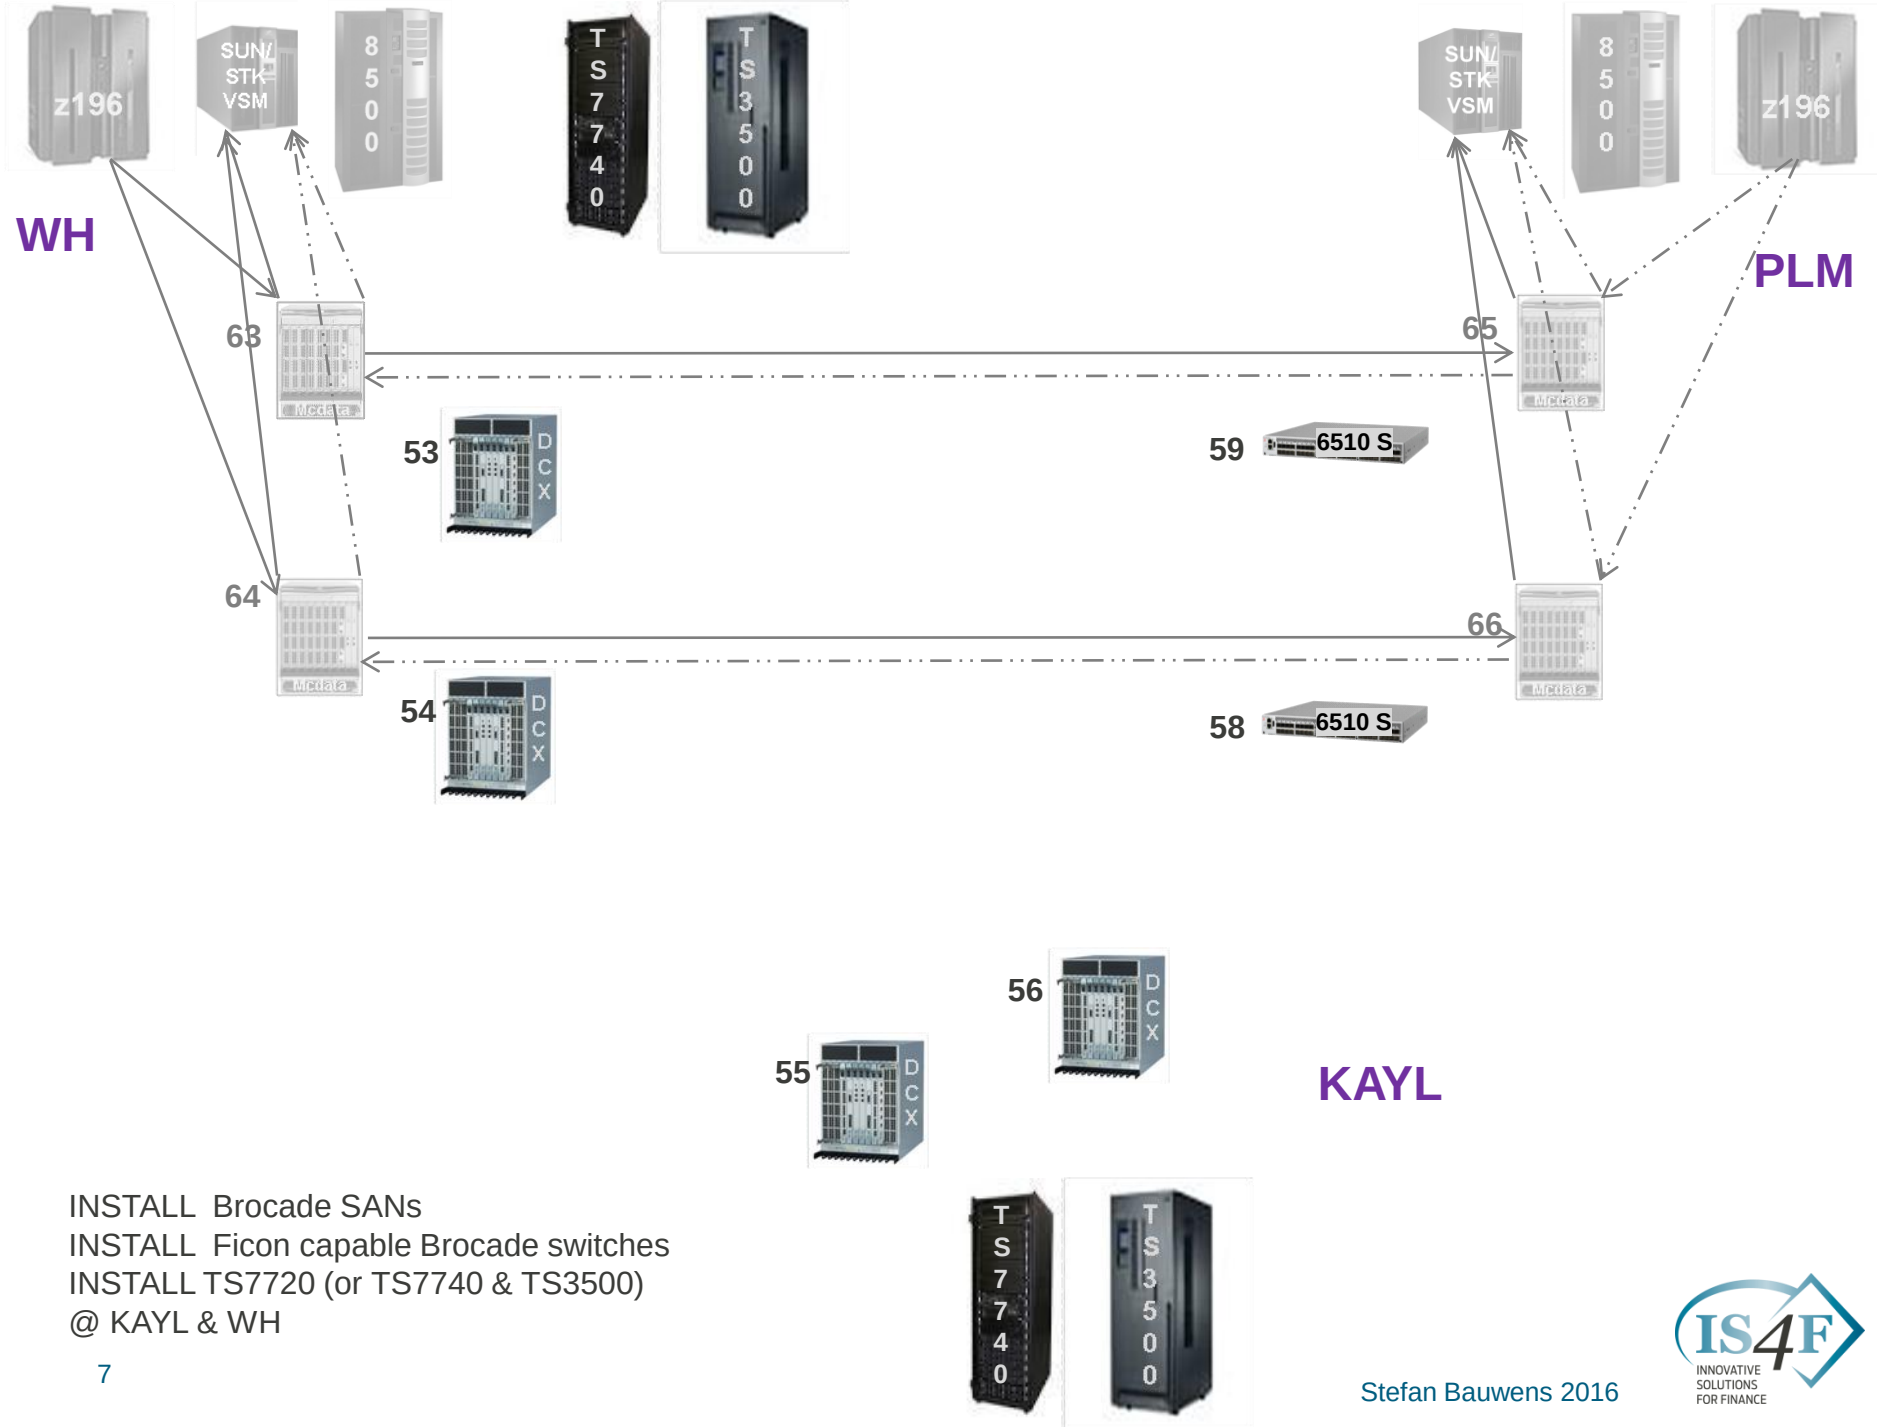



INSTALL Brocade SANs
 INSTALL Ficon capable Brocade switches
 INSTALL TS7720 (or TS7740 & TS3500)
 @ KAYL & WH



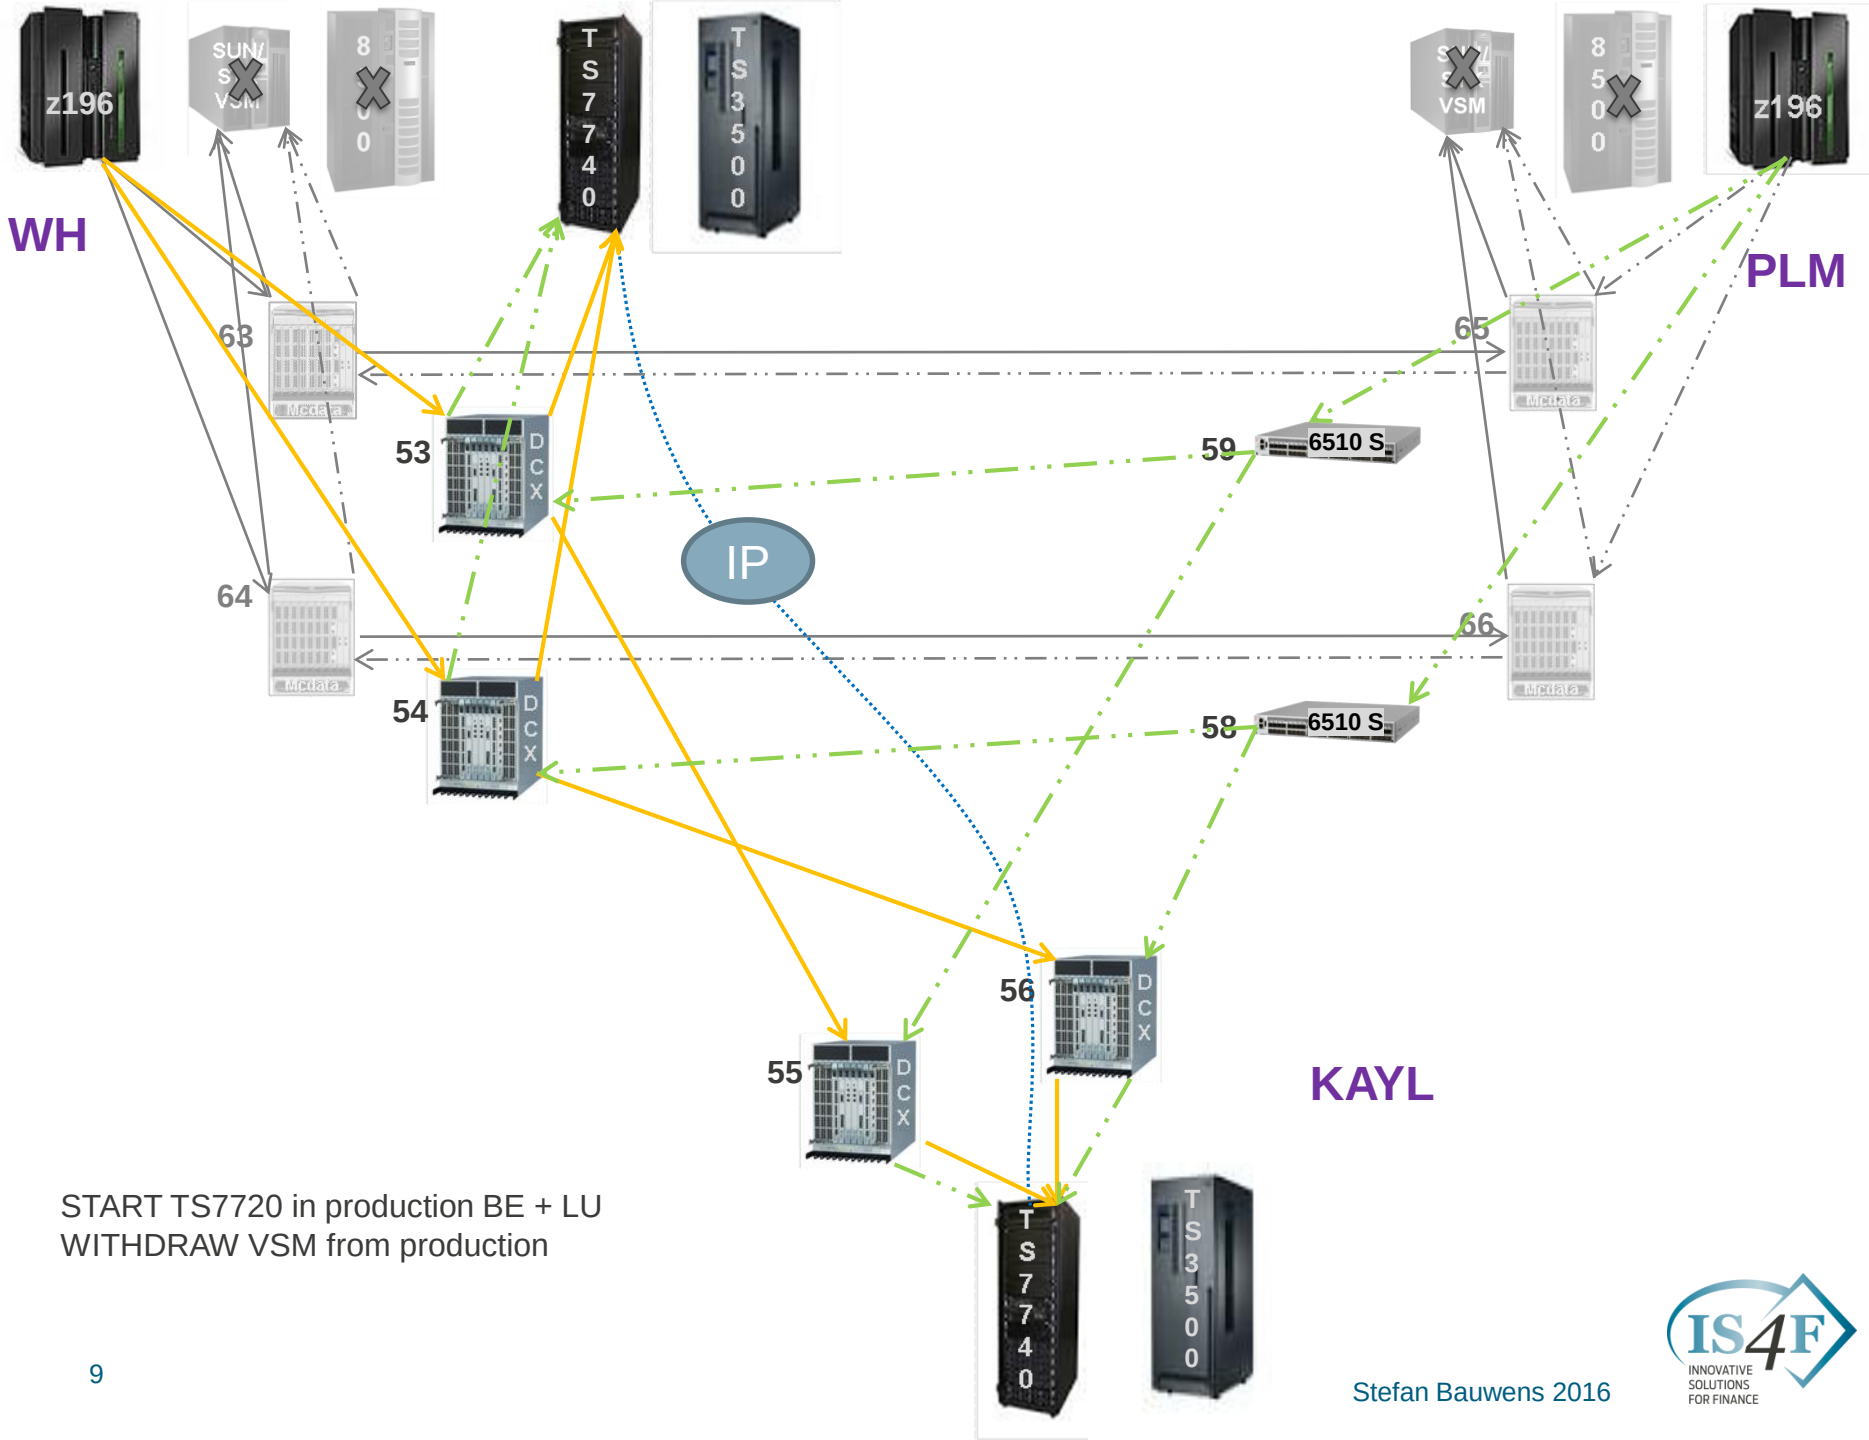

START TS7720 in production BE + LU
WITHDRAW VSM from production

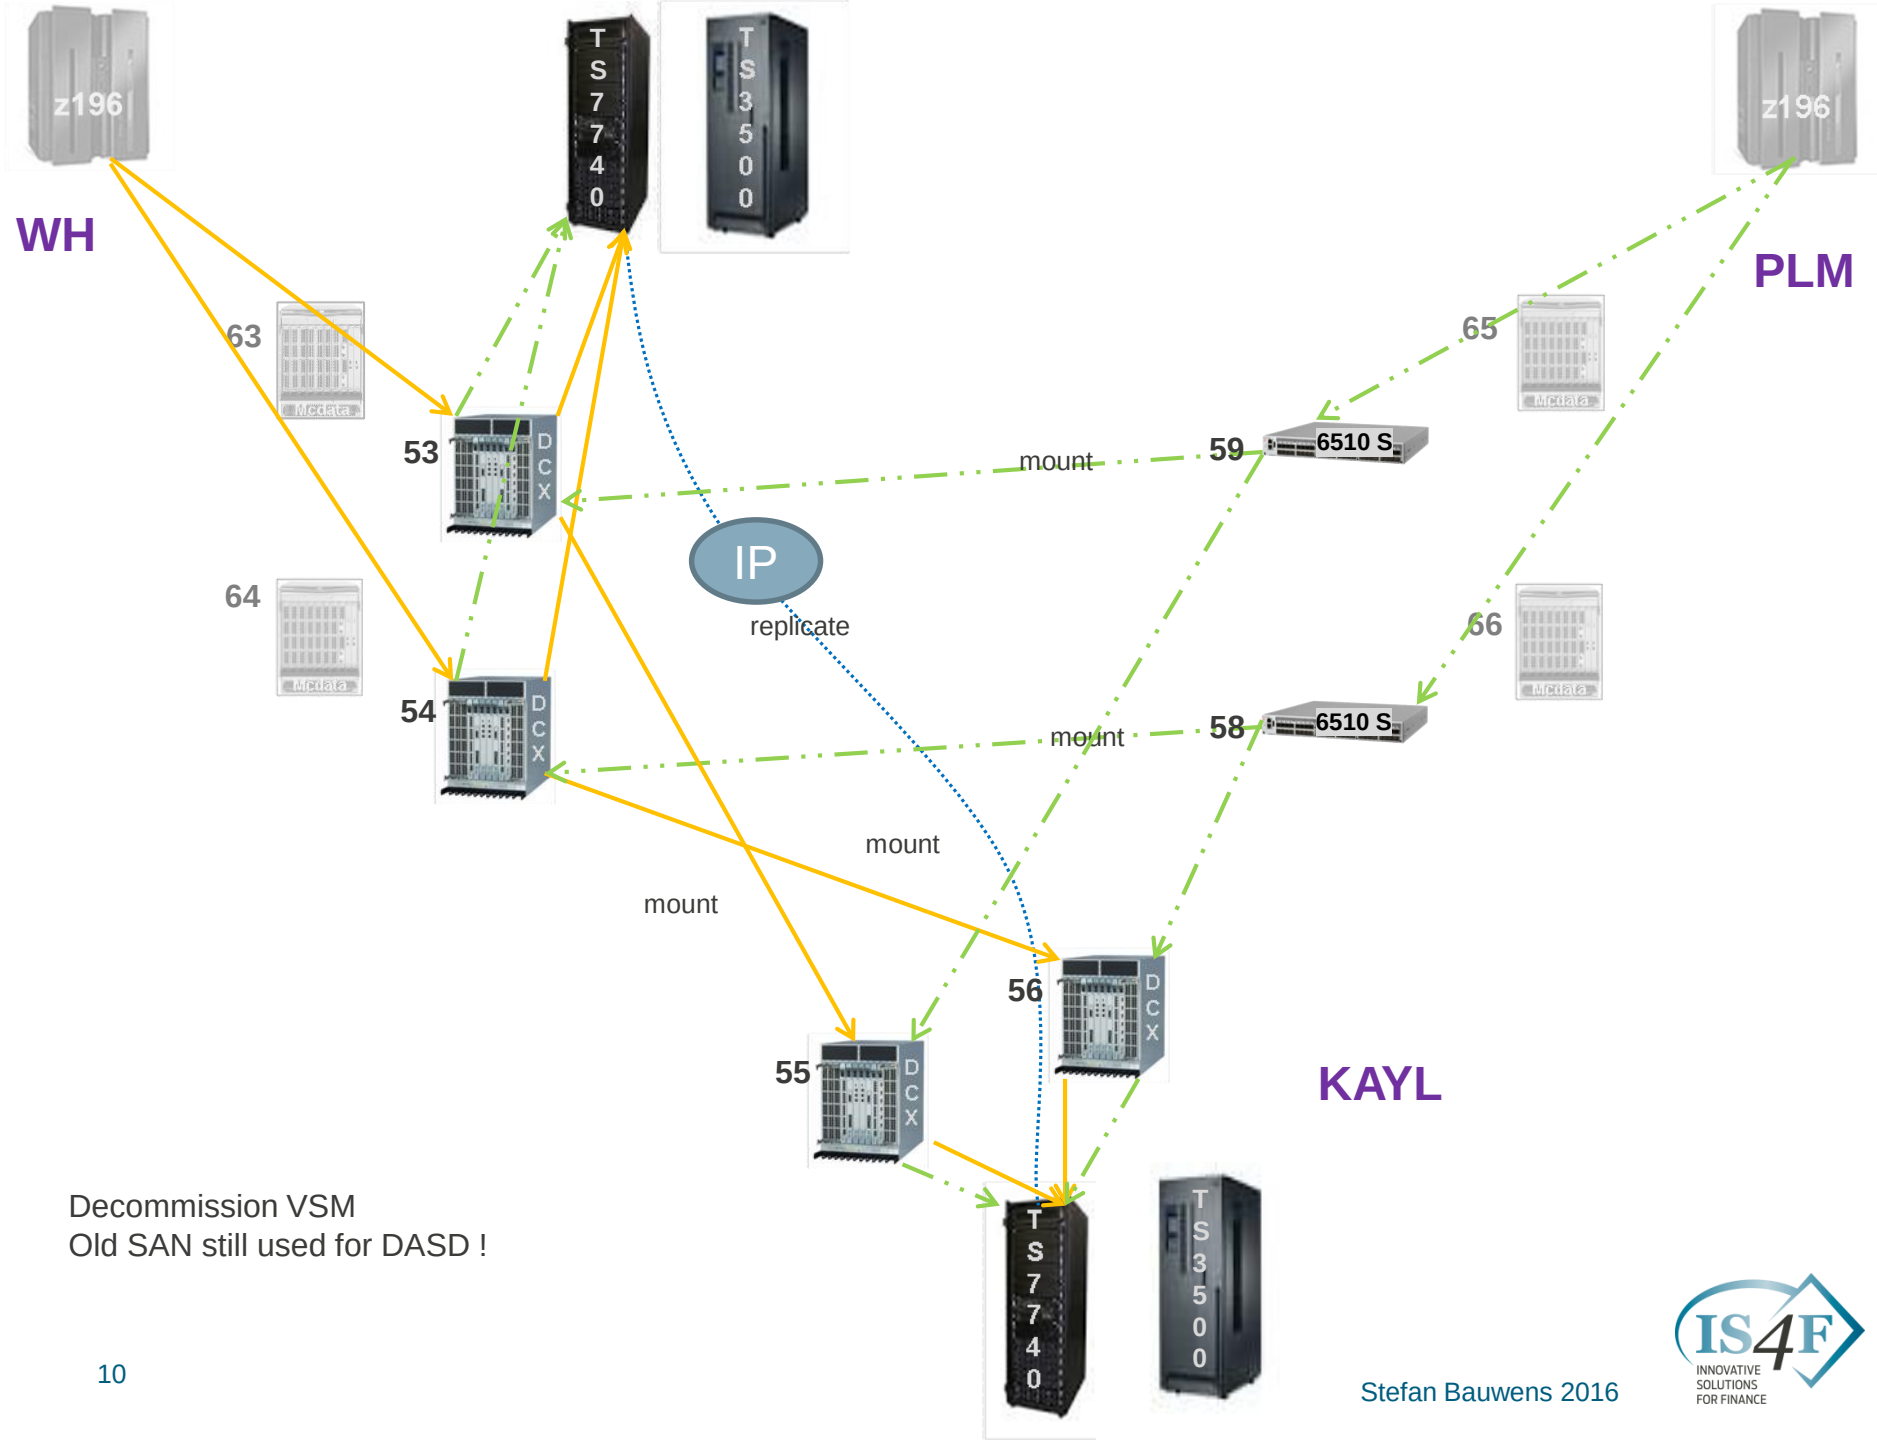

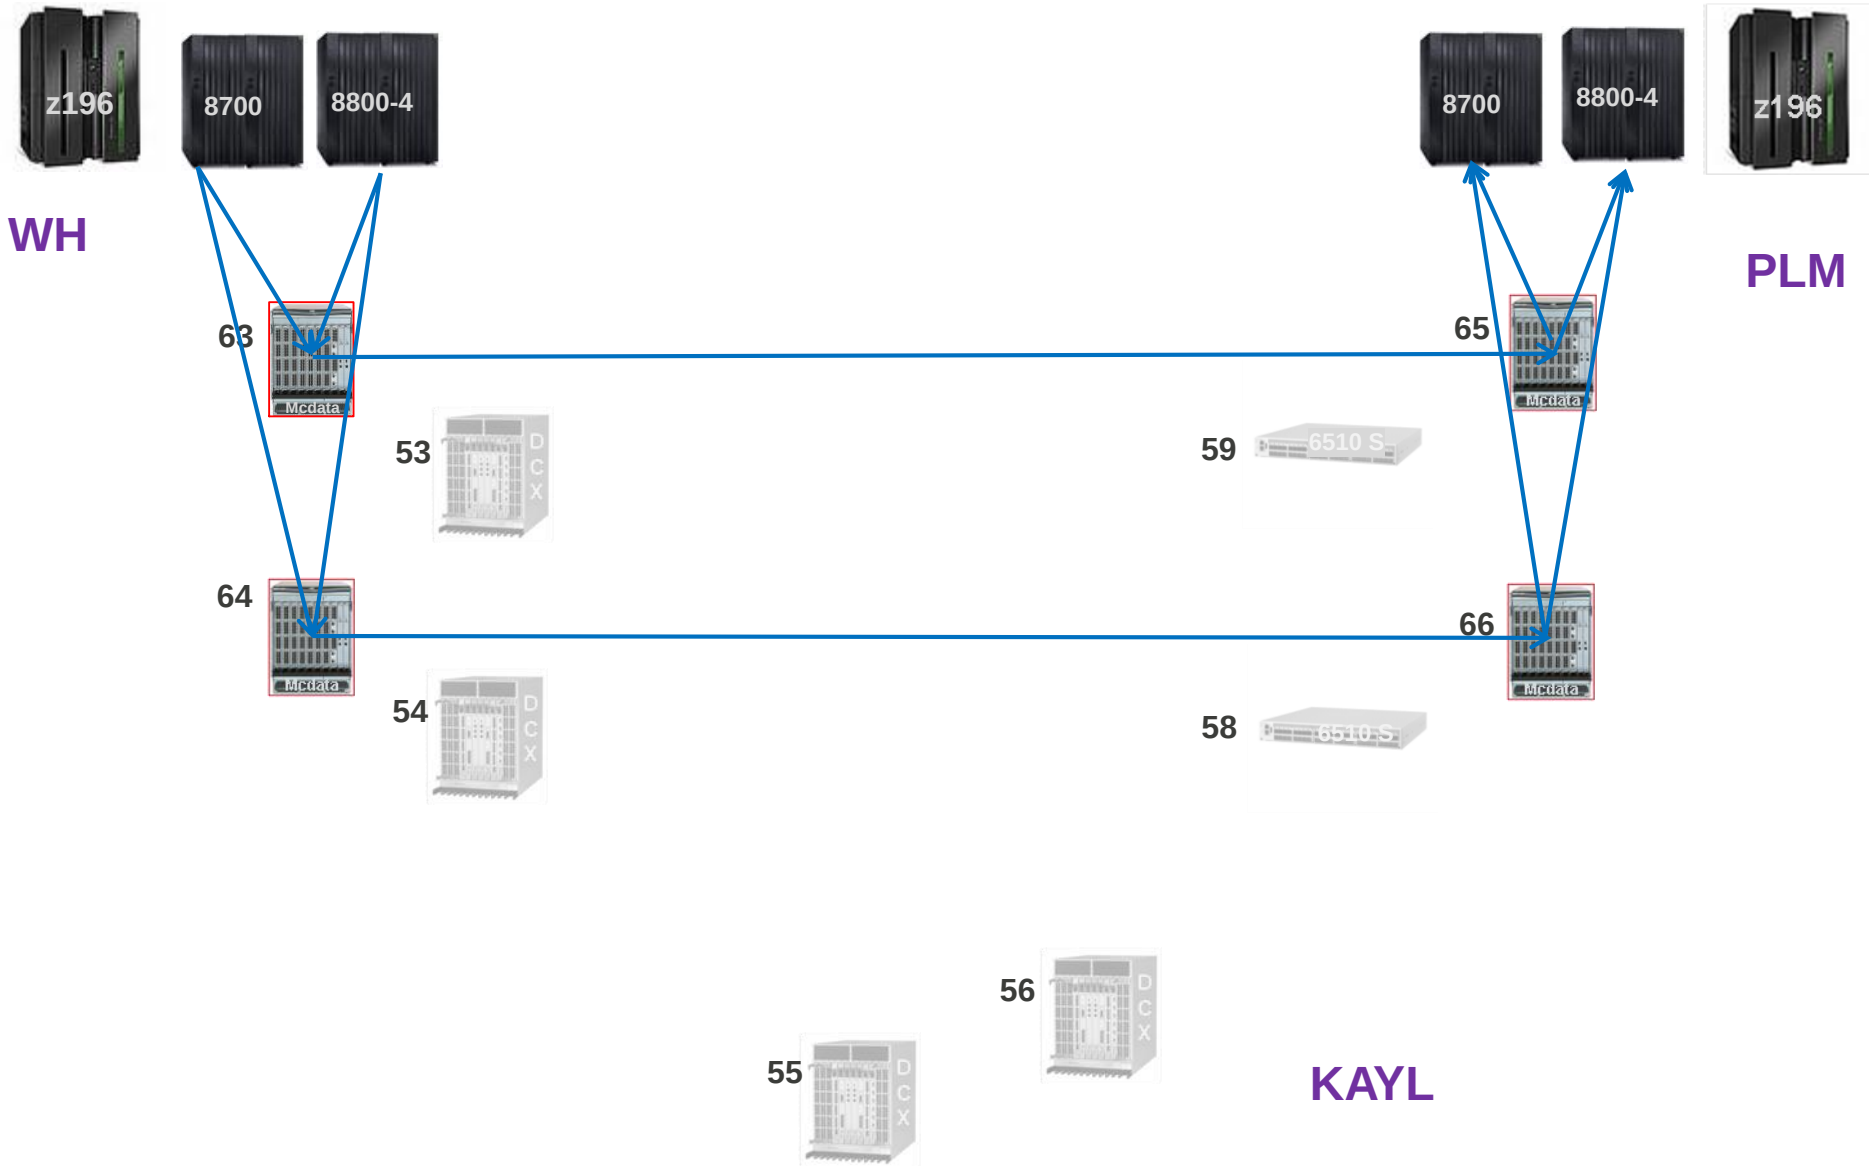

AS IS (DASD)

→ pprc paths over old SAN

