



Next edition :  
not later than January 2003

The Guide 2000 : Book 4

## CONTENT

### 1. Cell structure:

- |      |   |      |  |
|------|---|------|--|
| 1.1. | The nature of the PU polymer  | 1.5. | Modification of the cell               |
| 1.2. | Struts thickness, overall cell size, size of the window, foam density | 1.6. | Air content                            |
| 1.3. | Residual membranes  | 1.7. | The cell size unit                     |
| 1.4. | Anisotropy  | 1.8. | The number of cells per m <sup>3</sup> |

### 2. Sales of functions

- |          |                                    |       |                               |
|----------|------------------------------------|-------|-------------------------------|
| 2.1.     | Definition                         | 2.5.  | Air Sealing                   |
| 2.2.     | Mechanism of functions             | 2.6.  | Antistatic and Shielding      |
| 2.3.     | Acoustical treatment               | 2.7.  | Carrier                       |
| 2.3.1.   | The nature of the sound            | 2.8.  | Flame Barrier                 |
| 2.3.2.   | Difference between music and noise | 2.9.  | Shock absorption              |
| 2.3.3.   | Acoustical treatment types         | 2.10. | Impact protection             |
| 2.3.3.1. | Correction                         | 2.11. | Thermal insulation            |
| 2.3.3.2. | Insulation                         | 2.12. | Water infiltration            |
| 2.3.4.   | Foam as absorber                   | 2.13. | Water sealing, liquid barrier |
| 2.4.     | Air filtration                     | 2.14. | Miscellaneous                 |

### 3. Physical testing


- |        |  |         |                                 |
|--------|--|---------|---------------------------------|
| 3.1.1. | Density (D)  | 3.3.5.  | Air Resistance (Acoustics) (R)  |
| 3.2.1. | Compression Deflection                             | 3.3.6.  | Air Resistance (Sealing)        |
|        | Hardness (CDH)                                     | 3.3.7.  | Air Permeability                |
| 3.2.2. | Indentation Load Deflection (ILD)                  | 3.3.8.  | Water Tightness                 |
| 3.2.3. | Ultimate Elongation (ER) and Tensile Strength (RR) | 3.3.9.  | Water Absorption                |
| 3.2.4. | Tear Resistance (TR)                               | 3.3.10. | Electrical Resistivity          |
| 3.2.5. | Clickability                                       | 3.3.11. | Die Cut Weldability             |
| 3.2.6. | Compression Set (CS)                               | 3.4.1.  | Fogging by Reflection           |
| 3.3.1. | Cell Diameter                                      | 3.4.2.  | Fogging by Gravimetry           |
| 3.3.2. | Cell Count   | 3.4.3.  | Blue scale colour fastness      |
| 3.3.3. | Cell Structure of Sponges                          | 3.4.4.  | Flammability : MVSS 302         |
| 3.3.4. | Pressure Drop                                      | 3.4.5.  | Flammability : UL 94 horizontal |
|        |  | 3.4.6.  | Flammability (Epiradiateur)     |

### 4. Visiocell

- |      |   |       |  |
|------|---|-------|--|
| 4.1. | The cellular structure of polyurethane foams        | 4.7.  | Narrower specifications                  |
| 4.2. | PPI : an obsolete unit                              | 4.8.  | New identification of reticulated foams  |
| 4.3. | A new concept                                       | 4.9.  | Actual limitations of the method         |
| 4.4. | Short description of Visiocell                      | 4.10. | Slides: exclusive properties of Recticel |
| 4.5. | Example of Visiocell                                | 4.11. | Procedure for new product development    |
| 4.6. | Relation between cell diameter by Visiocell and PPI |       |  |

### 5. Production Technologies

- |        |   |       |                                       |
|--------|---|-------|---------------------------------------|
| 5.1.   | Chemistry   | 5.5.  | Discontinuous (moulding)              |
| 5.2.   | Raw materials   | 5.6.  | Foaming : Critical curve (process)    |
| 5.3.   | Raw materials chart from crude oil to Polyol and Isocyanate | 5.7.  | Comparison ether < - > ester PU foams |
| 5.4.   | Foaming Technologies  | 5.8.  | Reticulation                          |
| 5.4.1. | Inclined conveyor   | 5.9.  | Impregnation                          |
| 5.4.2. | Downwards foaming   | 5.10. | Densification                         |
| 5.4.3. | Vertical foaming  | 5.11. | Cutting technologies                  |
|        |   | 5.12. | Conversion table                      |

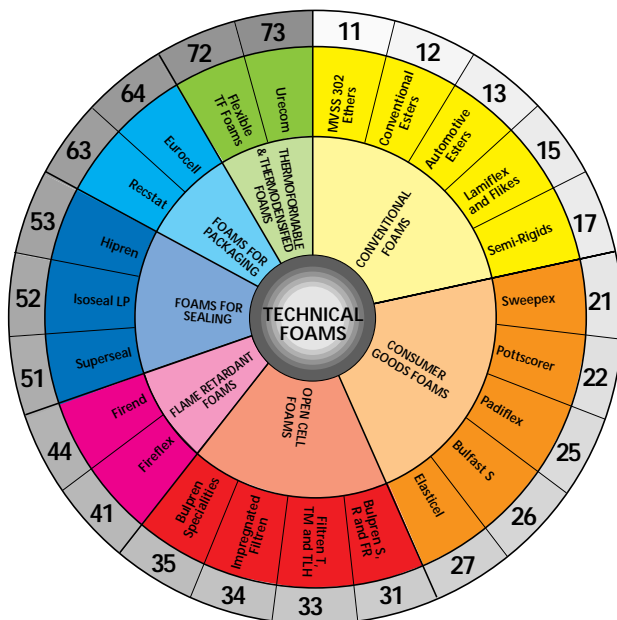

## ADDRESSES

### RECTICEL INTERNATIONAL:

Av. des Pléiades 15  
Plejadenlaan 15  
B-1200 Bruxelles - Brussel  
Phone: 02/775 18 11  
Fax: 02/775 19 90

### INTERNATIONAL BUSINESS LINE

#### TECHNICAL FOAMS:

Damstraat 2  
B-9230 Wetteren  
Phone: 09/368 95 27  
Fax: 09/368 95 59

### RECTICEL BELGIUM:

Recticel N.V.  
Damstraat 2  
B-9230 Wetteren  
Phone: 09/368 92 11  
Fax: 09/368 94 92

### RECTICEL FRANCE:

Recticel S.A.  
Boulevard du Général Leclerc 6  
F-92115 Clichy-la-Garenne  
Phone: 0145/19 22 00  
Fax: 0145/19 22 01

### EUROFOAM GERMANY:

Location: Am Gatherhof 41  
D-40472 Düsseldorf  
Mail: Postfach 33 01 16  
D - 40434 Düsseldorf  
Phone: 0 211 90 446 0  
Fax: 0 211 90 446 68

### EUROFOAM AUSTRIA:

Eduard-Sueß-Strasse 25  
A-4021 Linz  
Phone: 732 381 0240  
Fax: 732 381 0245

### RECTICEL THE NETHERLANDS:

Location: Schuilheuvelstraat 1  
NL-4116 GA Buren  
Mail: P.B. 726  
NL-4116 ZJ Buren  
Phone: 0344/579777  
Fax: 0344/579745

### RECTICEL SWEDEN:

Nordflex AB  
S. Storgatan 50 - box 507  
S-332 28 Gislaved  
Phone: 0371/845 00  
Fax: 0371/108 10

### RECTICEL UK:

Recticel Limited  
Bluebell Close  
Clover Nook Industrial Park  
UK-Alfreton Derbyshire DE 55 4RD  
Phone: 1773/835 721  
Fax: 1773/835 563

### EUROFOAM POLAND:

Polopren Sp. z O.O.  
ul. Szczawinska 42  
Pl-95100 Zgierz  
Phone: 42 7163 493  
Fax: 42 7162 911

### EUROFOAM HUNGARY:

Poran kft  
Postfach 16  
H- 3792 Sajóbáony (Miskolc)  
Phone: 46 412 855  
Fax: 46 507 240