


Target: $O(0.5) \text{ W/cm}^2$

Traditional inductor-based on-board DC/DC not possible:

Possible options:

Serial powering

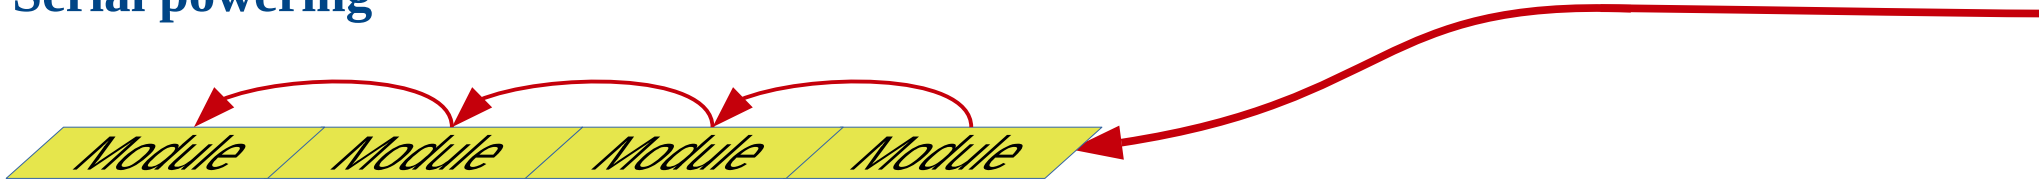

More complex schemes

