




USB and power

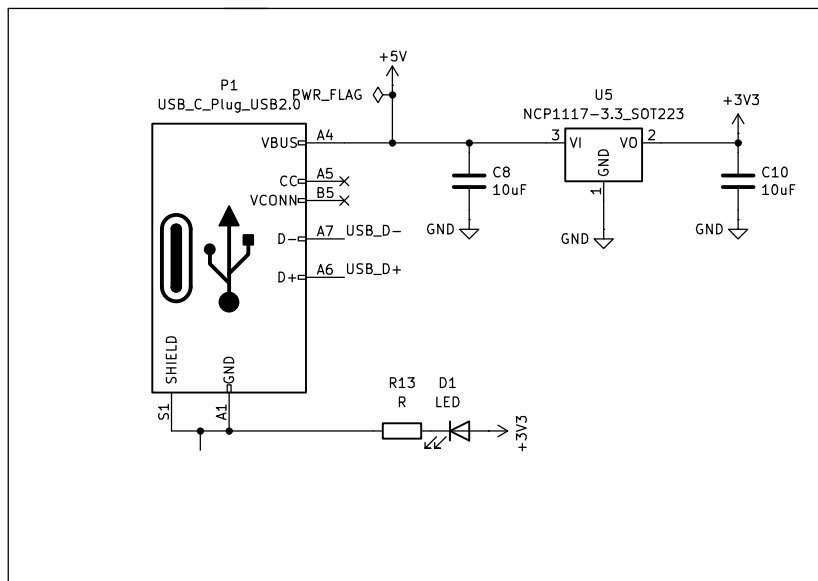


Flash

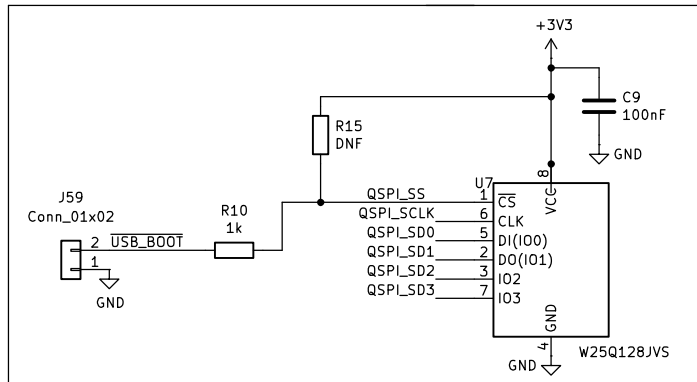


Crystal oscillator

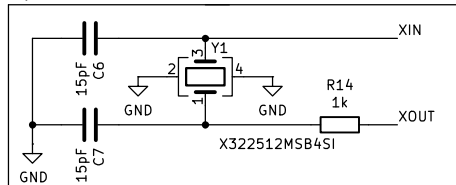

Debug connector



If there are stability issues then R4 may need to be replaced with a smaller value resistor. See <https://forums.raspberrypi.com/viewtopic.php?t=336663> for more details.

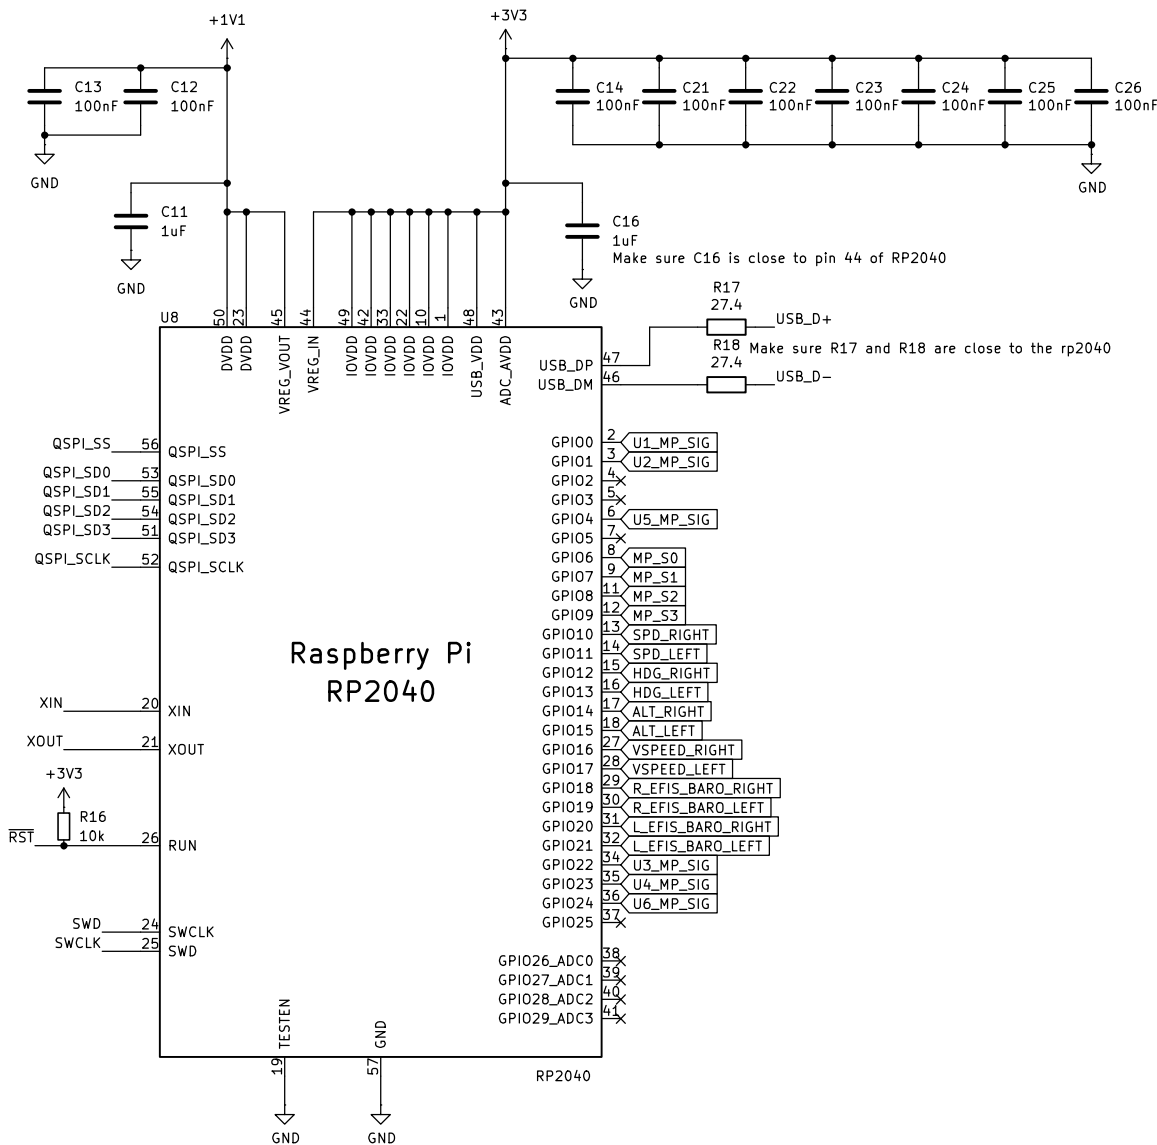

Sheet: /
File: FCU_Mainboard_v4.kicad_sch


Title: FCU Mainboard schematics

Size: A4 Date: 2024-03-05

KiCad E.D.A. 8.0.5

Rev: 1.0

Id: 1/6

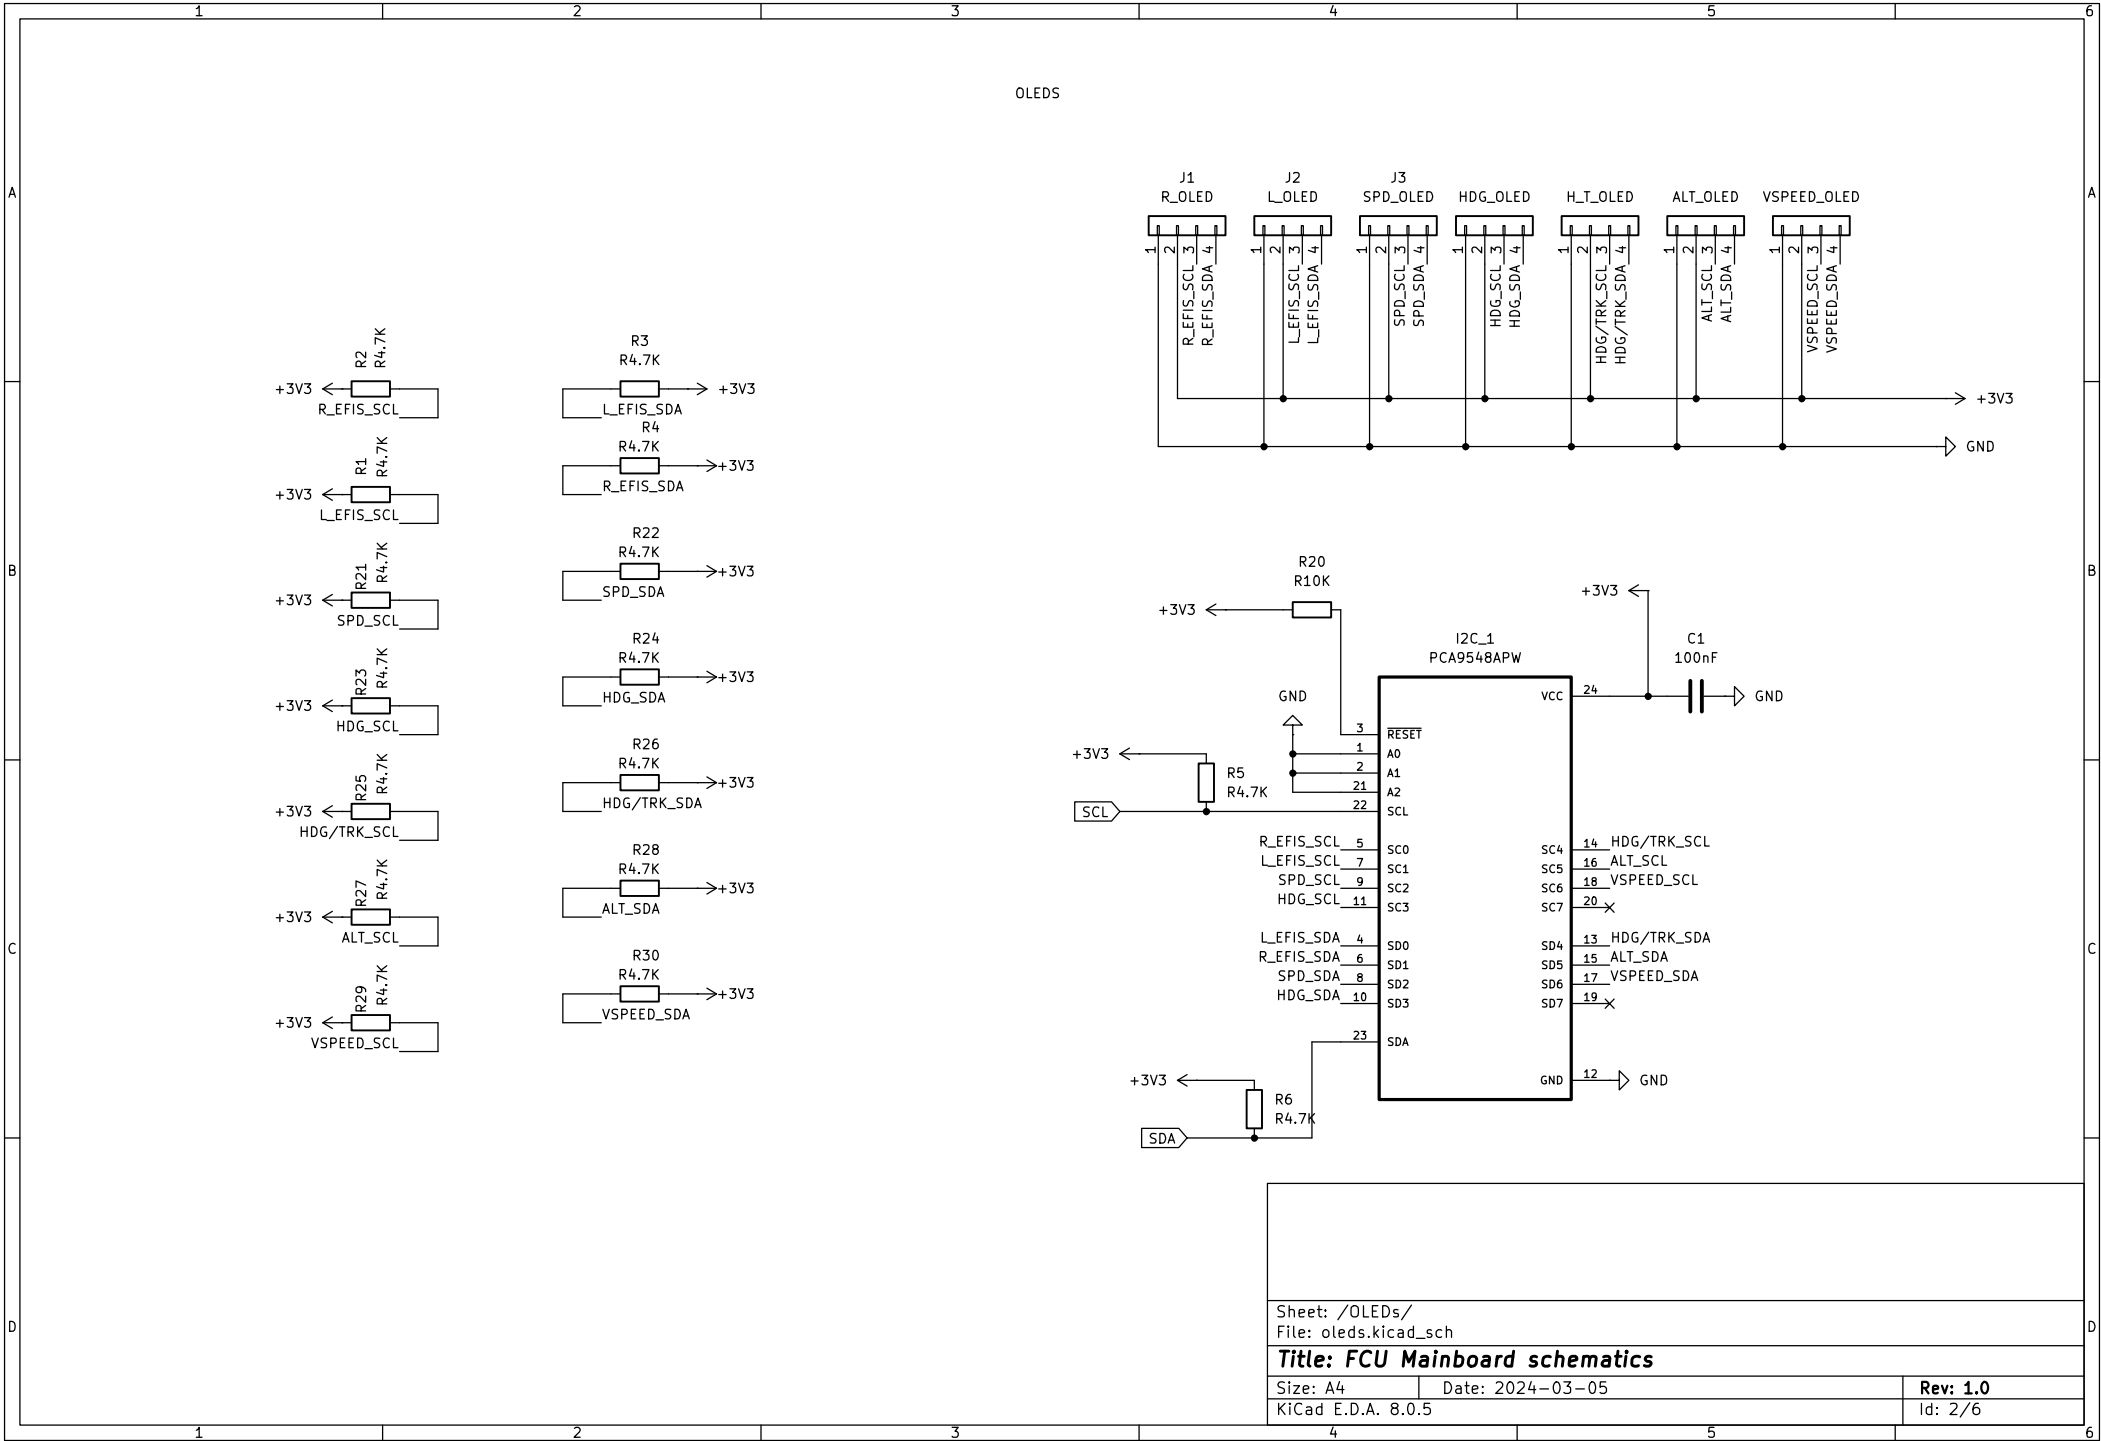

Sheet: /OLEDS/
File: oleds.kicad_sch


Title: FCU Mainboard schematics


Size: A4 | Date: 2024-03-05


KiCad E.D.A. 8.0.5

Rev: 1.0

Id: 2/6

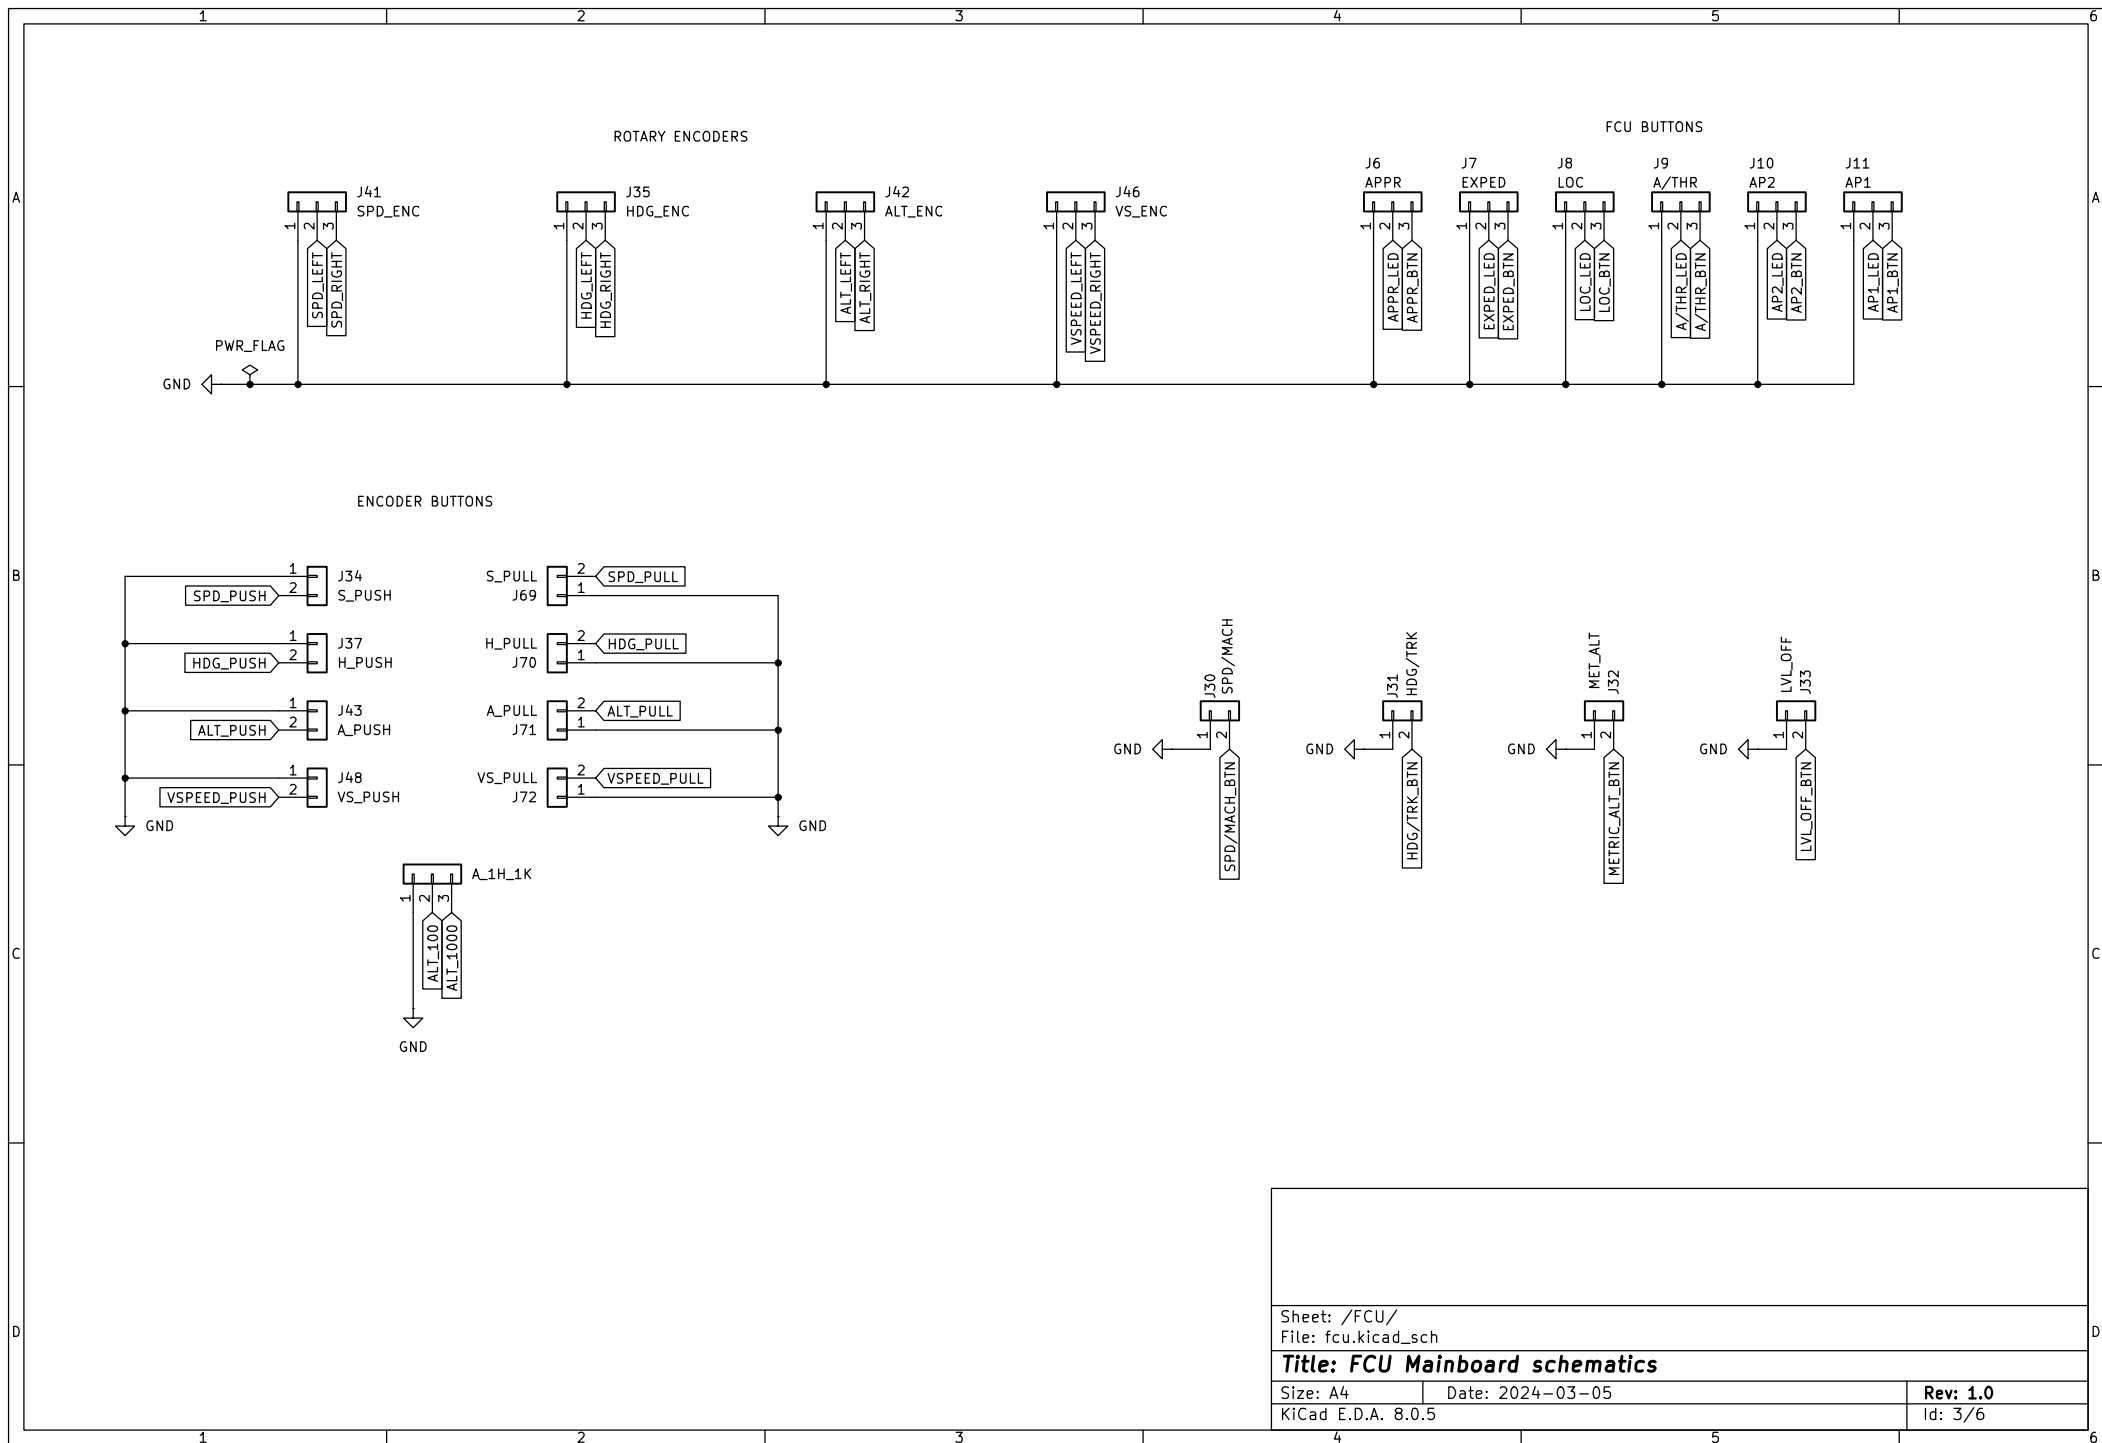

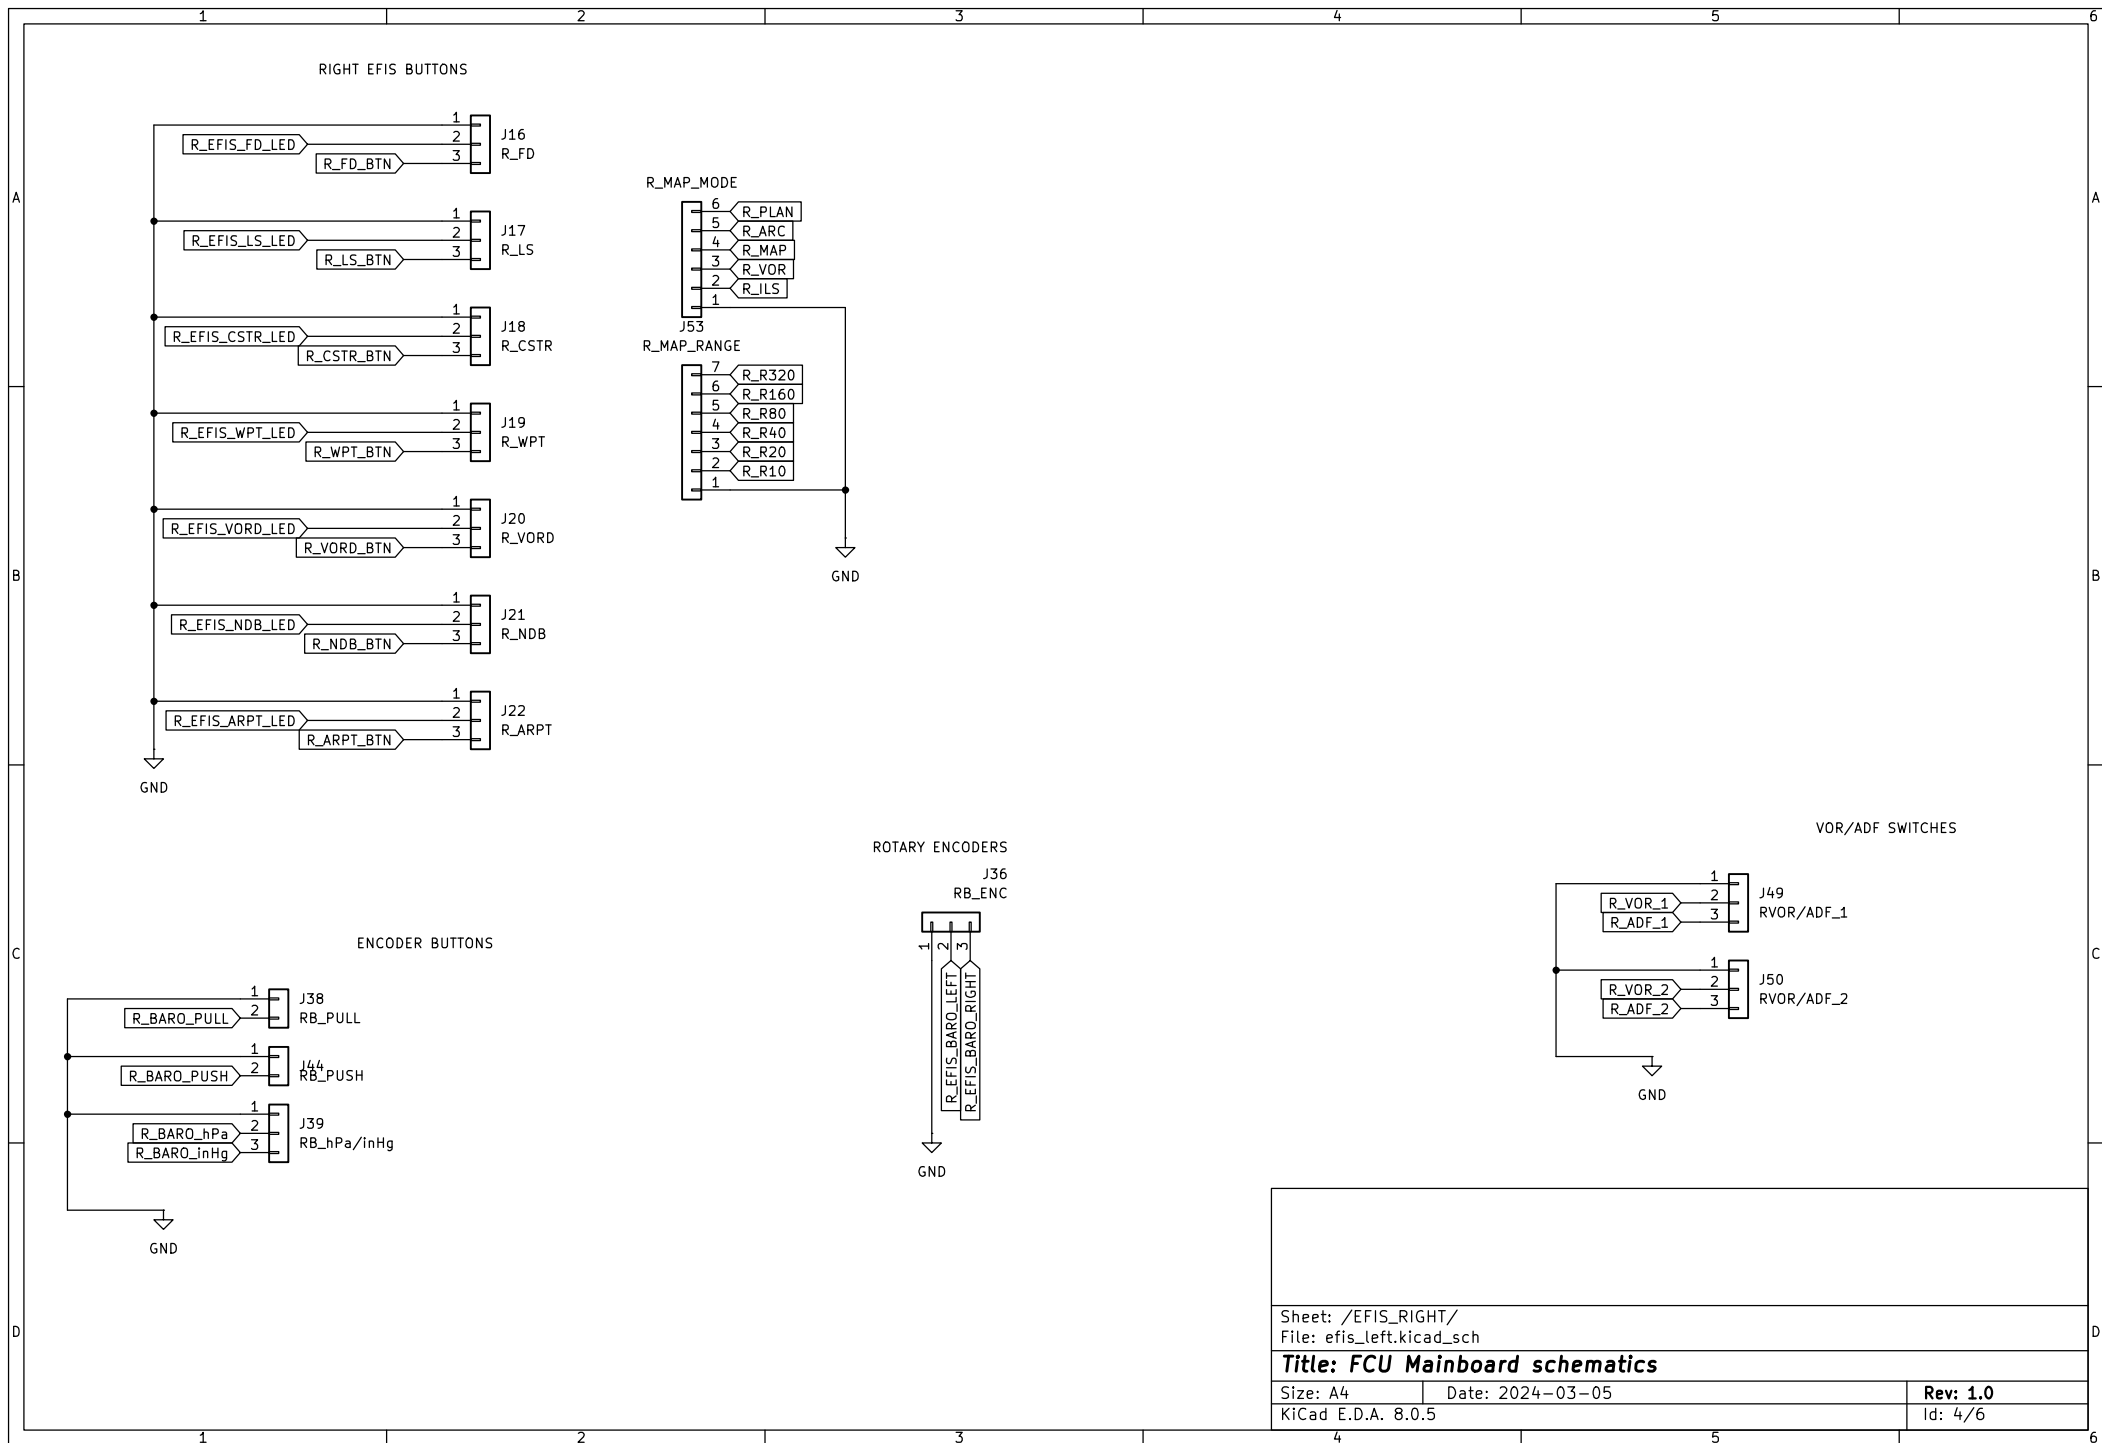

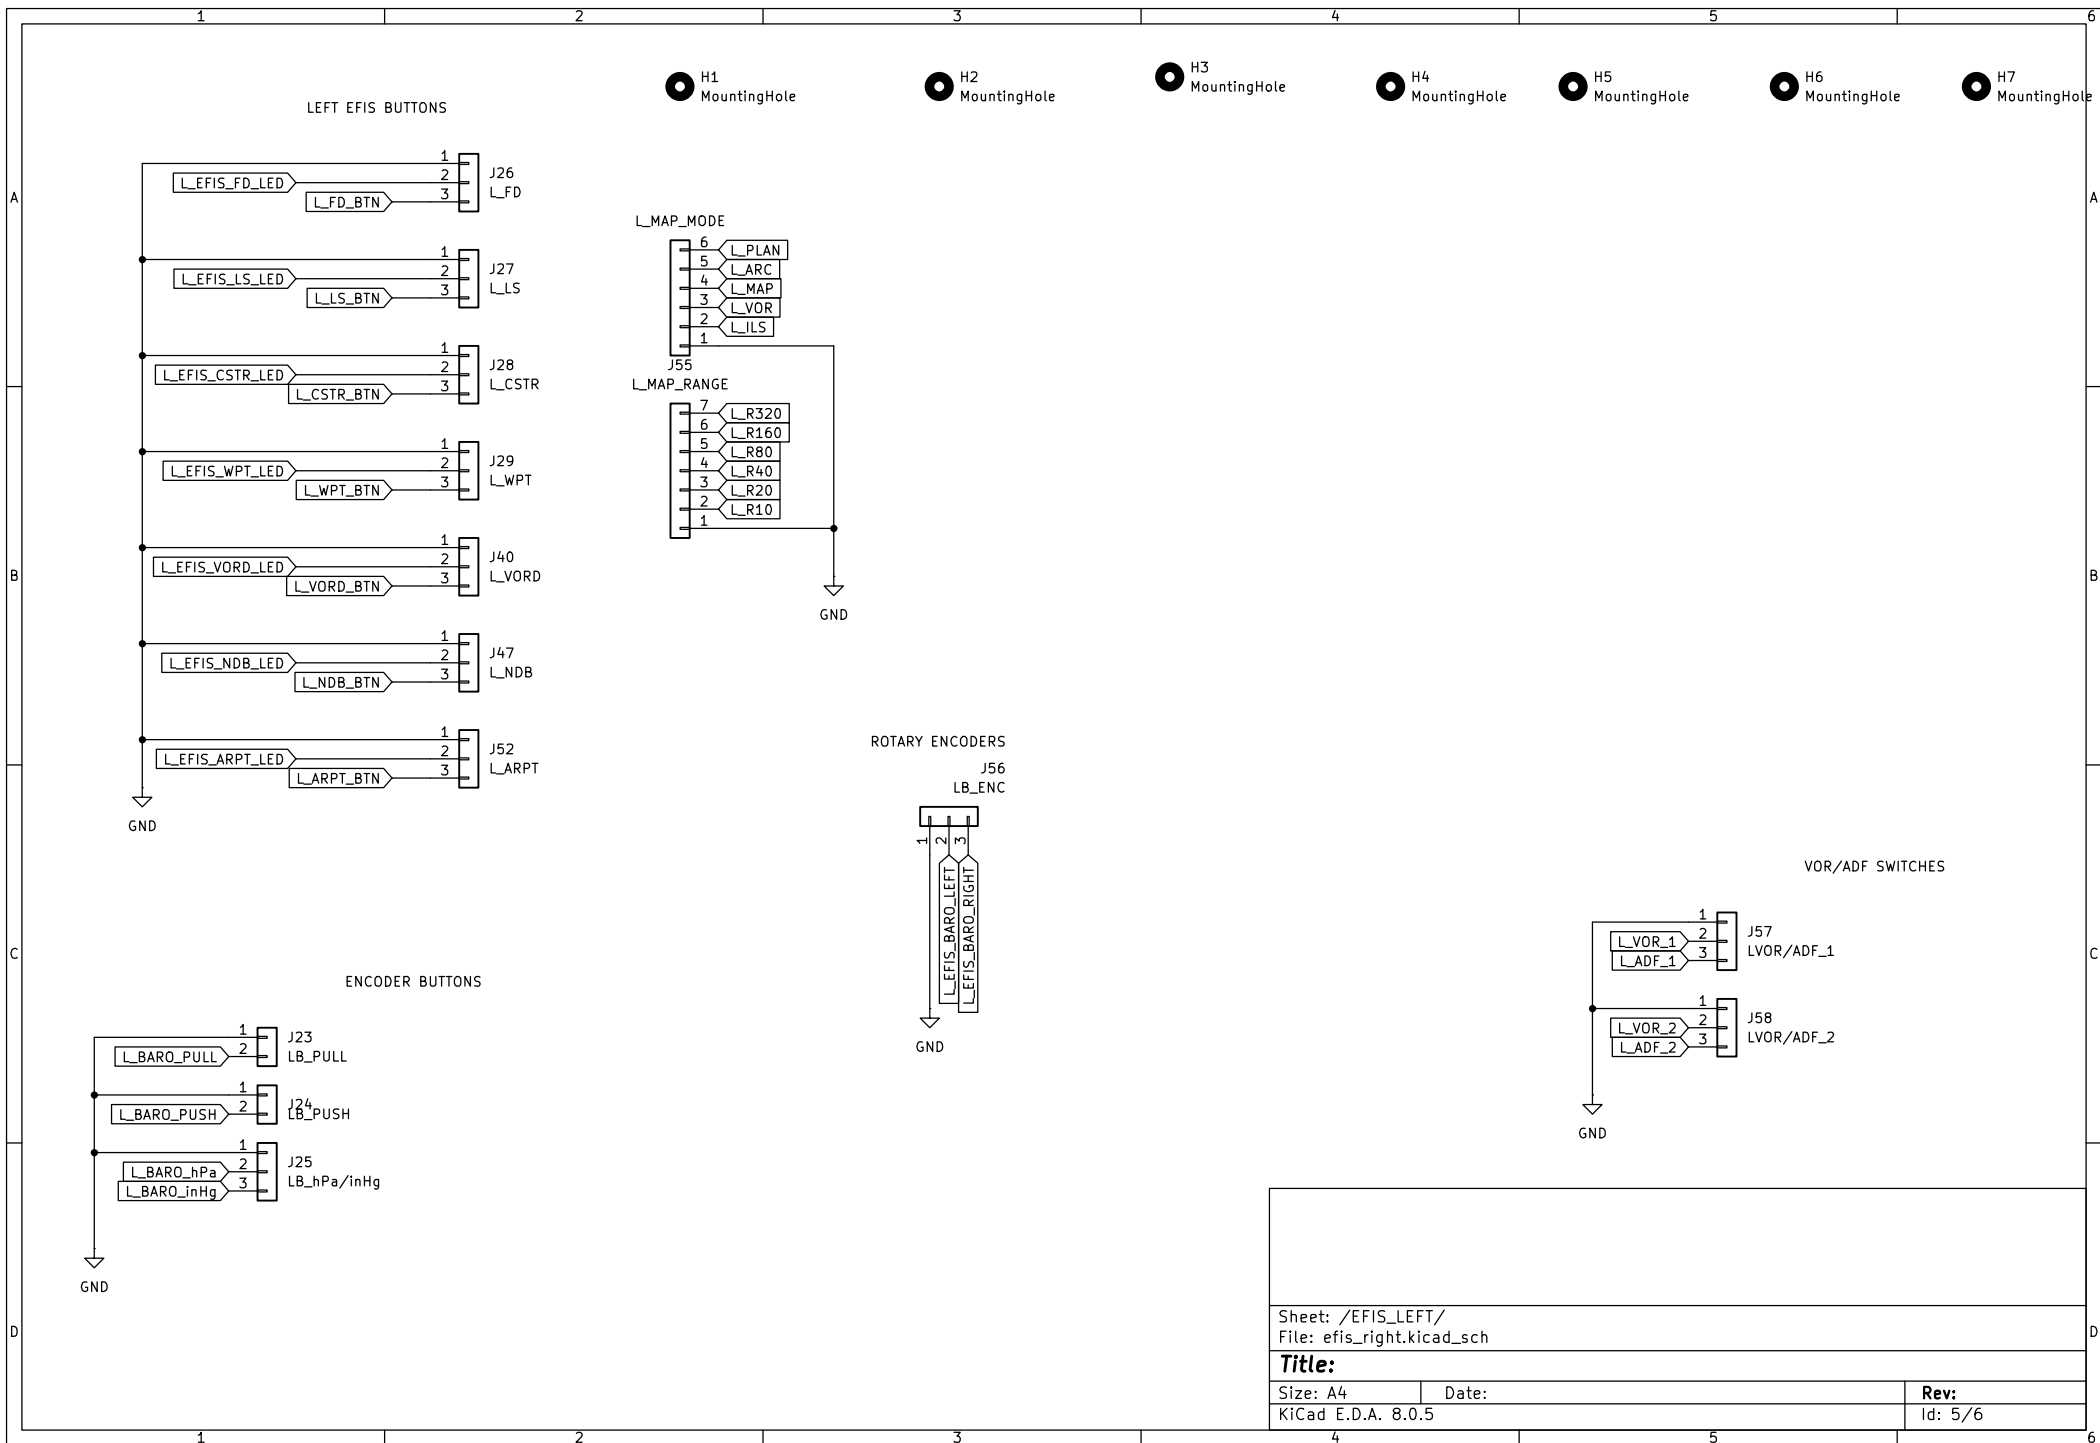

Sheet: /EFIS_LEFT/
File: efis_right.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 8.0.5

Rev:

Id: 5/6

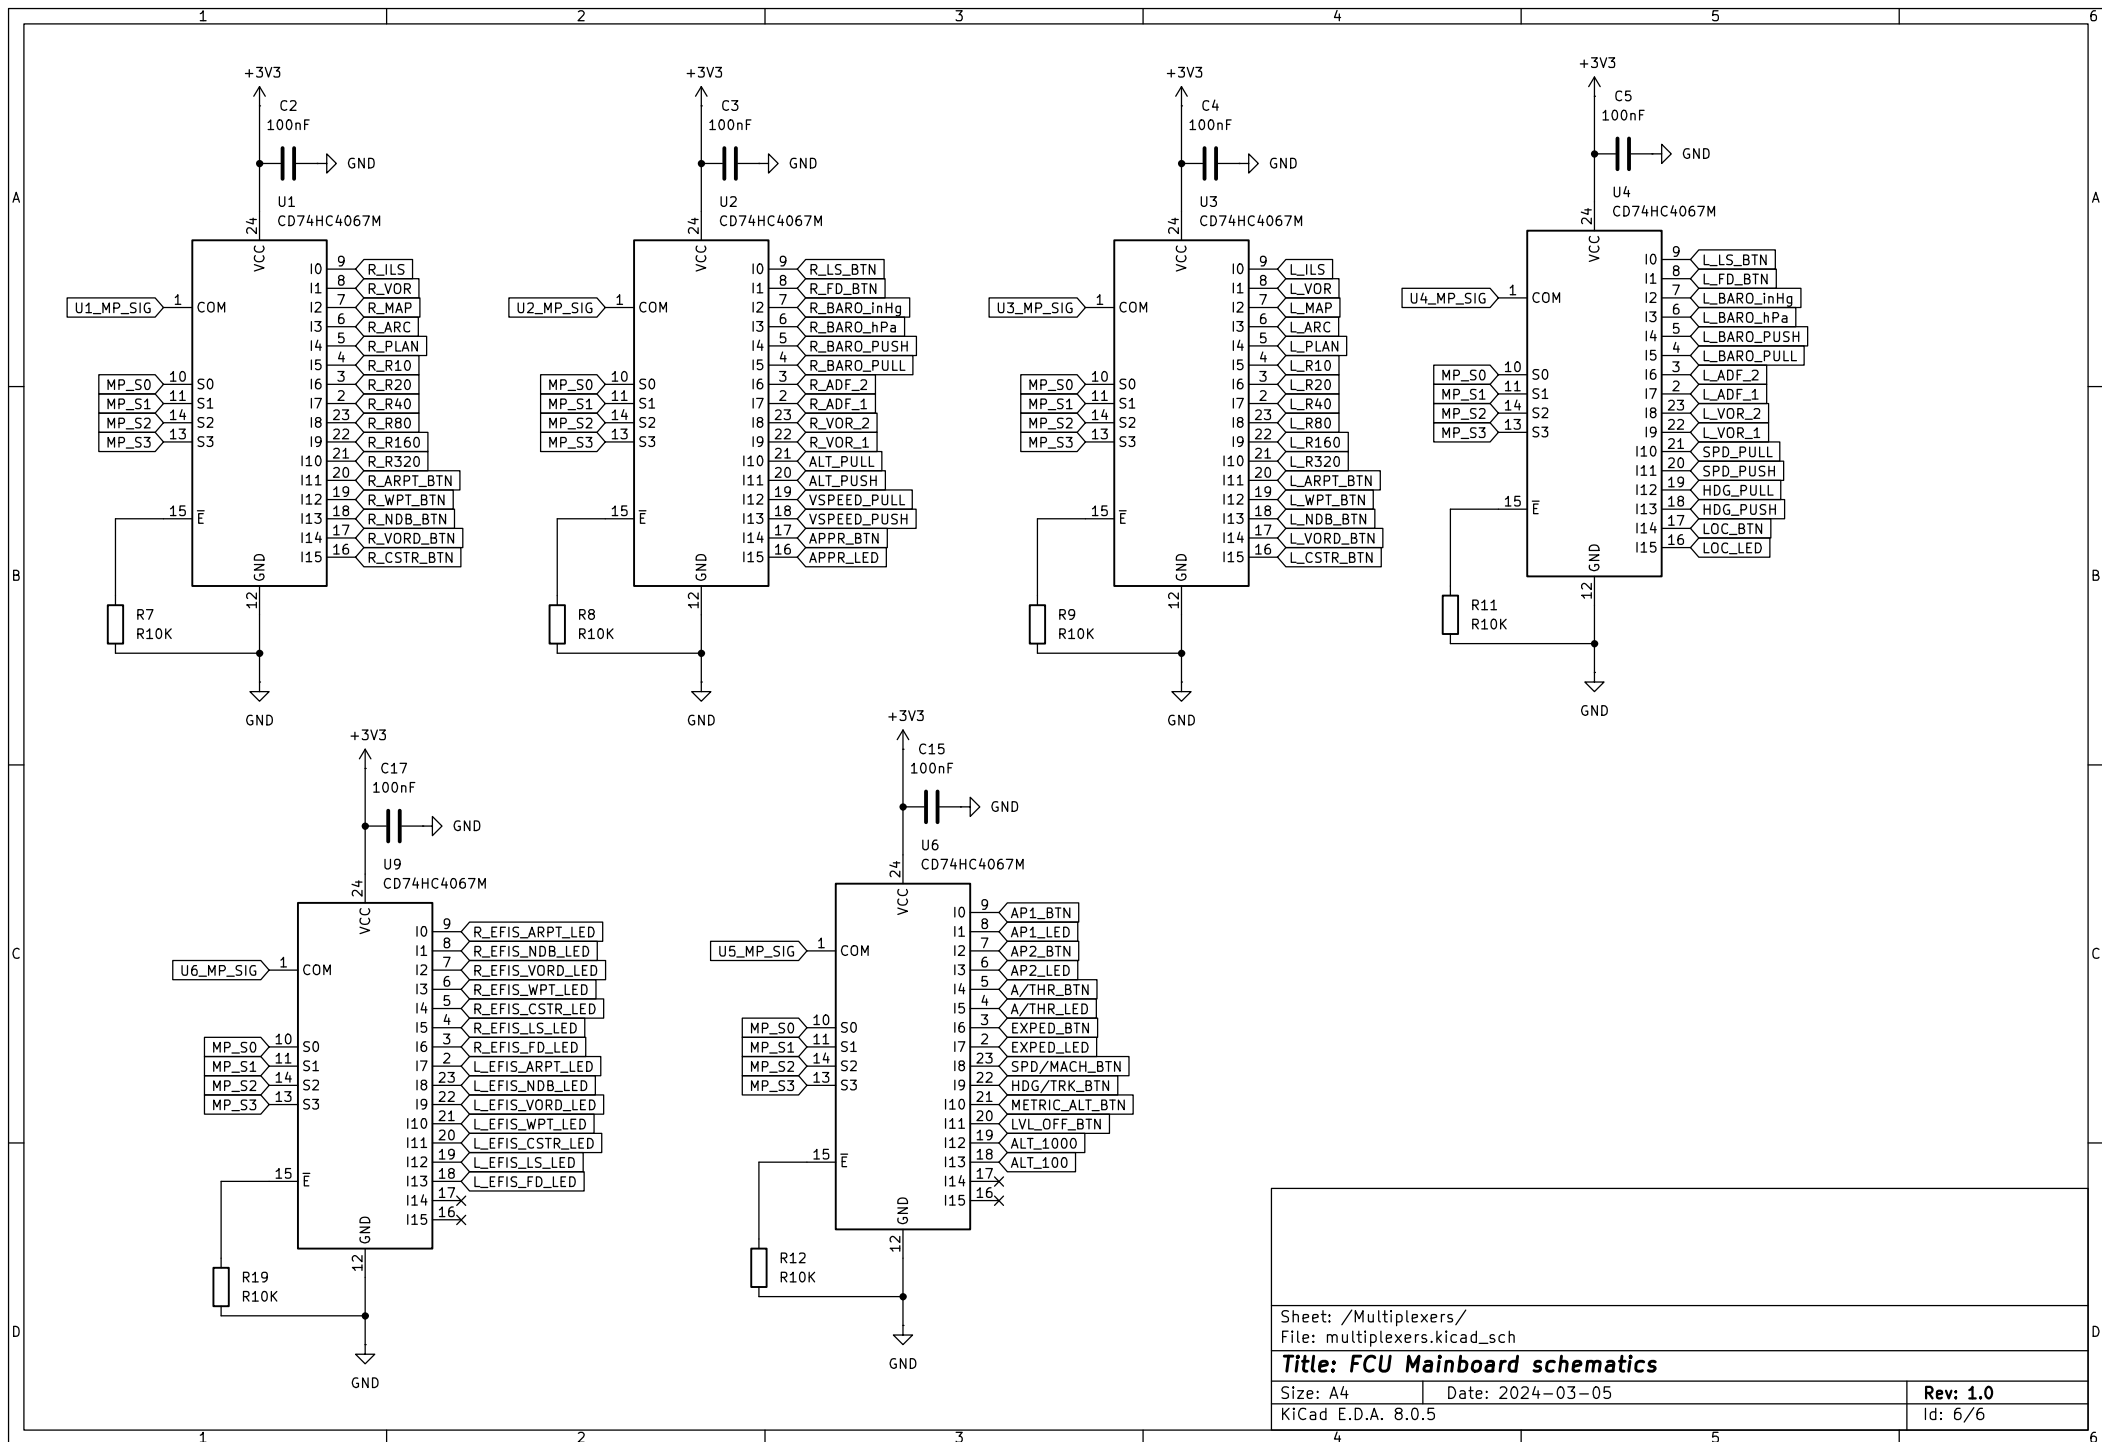

Sheet: /Multiplexers/
File: multiplexers.kicad_sch

Title: FCU Mainboard schematics

Size: A4 Date: 2024-03-05

KiCad E.D.A. 8.0.5

Rev: 1.0

Id: 6/6