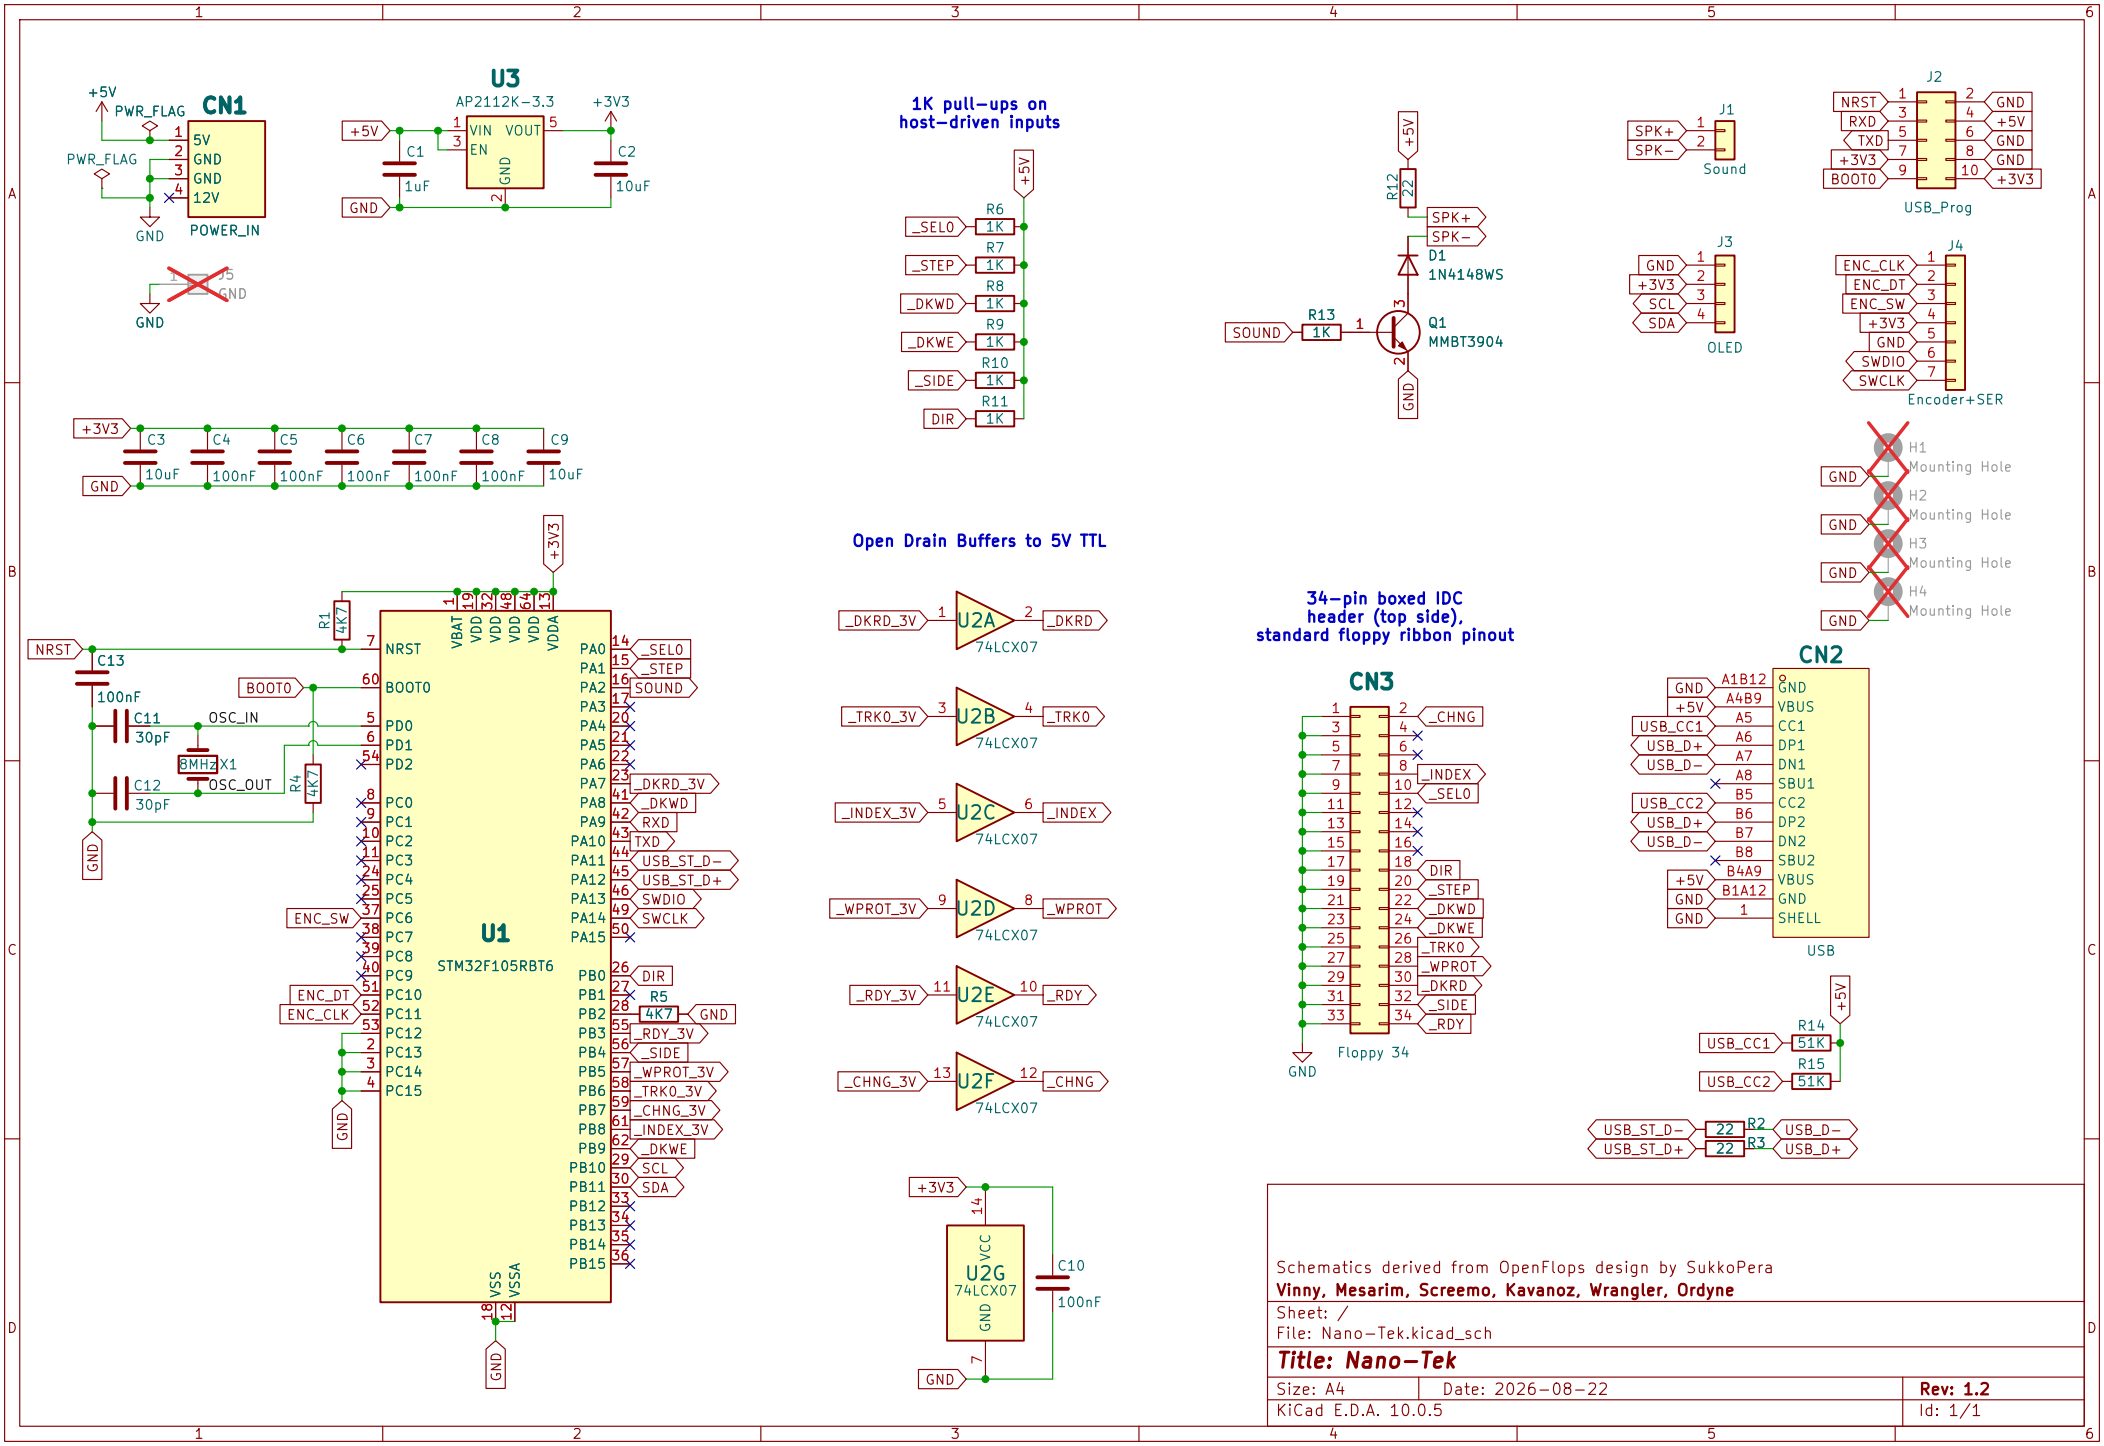

CN1
POWER_IN
U3
AP2112K-3.3
U1
STM32F105RBT6
1K pull-ups on host-driven inputs
Open Drain Buffers to 5V TTL
74LCX07
34-pin boxed IDC header (top side), standard floppy ribbon pinout
CN3
Floppy 34
CN2
USB
J1
Sound
J2
USB_Prog
J3
OLED
J4
Encoder+SER
D1
1N4148WS
Q1
MMBT3904
H1 Mounting Hole
H2 Mounting Hole
H3 Mounting Hole
H4 Mounting Hole
Schematics derived from OpenFlops design by SukkoPera
Vinny, Mesarim, Screemo, Kavanoz, Wrangler, Ordyne
Sheet: /
File: Nano-Tek.kicad_sch
Title: Nano-Tek
Size: A4
Date: 2026-08-22
Rev: 1.2
KiCad E.D.A. 10.0.5
Id: 1/1