


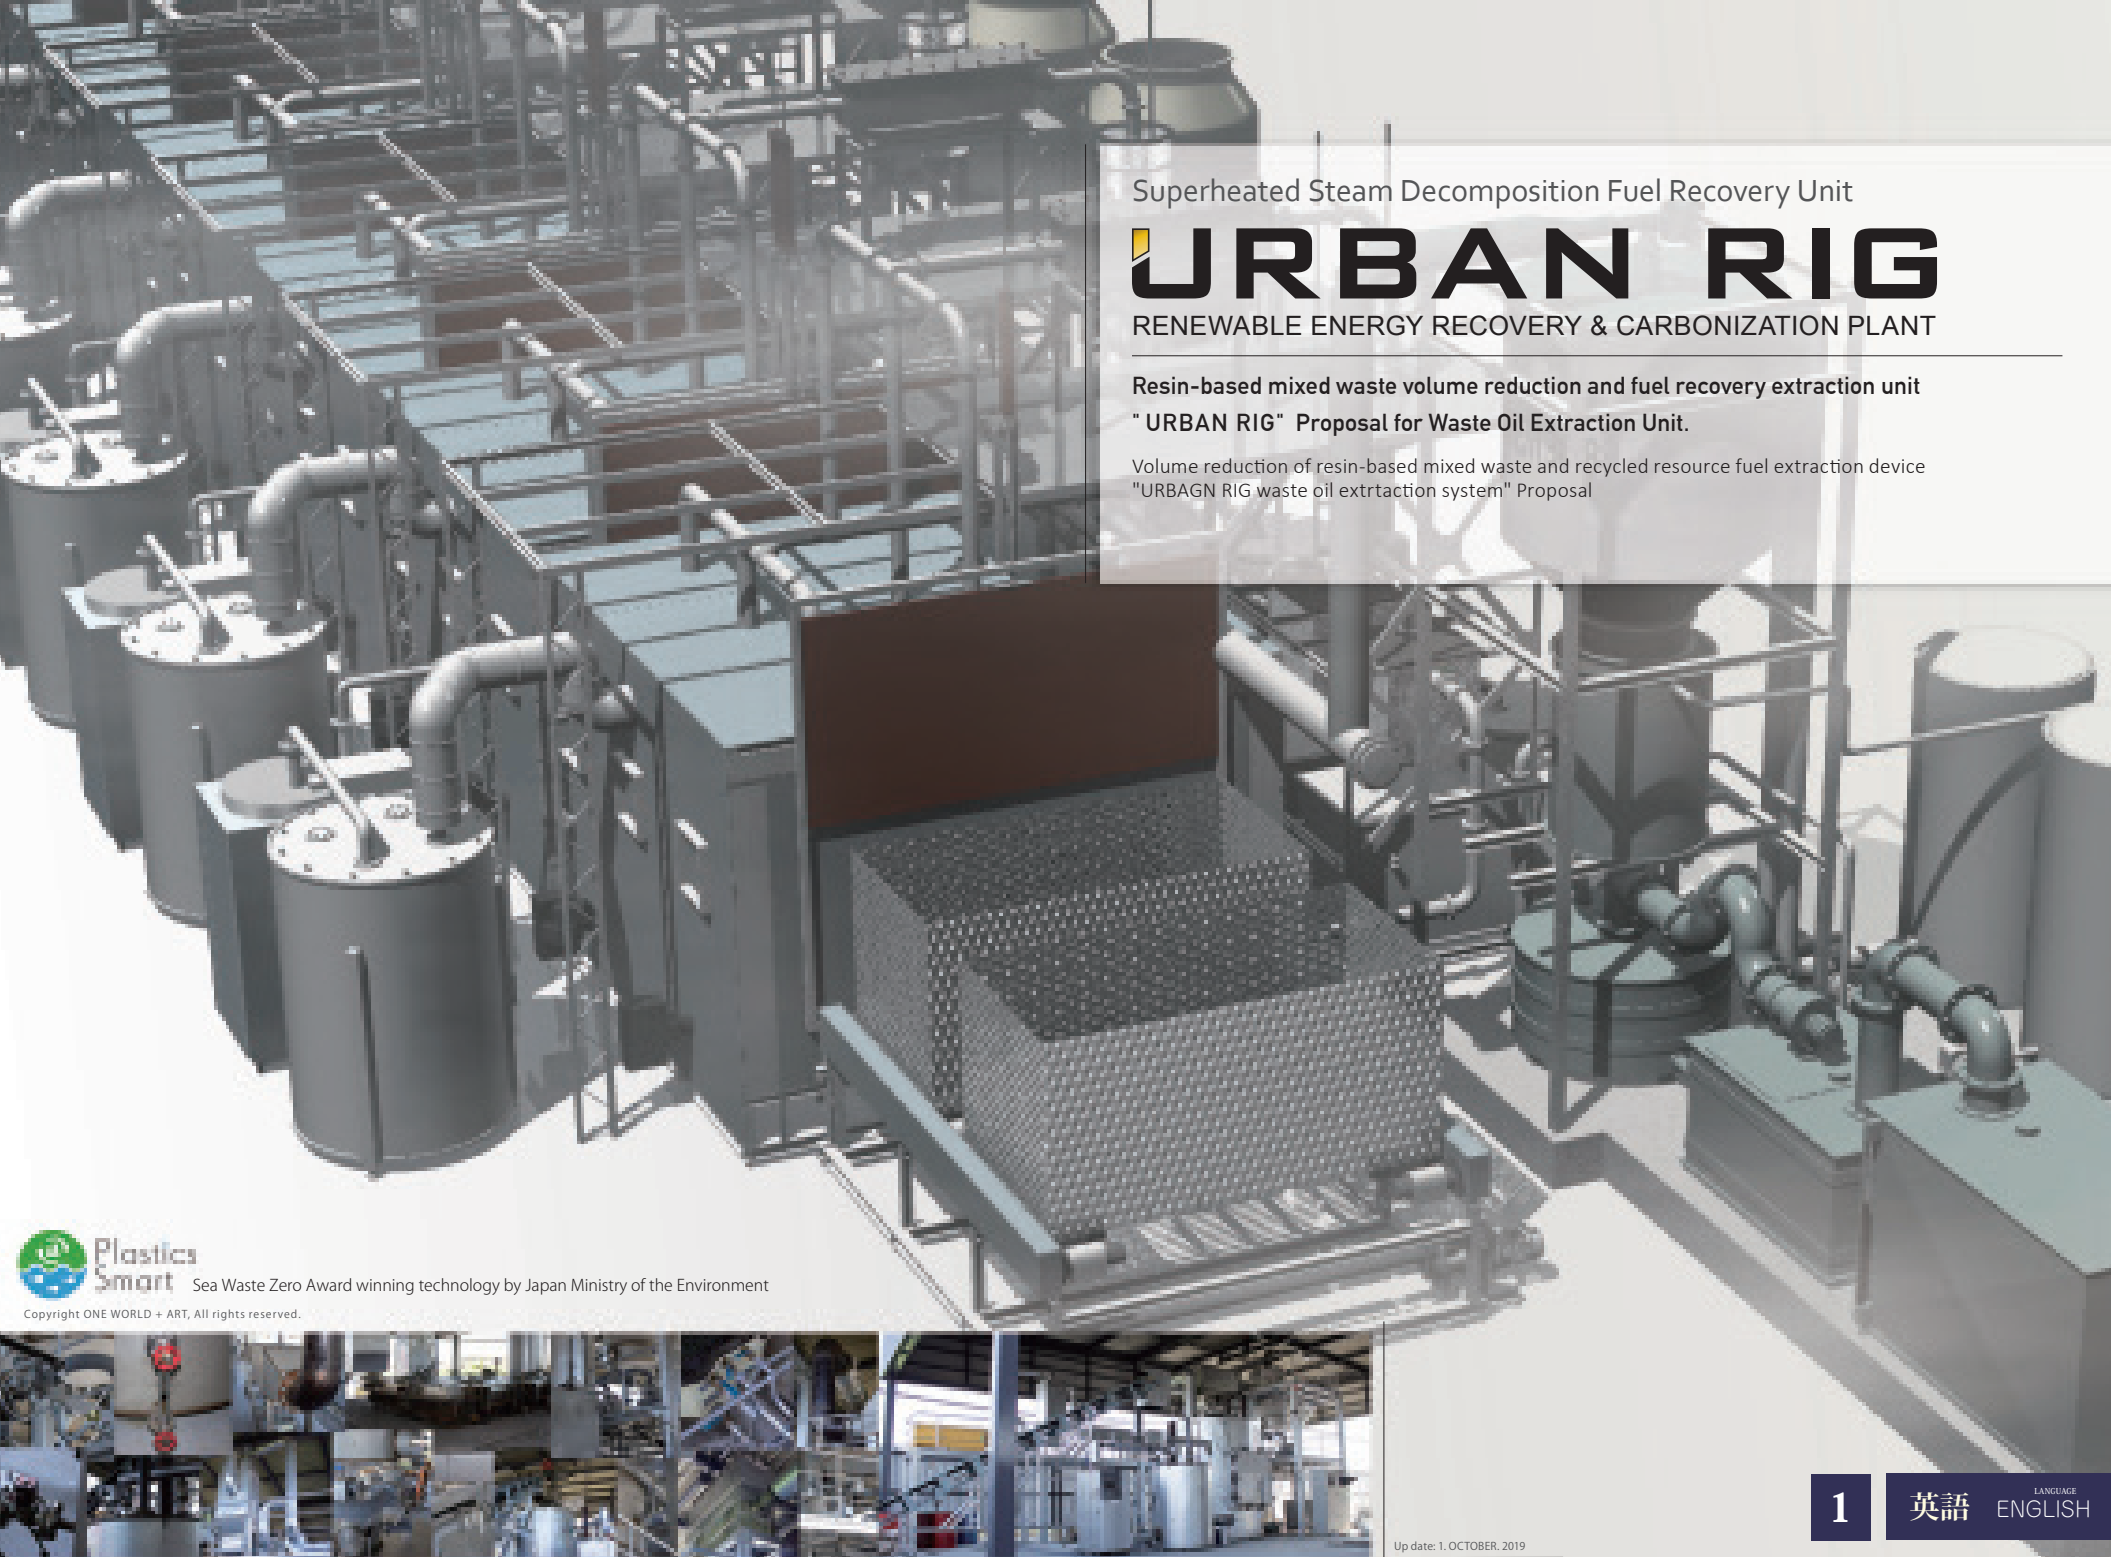

Superheated Steam Decomposition Fuel Recovery Unit

URBAN RIG

RENEWABLE ENERGY RECOVERY & CARBONIZATION PLANT

Resin-based mixed waste volume reduction and fuel recovery extraction unit
"URBAN RIG" Proposal for Waste Oil Extraction Unit.

Volume reduction of resin-based mixed waste and recycled resource fuel extraction device
"URBAGN RIG waste oil extrtaction system" Proposal



OneWorld corporation


One world corporation headquarters /1-1-20 Nagayoshinagahara, Hirano-ku, Osaka-city, Japan.
Zip547-0016 Phone: +81-6-4392-7499 Mail: info@1-world.asia URL: www.1-world.asia



Plastics
Smart

Sea Waste Zero Award winning technology by Japan Ministry of the Environment

Copyright ONE WORLD + ART, All rights reserved.

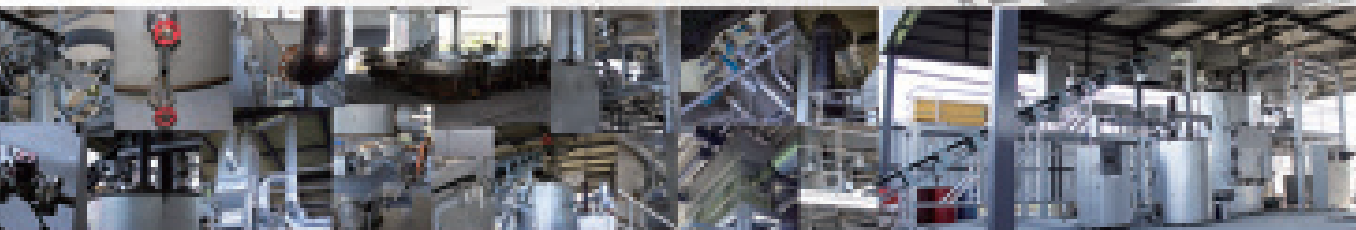

Up date: 1. OCTOBER, 2019

1

英語 ENGLISH

LANGUAGE

Secure high profitability with waste volume reduction. !!

— Superheated Steam Decomposition Fuel Recovery Unit —

URBAN RIG

URBAN RIG makes inside the reactor high temperature and oxygen free by superheated steam and recover the fuel oil from the resin-based mixed waste c/w food residue and mud.

The recovered fuel oil can be used as a fuel for natural renewable energy, and also a boiler fuel of the URBAN RIG and a superheated steam generator. It is a waste treatment facility with high-level environmental and economic efficiency.

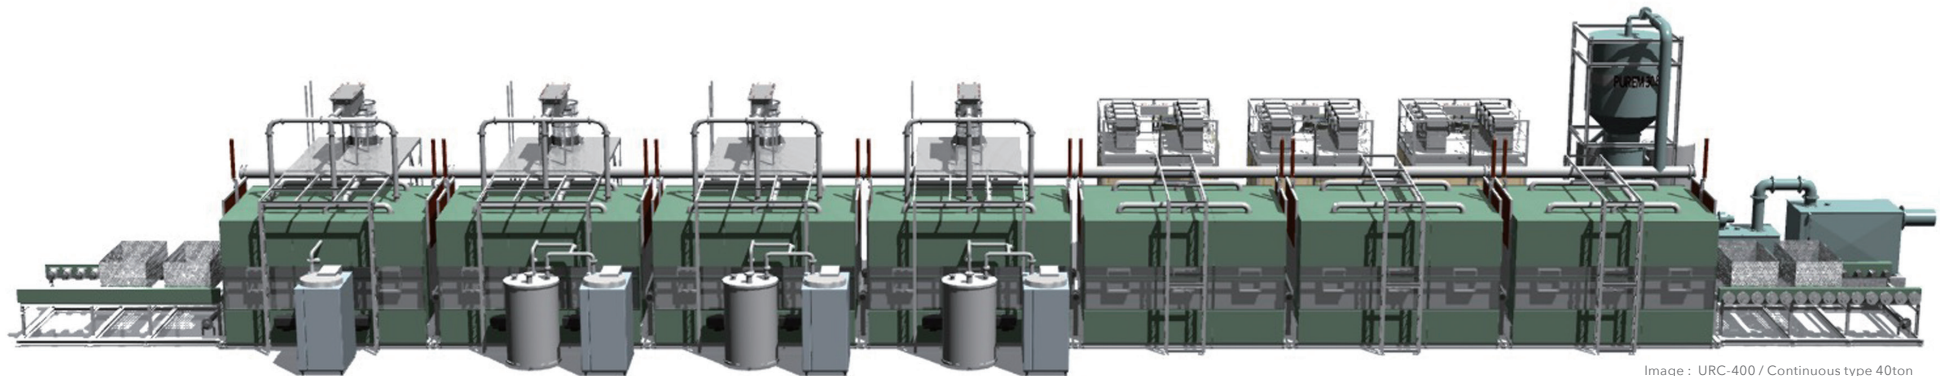


Image : URC-400 / Continuous type 40ton

|| No sorting required, Batch input processing.

URBAN RIG does not require to sort waste for processing and able to vaporize and carbonize the waste by superheated super-fine particles steam. Furthermore, metals can be extracted in a non-oxidizing state.

|| Solve the secondary pollution issue with waste cleaning.

Waste plastic may contain mud and residue and non-resin materials of metals, and agricultural plastic waste may contain pesticides. This machine does not require clean such contamination and able to input after one-day storage to remove moisture.

|| Able to handle mixed PVC and mixed resin

It is difficult to pelletize multicomponent materials such as crimped film and polyvinyl chloride resins. This facility is also able to extract high-quality oxygen-free recycled oil from PVC waste as well.


|| Able to operate with recycled oil

This facility uses gasified extracted oil as fuel for the boiler and superheater. It is not necessary for fuel for operation except initial startup. It is expected highly profitable as only labor and electricity cost is the main operational costs.


|| Pollution-free emission function

The exhaust gas purification system performs high-level cleaning of the exhaust gas from steam boiler, superheaters, and temperature control heaters of decomposition furnaces. A portion of the purified water purified by the system will be recycled and used by the steam boiler.


URBAN RIG Line-up

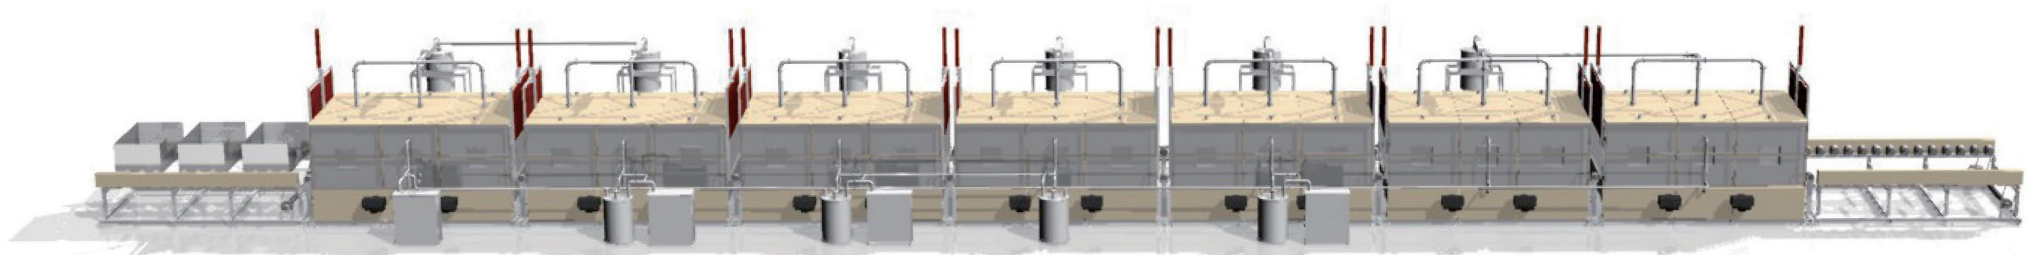


200 ton 7 Continuous Process **URC-2000**

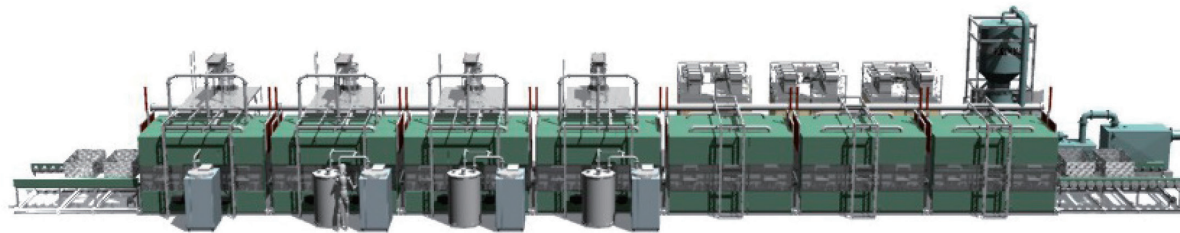

40 ton Continuous Process **URC-400**

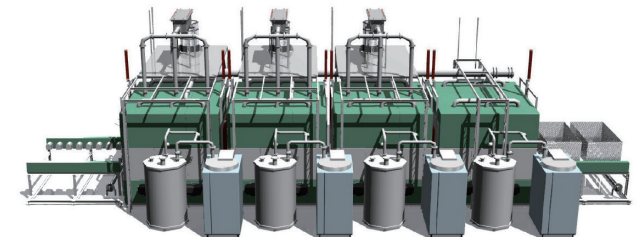

100 ton Continuous Process **URC-1000**

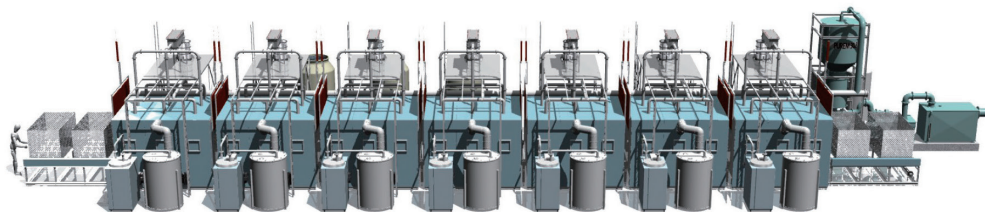

40 ton Continuous Process **URC-400**




1 ton 1 Batch **URB-10**

1 Mt batch system Stationary Type



1 ton 1 Batch **URT-10**

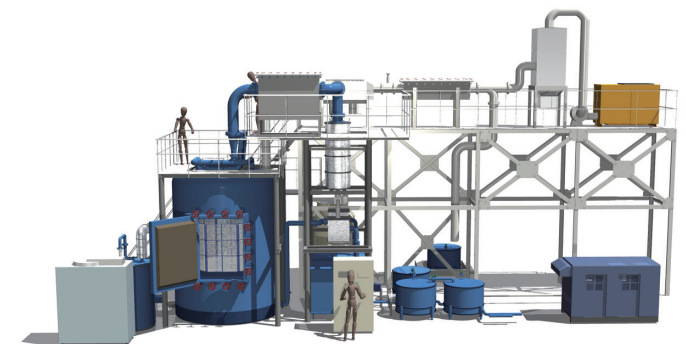

5 ton 1 Batch **URB-50**

200 ton 7 Continuous Process

URC-2000





URC-2000 for General waste, volume reduction, and liquefied resource recovery

URC-2000 is designed for carbonizing waste with high moisture content such as food residue, waste with sludge and soil, etc., which is represented by general household waste. Input to the process, 3 buckets as 1 batch and automatically operated by microcomputer from the loading slot through 7 processes such as drying, heating, carbonization extraction, and cooling to the unloading slot.

■ SPEC

Product model name	URC-2000
Throughput / day	200 ton / day
Decomposition temperature	MAX 600° normal, 0.2MPa under
Size (Processing Unit)	W:66m D: 7m H: 7m
Size (bucket)	W: 1.5m D: 3m H: 1m / 4.5m ³
Process System	Continuous type
Steam Generation	Steam boiler
Superheating type	Heating burner
Control System	microcomputer control
Safety device	Valve & sensor

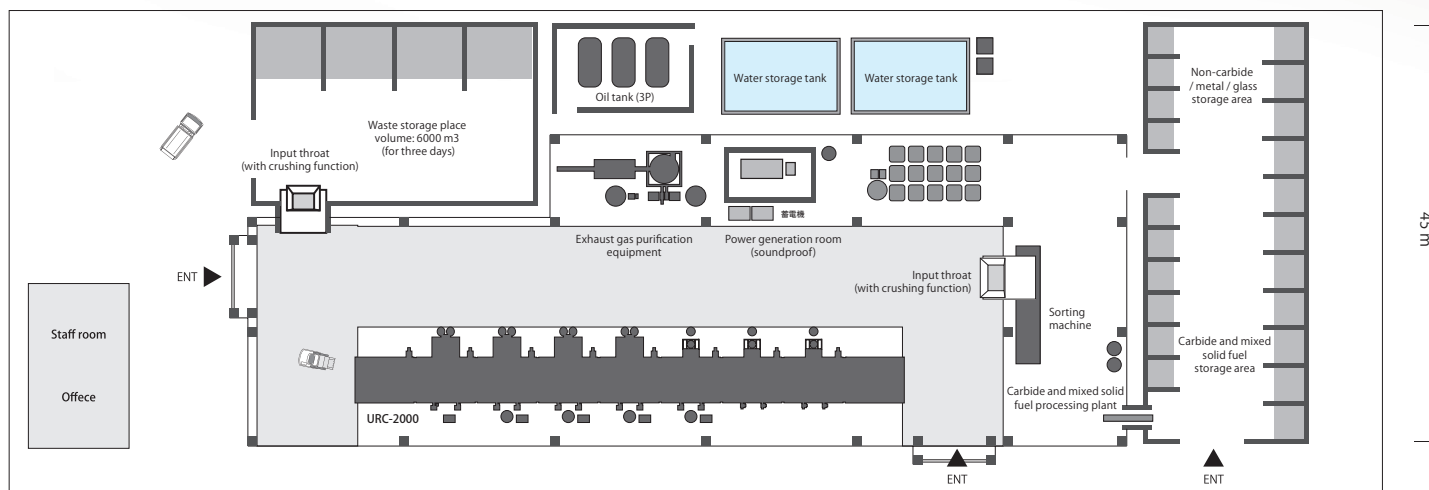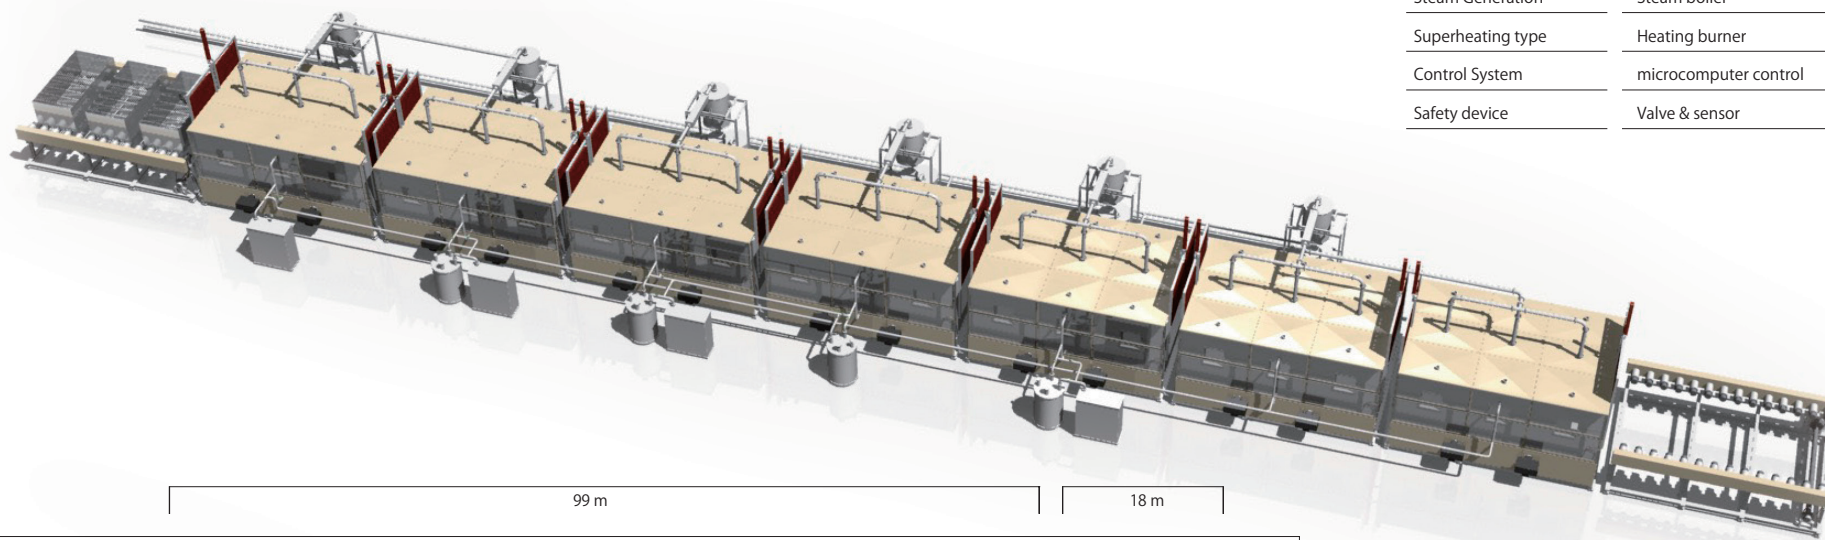

Building area	4,650 m ²
Processing plant	3,000 m ²
Waste storage	640 m ²
Reclaimed storage area	810 m ²
Office warehouse	200 m ²
Main building structure	HR-construct
Firewall structure	R-construct
Ceiling height	10 m
Oil storage tank	5 t × 8
Water storage tank	5 t × 2



40 ton Continuous Process

URC-400**URC-400 for Resin waste / Liquefaction resource recovery**

URC-400 is designed dedicated for resin-based waste treatment (up to 40Mt/day) to extract liquefied recovery fuel. Input to the process as 3 buckets as 1 batch and operate seven processes. It is possible to process wastes with high thermal conductivity, such as mixed waste plastic, electronic parts, synthetic leather, and vinyl, etc. It is applicable for chemical recycling in a short time.

■ SPEC

Product model name	URC-400
Throughput / day	40ton / day
Decomposition temperature	MAX 600° normal, 0.2MPa under
Size (Processing Unit)	W: 41m D: 7m H: 7m
Size (bucket)	W: 1m D: 1.5m H: 0.7m / 1m ³
Process System	Continuous type
Steam Generation	Steam boiler
Superheating type	Heating burner
Control System	microcomputer control
Safety device	Valve & sensor

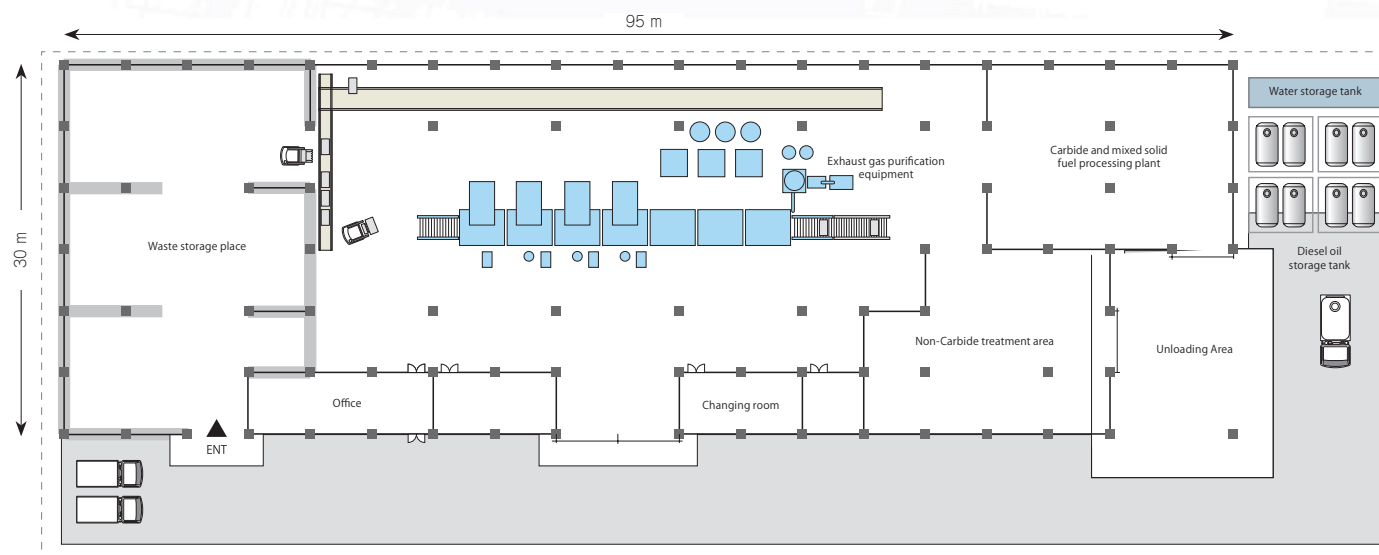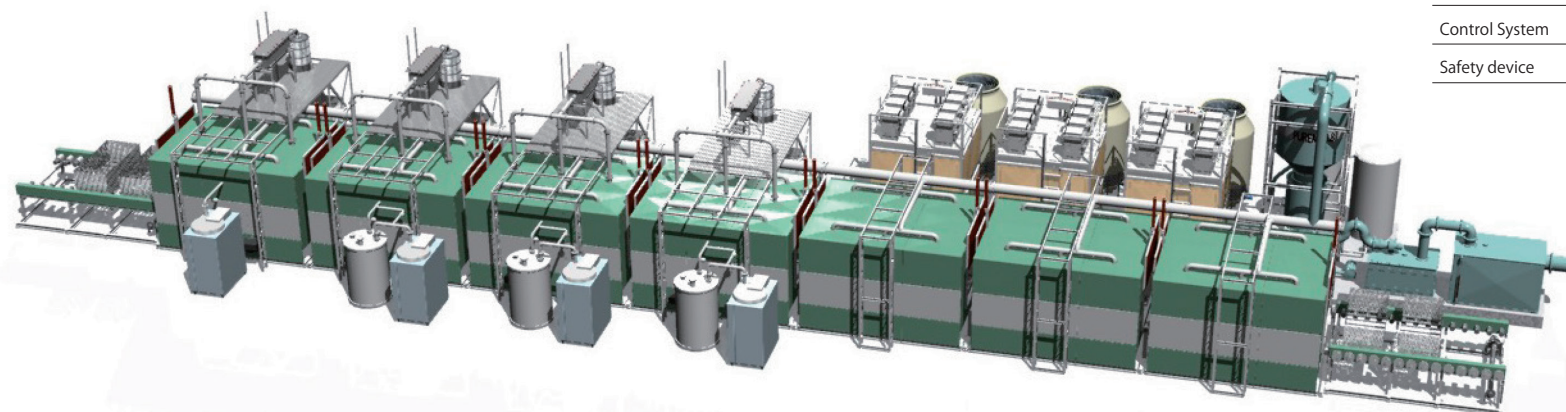

Building area	2,700 m ²
Main building structure	HR-construct
Firewall structure	R-construct
Ceiling height	9 m
Oil storage tank	5 t × 8
Water storage tank	5 t × 2



100 ton 4 Continuous Process

URC-1000



URC-1000 for General waste, volume reduction, and liquefied resource recovery

URC-1000 is designed for carbonizing waste with high moisture content such as food residue, waste with sludge and soil, etc., which is represented by general household waste. Input to the process as 2 buckets as 1 batch and automatically operated by microcomputer from the loading slot through 4 processes such as drying, heating, carbonization extraction, and cooling to the unloading slot.

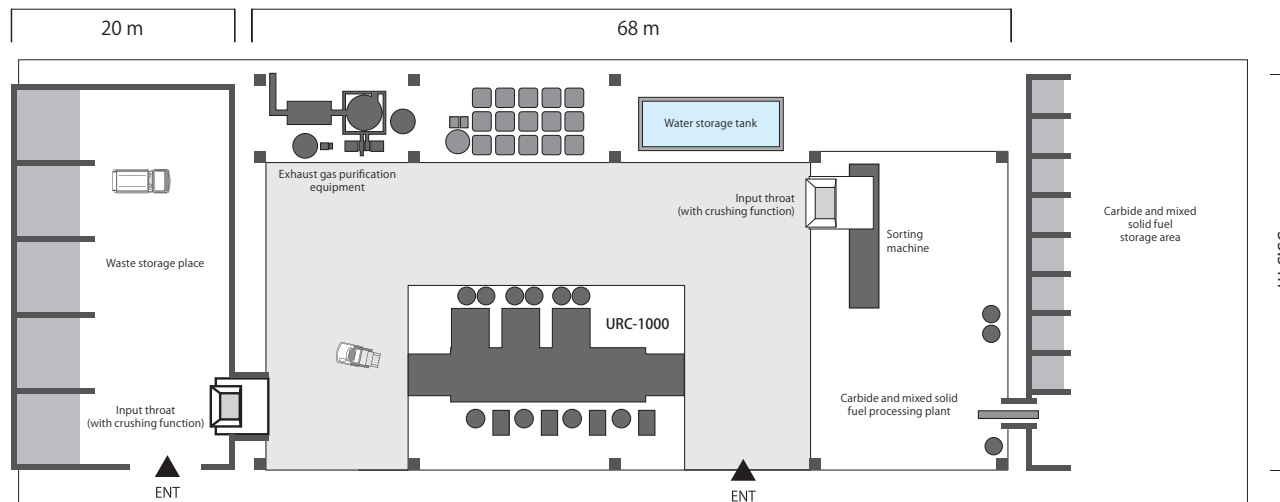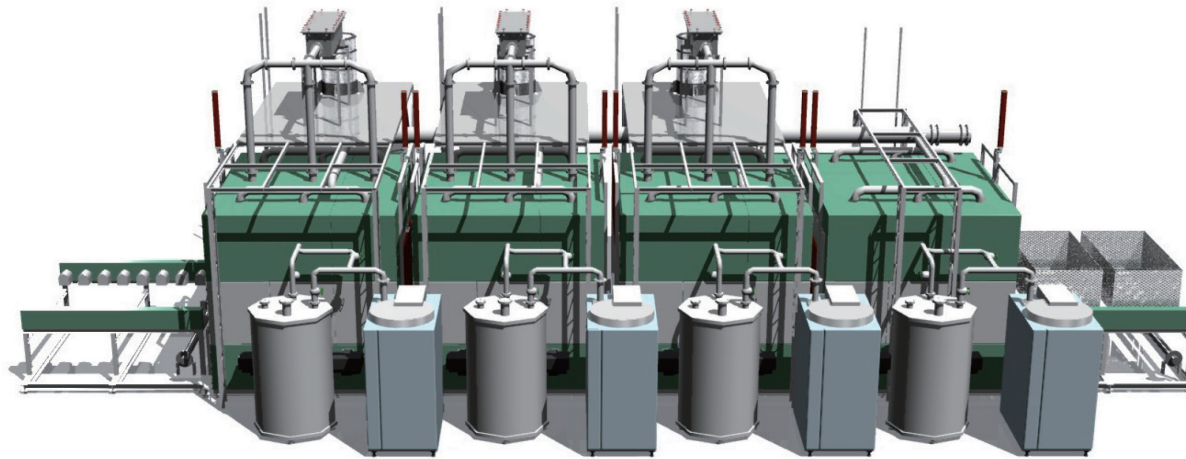

■ SPEC

Product model name	URC-1000
Throughput / day	100 ton / day
Decomposition temperature	MAX 600° normal, 0.2MPa under
Size (Processing Unit)	W:20m D: 7m H: 7m
Size (bucket)	W: 1.5m D: 3m H: 1m / 4.5m ³
Process System	Continuous type
Steam Generation	Steam boiler
Superheating type	Heating burner
Control System	microcomputer control
Safety device	Valve & sensor



Building area S	2,415 m ²
- ditto - RS	710 m ²
Main building structure	HR-construct
Firewall structure	R-construct
Ceiling height	9 m
Oil storage tank	5 t × 8
Water storage tank	5 t × 2

15 ton 7 Continuous Process

URC-150



URC-150 for General waste, volume reduction, and liquefied resource recovery

URC-150 is designed for carbonizing waste with high moisture content such as food residue, waste with sludge and soil, etc., which is represented by general household waste. Input to the process as 1 or 2 buckets as 1 batch and automatically operated by microcomputer from the loading slot through 7 processes such as drying, heating, carbonization extraction, and cooling to the unloading slot.

※ One bucket set is for disposal of low specific gravity values such as waste plastic

■ SPEC

Product model name	URC-150
Throughput / day	15 ton / day
Decomposition temperature	MAX 600° normal, 0.2MPa under
Size (Processing Unit)	W: 22m D: 6.5m H: 6m
Size (bucket 1P)	W: 1m D: 2m H: 1m / 1m ³
Size (bucket 2P)	W: 2m D: 2m H: 1m / 2m ³
Process System	Continuous type
Steam Generation	Steam boiler
Superheating type	Heating burner
Control System	microcomputer control
Safety device	Valve & sensor

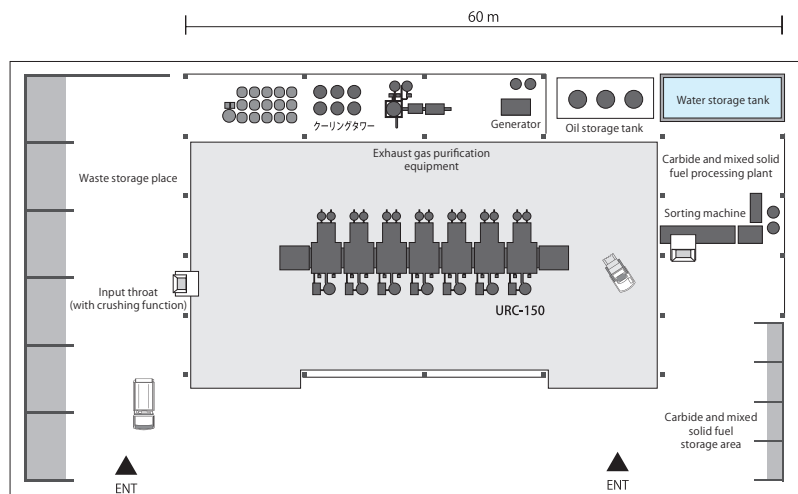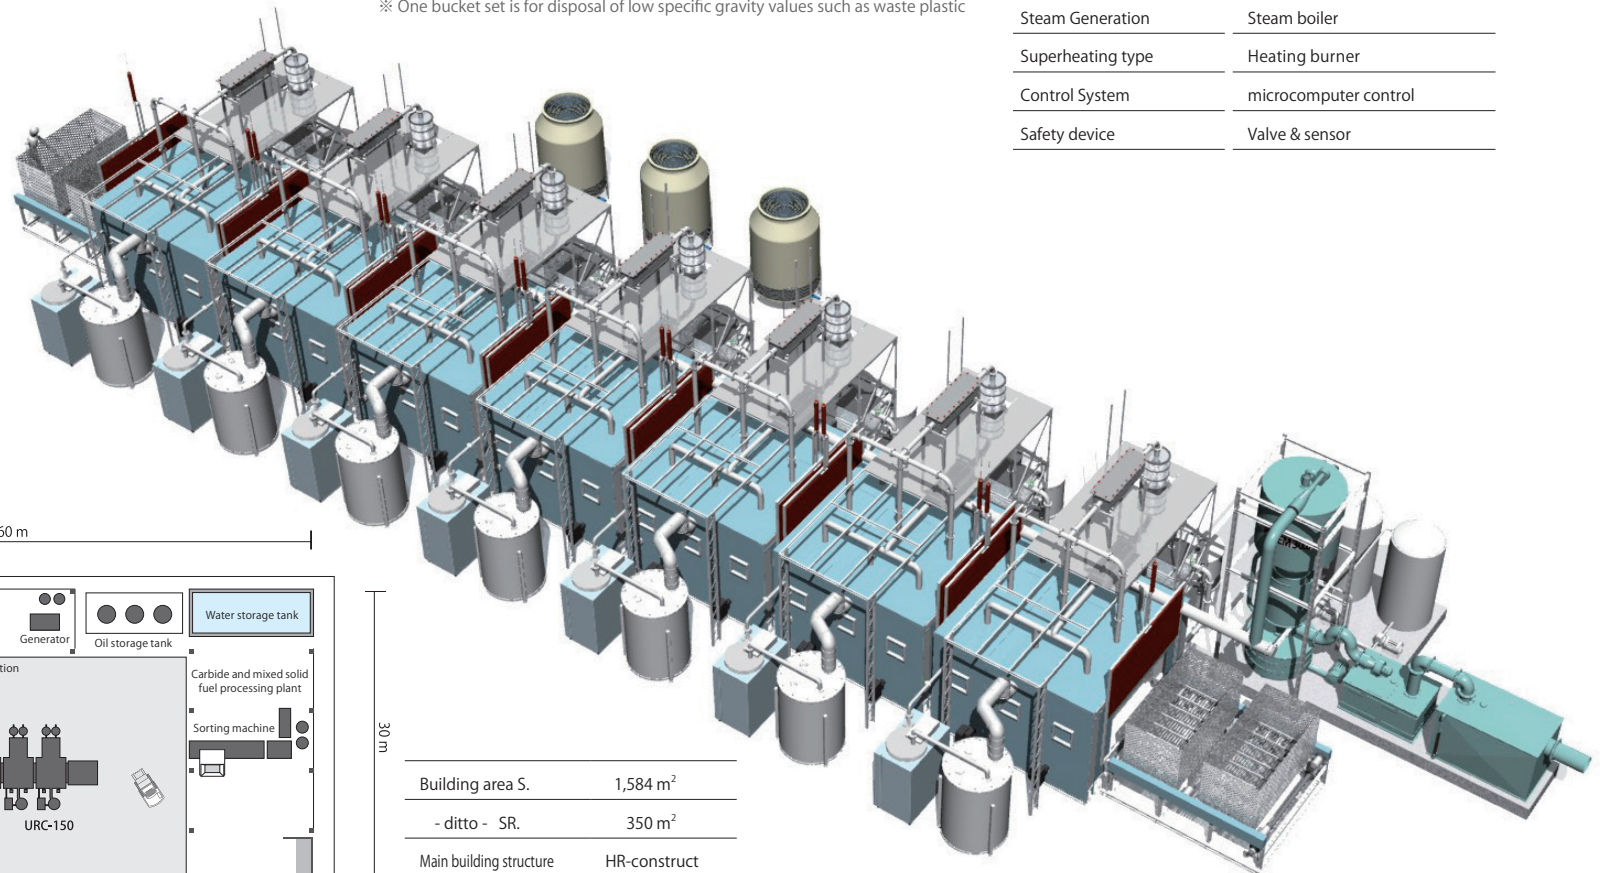

Building area S.	1,584 m ²
- ditto - SR.	350 m ²
Main building structure	HR-construct
Firewall structure	R-construct
Ceiling height	8 m
Oil storage tank	3 t × 3
Water storage tank	3 t × 3

5 ton 1 Batch



URB-50



URB-50 for Resin waste / Liquefaction resource recovery

■ SPEC

Product model name	URB-50
Type	Liquefaction resource recovery
Throughput / day	5 ton / day
Size	W:10m D:5m H:7m
Process System	Batch type

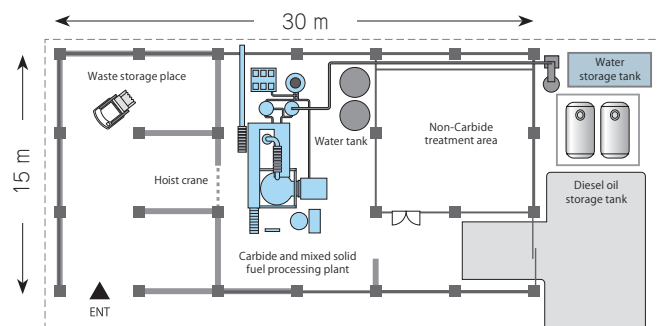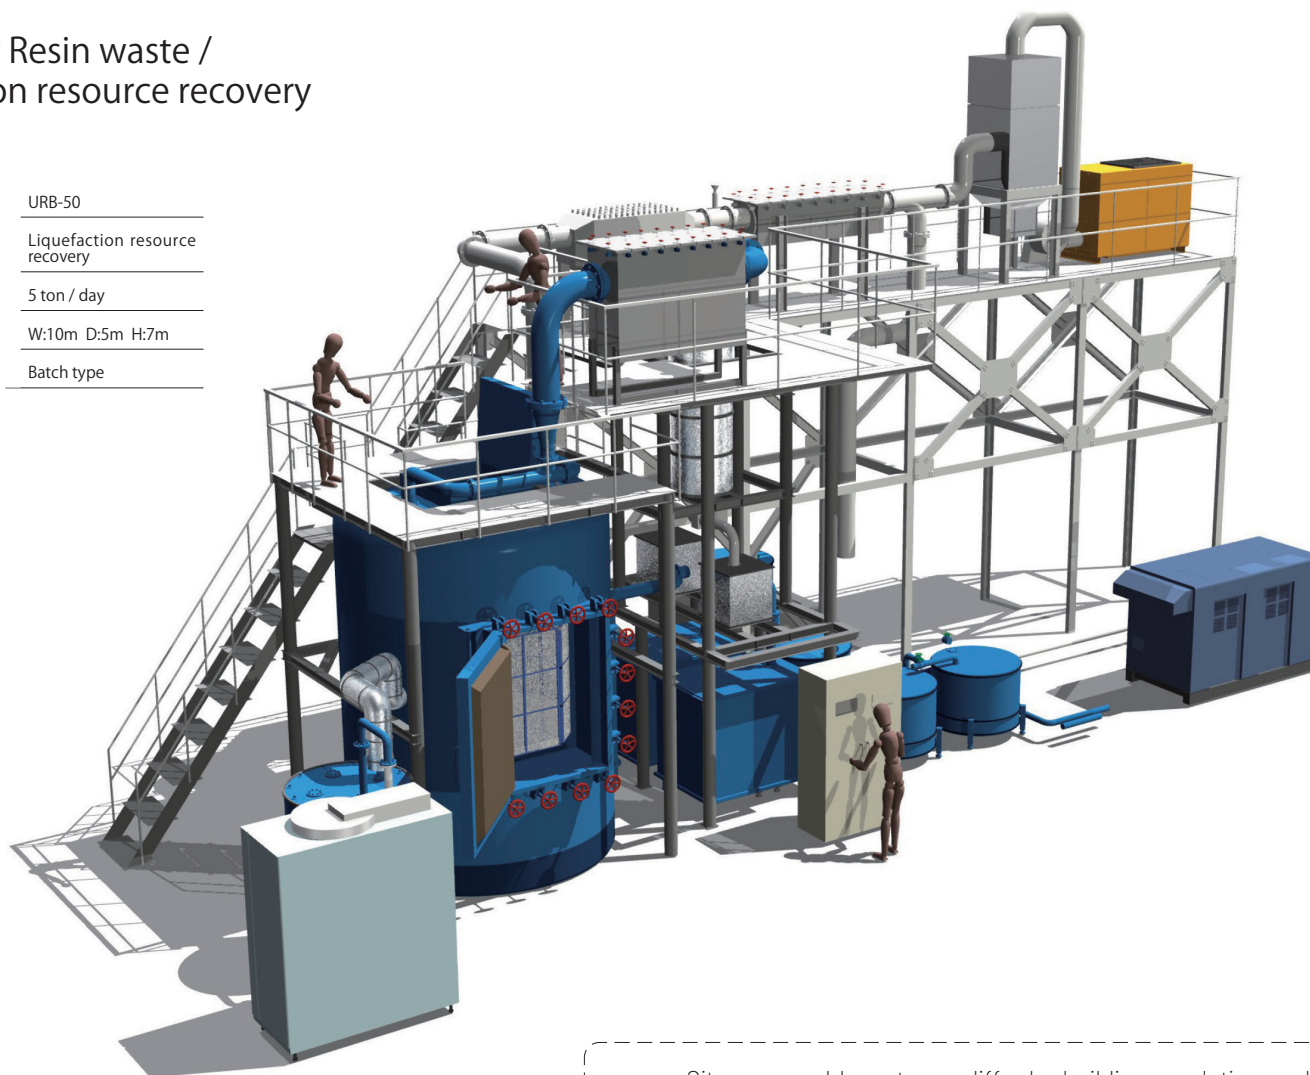

Building area	620 m ²
Main building structure	HR-construct
Firewall structure	R-construct
Ceiling height	8 m
Oil storage tank	5 t × 2
Water storage tank	5 t × 2



Site area and layout may differ by building regulation and disaster prevention laws and other rules. The input storage area needs a storage area according to the actual input plan.

Also, depending on the type of input, there may be cases where the relevant laws and regulations may require odor control and/or structural wall.

It is recommendable to take into account those issues for purchasing our facilities.

1 ton 1 Truck


URT-10



URT-10 for Mobile Waste Disposal Facility

■ SPEC

Product model name	URT-10
Type	Mobile Plant
Throughput / day	1 ton / day
Size	W: 9 D: 2.5 H: 2.3
Process System	Batch type
Vehicle type	10 ton truck

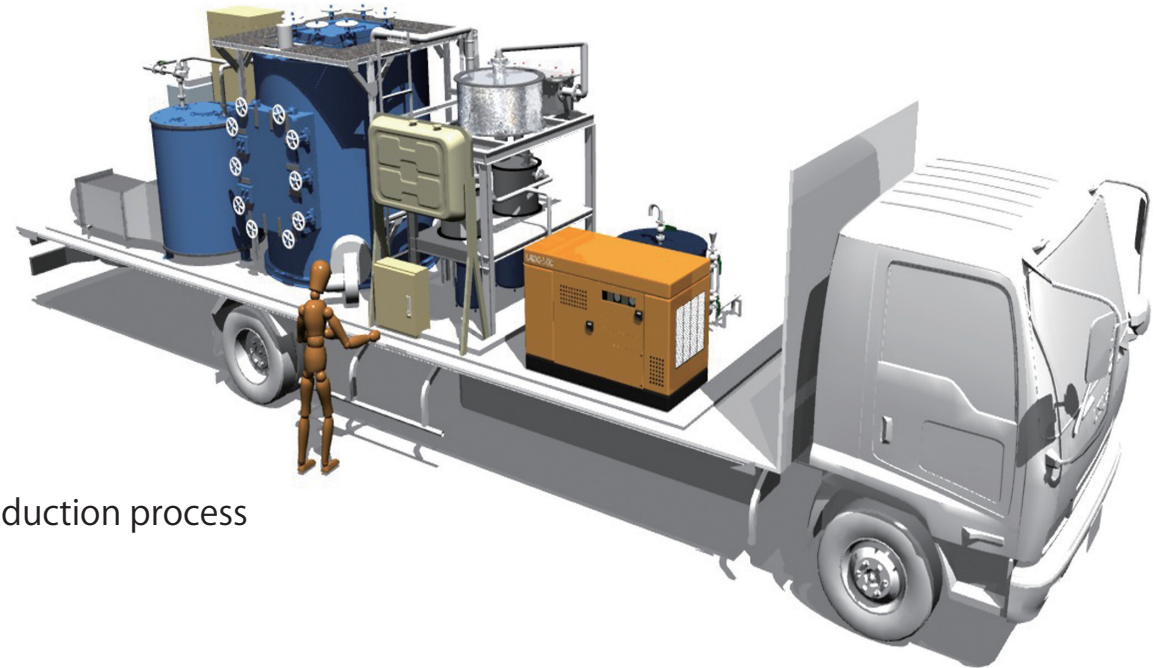



1 ton 1 Batch

URB-10



URB-10 for Organic waste
Sterilization and volume reduction process

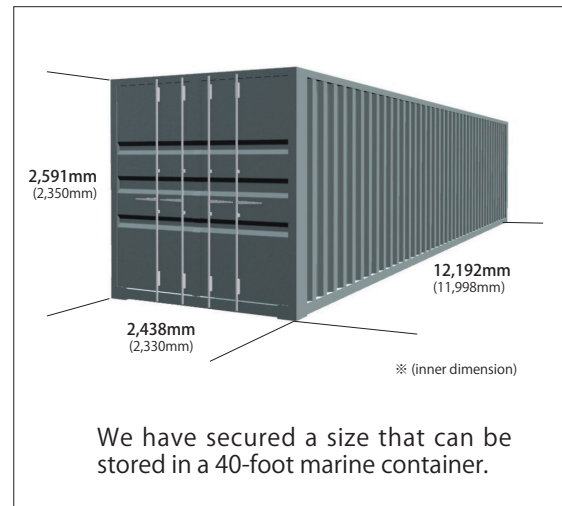

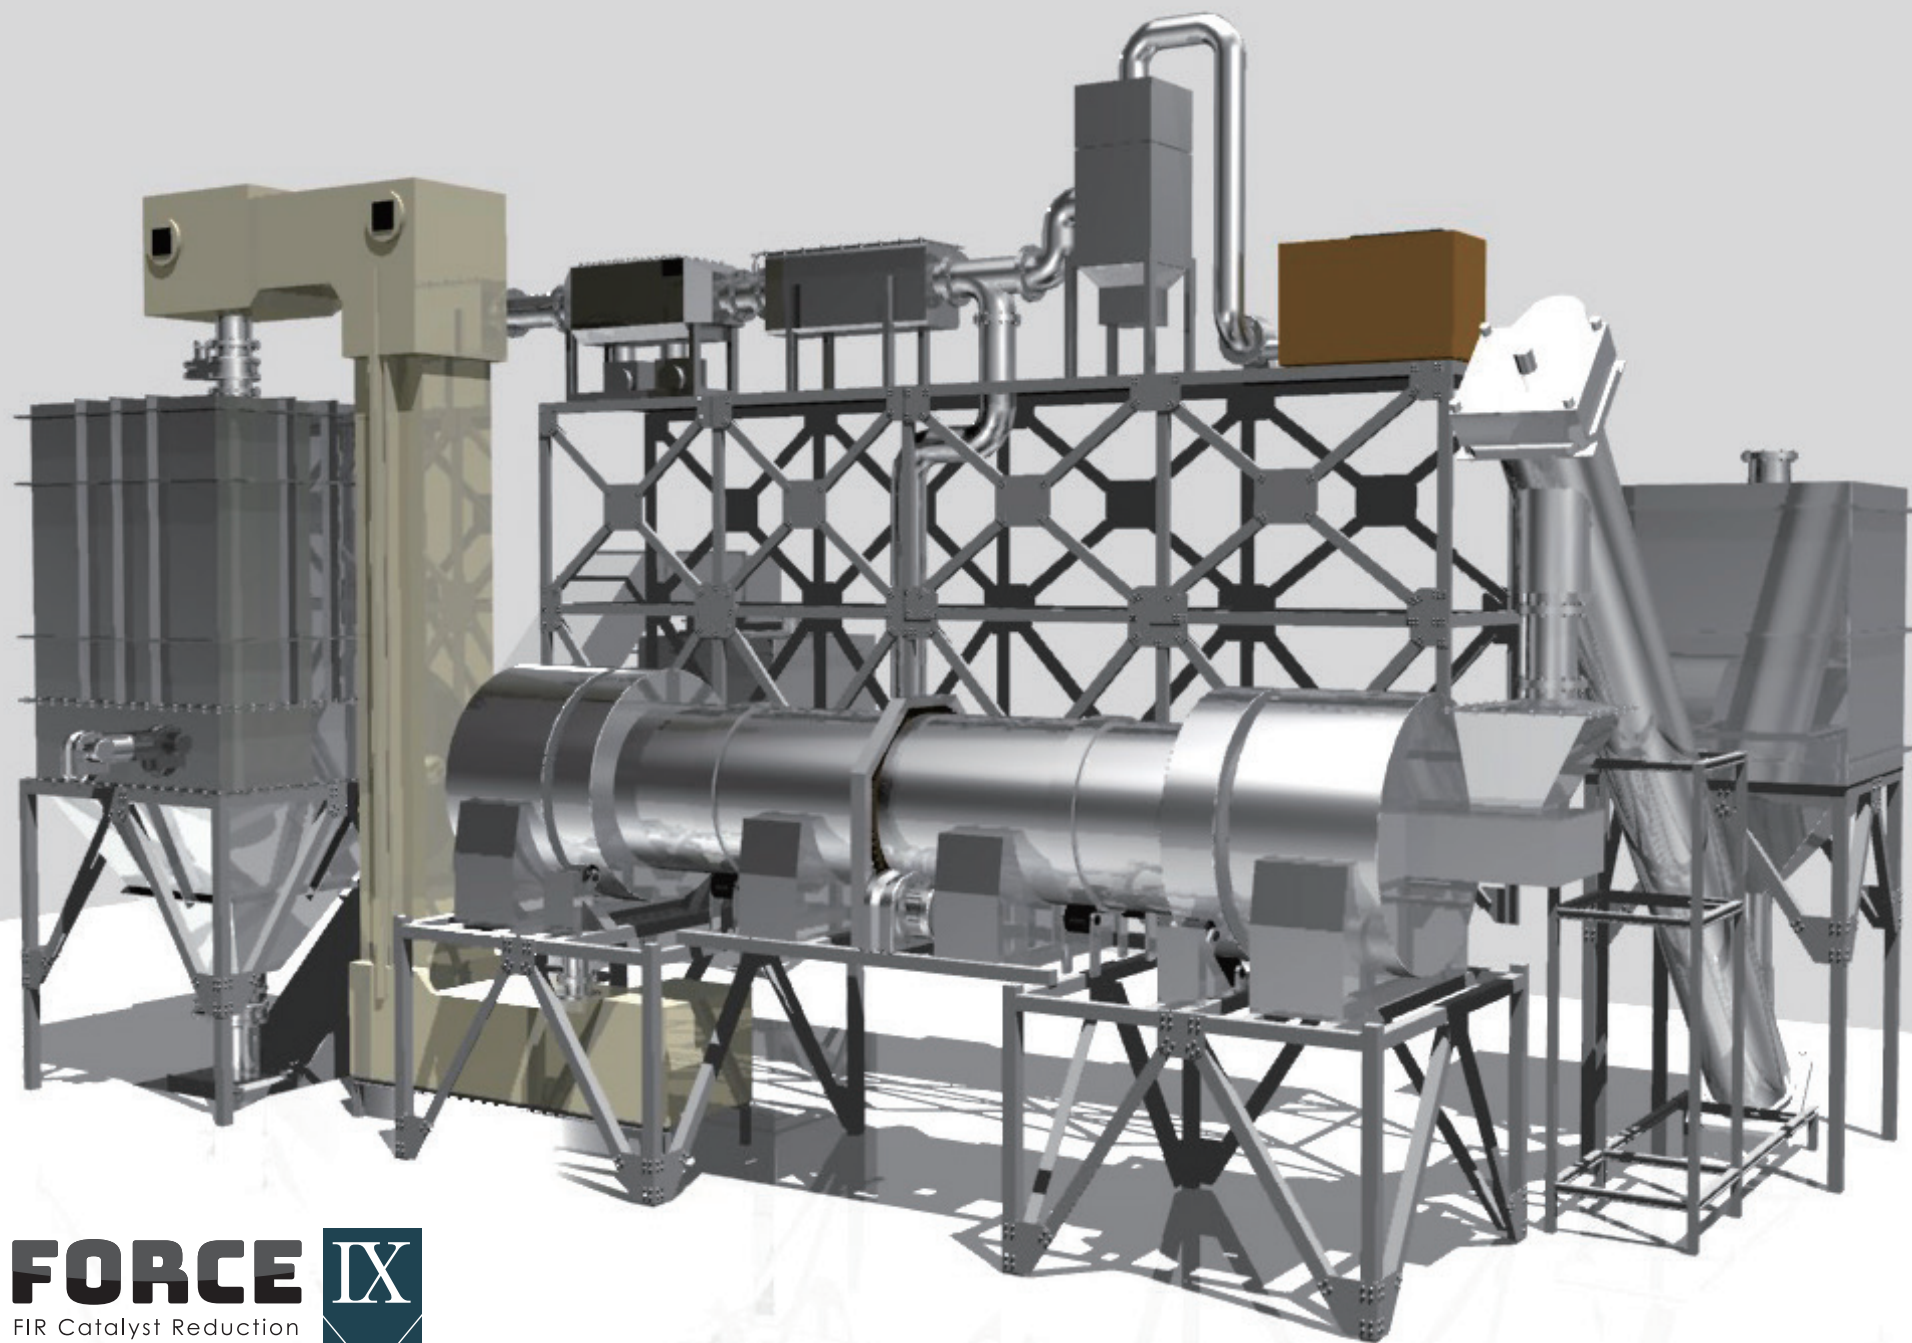

single machine use image

FORCE IX

FIR Catalyst Reduction

FORCE 9 / FIA CR-09 Far infrared catalytic reduction facility.

"Non-incinerated type, far infrared catalytic reduction facility" is made for the stabilization of carbide residue and the safe carbonization of toxic, hazardous waste produced by the URBAN RIG. It is a completely new patented technology to solve the problem of a conventional incinerator by detoxifying incinerated ash and carbide containing harmful substances and uses it as a recycled resource.

At conventional incinerator, heavy metals contained in incinerators have been converted to metal (oxides or chlorides) which are easily dissolved to water. With this new technology, those heavy metals are converted into sulfur compound (which is "non-water dissolved metal") by catalytic reduction and processing into a stable harmless metal by using a patented catalyst (ceramic) at a low temperature of about 400°C. The treated waste can be used as a reclaimed resource for fertilizers, dehydrating agents, cleaning agents, soil conditioners, construction materials, etc.



Post-treatment measurement report of contaminated soil containing radioactive material

Test result


Nuclide name	Energy (keV)	Radiation concentration (Bq/g)
$^{131}\text{I}^*$	364.5	$< 4.6 \times 10^{-2}$
^{134}Cs	604.7	8.0×10^0
^{137}Cs	661.6	1.6×10^1

* Since no significant radioactivity was detected, the detection limit concentration is displayed.

Sample : Radioactively contaminated soil.
 Measurement : Radiation concentration of item γ -ray emitting nuclides.
 Measurement : γ -ray spectrometry using method Ge semiconductor detector.
 Test weight : 100g
 Test date : January 22, 2013.
 Test time : 2,000 seconds.
 Tested by : Sawahata Tadahiro.
 Test Equipment: EG & G ORTEC GMX-40195-S

■ Automatic insert type crushing sorting crusher.

□ Closed space for stabilization treatment of radioactivity

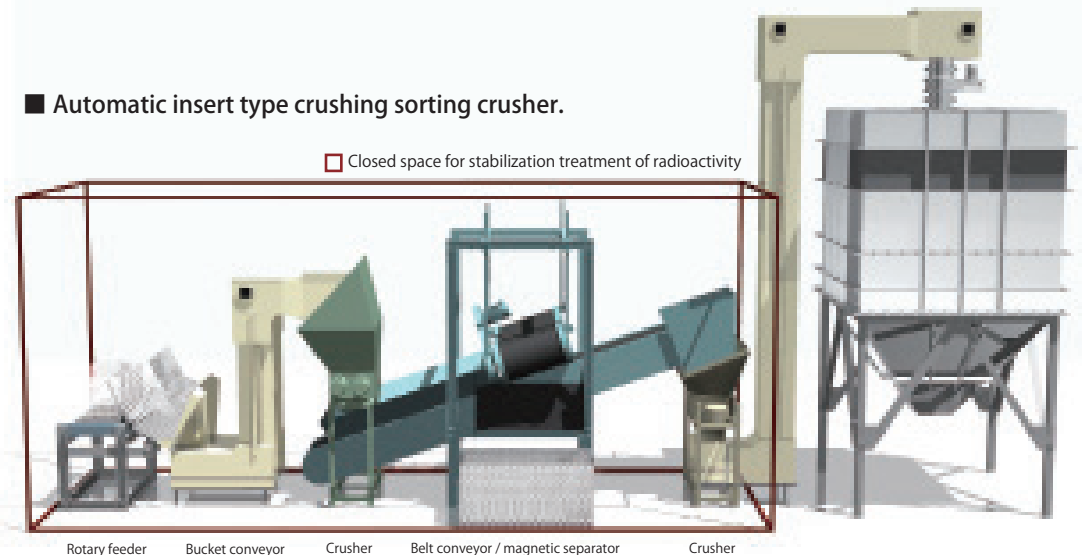


OPTION

PRIMO /Exhaust Gas Purification Facility



PRIMO is standard equipment installed at thermal power plants and oil/coal-burning petroleum facilities all over the world. It adopts the same principle as the NOx removal system which operates with ammonia mist shower. Desulfurizer for sulfur oxides sox (SOx) removal. PRIMO is dedicated for Urban Rig equipped with a deodorizer.

- DeNOx NOx decomposition
- DeSOx SOx decomposition
- Dust Dust removal
- Deodorizer Odor removal


SOx




NOx

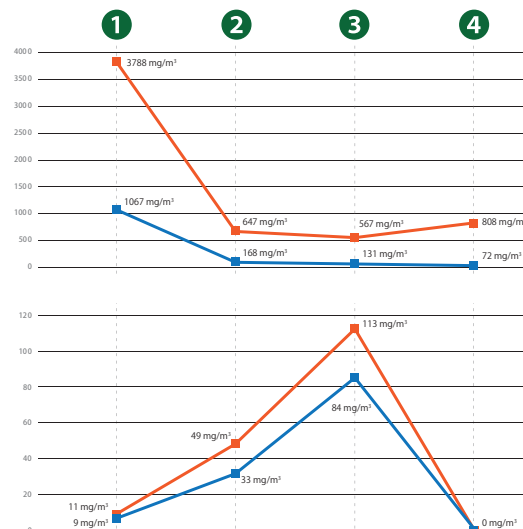

1
Measurement point

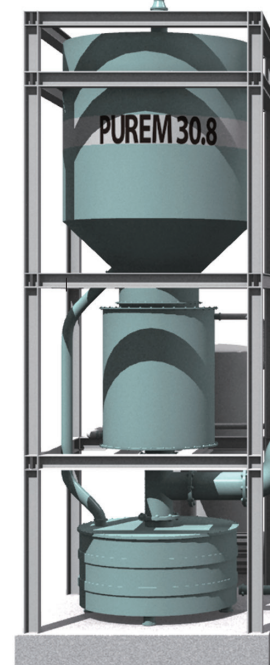


PUREM 30.8 PRIMO type 6

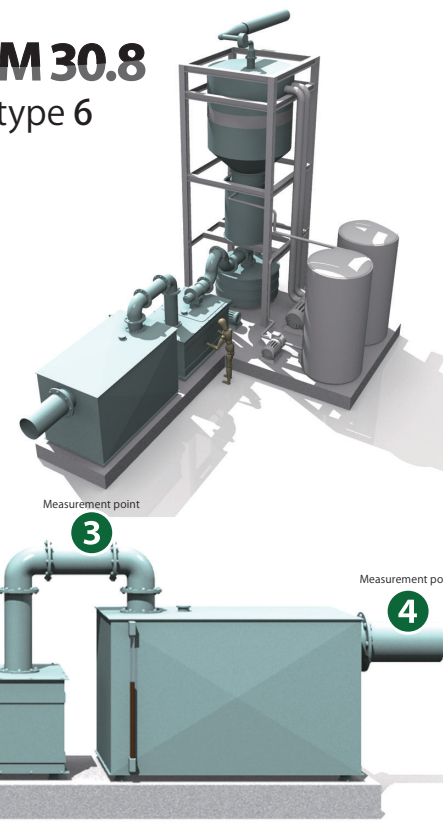

PUREM 30.8

PRIMO type 4

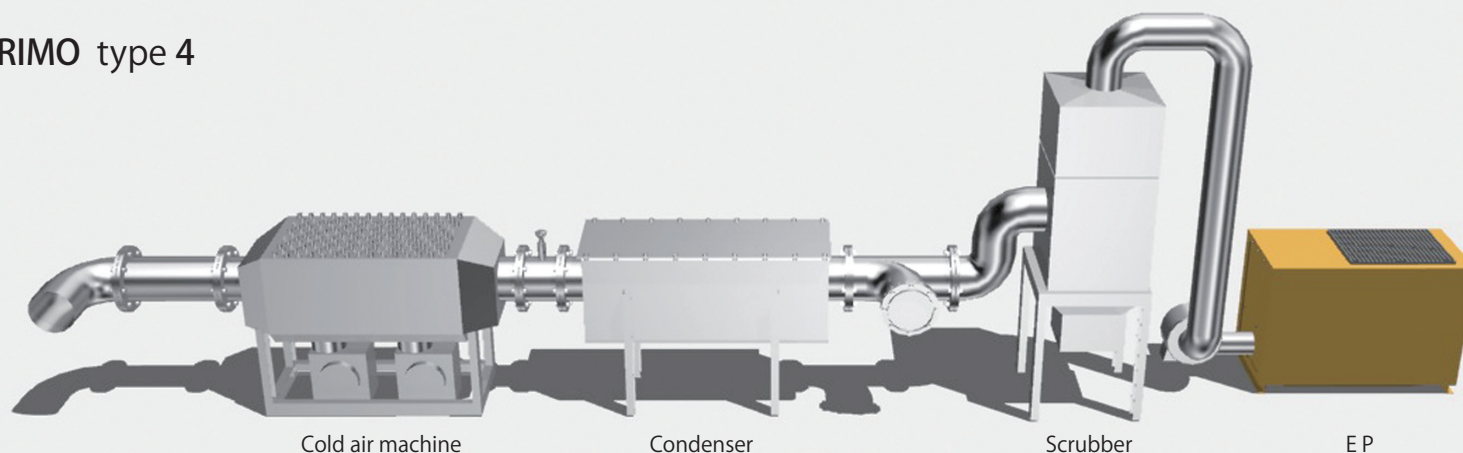

appropriate machine

PRIMO type 6

URC-2000 • URC-1000
URC-400 • URC-150

PRIMO type 4

URC-150 • URB-50
URB-10 • URT-10
FORCE 9


SEA CORAL

New Ceramic purification filter

OPTION


SEA CORAL / Specialized ceramic purifier

This technology is a water treatment system that uses the vaporization heat with special ceramic as an absorber. This **SEA CORAL** ceramic absorbs water molecule from wastewater. The water molecule is vaporized by air blowing and recover pure water from the saturated steam.

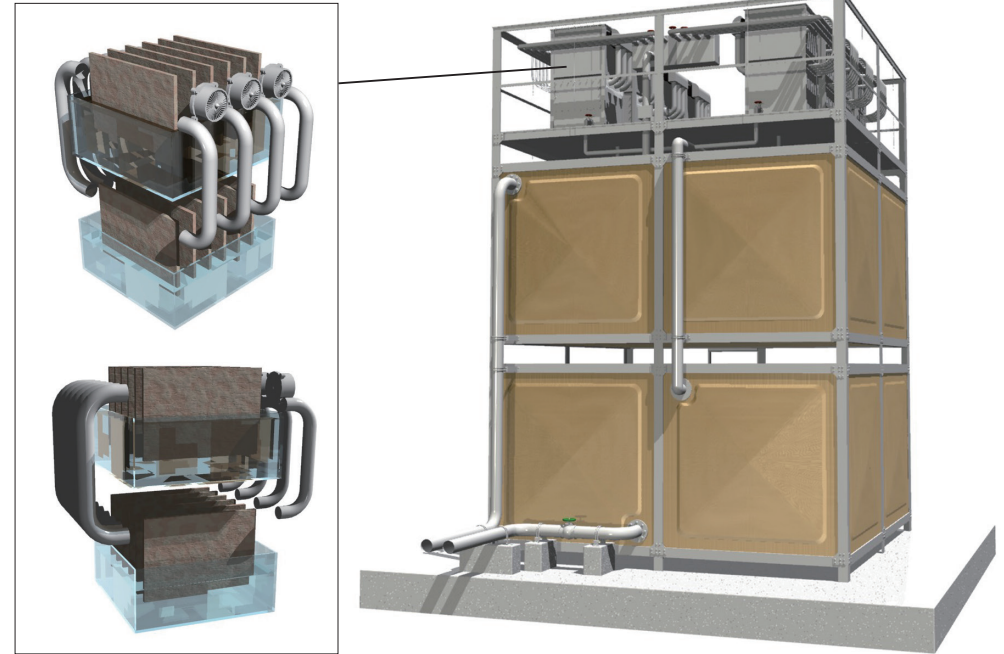


The "Sea Coral System" is a mechanism that extracts moisture from seawater or sludge water using a sea coral catalyst. Another sea coral catalyst adsorbs the water molecules to produce pure water completely free of minerals (including arsenic). To perform the process efficiently, generate vaporization heat by air blowing.


absorption of the solution

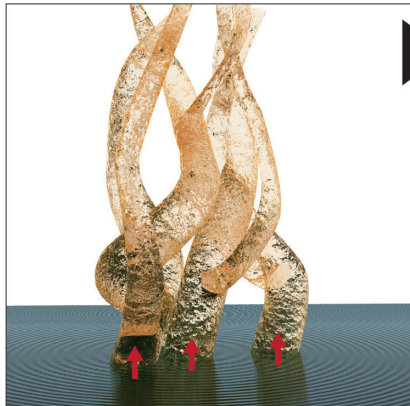


rise of the aqueous solution

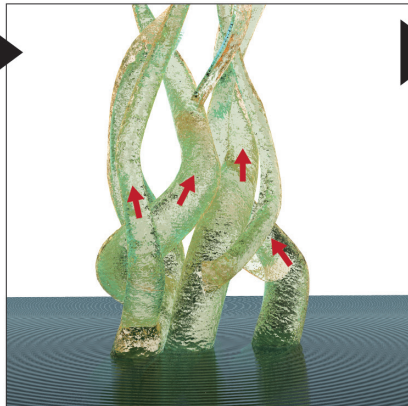


release of water molecules

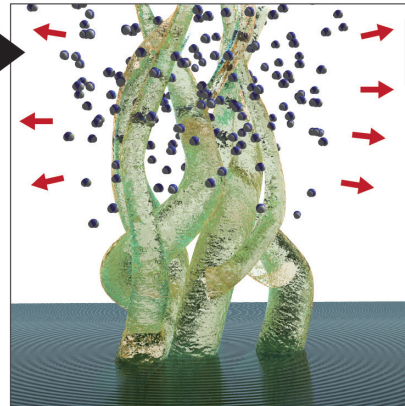

absorption of water molecules

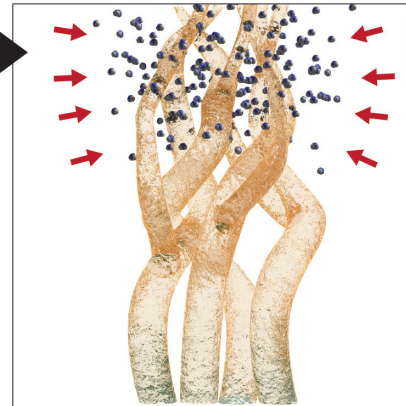

discharge of water molecules

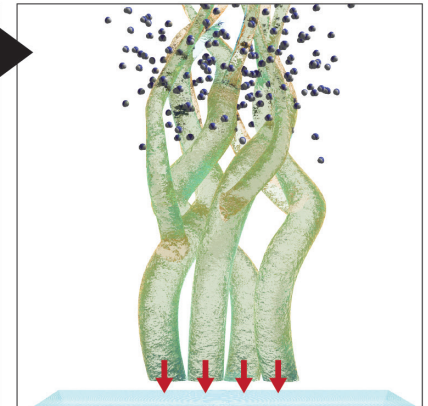

Fuel Recovery Mechanism

Fuel Recovery Mechanism is as follows:


1. Inject high-temperature oxygen-free steam (further superheated) at 600 °C into the cracking furnace.
2. Distillate and vaporize oil component by high-temperature H₂O gas.
3. The vaporized gas is treated with chlorine catalyst and liquefied by a cooling condenser.
4. Segregate gas-oil and heavy-oil by the temperature difference of vaporized gas through a solenoid valve.
5. Water is separated in an oil/water separation tank, remove impurities in a filtration tank, and recover recycled oil.

Superheated steam potential


■ Dioxin & carbon dioxide free

The inside of the reactor is anoxic, and no oxygen reaction occurs. Therefore, Dioxin and CO₂ are not generated.

Superheated steam carbonization furnace

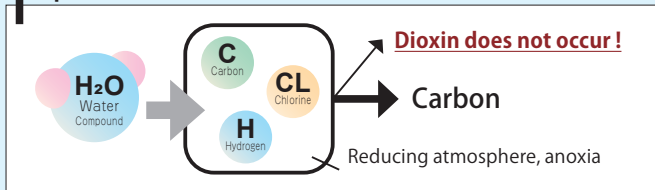

Conventional incinerator / carbonizing furnace

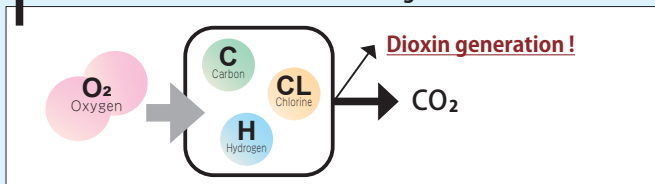

■ Heating power of superheated steam

Water becomes steam when it reaches 100 °C. At this time, the steam temperature is 100 °C. Through further rubbing the molecules at high speed, the temperature of the steam exceeds 100 °C, and it becomes colorless and transparent H₂O gas. This gas has the characteristics of spread heat transfer, convective heat transfer, and condensation heat transfer. It holds the combined heat transfer power of oxygen, convection, radiation, condensation with accurate controllability.



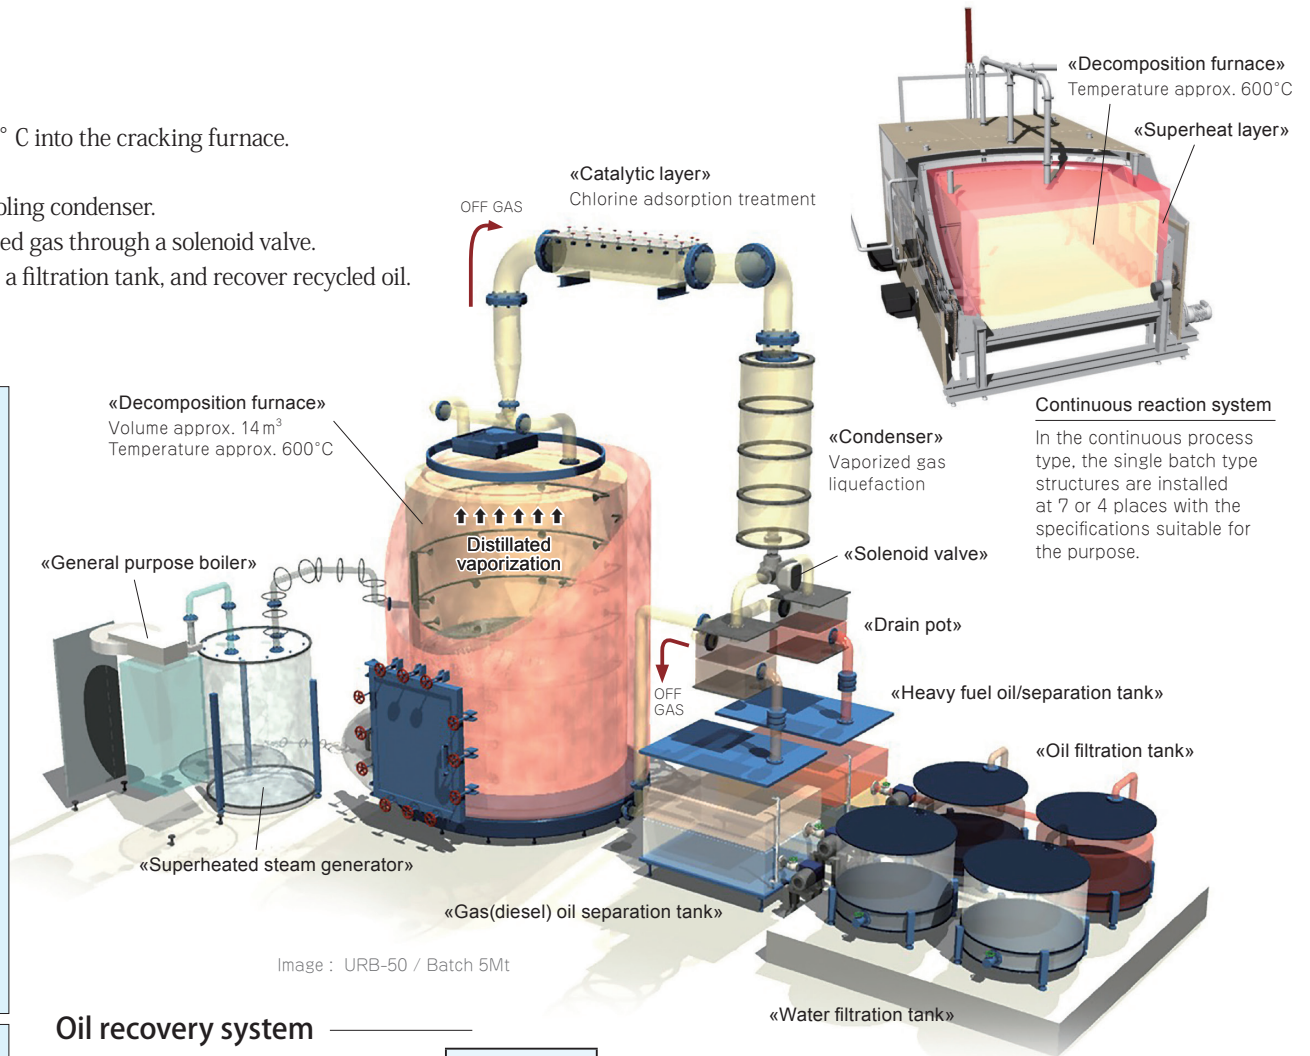


Image : URB-50 / Batch 5Mt

Oil recovery system

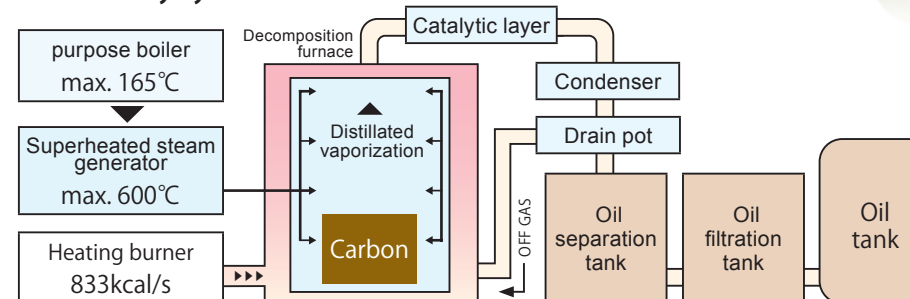

Overheat temperature of 7-continuous process unit

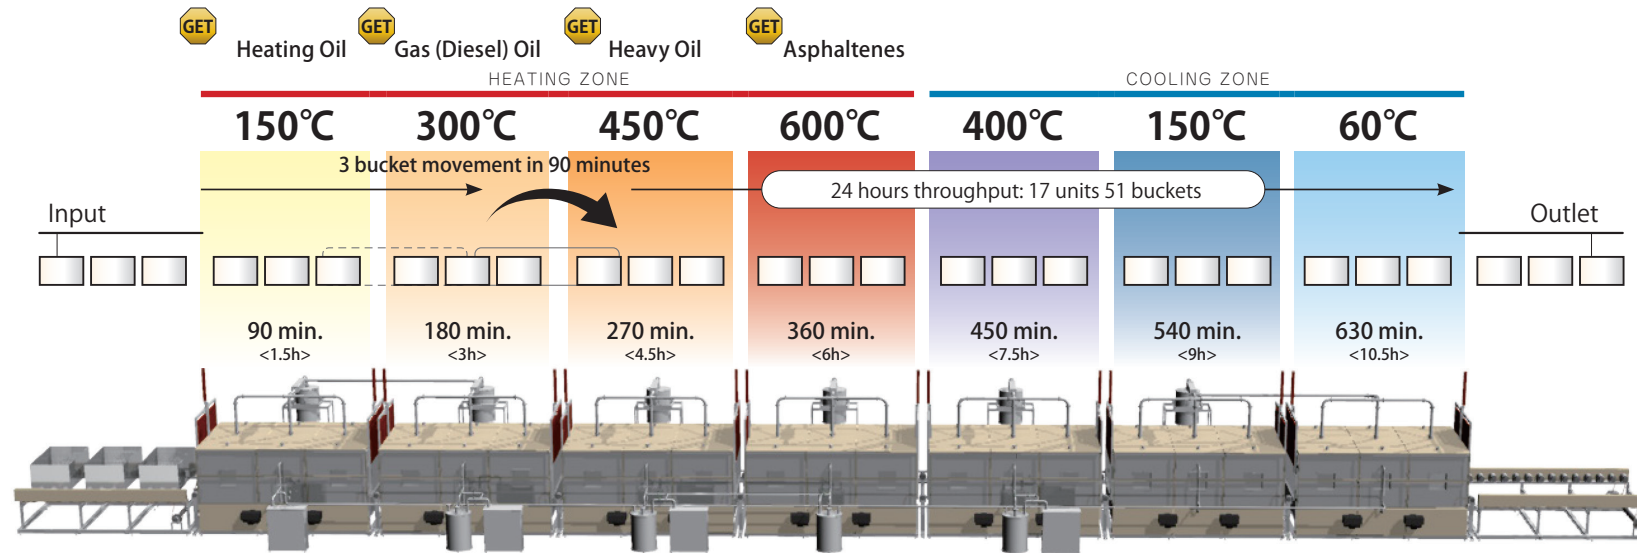

New generation Resource Recovery Facility Continuous unit system

The continuous unit process has a temperature setting for each unit. The state of the extracted vaporized gas is stable by a constant temperature setting and able to create the environment for chlorine removal, liquefaction, and cooling process without time lag and loss. It is possible to carry out the work efficiently and accurately for the work before loading and the residuals processing such as carbides and metals.




7 - continuous process bucket timetable

7-continuous process bucket timetable : 7-continuous process, 90 minutes

ENT	1	2	3	4	5	6	7	OUT	Offloading time
○ 1 ○									
○ 2 ○	○ 1 ○								
○ 3 ○	○ 2 ○	○ 1 ○							
○ 4 ○	○ 3 ○	○ 2 ○	○ 1 ○						
○ 5 ○	○ 4 ○	○ 3 ○	○ 2 ○	○ 1 ○					
○ 6 ○	○ 5 ○	○ 4 ○	○ 3 ○	○ 2 ○	○ 1 ○				
○ 7 ○	○ 6 ○	○ 5 ○	○ 4 ○	○ 3 ○	○ 2 ○	○ 1 ○			
○ 8 ○	○ 7 ○	○ 6 ○	○ 5 ○	○ 4 ○	○ 3 ○	○ 2 ○	○ 1 ○		
○ 9 ○	○ 8 ○	○ 7 ○	○ 6 ○	○ 5 ○	○ 4 ○	○ 3 ○	○ 2 ○	○ 1 ○	0h.
○ 10 ○	○ 9 ○	○ 8 ○	○ 7 ○	○ 6 ○	○ 5 ○	○ 4 ○	○ 3 ○	○ 2 ○	
○ 11 ○	○ 10 ○	○ 9 ○	○ 8 ○	○ 7 ○	○ 6 ○	○ 5 ○	○ 4 ○	○ 3 ○	
○ 12 ○	○ 11 ○	○ 10 ○	○ 9 ○	○ 8 ○	○ 7 ○	○ 6 ○	○ 5 ○	○ 4 ○	
○ 13 ○	○ 12 ○	○ 11 ○	○ 10 ○	○ 9 ○	○ 8 ○	○ 7 ○	○ 6 ○	○ 5 ○	6h.
○ 14 ○	○ 13 ○	○ 12 ○	○ 11 ○	○ 10 ○	○ 9 ○	○ 8 ○	○ 7 ○	○ 6 ○	
○ 15 ○	○ 14 ○	○ 13 ○	○ 12 ○	○ 11 ○	○ 10 ○	○ 9 ○	○ 8 ○	○ 7 ○	
○ 16 ○	○ 15 ○	○ 14 ○	○ 13 ○	○ 12 ○	○ 11 ○	○ 10 ○	○ 9 ○	○ 8 ○	
○ 17 ○	○ 16 ○	○ 15 ○	○ 14 ○	○ 13 ○	○ 12 ○	○ 11 ○	○ 10 ○	○ 9 ○	12h.
○ 18 ○	○ 17 ○	○ 16 ○	○ 15 ○	○ 14 ○	○ 13 ○	○ 12 ○	○ 11 ○	○ 10 ○	
○ 19 ○	○ 18 ○	○ 17 ○	○ 16 ○	○ 15 ○	○ 14 ○	○ 13 ○	○ 12 ○	○ 11 ○	
○ 20 ○	○ 19 ○	○ 18 ○	○ 17 ○	○ 16 ○	○ 15 ○	○ 14 ○	○ 13 ○	○ 12 ○	
○ 21 ○	○ 20 ○	○ 19 ○	○ 18 ○	○ 17 ○	○ 16 ○	○ 15 ○	○ 14 ○	○ 13 ○	18h.
○ 22 ○	○ 21 ○	○ 20 ○	○ 19 ○	○ 18 ○	○ 17 ○	○ 16 ○	○ 15 ○	○ 14 ○	
○ 23 ○	○ 22 ○	○ 21 ○	○ 20 ○	○ 19 ○	○ 18 ○	○ 17 ○	○ 16 ○	○ 15 ○	
○ 24 ○	○ 23 ○	○ 22 ○	○ 21 ○	○ 20 ○	○ 19 ○	○ 18 ○	○ 17 ○	○ 16 ○	
○ 25 ○	○ 24 ○	○ 23 ○	○ 22 ○	○ 21 ○	○ 20 ○	○ 19 ○	○ 18 ○	○ 17 ○	24h.
○ 26 ○	○ 25 ○	○ 24 ○	○ 23 ○	○ 22 ○	○ 21 ○	○ 20 ○	○ 19 ○	○ 18 ○	

New generation Resource Recovery Facility About inputs and recovery fuel oil

URBAN RIG is a new generation resource recycling facility that can easily recover fuel oil from waste by thermal decomposition without pre-treatment and sorting. The carbonization reduction rate of waste is up to 5%, and the fuel oil recovery from **resin-based waste is about 85% of the input content.**

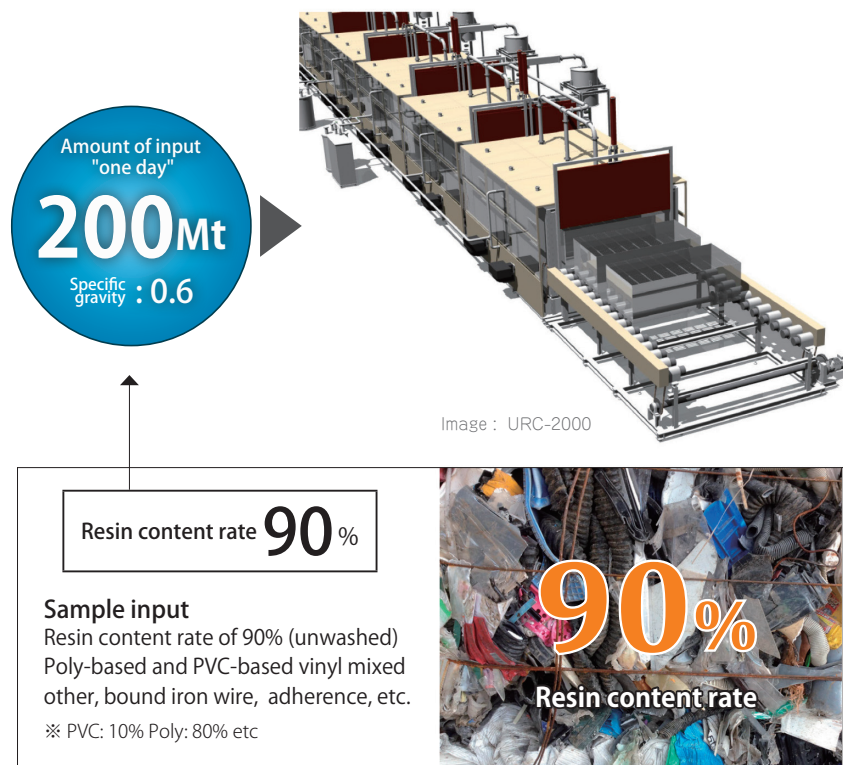

Details of waste per day that can be recovered by URC-2000

	Ingredient name	Component ratio	Daily Recovery quantity	Resource recycling method	
Liquefied oil	Gas (Diesel) Oil	61.2 %	62,424 ℓ (62.424ton)	Reuse in the processing machine = 1500 ℓ Fuel for sale = 60,924 ℓ Electricity sales = 60,924 ℓ	RENEWABLE
	Heating Oil	7.65 %	7,803 ℓ (7.803ton)	Sale as heating fuel	RENEWABLE
	Heavy Oil	7.65 %	7,803 ℓ (7.803ton)	Sale as heating fuel	RENEWABLE
	Recovery Loss	11.5 %	11,730 ℓ (11.73ton)	Mainly discharged as flue gas; a very small amount will be carbide.	
	Carbide	5 %	5.1m ³ (5.1ton)	Produce high-calorie powder coal mixed with heavy oil	RENEWABLE
	water	5 %	5,100 ℓ (5.1ton)	Reuse in steam boiler. Residual water is utilized as in house water or drain to sewage.	REUSE
	Metals and glasses etc.	2 %	2.04m ³ (2.04ton)	Metals and glasses = Recycled resources Debris sand, stone = Reclamation at site	RECYCLE

If the component ratio of the input waste is the same,
the same recovery ratio can be achievable with any model

Quality of recovery fuel



Sample input

Resin content rate of 90% (unwashed)
Poly-based and PVC-based vinyl mixed
other, bound iron wire, adherence, etc.

※ PVC: 15% Poly: 80% etc

Diesel(gas) oil
component

Diesel(gas) oil component (Flashpoint range)		1st. 21° under	2nd. 21-70°	3rd. 70-200°	4tj. 200-250°
1	Flashpoint		46°		
2	Dynamic viscosity		2.28		
3	Pour point		- 4°		
4	Pour point	-	- 22°		
5	Residual carbon content		0.31		
6	Ash Content	0.05 under	0.006		
7	Total chlorine content	100 under			
8	Sulfur content	0.2 under			
9	Nitrogen content	0.2 under			
10	moisture	Does not contain free water			
11	Cetane index				

会 社 東京橋中央区八丁堀1丁目9番7号 電話 大代表 東京 (03) 3552-1257 ファクシミリ 東京 (03) 3552-4073 ホームページ http://www.nihok.or.jp/	一般社団法人 日本海事検定協会 日本 航海 協会 	事 業 所 全国各主要港
---	--	---

ORIGINAL
(Ref. III)

大 阪
 平成31年4月10日
 Report No. ZF8004 / 19

分析報告書

委 嘱 者 :	株式会社ワンワールド 殿
試 料 名 :	燃料油
試 料 提 供 者 :	委嘱者
備 考 :	申込日: 平成31年3月25日

分 析 結 果 :

項目	単位	結果	試験方法
1. 反応	-	中性	JIS K 2252
2. 引火点 (PMCC)	℃	40 以下	JIS K 2265-3
3. 動粘度 (50℃)	mm ² /s	1.11	JIS K 2283
4. 流動点	℃	-20.0	JIS K 2269
5. 残炭炭素分	質量分率%	0.56	JIS K 2270-2
6. 水分	体積分率%	0.40	JIS K 2275-1
7. 灰分	質量分率%	0.005	JIS K 2272
8. 硫黄分	質量分率%	0.014	JIS K 2541-6
9. 総発熱量	J/g	43,270	JIS K 2279
10. 無機炭素分	質量分率%	0.0001	硝酸銀滴定法

一般社団法人 日本海事検定協会

大坂理化学分析センター

センター長 南田 雅彦


 平成31年4月10日

本レポートに関するお問い合わせは: 06-6612-1777

この分析報告書は計測した試験結果のみを示します。試験報告に試験結果の全量 (Original Report) を添付しております。
 この報告書は、当会が個人、日本海事検定協会 (JMA) により委託された一般社団法人、日本海事検定協会 (JMA) によって、JIS規格 (JIS規格) への適合が確認されている
 試験とマネジメントシステムの一部として提供されます。



About Recycled Fuel

The recovery fuel oil component varies depending on the content of the resin waste to feed. To recover the appropriate component value of fuel oil, it is necessary to control system settings such as overheat temperature and time.



检测报告
TEST REPORT

組合標号: 201408231001 組合頁碼: 第 1 頁, 共 1 頁

样品编号: BLF114080001
客户名称: 上海本良贸易有限公司
油品名称: 柴油

收样日期: 2014.06.17
报告日期: 2014.06.23

检测项目	检测结果	试验方法	GB2828-2011 0#柴油质量指标
色度	号	小于 2.5	GB/T 8540
氧化安定性 (以总不溶物计)	mg/100mL	12.5	SH/T 0175
硫含量	质量分数(%)	0.075	GB/T 11140
酸度	mgKOH/(kg)质量	14.60	GB/T 268
10%离心物残炭	(%)质量/质量	0.31	GB/T 268
灰分	质量分数(%)	0.006	GB/T 508
铜片腐蚀 (50℃,3h)	级	1	GB/T 5096
水分	重量百分含量, %	无	GB/T 260
机械杂质	% (质量分数)	无	GB/T 511
运动粘度(20℃)	mm ² /s	2.545	GB/T 265
凝点	℃	-22	GB/T 510
闪燃点	℃	-4	SH/T 0248
闭口闪点	℃	46	GB/T 261
十六烷指数		50	GB/T 11139
馏程			GB/T 6536
50%回收温度	℃	234	≤300
90%回收温度	℃	313	≤355
95%回收温度	℃	326	≤365
密度(20℃)	kg/m ³	814.9	GB/T 1894

批准人:

Field report

At a processing plant in China (Shandong Qufu), the recovered diesel oil is used as forklift fuel.

<Drum batch type 5 tons>

New generation Resource Recovery Facility About Waste

Not disposable Wastes can treat with zero fuel consumption.

The right pictures are for reference only. Waste treatment laws and regulation are differ depending on the country or region. Also, the recovery rate and the recovery material component may change depending on the waste. Please contact us for a suitable system.

Request for preliminary analysis of waste


OneWorld analyzes carbonization volume reduction and analytic survey of fuel oil recovery rate and other recovery items other than fuel oil (aromatics, etc.) for the waste trouble you with a reasonable fee. Also, based on these analyses, we can propose a basic planning system based on the processing volume required

Contact us


oneworld-jp.co/contact

Please contact us by specifying the waste you want to analyze together with an overview of your company. We will send an analysis survey request form. We will inform you of the analysis costs as well.


General household waste

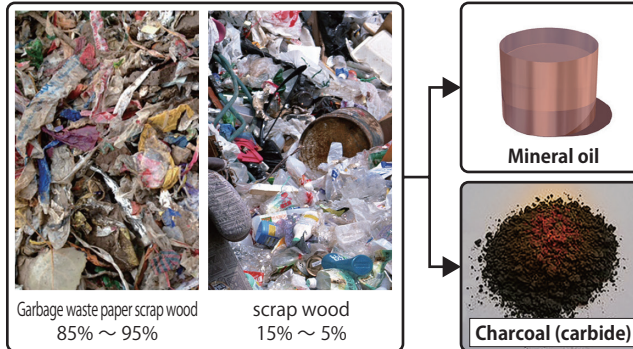


Livestock waste

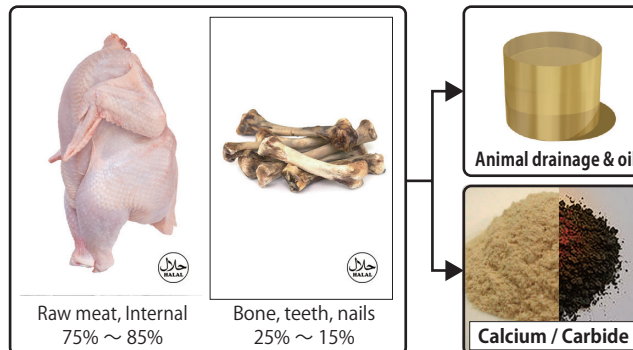


Flower wastes

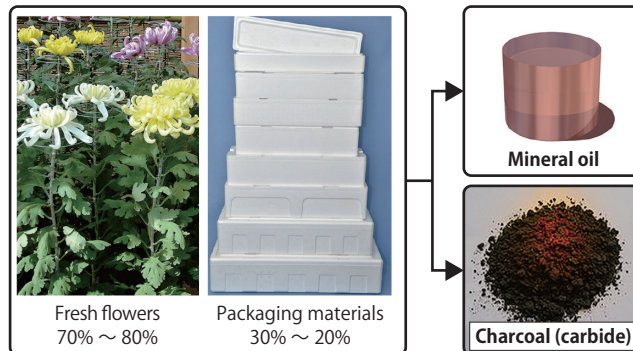


Wire cord waste

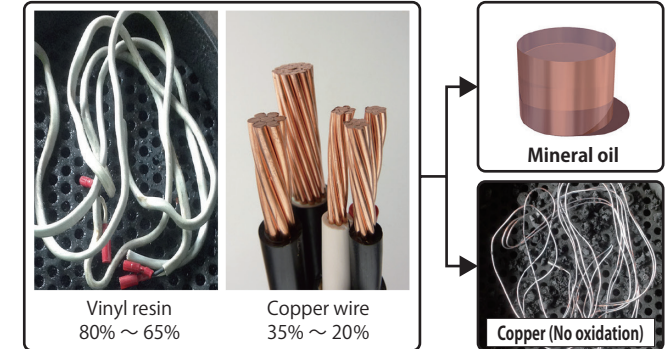

Deposition films wastes

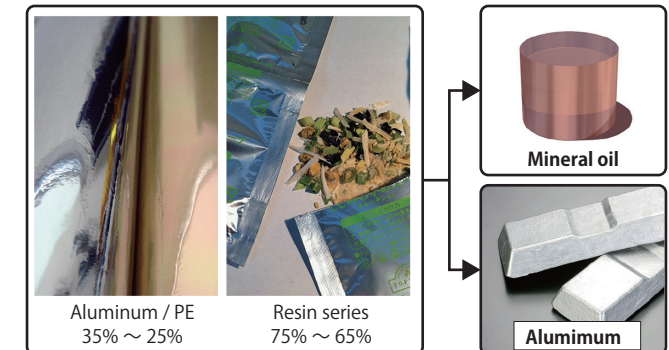


Textile waste

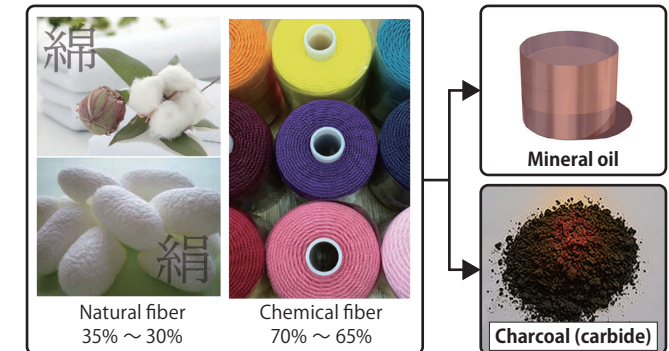

New generation Resource Recovery Facility

Progress schedule

The manufacturing period varies depending on the product.
Continuous type = about 10 months · Batch type = about 6 months

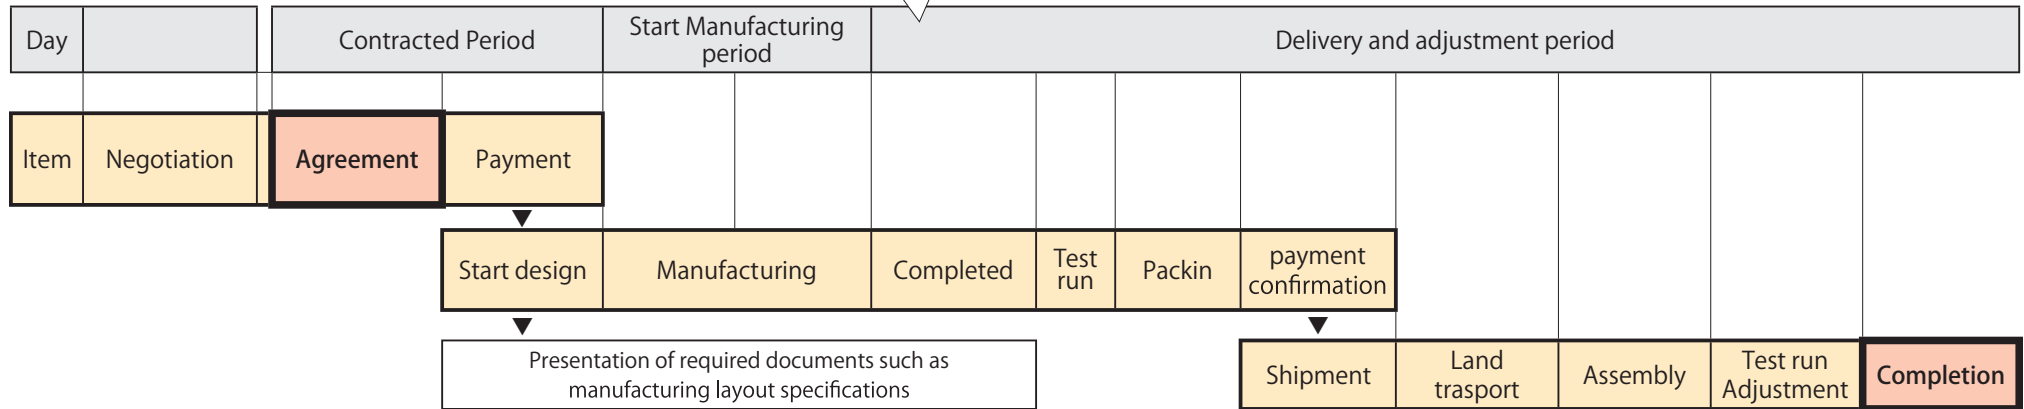

Content of work for each party

Seller	• Introduction of Product discription. • Description of Made ro order. • Contents of contract. • Location for instruct. • Base design.			<u>Report on the end of production after confimion of trial operation.</u>			<u>Report on the end of production after confirmation of trial oderation</u>		
Buyer	• Disclosure of the instslstion site. • Description of Purchased Corporation. • Bank certificate. • About qualification for application.	<u>Application for processing lisense to responsible regional administraction</u>		Remittance Instruction		Customs receipts & Trsndportstion arrangements	Preparation for water and fuel	Preparation for general waste arrangement	Oil recovery Extraction test
		• Foundation regional work of setting constraction • P reparation of water supply and waste liquid treatment equipment. • Examination and preparation for charcoa l solidification technology.							

The standards, application procedures, qualification criteria, etc. differ depending on the country and region. If you plan to introduce our facility, please consult with the relevant authorities in advance.

- The foundation basic strength of the ground requires a foundation curing of 5 Mt or more per square meter.
- Please follow the guidance of the relevant authorities for drainage and exhaust conditions.



The processing unit will be loaded on a large trailer.



株式会社ワンワールド

〒547-0016 大阪市平野区長吉長原 1-1-20

電話: 06-4392-7499 FAX: 06-4392-7676

URL: www.1-world.asia Mail: info@1-world.asia

Oneworld Corporation

1-1-20 Nagayoshinagahara, Hirano-ku, Osaka, Japan

Tel: 08-6-4392-7499 FAX : 08-6-4392-7676

URL: www.1-world.asia Mail: info@1-world.asia



Copyright ONE WORLD + ART, All rights reserved.