

CSC-586A Self-Adaptive Systems

Tory Borsboom, Sean Debroni, Stephan Heinemann

May 26, 2015

1 PART III – SENSOR APIs

1.1 ANDROID GYROSCOPE API

1.2 iOS MAGNETIC COMPASS API

The *iOS*¹ platform used on *Apple*² phones and tablets supports a variety of motion services via an object called *CMMotionManager*. This object is the gateway to raw *accelerometer/gyroscope/magnetometer* data, as well as some processed data such as *rotation rate, attitude, calibrated magnetic fields, direction of gravity*, and *the direction of acceleration of the device*. Of particular interest here, however, is the magnetometer and how the device handles the data collected by this sensor.

The magnetometer in the device collects magnetic field data, such as strength and polarity, which is accessible via the *CMMotionManager* object discussed above by either setting an interval at which updates can be pushed, or by polling the sensor whenever an update is required. If requesting updates at intervals the *accelerometerUpdateInterval* property must be specified and the *startMagnetometerUpdatesToQueue:withHandler:* method is called which requires a *CMMagnetometerHandler* type object be passed into it. This method will add data to a queue which can then be processed as needed. The purpose of the Handler is simply error handling. The alternative to requesting repeated information at intervals is periodic sampling of the data which is performed by calling *startMagnetometerUpdates* and then simply reading the *magnetometerData* property. In the case of both of these methods it is important that the *stopMagne-*

¹<https://www.apple.com/ca/ios/what-is/>

²<https://www.apple.com>

tometerUpdates method is called when the system no longer needs to process magnetometer data.

In order to access the data acquired from the most recent polling of the sensors *magnetometerData* must be accessed, this property is a structure of type *CMMagnetometerData*. It contains three int values x, y, and z. These int values represent directional magnetic field relative to the body of the device using microteslas as units. With regards to the coordinate system used here The z axis is positive up through the front of the screen, the y axis is positive up through the top of the phone, and the x axis is positive to the right of the device if the screen is facing you. There are also two methods made for simply polling the sensor to see if it is working or available *magnetometerActive* and *magnetometerAvailable*. *magnetometerActive* checks to see if the sensor is currently taking readings and *magnetometerAvailable* checks to see if the sensor is available for use.

The purpose of having the two separate collection methods is one of resource management. If the purpose of the app being written is something like a game or some sort of mapping software, it is unnecessary to acquire data rapidly and keep it in a queue. Most programs intended for light users will simply need to query the sensor once per frame rendered on the screen at the very most. The only time it would be necessary to use the queueing method is if the data needs to be incredibly precise and with little latency between updates, such as if the device were being used as a magnetometer in an experiment measuring magnetic flux.

1.3 NUTTX / ARDUPILOT PX4 OPTICAL FLOW AND SONAR API

The *ArduPilot*³ autopilot stack supports a wide range of sensors to be used with any of the supported vehicle types including *Plane*, *Copter* and *Rover*. It builds on top of the *NuttX*⁴ operating system and requires the applicable firmware for the underlying hardware such as the *Pixhawk*⁵. The supported sensor types include those to capture data about the vehicle's *environment* as well as those related to its own *capabilities* in order to establish an adequate *situational awareness*.

Examples of supported environment sensors gather *inertial* (attitude and acceleration), *barometric* (altitude and airspeed), *magnetic* (direction), *range* (distance), *optical* (orientation and recognition) and *satellite* (position) data. Sensors that capture the vehicle's capability state include a *battery monitor* (power consumption and endurance) and a *performance monitor* (scheduler latency). Environment sensors themselves may provide *health* and *quality* monitoring functions. Furthermore, all information that is provided by the *NuttX* operating system about its *Pixhawk* platform including the available *memory* and *filesystem* space can be instrumented to enhance the vehicle's capability state.

The ArduPilot Application Programming Interface (API) separates sensor *frontends* (interfaces) from their actual *backends* (implementation) in order to easily support different sensors of the same type. These and other Hardware Abstraction Layer (HAL) modules can be found in the

³<http://ardupilot.com/>

⁴<http://nuttx.org/>

⁵<https://pixhawk.org>

libraries directory⁶ and are, hence, separate from any concrete vehicle-related software. The *Copter* vehicle employs the sensor API through its `sensors.pde` arduino sketch file which represents an even higher level API⁷ to the actual vehicle functions such as different autoflight modes. As a representative example, the structure of the *PX4 Optical Flow / Sonar*⁸ sensor interface shall be explained. This sensor allows to capture the optical flow, that is, the rate of translational and rotational changes in a captured image, in order to establish positional information. The optical flow camera is mounted on the bottom of the *Iris*⁹ quadcopter body pointing downwards and sampling the floor pattern that is being overflown. Since the aircraft can be tilted (pitch and bank) and flown at different altitudes, a range finder (sonar sensor) on the same sensor board is employed to relate the optical flow information to the measured ground distances accordingly. Assuming the actual attitude of the aircraft based on inertial sensors, an actual ground distance can be derived from the sonar slant range readings.

Figure 1.1 shows a small extract of the optical flow sensor frontend API in the `libraries/AP_OpticalFlow` directory possessing the sensor state data structure as well as methods that determine flow and body rates in a two-dimensional image. The interface itself furthermore consists of methods that determine the health of the sensor and the quality of the data being captured by it.

Figure 1.2 shows an API extract of the range finder component of the optical flow sensor board. On the *PX4 Optical Flow* board, a sonar sensor is employed to obtain range in order to relate optical flow to ground distance. This concrete implementation is abstracted by the more generic range finder API in the directory.

The `sensors.pde` arduino sketch file uses the above API in order to provide the *Copter* vehicle with necessary sensor data to perform its functions such as automatic flight modes. The overall static structure is shown in Figure 1.3.

1.4 APPLICATION EXAMPLE

A small application example makes use of the *PX4 Optical Flow* board connected to the *Iris Pixhawk* autopilot module. The application realizes a flight envelope warning alert. The alert is triggered whenever translational flow or rotational body rates exceed a certain limit. It is also triggered when the Attitude and Heading Reference System (AHRS)¹⁰ which fuses different sensor inputs for the current height of the aircraft including the sonar distance reports a height above ground that exceeds a certain threshold.

The alert consist a series of high pitch tones whenever the normal envelope is violated and a long low pitch tone as soon as the normal flight envelope is re-established. Furthermore, the aircraft status Light-Emitting Diode (LED) continues to flash red as long as the normal envelope is violated.

⁶<https://github.com/diydrones/ardupilot>

⁷<http://www.arduino.cc/en/pmwiki.php?n=Reference/HomePage>

⁸<https://pixhawk.org/modules/px4flow>

⁹<http://3drobotics.com/iris/>

¹⁰http://en.wikipedia.org/wiki/Attitude_and_heading_reference_system

```

class OpticalFlow
{
    //...
public:
    //...
    bool enabled() const { return _enabled; }
    bool healthy() const { return backend != NULL && _flags.healthy; }
    void update(void);
    uint8_t quality() const { return _state.surface_quality; }
    const Vector2f& flowRate() const { return _state.flowRate; }
    const Vector2f& bodyRate() const { return _state.bodyRate; }
    uint8_t device_id() const { return _state.device_id; }
    uint32_t last_update() const { return _last_update_ms; }

    struct OpticalFlow_state {
        uint8_t device_id;
        uint8_t surface_quality;
        Vector2f flowRate;
        Vector2f bodyRate;
    };
private:
    //...
};

```

Figure 1.1: Optical Flow Sensor API

1.5 APPLICATION IN THE CLOUD

```

class RangeFinder
{
public:
    //...
    struct RangeFinder_State {
        uint8_t          instance;
        uint16_t         distance_cm;
        uint16_t         voltage_mv;
        enum RangeFinder_Status status;
        uint8_t          range_valid_count;
        //...
    };
    //...
    void update(void);
    uint16_t distance_cm() //...
    int16_t ground_clearance_cm() //...
    RangeFinder_Status status(void) //...
    bool has_data() //...
    uint8_t range_valid_count() //...
private:
    //...
};

```

Figure 1.2: Range Finder API

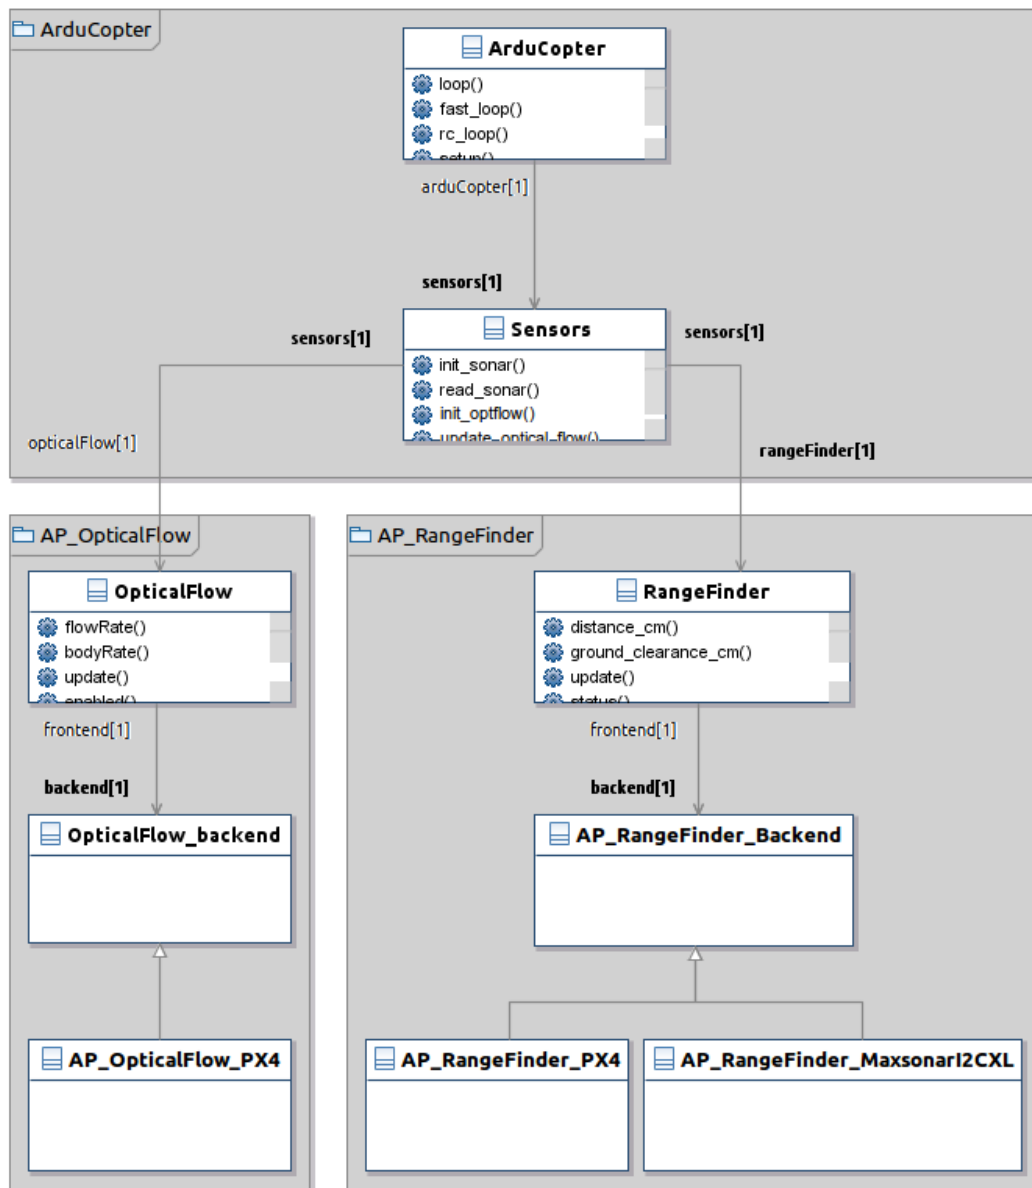


Figure 1.3: PX4 Optical Flow Sensor Board API

2 ACRONYMS

AHRS Attitude and Heading Reference System

An attitude and heading reference system consists of sensors on three axes that provide attitude information for aircraft, including heading, pitch and yaw. They are designed to replace traditional mechanical gyroscopic flight instruments and provide superior reliability and accuracy.¹¹

API Application Programming Interface

In computer programming, an application programming interface is a set of routines, protocols, and tools for building software applications. An API expresses a software component in terms of its operations, inputs, outputs, and underlying types. An API defines functionalities that are independent of their respective implementations, which allows definitions and implementations to vary without compromising each other.¹²

CPS Cyber-Physical System

A cyber-physical system is a system of collaborating computational elements controlling physical entities. Today, a precursor generation of cyber-physical systems can be found in areas as diverse as aerospace, automotive, chemical processes, civil infrastructure, energy, healthcare, manufacturing, transportation, entertainment, and consumer appliances.¹³

HAL Hardware Abstraction Layer

Hardware abstractions are sets of routines in software that emulate some platform-specific details, giving programs direct access to the hardware resources.¹⁴

II Industrial Internet

The Industrial Internet refers to the integration of complex physical machinery with networked sensors and software.¹⁵

IIoT Industrial Internet of Things

The Industrial Internet of Things is a subdiscipline of the IoT, which describes IP-enabled systems in factories, offices and other commercial (and sometimes government) facilities. It is the part of the IoT that focuses on how smart machines, networked sensors and sensor analytics can help improve business-to-business initiatives across a wide variety of industries, especially manufacturing.¹⁶

IoT Internet of Things

The Internet of Things is the network of physical objects or "things" embedded with elec-

¹¹http://en.wikipedia.org/wiki/Attitude_and_heading_reference_system

¹²http://en.wikipedia.org/wiki/Application_programming_interface

¹³http://en.wikipedia.org/wiki/Cyber-physical_system

¹⁴http://en.wikipedia.org/wiki/Hardware_abstraction

¹⁵http://en.wikipedia.org/wiki/Industrial_Internet

¹⁶http://itlaw.wikia.com/wiki/Industrial_Internet_of_Things

tronics, software, sensors and connectivity to enable it to achieve greater value and service by exchanging data with the manufacturer, operator and/or other connected devices. ¹⁷

LED Light-Emitting Diode A light-emitting diode is a two-lead semiconductor light source. It is a pn-junction diode, which emits light when activated. When a suitable voltage is applied to the leads, electrons are able to recombine with electron holes within the device, releasing energy in the form of photons. ¹⁸

SoSs System of Systems

System of systems is a collection of task-oriented or dedicated systems that pool their resources and capabilities together to create a new, more complex system which offers more functionality and performance than simply the sum of the constituent systems. ¹⁹

ToE Theory of Everything

A theory of everything or final theory, ultimate theory, or master theory is a hypothetical single, all-encompassing, coherent theoretical framework of physics that fully explains and links together all physical aspects of the universe. ²⁰

ULSS Ultra-Large-Scale System

Ultra-large-scale system is a term used in fields including Computer Science, Software Engineering and Systems Engineering to refer to software intensive systems with unprecedented amounts of hardware, lines of source code, numbers of users, and volumes of data. ²¹

¹⁷http://en.wikipedia.org/wiki/Internet_of_Things

¹⁸http://en.wikipedia.org/wiki/Light-emitting_diode

¹⁹http://en.wikipedia.org/wiki/System_of_systems

²⁰http://en.wikipedia.org/wiki/Theory_of_everything

²¹http://en.wikipedia.org/wiki/Ultra-large-scale_systems

REFERENCES