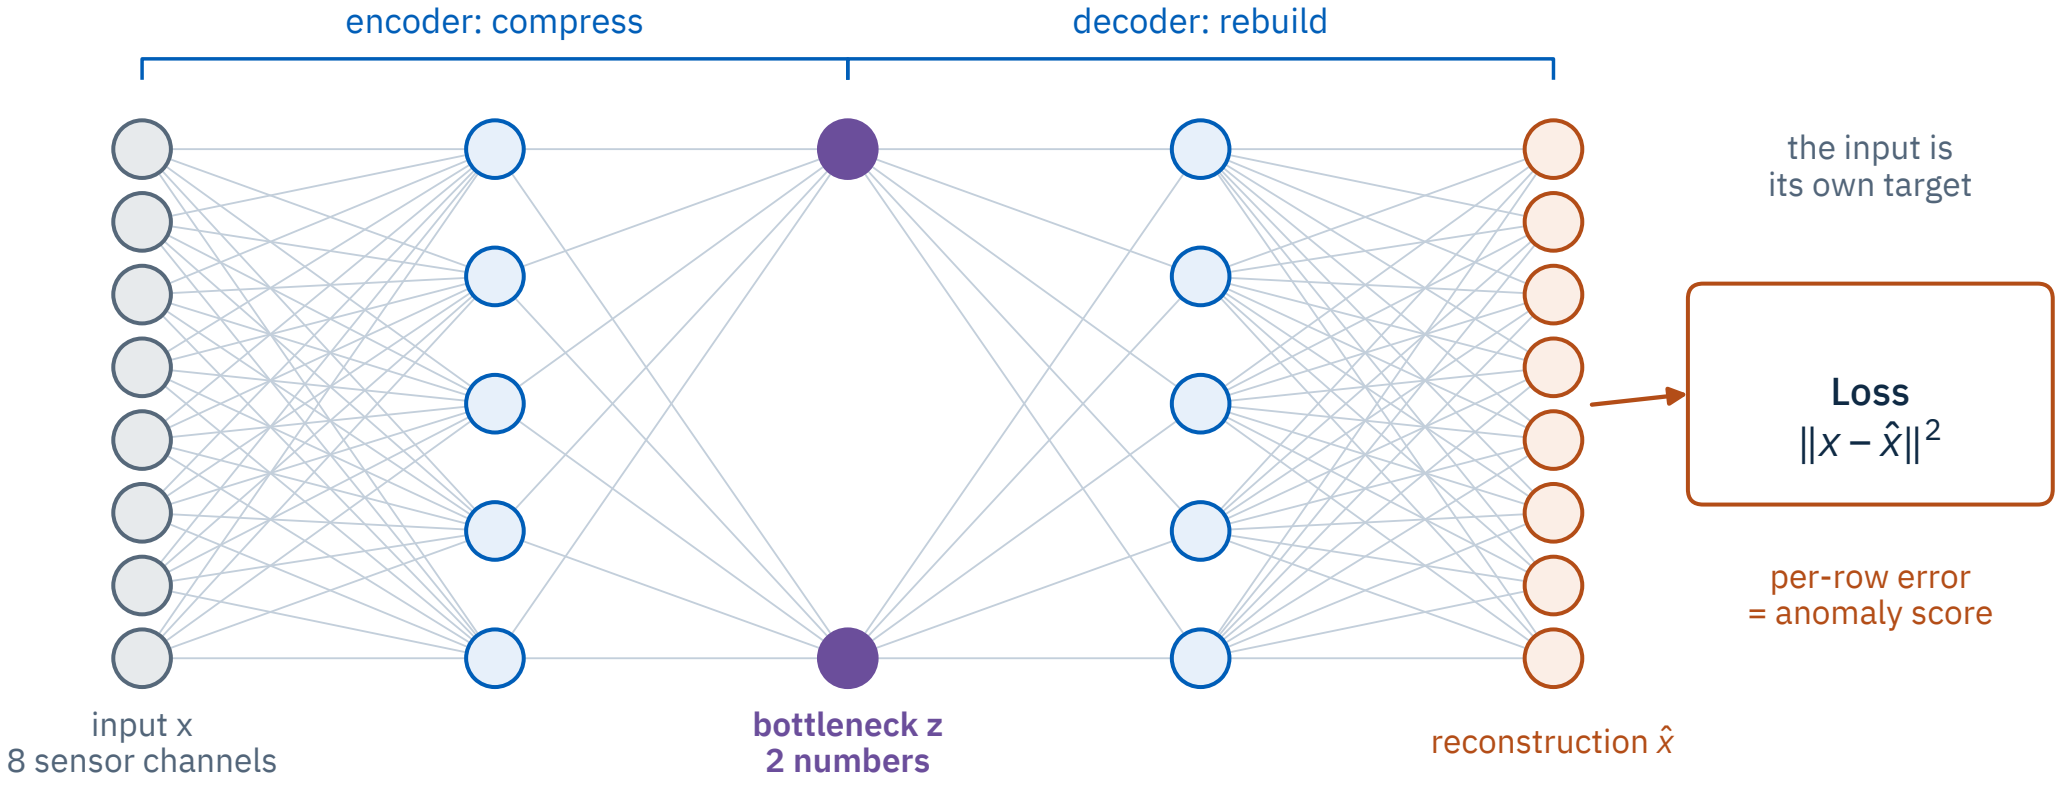
encoder: compress
decoder: rebuild
the input is
its own target
Loss
$||x - \hat{x}||^2$
per-row error
= anomaly score
input x
8 sensor channels
bottleneck z
2 numbers
reconstruction $\hat{x}$