


MOUNTING YOUR HANDMADE WOODEN AMERICAN FLAG

STEP-BY-STEP WALL MOUNTING GUIDE

1

WHAT'S INCLUDED WITH YOUR FLAG?

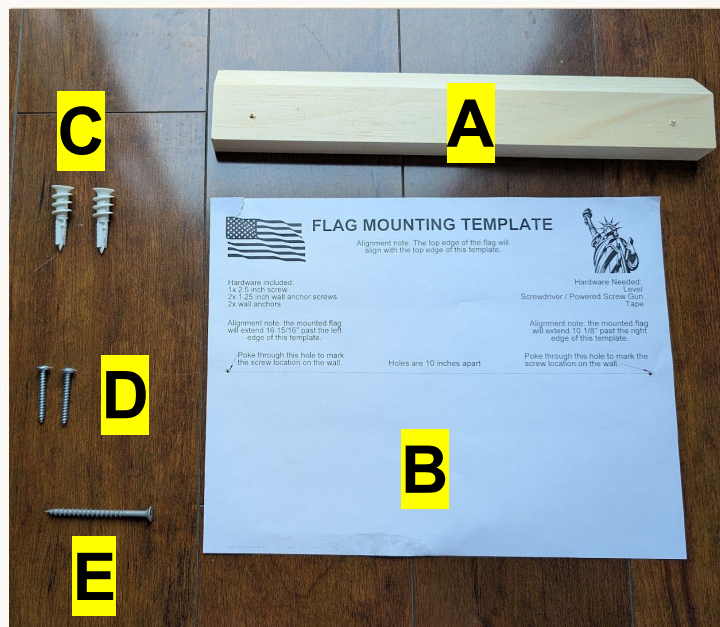

A: French cleat

B: Mounting Template


C: Wall Anchors (2)

D: 1.25" Wall Anchor Screws (2)

E: 2.5" Wood Screw

2

WHAT YOU NEED TO MOUNT IT

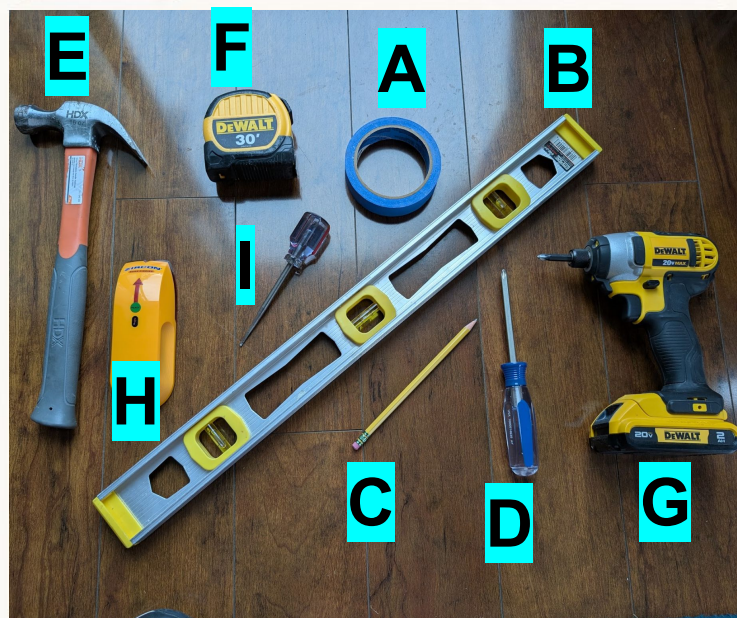

A: Tape

B: Level

C: Pencil

D: Screwdriver

E: Hammer

F: Measuring Tape

G: Screw Gun

H: Stud Finder

I: Any Pointed Poking Tool

MOUNTING YOUR HANDMADE WOODEN AMERICAN FLAG

STEP-BY-STEP WALL MOUNTING GUIDE



3

CHOOSE YOUR MOUNTING OPTION

OPTION 1



USE ONE STUD + ONE ANCHOR

Use this option if you can locate a wall stud where one of the mounting holes will be placed. Use one wall anchor, one 1.25" screw into the wall anchor, one 2.5" screw into the wall stud

OR

OPTION 2



USE TWO WALL ANCHORS

Use this option if you cannot locate a wall stud where the flag will be mounted. Use two wall anchors and two 1.25" screws into the wall anchors

4

FIND AND MARK THE WALL STUD

OPTION 1 ONLY



- If you have a stud finder, and locate a stud in a useable spot, mark the two edges of the stud with a pencil. In the next step, you will want to place the template so that one of the marking holes is in the middle of the two lines to ensure the screw enters into the stud





MOUNTING YOUR HANDMADE WOODEN AMERICAN FLAG

STEP-BY-STEP WALL MOUNTING GUIDE

5

TAPE THE TEMPLATE TO THE WALL AND LEVEL IT

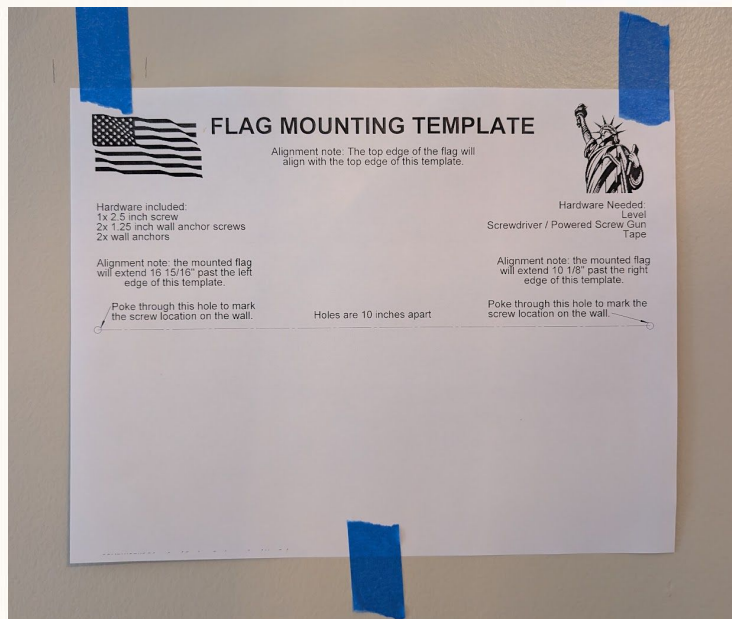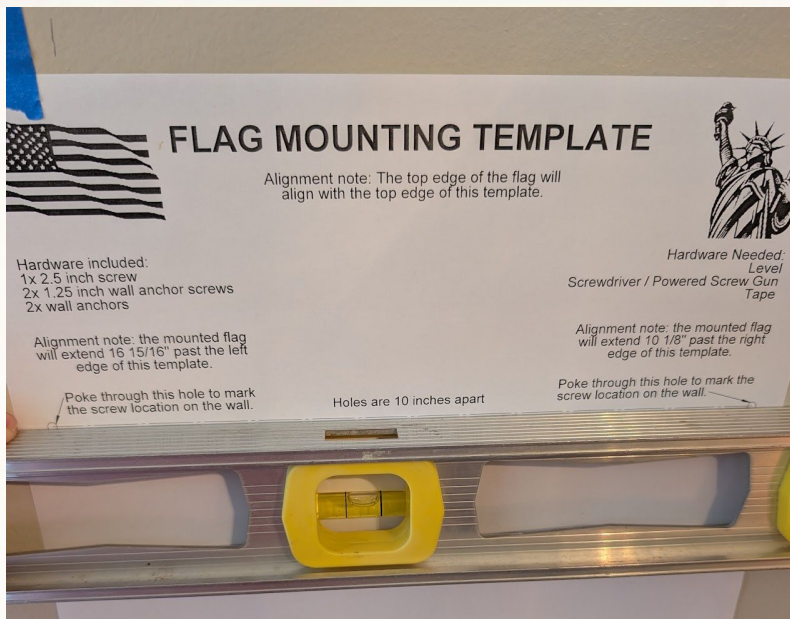BOTH
OPTIONS

- Hold the level up parallel to the dotted line on the template. Adjust the angle of both the paper and the level until the bubble inside the level indicates that the piece of paper is perfectly level. Then tape the template to the wall

- The template should now sit level on your wall. Doing this step correctly will ensure the french cleat will be screwed to the wall perfectly horizontally, and that your flag will always be level


MOUNTING YOUR HANDMADE WOODEN AMERICAN FLAG

STEP-BY-STEP WALL MOUNTING GUIDE




6


CHECK THE FLAG WIDTH AND PLACEMENT

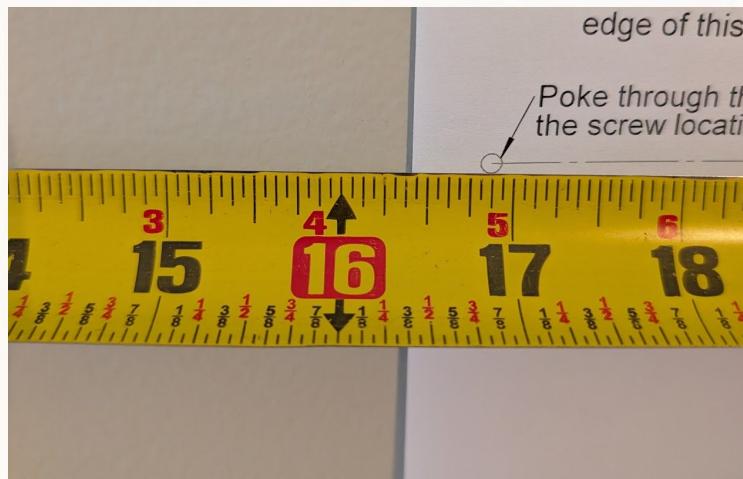**BOTH
OPTIONS**


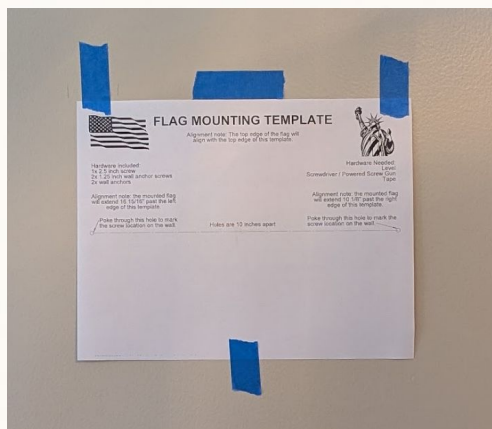
- Measure 16- $\frac{3}{8}$ " off the left edge of the sheet of paper. Mark that spot with tape to indicate how far the left side of the flag will extend to

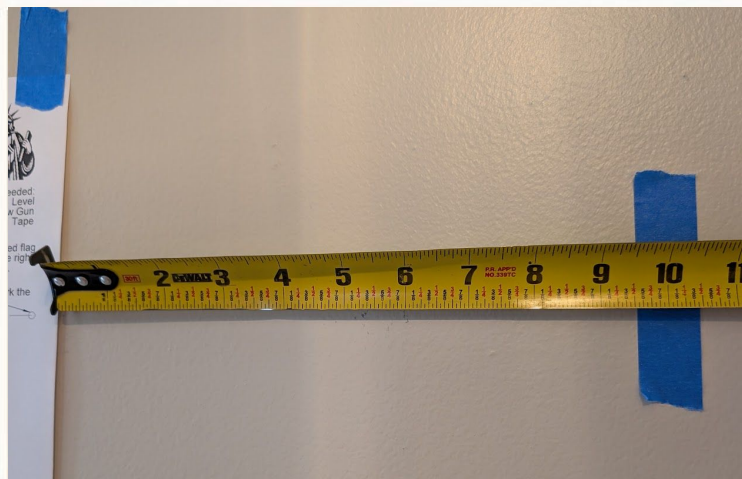


- Measure 9- $\frac{5}{8}$ " off the right edge of the sheet of paper. Mark that spot with tape to indicate how far the right side of the flag will extend to

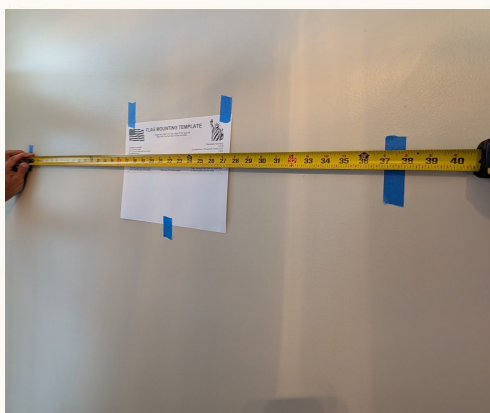

- As a test, measure from the left piece of tape to the right. It should measure 37"



- Mark the top of the template with tape to indicate where the top of the flag will be

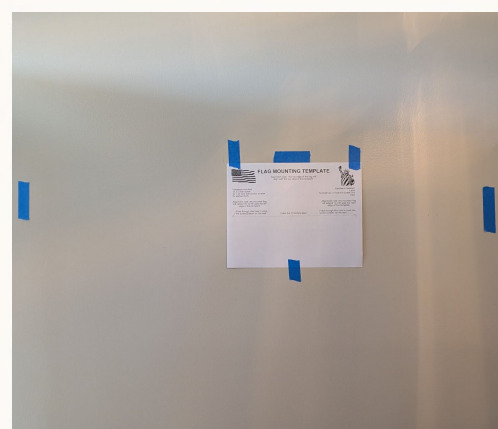

- There are now 3 pieces of tape to help visualize the location of your flag






MOUNTING YOUR HANDMADE WOODEN AMERICAN FLAG

STEP-BY-STEP WALL MOUNTING GUIDE

**7**

PIERCE THROUGH THE TEMPLATE TO MARK THE WALL

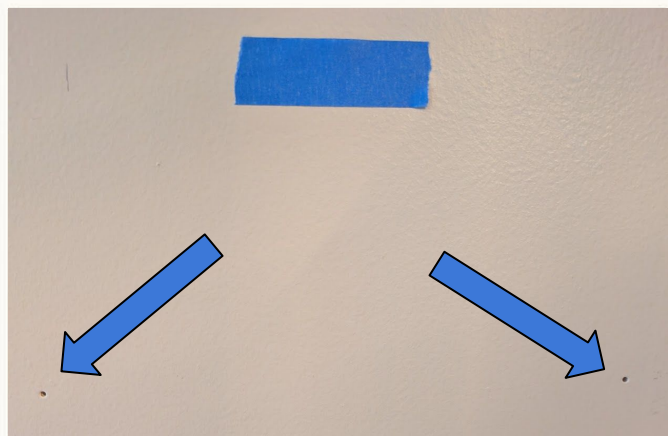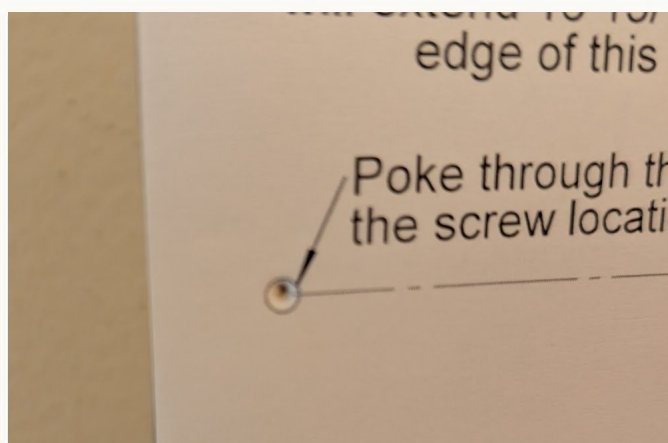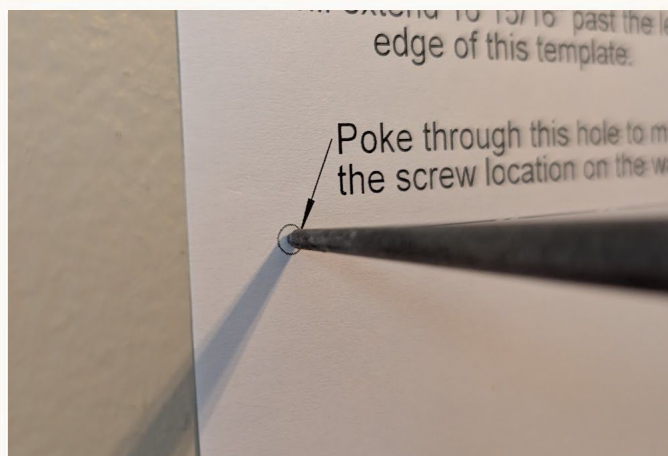**BOTH
OPTIONS**

- Use a small pointed tool, nail, or screw to poke through the two marked holes on the template. This transfers the hole locations onto the wall. Give just a light enough tap to make an indent in the wall, as seen in the photos to the left
- After both hole locations are marked, remove the paper template from the wall



MOUNTING YOUR HANDMADE WOODEN AMERICAN FLAG


STEP-BY-STEP WALL MOUNTING GUIDE



8

INSTALL THE WALL ANCHOR(S)

**VARIES
BY OPTION**

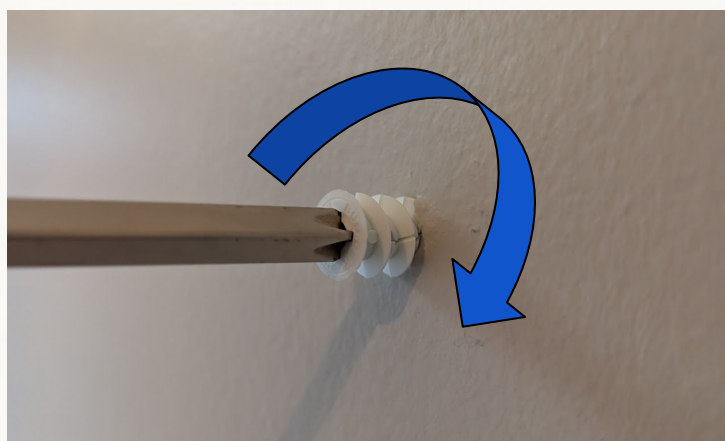

- **Note: You will do this for one or two anchors, depending on which mounting option you chose in step 3**
- **For the wall anchor(s), start by hammering the stem into the wall until the threads of the anchor(s) are flush against the wall**
- **Now use a screwdriver to screw the anchor(s) into the drywall. Apply a consistent, firm pressure as you go. Keep the anchor(s) perpendicular to the wall so they screw in straight**
- **The anchor(s) should end flush to the wall and not protruding out from the wall. Also ensure that you don't screw too far in either**

MOUNTING YOUR HANDMADE WOODEN AMERICAN FLAG

STEP-BY-STEP WALL MOUNTING GUIDE

**9**

START THE SCREWS THROUGH THE FRENCH CLEAT

**BOTH
OPTIONS**

- Before placing the cleat on the wall, start the screws through the french cleat mounting bar. Drive each screw through the cleat until the tip of the screw just barely sticks out the back. This makes it easier to line up the screws with the holes or anchors in the wall.

10

ALIGN THE CLEAT WITH THE MARKED HOLES

**BOTH
OPTIONS**

- Hold the cleat against the wall and feel for the screw tips lining up with the marked holes or anchors. Once you feel that the screw tips are seated in their respective spots, you are ready to screw the cleat to the wall




MOUNTING YOUR HANDMADE WOODEN AMERICAN FLAG

STEP-BY-STEP WALL MOUNTING GUIDE

**11**

TIGHTEN THE CLEAT AND RECHECK LEVEL

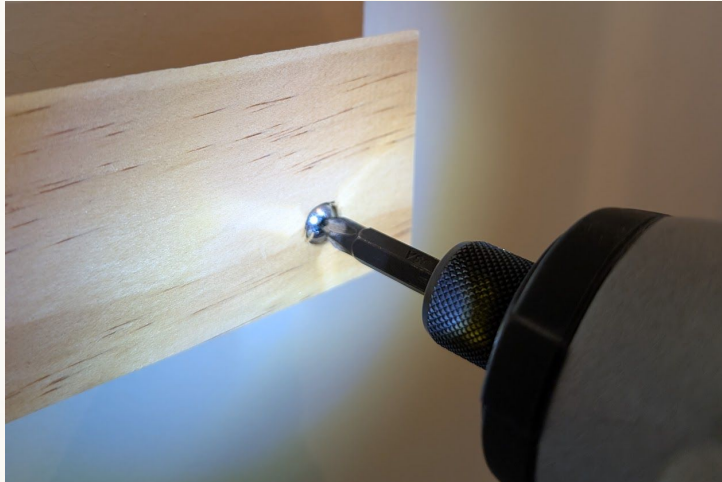**BOTH
OPTIONS**

- Tighten each screw until the french cleat mounting bar is firmly secured to the wall
- The cleat should sit tight against the wall. It should not feel loose, wobbly, or able to shift by hand
- Do not overtighten to the point where the drywall anchor strips out or the cleat is damaged
- Recheck level



MOUNTING YOUR HANDMADE WOODEN AMERICAN FLAG

STEP-BY-STEP WALL MOUNTING GUIDE



12

MOUNT THE FLAG ONTO THE CLEAT

BOTH
OPTIONS



- Lift the flag and bring it to the wall. Then line up the french cleat on the back of the flag with the cleat mounted to the wall
- Lower the flag down onto the wall cleat until it is fully seated
- Once the flag is hanging, gently check that it is sitting flat, secure, and level. Use the left and right pieces of tape to ensure it is horizontally aligned on the cleat
- Don't force the flag. If it does not sit correctly, lift it off and try again

[Click here to watch how the flag is mounted on the french cleat](#)




MOUNTING YOUR HANDMADE WOODEN AMERICAN FLAG

STEP-BY-STEP WALL MOUNTING GUIDE



13

FINISHED FLAG ON THE WALL

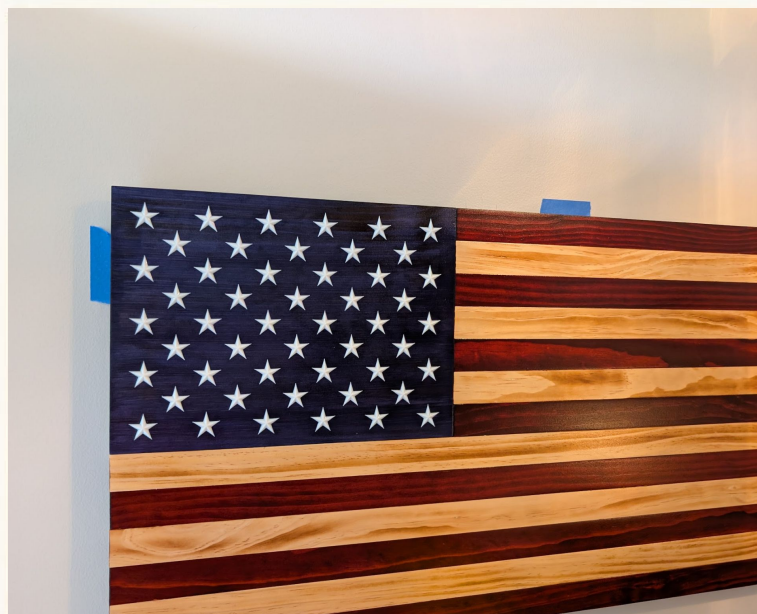

- Note: the flag should be flat against the wall and not tilted at an angle
- Note: the edges of the flag line up with the alignment tape from step 6

14

FINAL CHECK

- ☒ Flag is fully seated on the wall and stable.
- ☒ Mounting hardware is secure.
- ☒ Flag is level and straight.
- ☒ All mounting points are tight.

