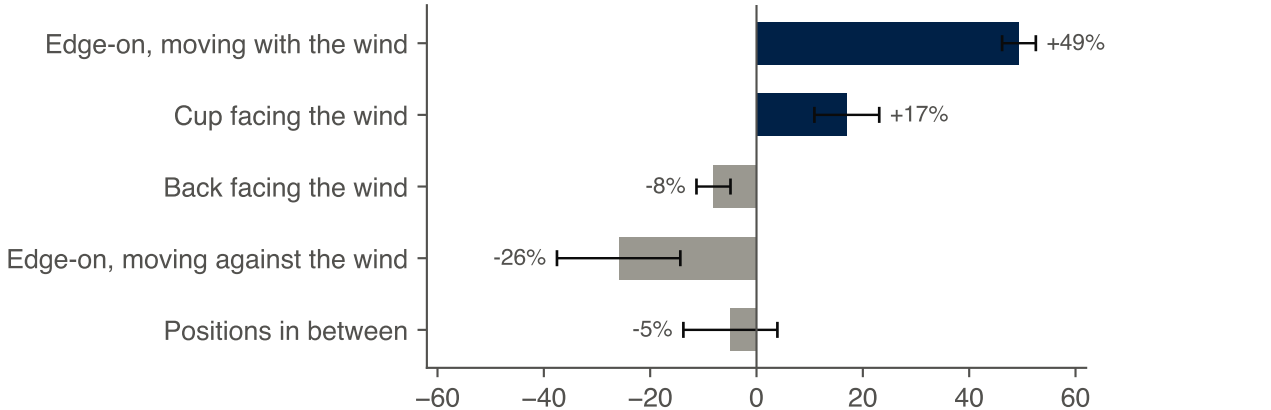
Edge-on, moving with the wind
Cup facing the wind
Back facing the wind
Edge-on, moving against the wind
Positions in between
+49%
+17%
-8%
-26%
-5%
−60
−40
−20
0
20
40
60
Change in torque, 400 μm against smooth, as % of the smooth rotor's torque (sum +27%)