**SMARTBRIDGE IOT**

**ASSIGNMENT 3**

Name: V A Monica

Registration number: 20BEC1189

## Challenging task:

In wokwi, add LED and switch on and off from node-red software

## Code:

```
#include <WiFi.h>//library for wifi
#include <PubSubClient.h>//library for MQtt
#include "DHT.h"// Library for dht11
#define DHTPIN 15     // what pin we're connected to
#define DHTTYPE DHT22   // define type of sensor DHT 11
#define LED 2

DHT dht (DHTPIN, DHTTYPE);// creating the instance by passing pin and typr of
dht connected

void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);

//-------credentials of IBM Accounts------

#define ORG "hakody"//IBM ORGANITION ID
#define DEVICE_TYPE "wokwi"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "1234"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "12345678"     //Token
String data3;
float h, t;


//-------- Customise the above values --------
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";// Server Name
char publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and type of
event perform and format in which data to be send
char subscribetopic[] = "iot-2/cmd/command/fmt/String";// cmd  REPRESENT
command type AND COMMAND IS TEST OF FORMAT STRING
char authMethod[] = "use-token-auth";// authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//client id


//-----------------------------------------
WiFiClient wifiClient; // creating the instance for wificlient
```

```
PubSubClient client(server, 1883, callback ,wifiClient); //calling the
predefined client id by passing parameter like server id,portand
wificredential


void setup()// configureing the ESP32
{
  Serial.begin(115200);
  dht.begin();
  pinMode(LED,OUTPUT);
  delay(10);
  Serial.println();
  wificonnect();
  mqttconnect();
}

void loop()// Recursive Function
{

  h = dht.readHumidity();
  t = dht.readTemperature();
  Serial.print("temp:");
  Serial.println(t);
  Serial.print("Humid:");
  Serial.println(h);

  PublishData(t, h);
  delay(1000);
  if (!client.loop()) {
    mqttconnect();
  }
}



/*.....................................retrieving to
Cloud.............................*/

void PublishData(float temp, float humid) {
  mqttconnect();//function call for connecting to ibm
  /*
     creating the String in in form JSon to update the data to ibm cloud
  */
  String payload = "{\"temp\":";
  payload += temp;
  payload += "," "\"Humid\":";
  payload += humid;
  payload += "}";
```

```
  Serial.print("Sending payload: ");
  Serial.println(payload);


  if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish ok");// if it sucessfully upload data on the cloud
then it will print publish ok in Serial monitor or else it will print publish
failed
  } else {
    Serial.println("Publish failed");
  }

}


void mqttconnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting client to ");
    Serial.println(server);
    while (!!!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
      delay(500);
    }

     initManagedDevice();
     Serial.println();
  }
}
void wificonnect() //function defination for wificonnect
{
  Serial.println();
  Serial.print("Connecting to ");

  WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish
the connection
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  }
  Serial.println("");
  Serial.println("WiFi connected");
  Serial.println("IP address: ");
  Serial.println(WiFi.localIP());
}

void initManagedDevice() {
  if (client.subscribe(subscribetopic)) {
    Serial.println((subscribetopic));
```

```
    Serial.println("subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}

void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{

  Serial.print("callback invoked for topic: ");
  Serial.println(subscribetopic);
  for (int i = 0; i < payloadLength; i++) {
    //Serial.print((char)payload[i]);
    data3 += (char)payload[i];
  }
  Serial.println("data: "+ data3);
  if(data3=="lighton")
  {
Serial.println(data3);
digitalWrite(LED,HIGH);
  }
  else
  {
Serial.println(data3);
digitalWrite(LED,LOW);
  }
data3="";
}
```

**Wokwi link:**

https://wokwi.com/projects/366433499064608769

**Circuit diagram:**

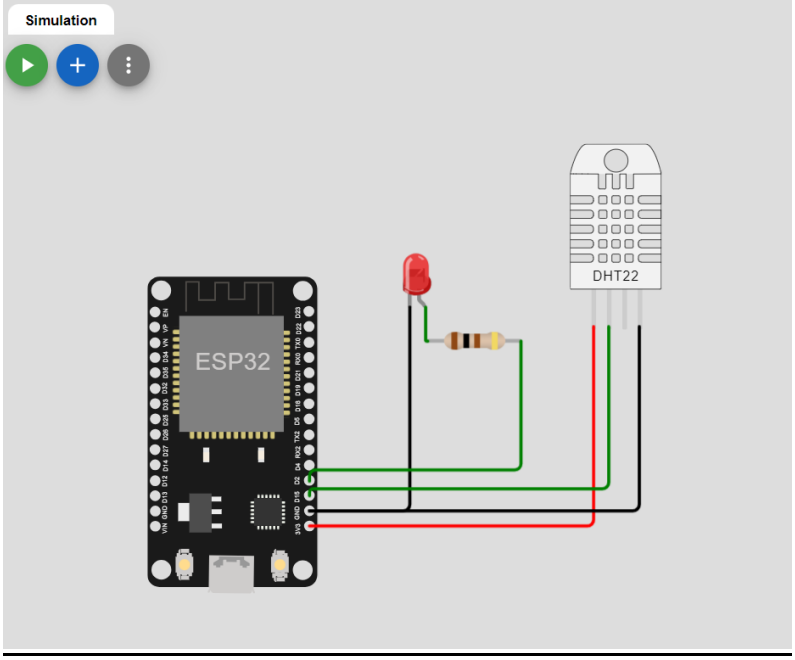


## Flow diagram:

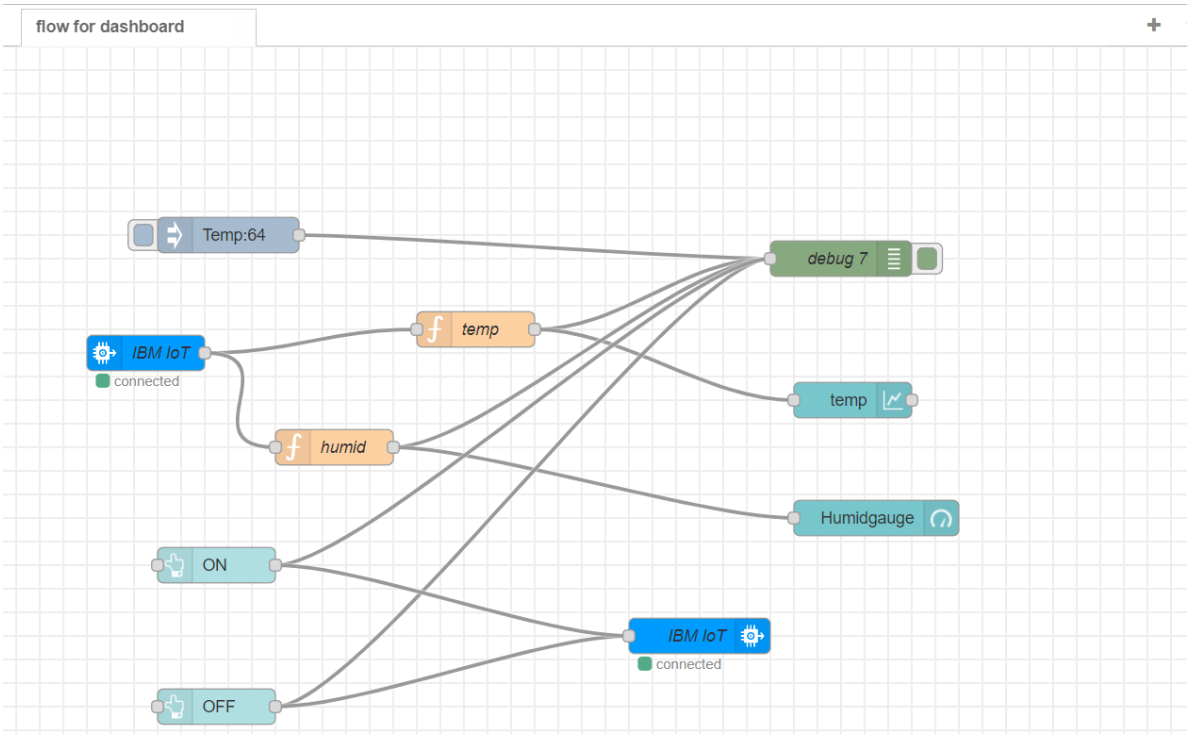

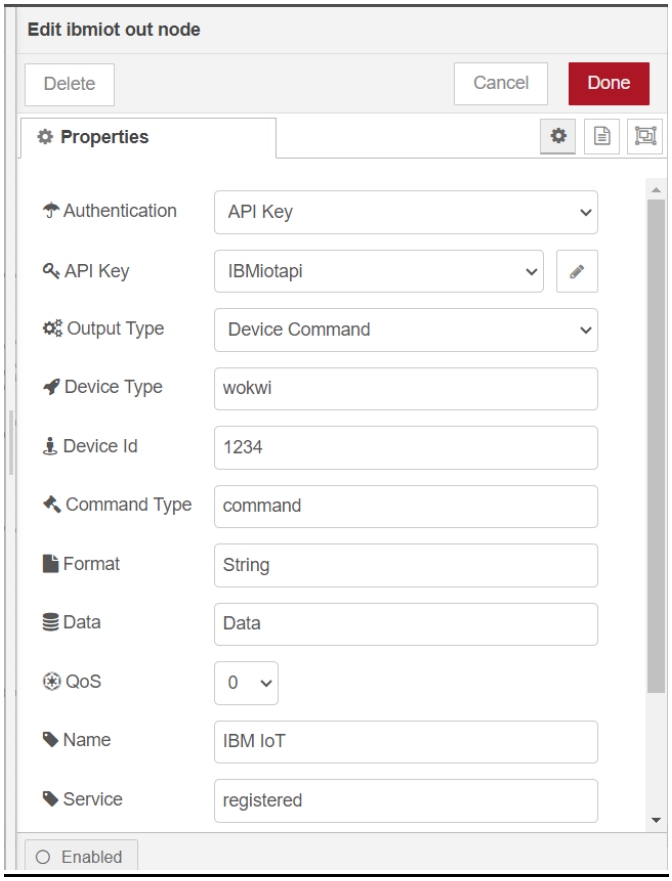
Edit ibmiot out node
Delete
Cancel
Done
Properties
Authentication
API Key
API Key
IBMiotapi
Output Type
Device Command
Device Type
wokwi
Device Id
1234
Command Type
command
Format
String
Data
Data
QoS
0
Name
IBM IoT
Service
registered
Enabled

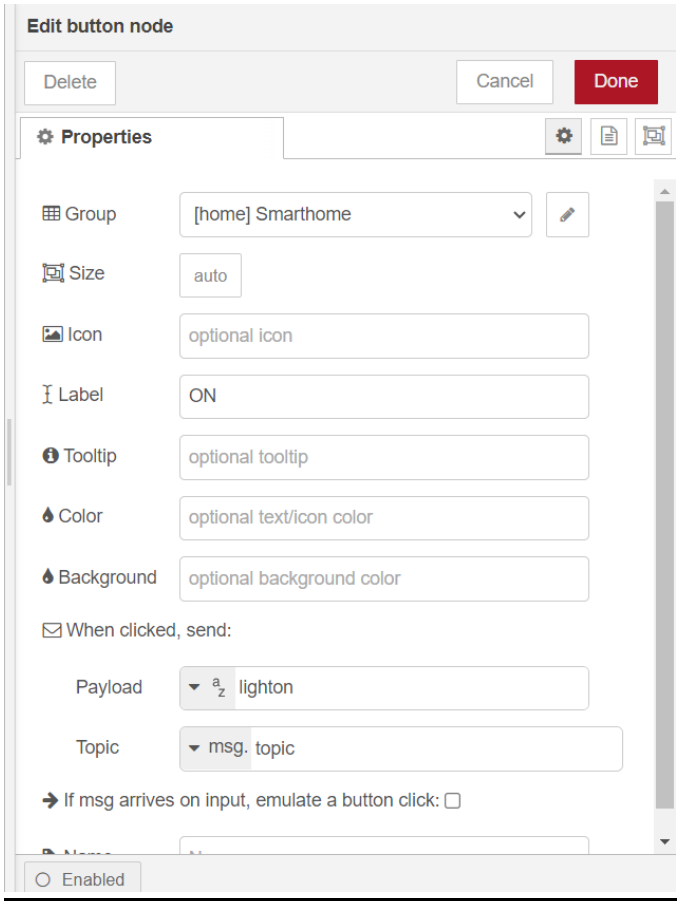
Edit button node
Delete
Cancel
Done
Properties
Group
[home] Smarthome
Size
auto
Icon
optional icon
Label
ON
Tooltip
optional tooltip
Color
optional text/icon color
Background
optional background color
When clicked, send:
Payload
lighton
Topic
msg.
topic
If msg arrives on input, emulate a button click:
Enabled

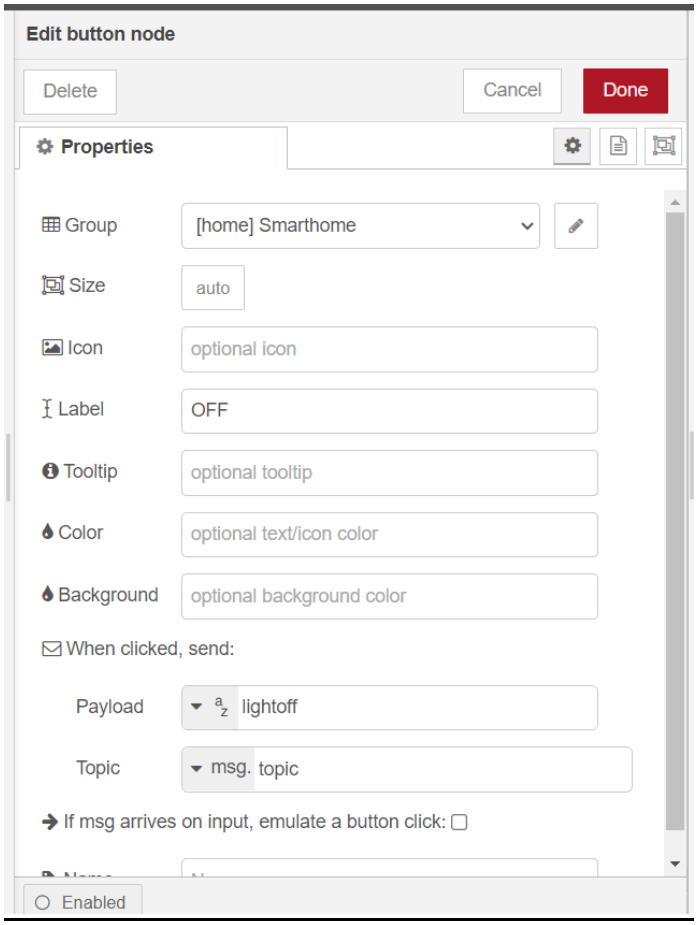


## Output:

## IBM Cloud:

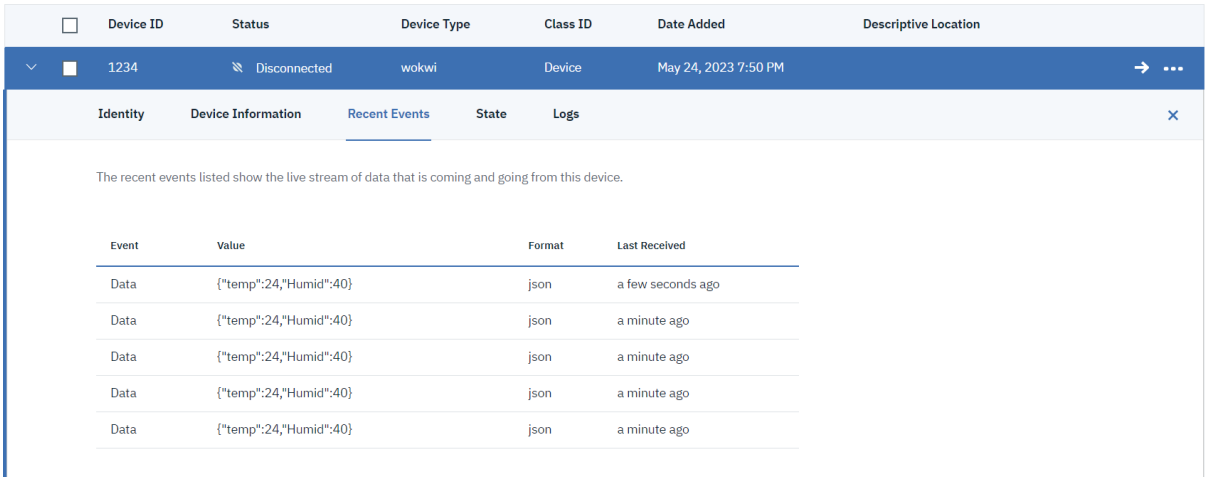


## Node red:

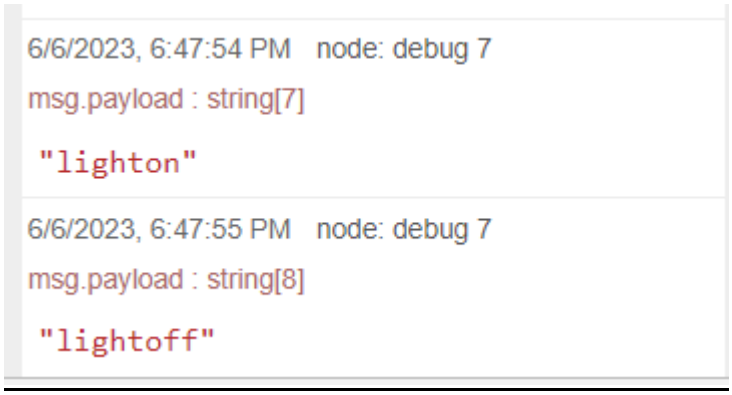


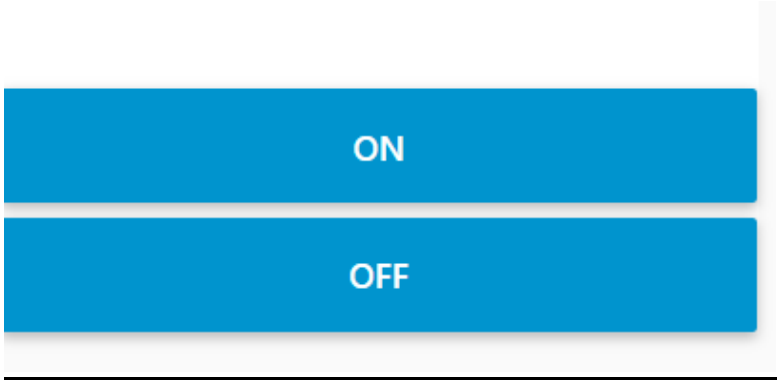


## Wokwi:

## Led is on:

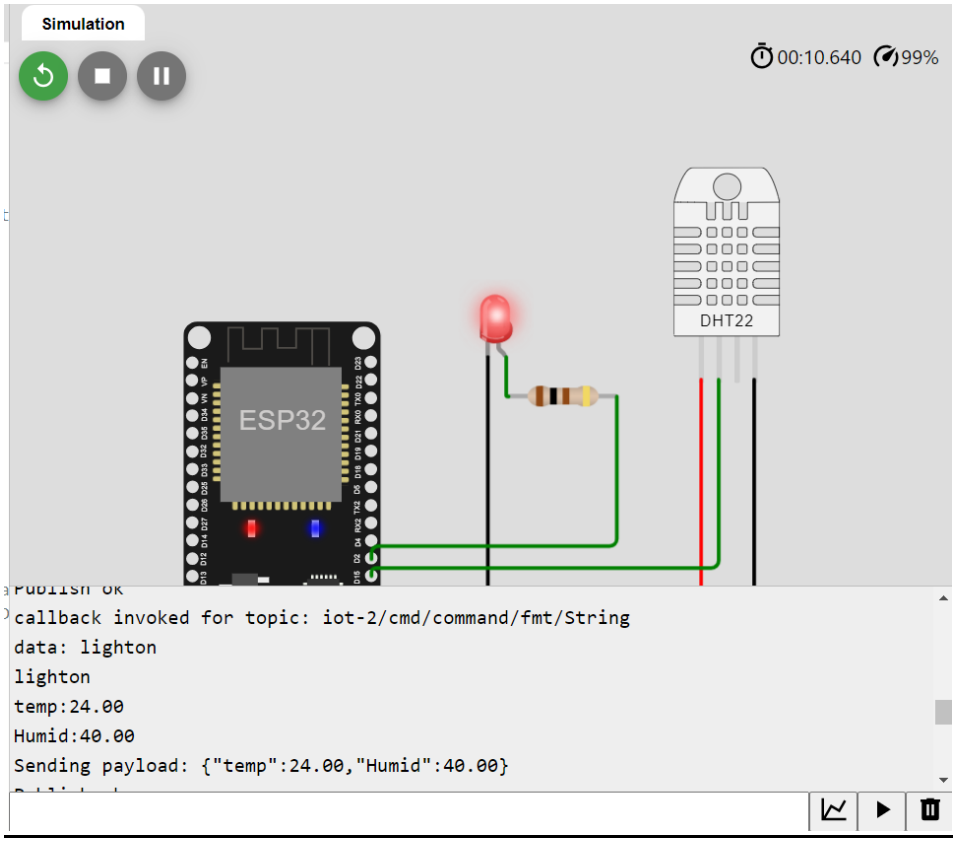

## Led is off:

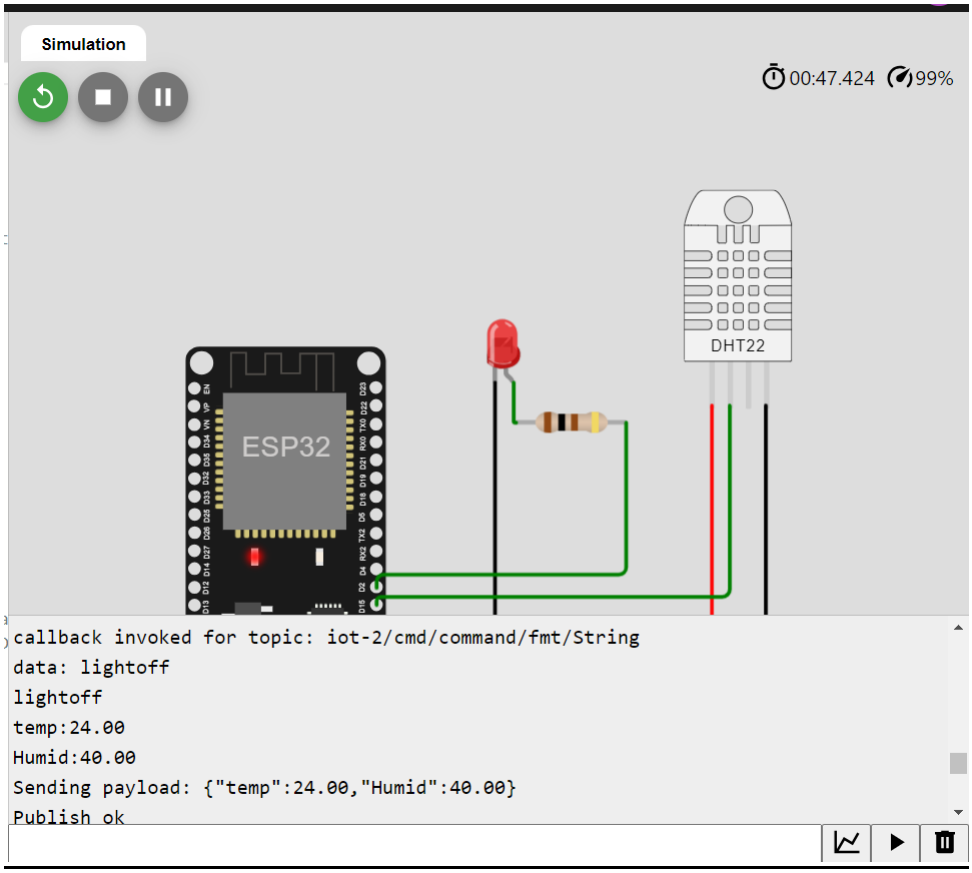


## Result:

Thus, the given task is done using wokwi, node red and ibm cloud and the outputs are observed respectively