KlassikDrain - KS200 Stainless steel edge rail channel system

One meter channel

Inside view of channel - showing channel ID number and knockout if applicable (every 5th channel)

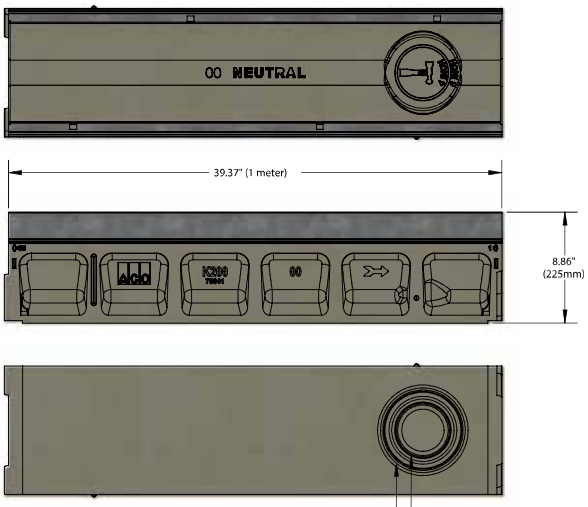



Knock-outs included on every 5th channel

Half meter channel

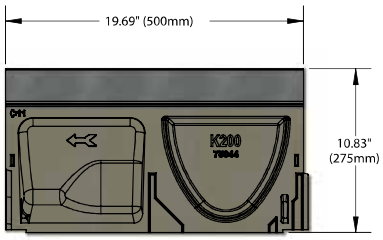

Type 902S In-line catch basin

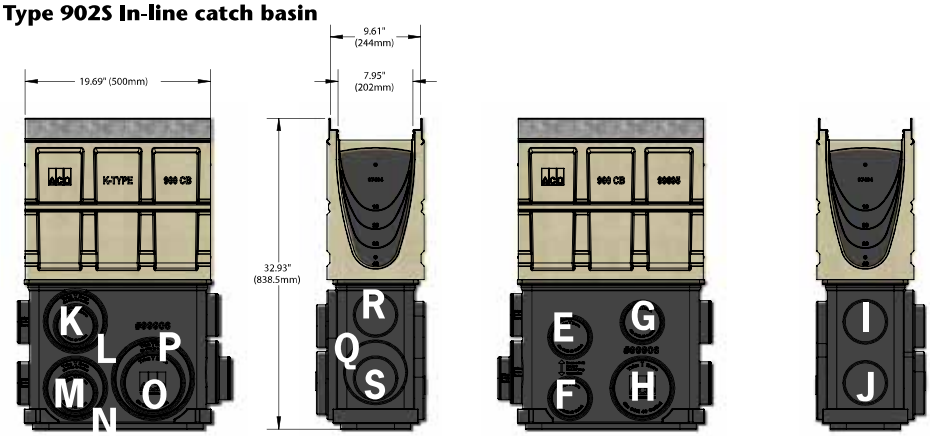

Total capacity = 19 gallons

Outlet flow rates

Outlet	Product	Outlet size (Sch. 40)	Invert Depth	GPM	CFS
A	Bottom outlet - KS2-00	4" round	7.87"	153	0.34
A	Bottom outlet - KS2-040	4" round	15.75"	216	0.48
B	Bottom outlet -KS2-00	6" round	7.87"	344	0.77
B	Bottom outlet - KS2-040	6" round	15.75"	486	1.08
C	End outlet - KS2-00	4" round	7.87"	132	0.29
C	End outlet - KS2-40	4" round	15.75"	202	0.45
D	End outlet - KS2-10	6" round	9.84"	320	0.71
D	End outlet - KS2-40	6" round	15.75"	437	0.97
E	Type KS2-902S	4" round	25.33"	263	0.59
F	Type KS2-902S	4" round	31.83"	297	0.66
G	Type KS2-902S	4" round	23.76"	254	0.57
H	Type KS2-902S	6" round	31.83"	658	1.47
I	Type KS2-902S	4" round	23.91"	255	0.57
J	Type KS2-902S	4" round	30.40"	290	0.65
K	Type KS2-902S	6" round	24.68"	570	1.27
L	Type KS2-902S	4" round	24.13"	256	0.57
M	Type KS2-902S	6" round	31.82"	658	1.47
N	Type KS2-902S	4" round	31.26"	294	0.66
O	Type KS2-902S	6" round	31.26"	651	1.45
P	Type KS2-902S	8" round	31.82"	1149	2.56
Q	Type KS2-902S	6" round	30.32"	640	1.43
R	Type KS2-902S	4" round	23.19"	251	0.56
S	Type KS2-902S	4" round	29.90"	288	0.64

Note: These are the pipe flow rates at the specified outlet, **NOT** channel flow rates. *Catch basin flow rates are without trash bucket - using trash bucket reduces flow.

End Cap





ACO Specification Information

ACO DRAIN

KlassikDrain - KS200 Stainless steel edge rail channel system

Description	Part No.	Invert Inches②	Invert mm②	Weight Lbs.
K2-00 Neutral channel - 39.37" (1m)①	**75441**	**7.87**	**200**	**83.6**
K2-1 Sloped channel - 39.37" (1m)	**75401**	8.07	205	83.6
K2-2 Sloped channel - 39.37" (1m)	**75402**	8.27	210	84.7
K2-3 Sloped channel - 39.37" (1m)	**75403**	8.46	215	85.8
K2-4 Sloped channel - 39.37" (1m)	**75404**	8.66	220	86.9
K2-5 Sloped channel - 39.37" (1m)①	**75405**	8.86	225	88.0
K2-6 Sloped channel - 39.37" (1m)	**75406**	9.06	230	89.1
K2-7 Sloped channel - 39.37" (1m)	**75407**	9.25	235	90.2
K2-8 Sloped channel - 39.37" (1m)	**75408**	9.45	240	91.3
K2-9 Sloped channel - 39.37" (1m)	**75409**	9.65	245	92.4
K2-10 Sloped channel - 39.37" (1m)①	**75410**	9.84	250	93.5
K2-010 Neutral channel - 39.37" (1m)①	**75443**	**9.84**	**250**	**93.5**
K2-0103 Neutral channel - 19.69" (0.5m)①	**75444**	**9.84**	**250**	**56.0**
K2-11 Sloped channel - 39.37" (1m)	**75411**	10.04	255	94.6
K2-12 Sloped channel - 39.37" (1m)	**75412**	10.24	260	95.7
K2-13 Sloped channel - 39.37" (1m)	**75413**	10.43	265	96.8
K2-14 Sloped channel - 39.37" (1m)	**75414**	10.63	270	97.9
K2-15 Sloped channel - 39.37" (1m)①	**75415**	10.83	275	99.0
K2-16 Sloped channel - 39.37" (1m)	**75416**	11.02	280	100.1
K2-17 Sloped channel - 39.37" (1m)	**75417**	11.22	285	101.2
K2-18 Sloped channel - 39.37" (1m)	**75418**	11.41	290	102.3
K2-19 Sloped channel - 39.37" (1m)	**75419**	11.61	295	103.4
K2-20 Sloped channel - 39.37" (1m)①	**75420**	11.81	300	104.5
K2-020 Neutral channel - 39.37" (1m)①	**75445**	**11.81**	**300**	**104.5**
K2-0203 Neutral channel - 19.69" (0.5m)①	**75446**	**11.81**	**300**	**64.0**
K2-21 Sloped channel - 39.37" (1m)	**75421**	12.01	305	105.6
K2-22 Sloped channel - 39.37" (1m)	**75422**	12.20	310	106.7
K2-23 Sloped channel - 39.37" (1m)	**75423**	12.40	315	107.8
K2-24 Sloped channel - 39.37" (1m)	**75424**	12.60	320	108.9
K2-25 Sloped channel - 39.37" (1m)①	**75425**	12.80	325	110.0
K2-26 Sloped channel - 39.37" (1m)	**75426**	12.99	330	111.1
K2-27 Sloped channel - 39.37" (1m)	**75427**	13.19	335	112.2

Description	Part No.	Invert Inches②	Invert mm②	Weight Lbs.
K2-28 Sloped channel - 39.37" (1m)	**75428**	13.39	340	113.3
K2-29 Sloped channel - 39.37" (1m)	**75429**	13.58	345	114.4
K2-30 Sloped channel - 39.37" (1m)①	**75430**	13.78	350	115.5
K2-030 Neutral channel - 39.37" (1m)①	**75447**	**13.78**	**350**	**115.5**
K2-0303 Neutral channel - 19.69" (0.5m)①	**75448**	**13.78**	**350**	**68.0**
K2-31 Sloped channel - 39.37" (1m)	**75431**	13.98	355	116.6
K2-32 Sloped channel - 39.37" (1m)	**75432**	14.17	360	117.7
K2-33 Sloped channel - 39.37" (1m)	**75433**	14.37	365	118.8
K2-34 Sloped channel - 39.37" (1m)	**75434**	14.57	370	119.9
K2-35 Sloped channel - 39.37" (1m)①	**75435**	14.76	375	121.0
K2-36 Sloped channel - 39.37" (1m)	**75436**	14.96	380	122.1
K2-37 Sloped channel - 39.37" (1m)	**75437**	15.16	385	123.2
K2-38 Sloped channel - 39.37" (1m)	**75438**	15.35	390	124.3
K2-39 Sloped channel - 39.37" (1m)	**75439**	15.55	395	125.4
K2-40 Sloped channel - 39.37" (1m)①	**75440**	15.75	400	126.5
K2-040 Neutral channel - 39.37" (1m)①	**75449**	**15.75**	**400**	**126.5**
K2-0403 Neutral channel - 19.69" (0.5m)①	**75450**	**15.75**	**400**	**77.0**
K2-901S In-line catch basin - 19.69" (0.5m)③	**94612**	32.81	833.3	68.0
K2-621S catch basin - 19.69" (0.5m)③	**94621**	37.33	948.1	91.0
K2-631S catch basin - 19.69" (0.5m)④	**94634**	49.33	1252.9	101.0
K2-Series 600 Optional plastic riser	**99902**	-	-	10.0
Foul air trap - fits both 900 & 600 series basins	**90854**	-	-	1.2
Universal end cap	**96821**	15.71	399	1.4
Debris strainer for 8" bottom knockout	**93488**	-	-	0.2
K2-Installation device	**97478**	-	-	2.8
Grate removal tool	**01318**	-	-	0.3
K2-QuickLok locking bar	**10457**	-	-	0.5

Notes:
1. This channel offers a bottom knockout feature; 4" & 6" round
2. Inverts shown are for the male end; for female invert depth subtract 5mm (≈0.2") from the male invert (except for neutral channels, where it will be same as male invert). To calculate the overall channel depth add 25mm (≈1.0") to invert depth.
3. This catch basin kit includes a polymer concrete top, removable Quicklok locking bar, trash bucket and plastic base. Select an appropriate grate.
4. This catch basin kit includes a polymer concrete top, removable Quicklok locking bar, deep trash bucket, plastic riser and plastic base. Select an appropriate grate.

Specifications

General
The surface drainage system shall be ACO Drain KS200 complete with gratings secured with 'QuickLok' locking as manufactured by ACO Polymer Products, Inc. or approved equal.

Materials
The trench system bodies shall be manufactured from polyester polymer concrete with the minimum properties as follows:

Compressive strength:	14,000 psi
Flexural strength:	4,000 psi
Water absorption	0.07%
Frost proof	YES
Salt proof	YES
Dilute acid and alkali resistant	YES

The nominal clear opening shall be 8" (200mm) with overall width of 10.24" (260mm). Pre-cast units shall be manufactured with either an invert slope of 0.5% or with neutral invert and have a wall thickness of at least 0.50" (13mm). Each unit will feature a partial radius in the trench bottom and a male to female interconnecting end profile. Units shall have horizontal cast in anchoring keys on the outside wall to ensure maximum mechanical bond to the surrounding bedding material and pavement surface. The stainless steel edge rail will be integrally cast in by the manufacturer to ensure maximum homogeneity between polymer concrete body and edge rail. Each edge rail shall be at least 3/32" (2.5mm) thick.

Grates
Grates shall be specified. See separate ACO Spec Info grate sheets for details. After removal of grates and 'QuickLok' bar there shall be uninterrupted access to the trench to aid maintenance.

Installation
The trench drain system shall be installed in accordance with the manufacturer's installation instructions and recommendations.

ACO Polymer Products, Inc.

Northeast Sales Office
9470 Pinecone Drive
Mentor, OH 44060
Tel: (440) 639-7230
Toll free: (800) 543-4764
Fax: (440) 639-7235

West Sales Office
825 W. Beechcraft St.
Casa Grande, AZ 85122
Tel: (520) 421-9988
Toll Free: (888) 490-9552
Fax: (520) 421-9899

Southeast Sales Office
4211 Pleasant Road
Fort Mill, SC 29708
Toll free: (800) 543-4764
Fax: (803) 802-1063

Follow us on

Electronic Contact:
info@ACODrain.us
www.ACODrain.us

© September 2016 ACO Polymer Products, Inc. This information is believed to be accurate but it is not guaranteed to be so. We cannot assume liability for results that buyer obtains with our product since conditions of use are beyond the control of the company. It is the customer's responsibility to evaluate suitability and safety of product for his own use. ACO Polymer Products Inc. reserves the right to change the product and specifications without notice.