
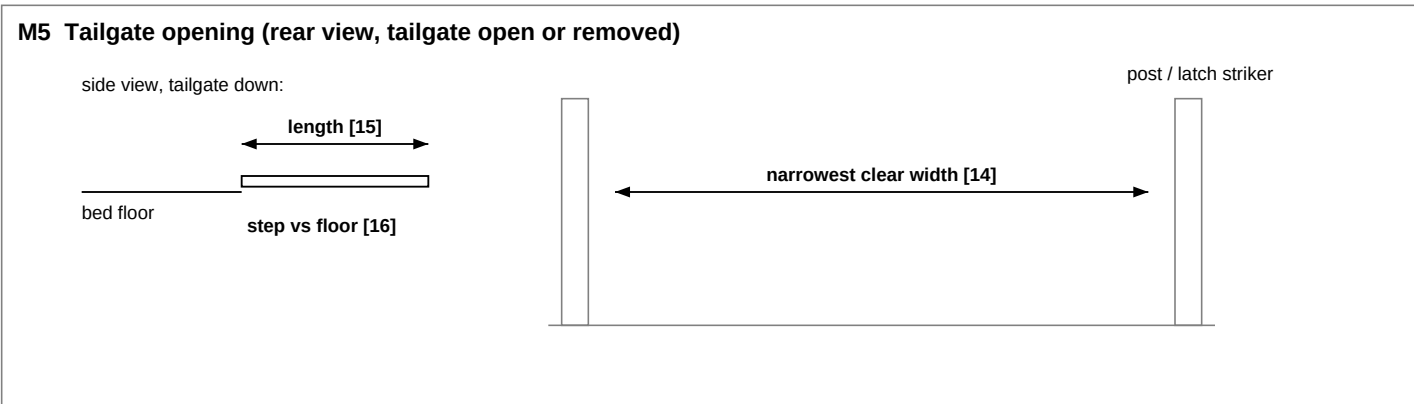
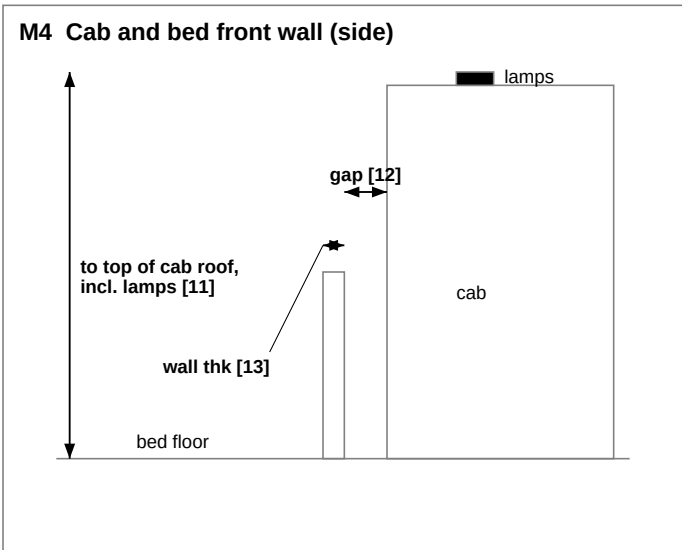
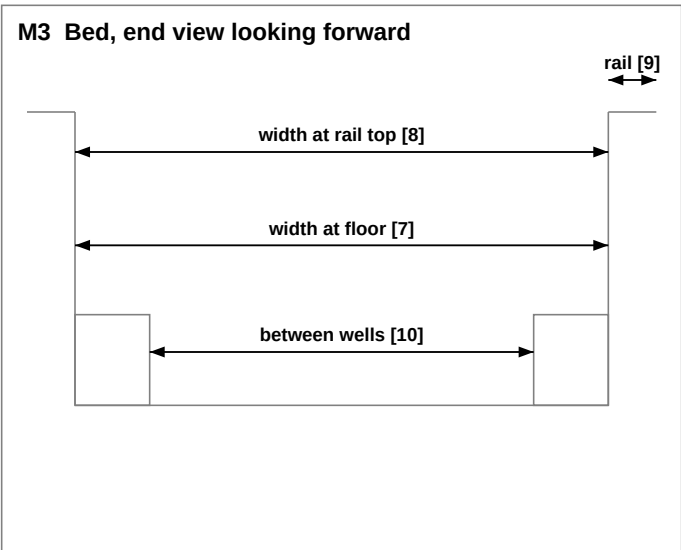
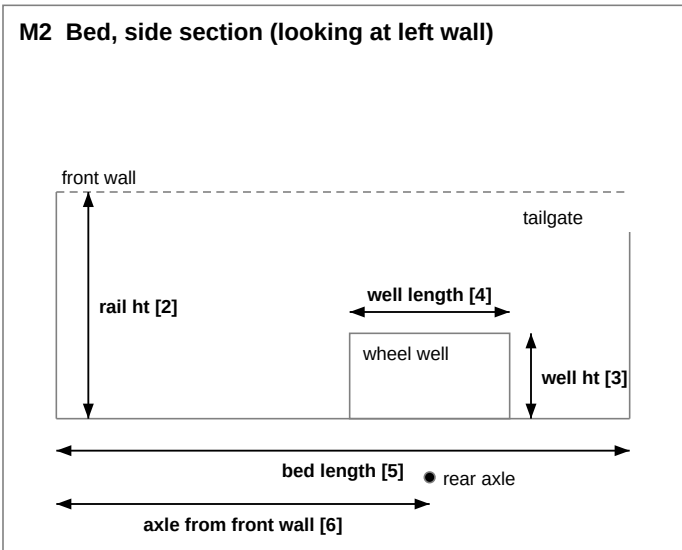


MINUTEMAN - F-350 measurement sheet: diagrams

Schematic, not to scale. Level ground, normal travel load, tailgate open. Numbers in brackets = row # on page 2.

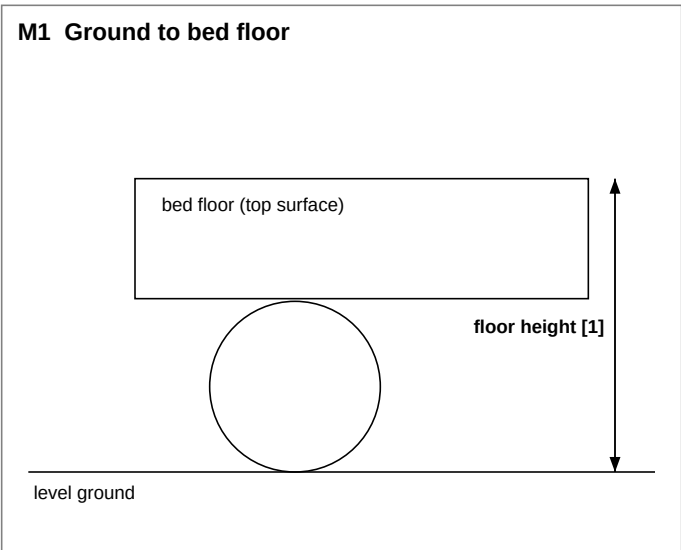

F-350 measurements - record left/right (or front/rear) where they can differ

#	Fig	Measurement	Model value now	A / Left	B / Right
1	M1	Ground to bed floor	39.5	_____	_____
2	M2	Bed floor to top of bed rail (bed depth)	20	_____	_____
3	M2	Wheel well height above bed floor	10.5	_____	_____
4	M2	Wheel well length along bed	34	_____	_____
5	M2	Bed length at floor	98 (8 ft) / 81.8 (6.75)	_____	_____
6	M2	Rear axle centerline aft of bed front wall	51.2 (8 ft) / 35 (6.75)	_____	_____
7	M3	Inside bed width at floor (outside the wheel wells)	66	_____	_____
8	M3	Inside bed width at top of rails	66	_____	_____
9	M3	Bed rail top width (each side)	6.5	_____	_____
10	M3	Clear width between wheel wells	50.9	_____	_____
11	M4	Bed floor to highest point of cab roof	41.5	_____	_____
12	M4	Gap: bed front wall outer face to cab back	4	_____	_____
13	M4	Bed front wall thickness at the rail	1.5	_____	_____
14	M5	Tailgate opening width (narrowest point)	61	_____	_____
15	M5	Tailgate length, hinge to top edge (projects rearward when	20	_____	_____
16	M5	Lowered tailgate top surface above bed floor	0.5	_____	_____

Also record

Which bed is on the truck?

6.75 ft or 8 ft; cab style (crew / super cab / regular); SRW or DRW.

Model year and trim

Door-jamb sticker.

Payload capacity (lb)

Door-jamb tire & loading sticker: "combined weight of occupants and cargo should never exceed".

GVWR / rear GAWR (lb)

Door-jamb certification label.

Tire load index / size

Tire sidewall.

Cab-roof items

Clearance/marker lamps, antenna, roof rack? Note heights (affects M4).

Bed liner / rail caps / tonneau rails

Type and thickness: they change bed widths and rail height.

Gooseneck / 5th-wheel puck or hitch in bed floor

Location from front wall; anything that protrudes above the floor.

Stake pockets and factory tie-down points

Positions along the bed (for v0.2 tie-downs).

Bed-mounted brake light / camera

Location; the camper will block it.

Date measured: _____ Measured by: _____