LL4001G THRU LL4007G

1.0 AMP Surface Mount Glass Passivated Silicon Rectifiers

Voltage Range
50 to 1000 Volts
Current
1.0 Ampere

MELF

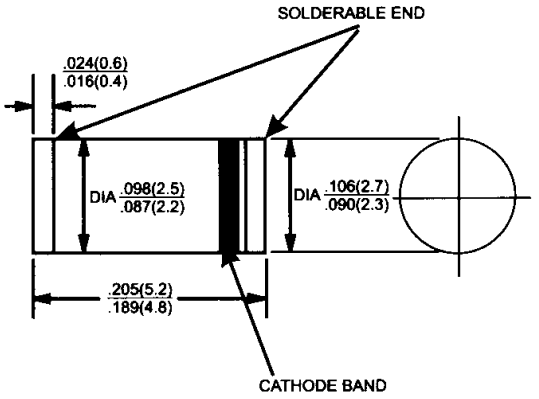

Dimensions in inches and (millimeters)

Features

- ✧ Surge overload ratings to 30 amperes peak
- ✧ Ideal for printed circuit board
- ✧ Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- ✧ Mounting position: Any
- ✧ Weight: 0.12 gram

Maximum Ratings and Electrical Characteristics

Rating at 25℃ ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Type Number	LL 4001G	LL 4002G	LL 4003G	LL 4004G	LL 4005G	LL 4006G	LL 4007G	Units
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @T_A = 75℃	1.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	30							A
Maximum Instantaneous Forward Voltage @1.0A	1.1							V
Maximum DC Reverse Current @ T_A=25℃ at Rated DC Blocking Voltage @ T_A=125℃	5 100							uA uA
Typical Junction Capacitance (Note 1)	15							pF
Typical Thermal Resistance RθJC (Note 2)	50							℃/W
Operating and Storage Temperature Range T_J,T_{STG}	- 65 to + 150							℃

Notes: 1. Measured at 1 MHz and Applied Reverse Voltage of 4.0 Volts D.C.
2. Thermal Resistance from Junction to Ambient

RATINGS AND CHARACTERISTIC CURVES (LL4001G THRU LL4007G)

FIG.1- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

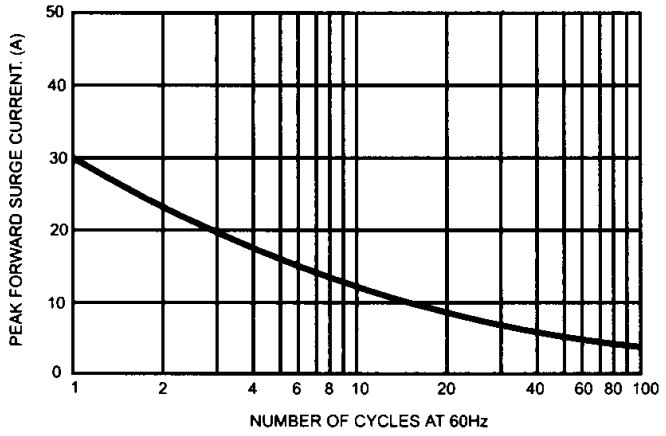

FIG.2- MAXIMUM FORWARD CURRENT DERATING CURVE

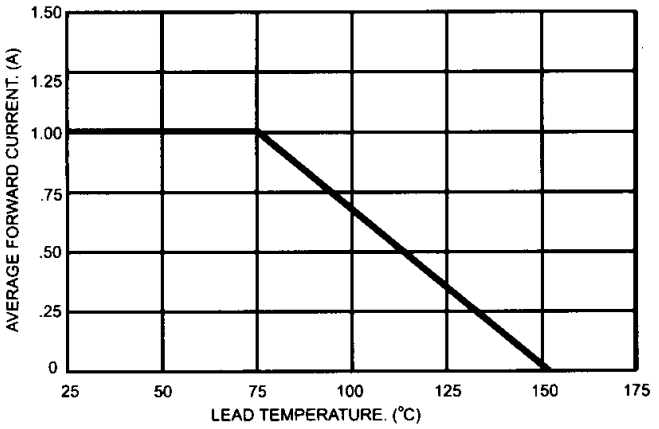

FIG.3- TYPICAL JUNCTION CAPACITANCE

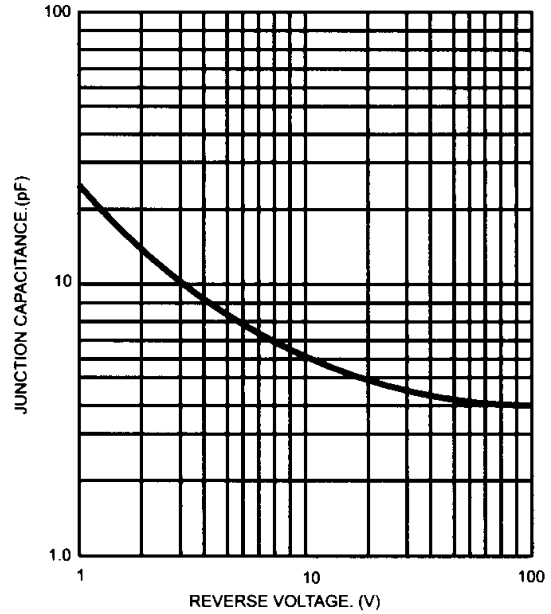

FIG.4- TYPICAL FORWARD CHARACTERISTICS