
Parking Control Equipment



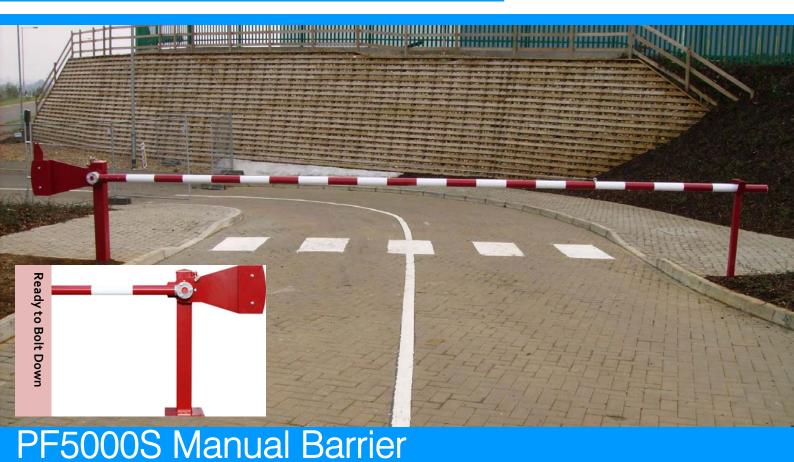

The PF5000S manual raise arm barrier is a low maintenance cost effective way of manually controlling access to unauthorised areas It covers roadway spanning up to 7 metres.

The pivot assembly is made of steel box section, the shaft is zinc coated pivoting on two heavy duty stainless steel bearing blocks.

The Aluminium arm, finished in either alternate red and white or alternate yellow and black vinyl hatching as standard (other colours available).

The design of the PF5000S also comes with a spring loaded locking mechanism allowing you to fix the barrier in the raised and lowered position prior to applying the padlock. It also incorporates a counter balanced fish tail weight, which is fine tuned for ease of operation.

Dual barriers are available with a central locking mechanism to suit wider spans. The PF5000 heavy duty comes complete with a lockable end rest, padlock and keys. No mounting plate is required as M16 anchor shield bolts are also included.

Each barrier can be custom designed to suit your company, with a variety of colour schemes available. Standard colours: Red/white or yellow/black.

TECHNICAL SPECIFICATION	
Specification	Counter balance, Standard manual raise arm barrier
Maximum Boom Length	7.0 Metres
Dimensions	Boom Diameter: 76mm / Stanchion Post: 120mm Square
Finish	Zinc coated and polyester powder coated
Comes Complete With	Lockable end rest Padlock Anchor shield bolts Lifting handle to assist
Optional Extras	Bottom skirting Stop/no entry signs Pogo tip support