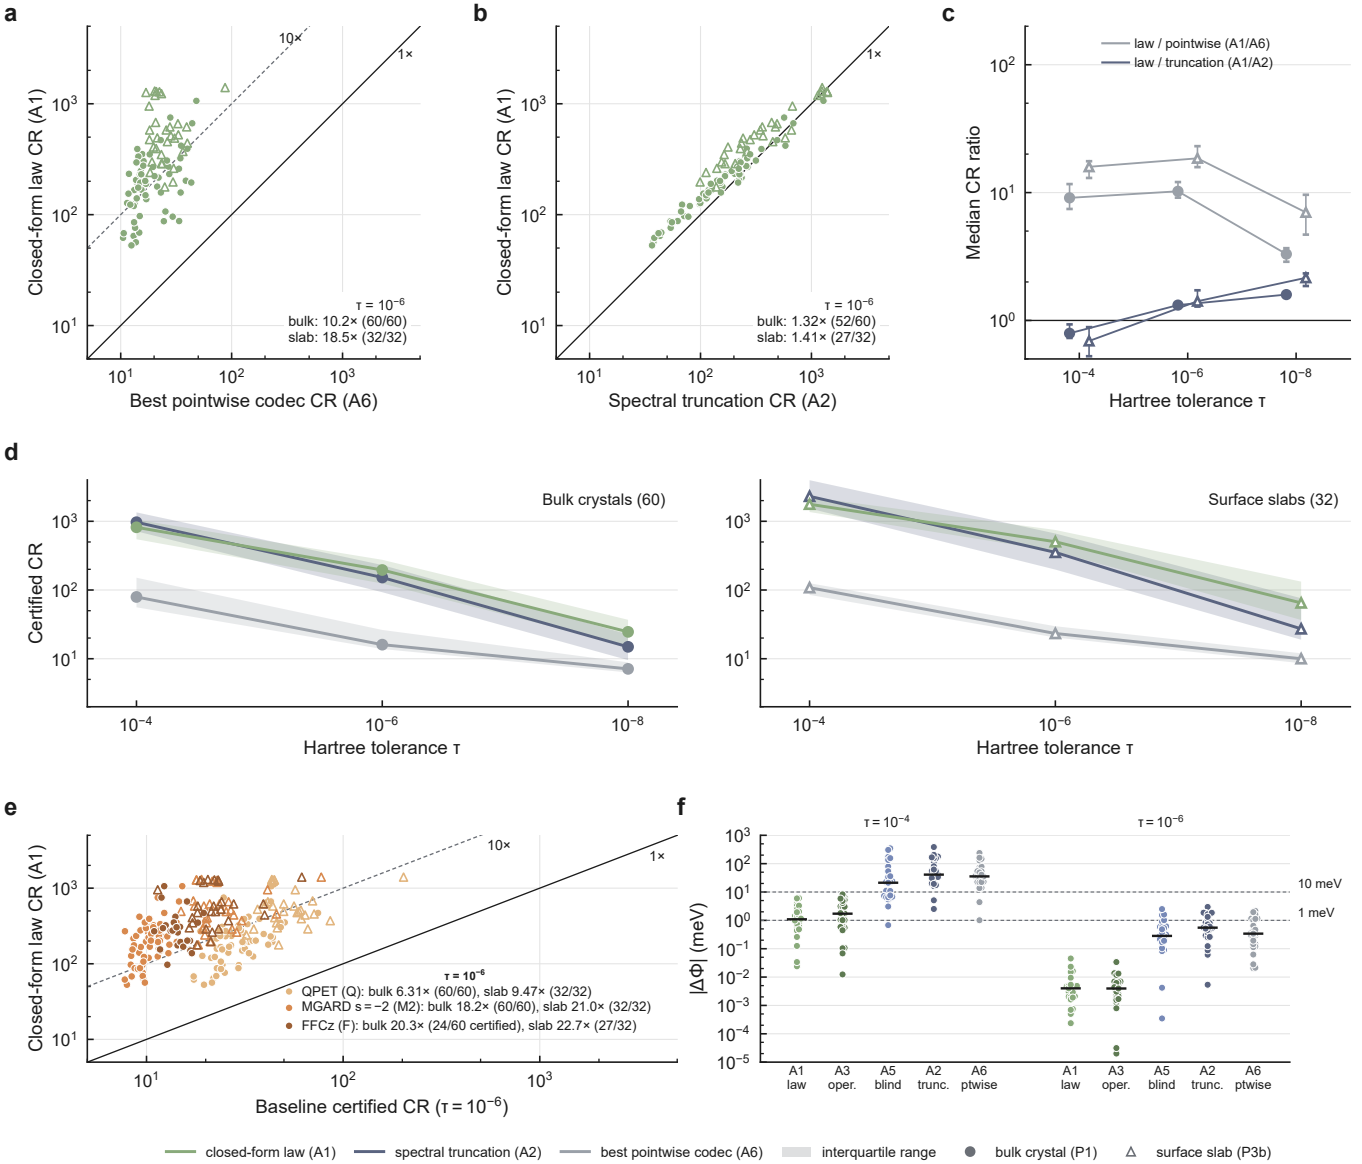

a
Closed-form law CR (A1)
Best pointwise codec CR (A6)
10×
1×
τ = 10⁻⁶
bulk: 10.2× (60/60)
slab: 18.5× (32/32)
b
Closed-form law CR (A1)
Spectral truncation CR (A2)
1×
τ = 10⁻⁶
bulk: 1.32× (52/60)
slab: 1.41× (27/32)
c
law / pointwise (A1/A6)
law / truncation (A1/A2)
Median CR ratio
Hartree tolerance τ
d
Bulk crystals (60)
Surface slabs (32)
Certified CR
Hartree tolerance τ
e
Closed-form law CR (A1)
Baseline certified CR (τ = 10⁻⁶)
10×
1×
τ = 10⁻⁶
QPET (Q): bulk 6.31× (60/60), slab 9.47× (32/32)
MGARD s = −2 (M2): bulk 18.2× (60/60), slab 21.0× (32/32)
FFCz (F): bulk 20.3× (24/60 certified), slab 22.7× (27/32)
f
|ΔΦ| (meV)
τ = 10⁻⁴
τ = 10⁻⁶
10 meV
1 meV
A1 law
A3 oper.
A5 blind
A2 trunc.
A6 ptwise
closed-form law (A1)
spectral truncation (A2)
best pointwise codec (A6)
interquartile range
bulk crystal (P1)
surface slab (P3b)