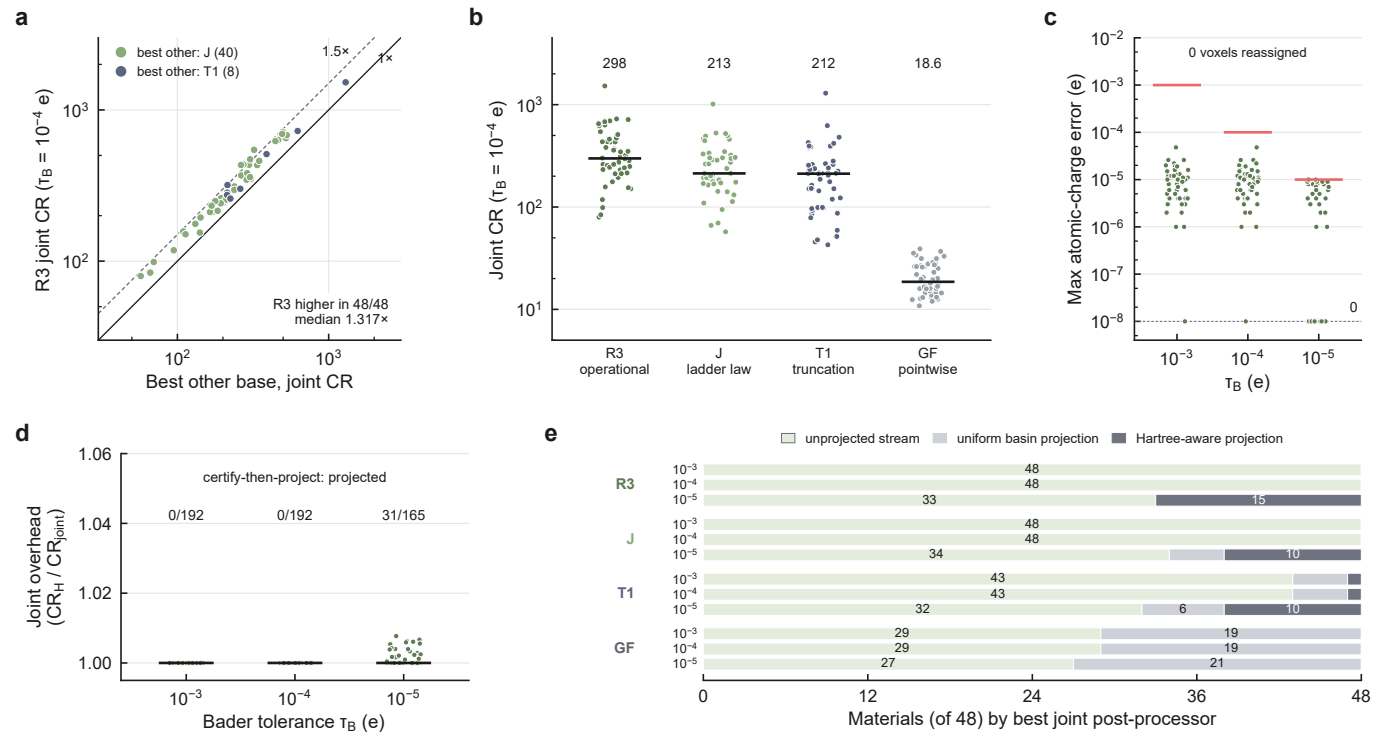

a
best other: J (40)
best other: T1 (8)
1.5×
1×
R3 higher in 48/48
median 1.317×
R3 joint CR (τB = 10−4 e)
Best other base, joint CR
b
298
213
212
18.6
Joint CR (τB = 10−4 e)
R3 operational
J ladder law
T1 truncation
GF pointwise
c
0 voxels reassigned
Max atomic-charge error (e)
0
τB (e)
d
certify-then-project: projected
0/192
0/192
31/165
Joint overhead (CRH / CRjoint)
Bader tolerance τB (e)
e
unprojected stream
uniform basin projection
Hartree-aware projection
R3
J
T1
GF
Materials (of 48) by best joint post-processor