


Supplementary Figure S7 | Codec-resolved consequences of stability qualification

At 10^{-4} and 10^{-3} e, more than 93% of naive failures for every codec lie on non-evaluable material-threshold pairs.


A | Strict-threshold reclassification appears in every codec

Percent labels are naive failures reclassified as non-evaluable

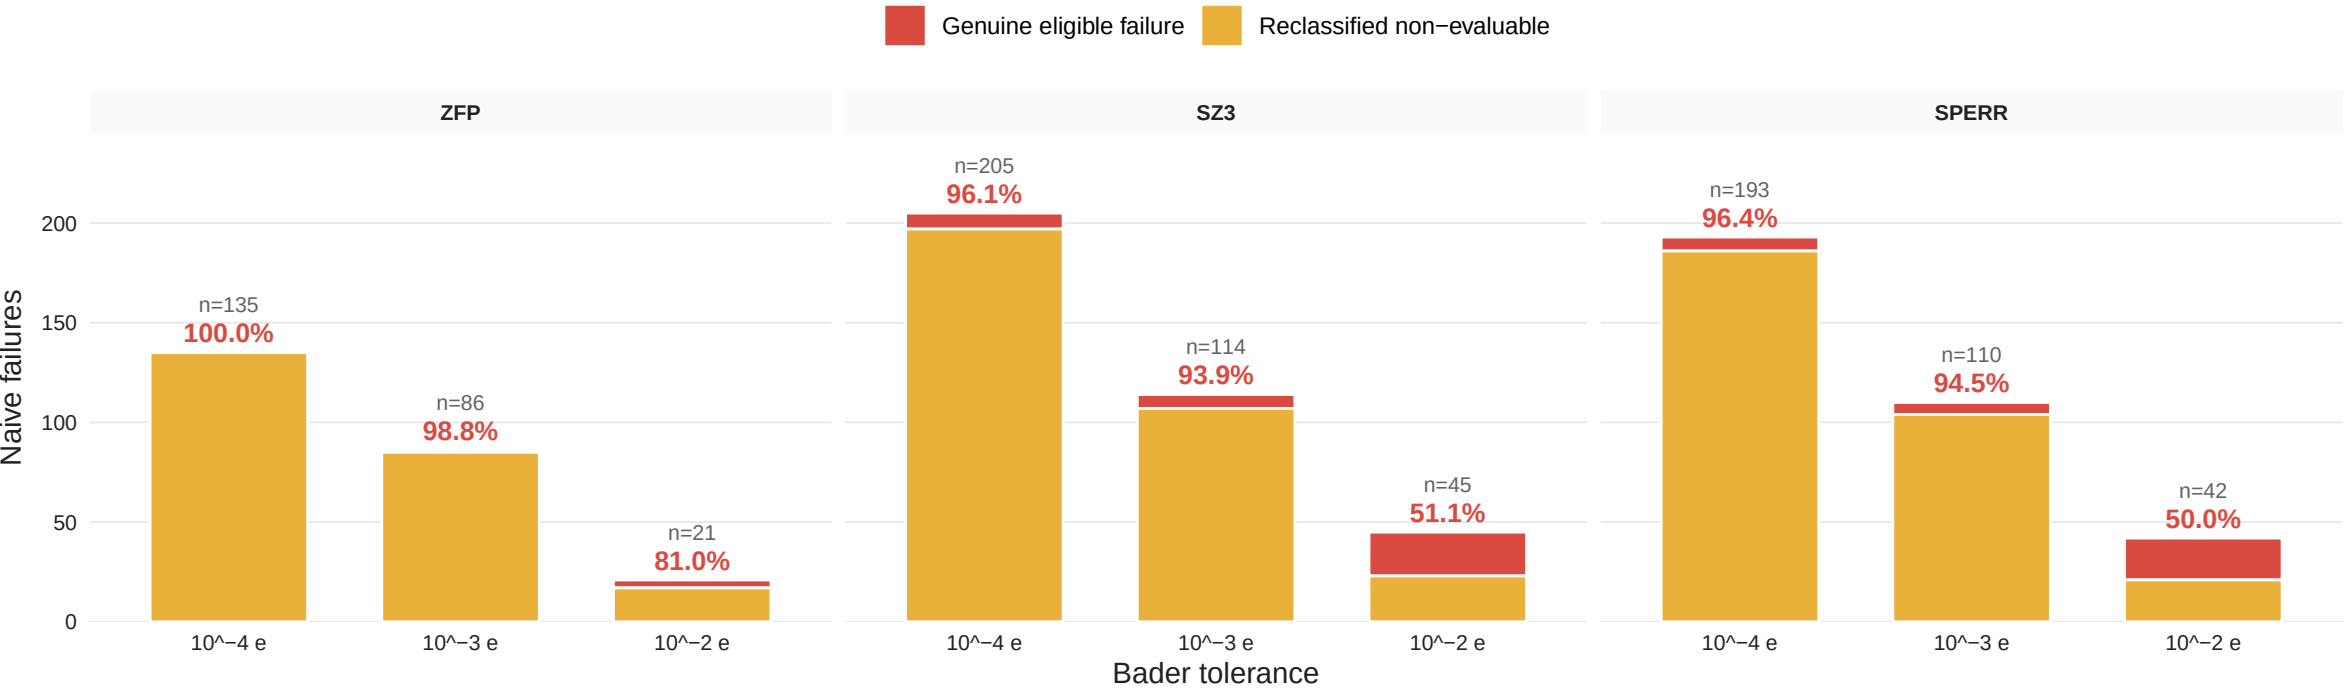


B | Qualification also invalidates apparent successes

Non-evaluable naive passes / all naive passes

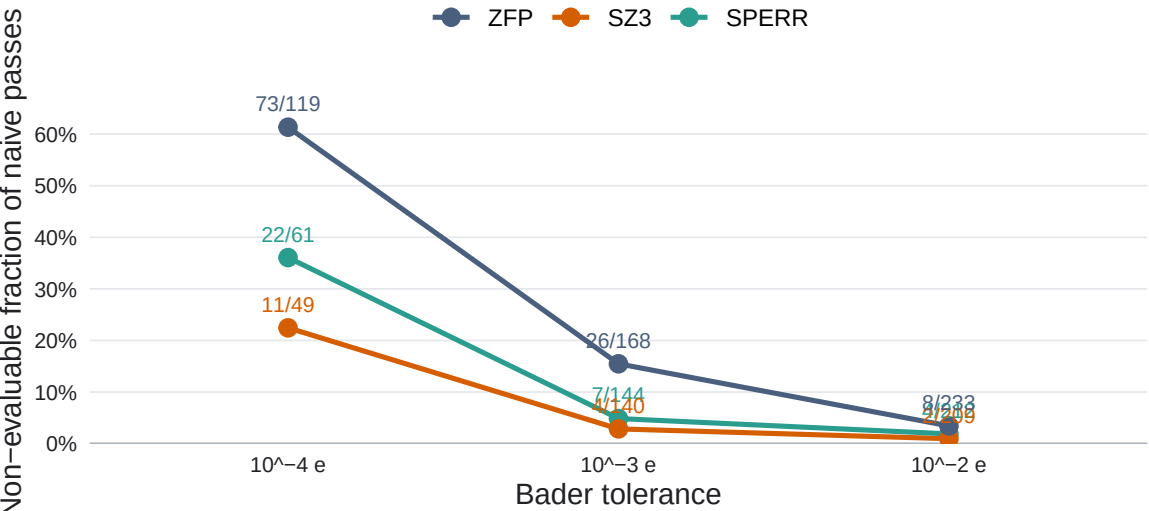

C | Genuine failure is defined only among eligible decisions

Exact counts are reported in Supplementary Table S4

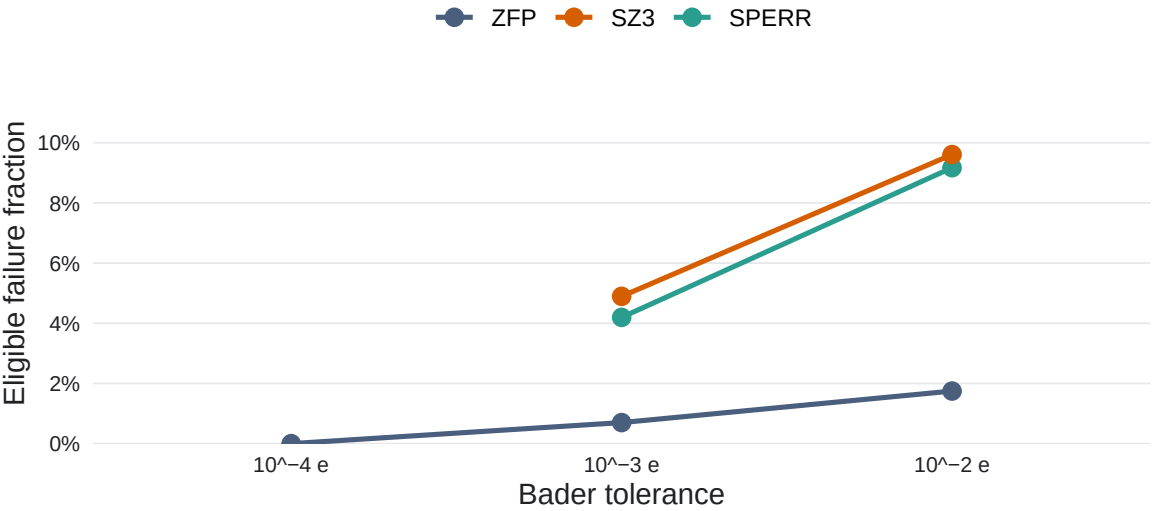

Each codec contributes 254 development decisions per threshold. Protocol A.1 removes invalid successes as well as invalid failures; non-evaluable is neither pass nor failure.