


Figure 4 | Stability is a property of the observable and its measurement procedure

QSQ uses five fixed-seed uniform-noise probes at the material-specific float32 L-infinity amplitude.

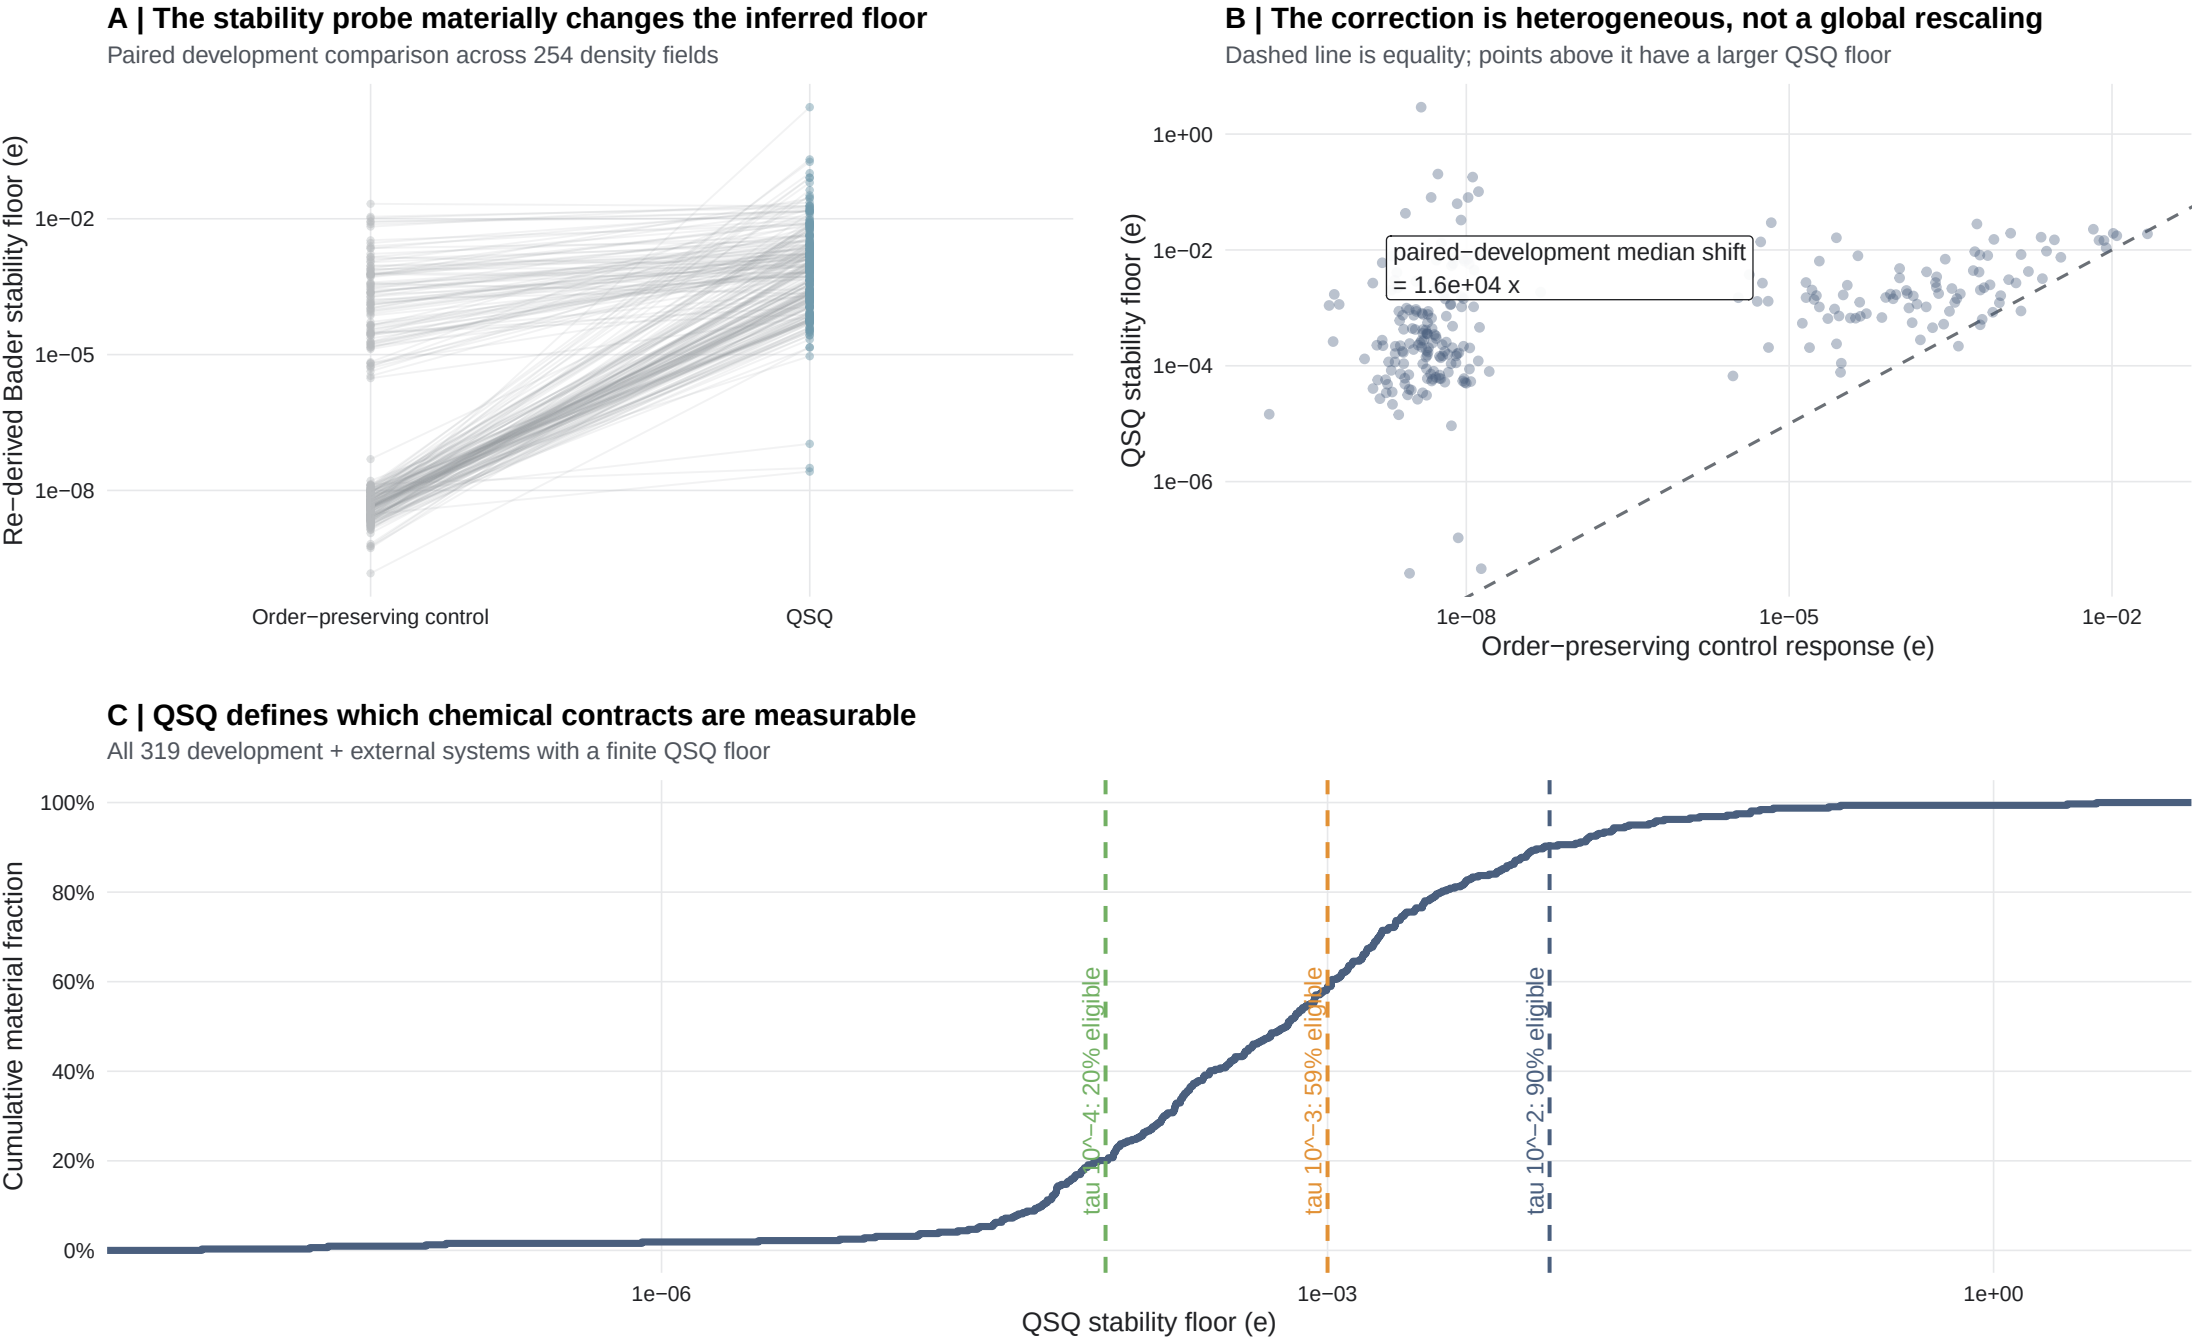

Panels A–B compare an order-preserving round-trip control with QSQ on the paired development subset.
Panel C uses all systems with a finite QSQ floor and shows how the requested tolerance determines the eligible cohort.