




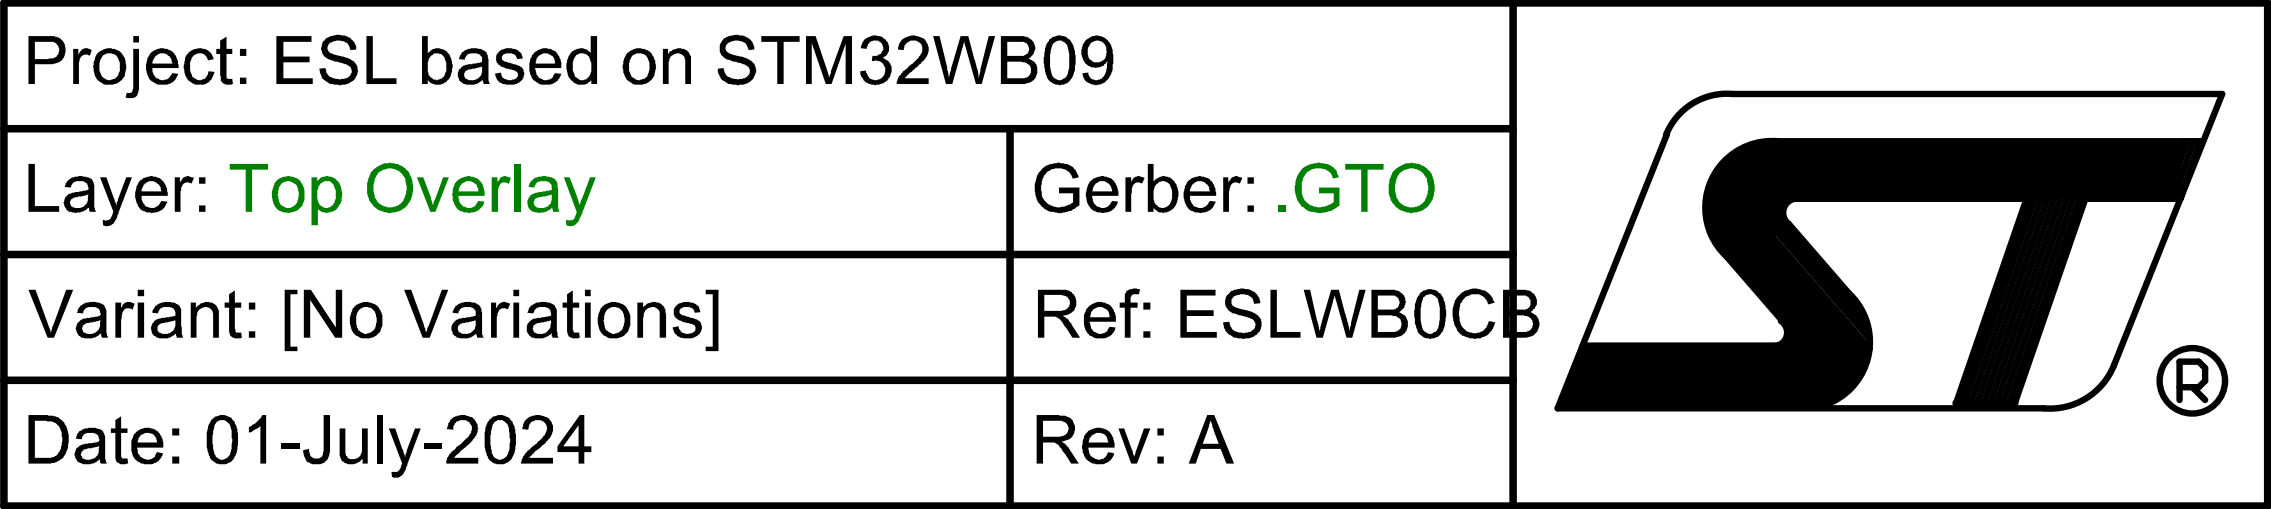


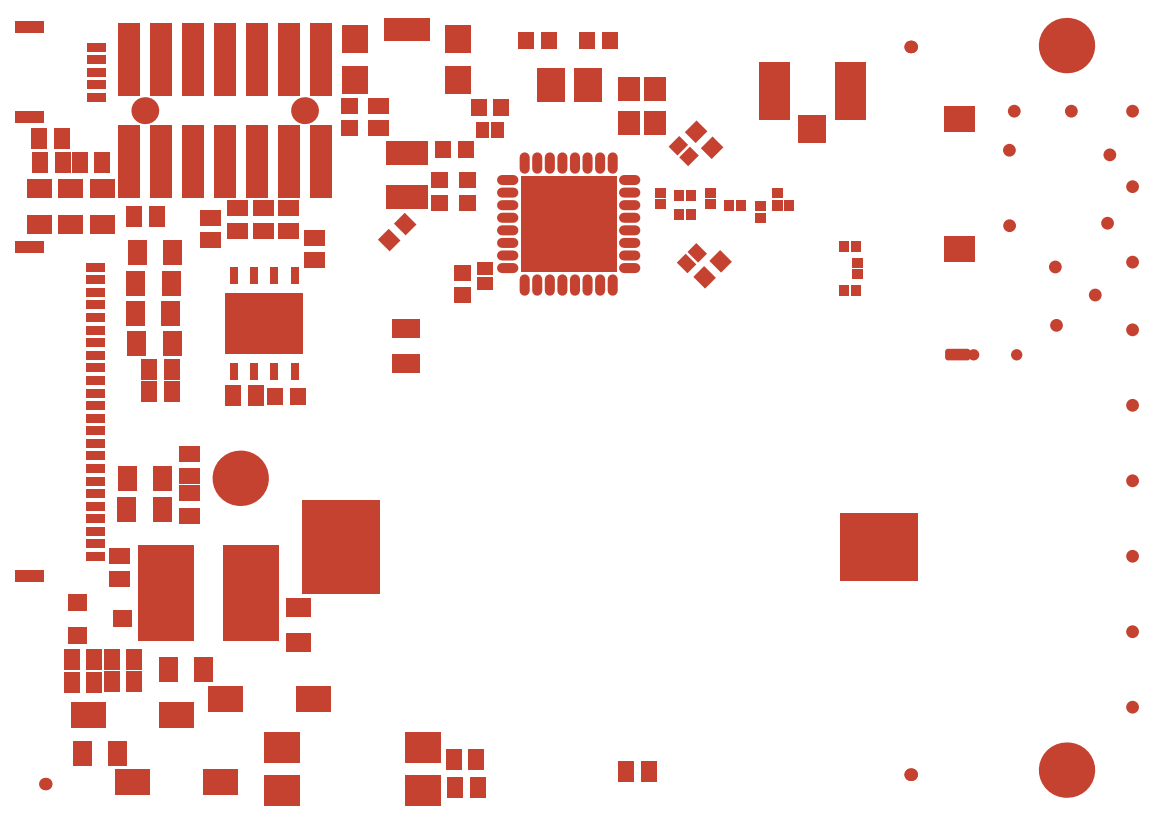


Project: ESL based on STM32WB09		
Layer: Top Solder	Gerber: .GTS	
Variant: [No Variations]	Ref: ESLWB0CB	
Date: 01-July-2024	Rev: A	

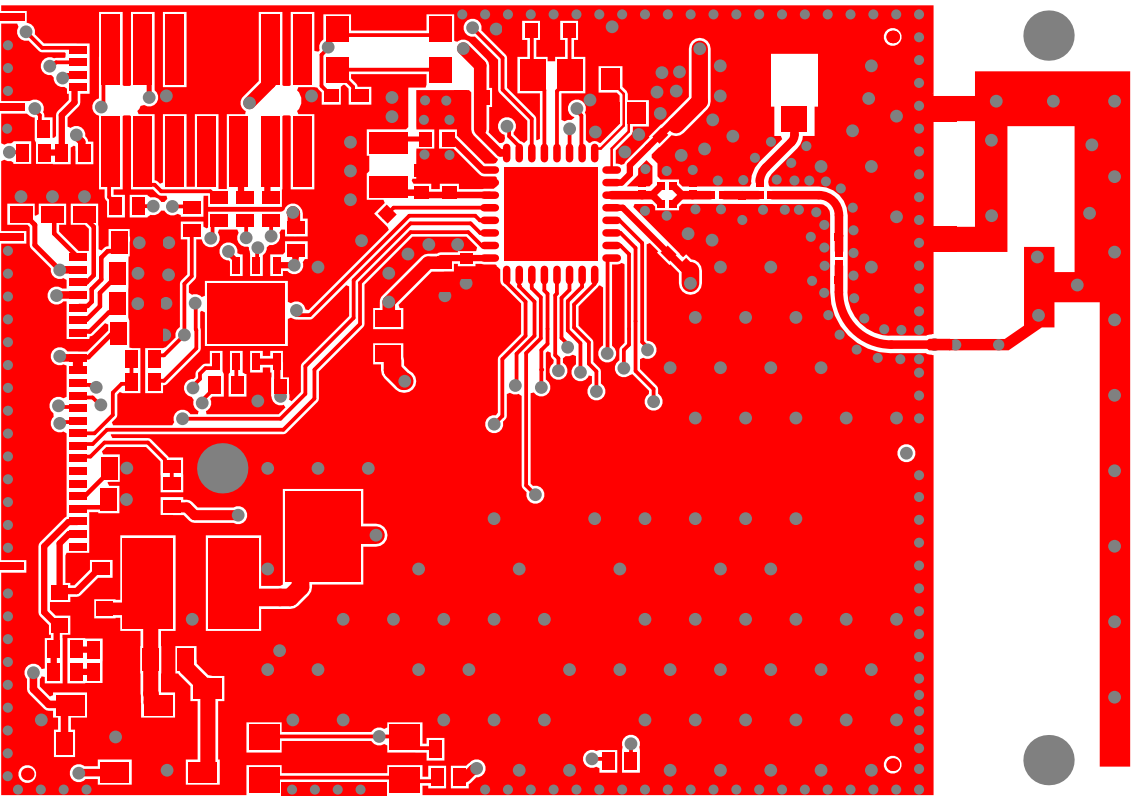

Project: ESL based on STM32WB09		
Layer: Top Layer	Gerber: .GTL	
Variant: [No Variations]	Ref: ESLWB0CB	
Date: 01-July-2024	Rev: A	

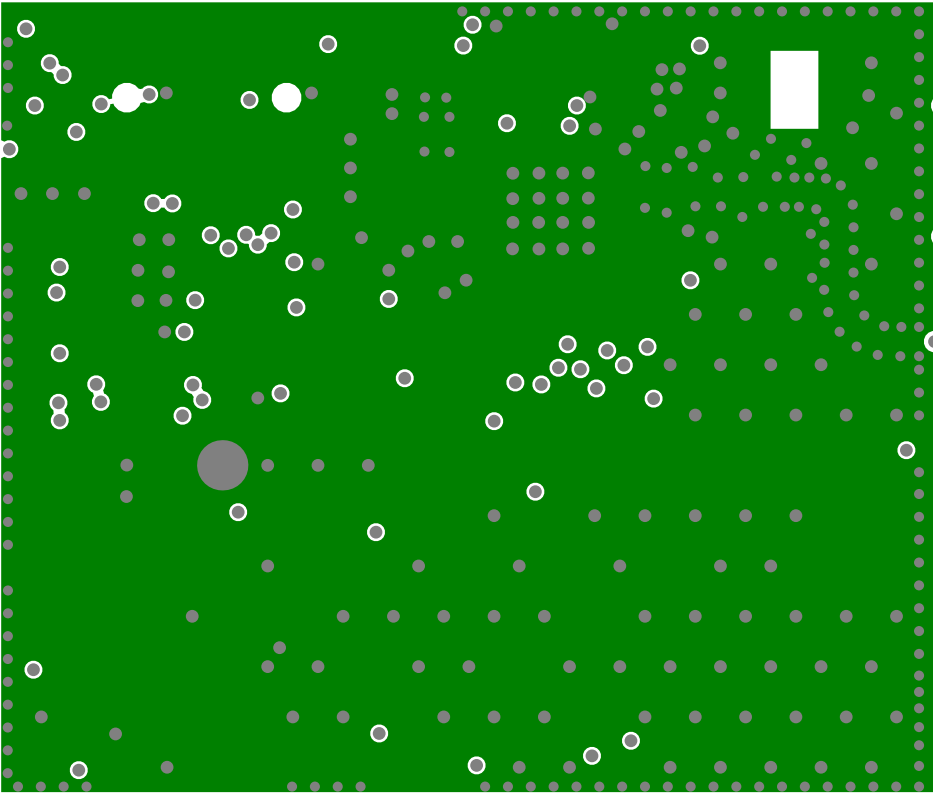


Project: ESL based on STM32WB09		
Layer: Mid Layer 1	Gerber: .G1	
Variant: [No Variations]	Ref: ESLWB0CB	
Date: 01-July-2024	Rev: A	

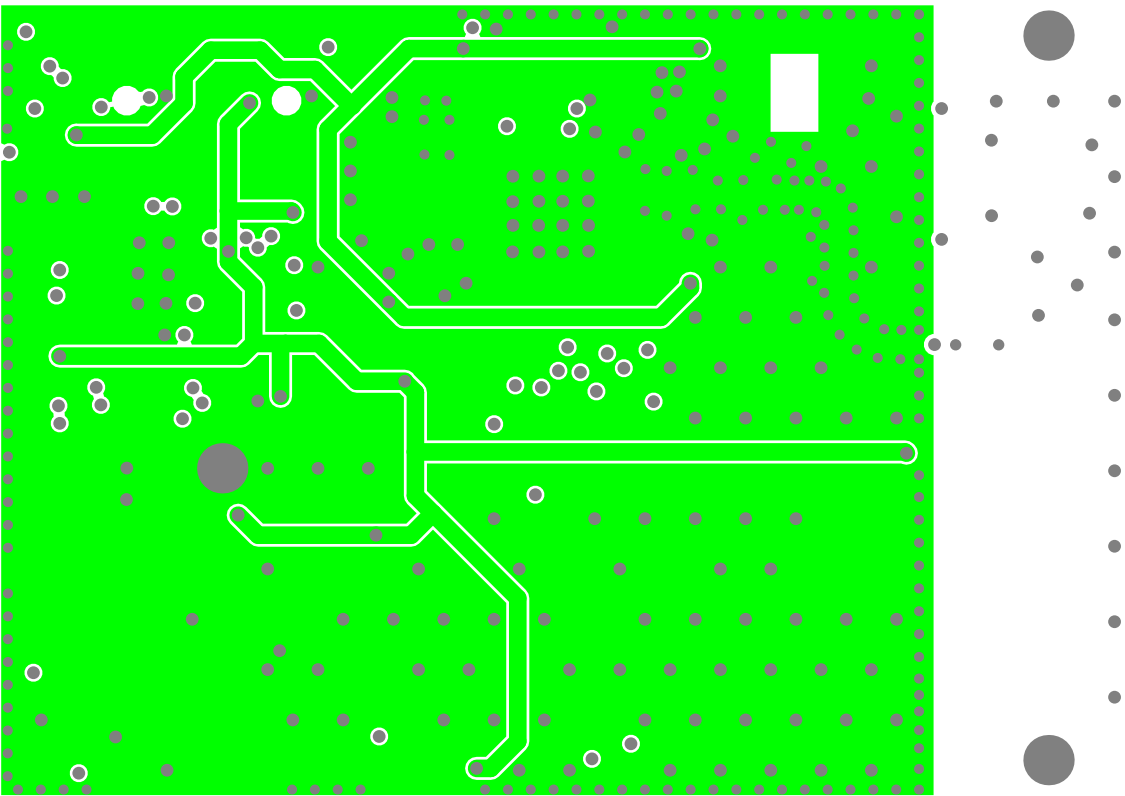

Project: ESL based on STM32WB09		
Layer: Mid Layer 2	Gerber: .G2	
Variant: [No Variations]	Ref: ESLWB0CB	
Date: 01-July-2024	Rev: A	

Project: ESL based on STM32WB09		
Layer: Bottom Layer	Gerber: .GBL	
Variant: [No Variations]	Ref: ESLWB0CB	
Date: 01-July-2024	Rev: A	

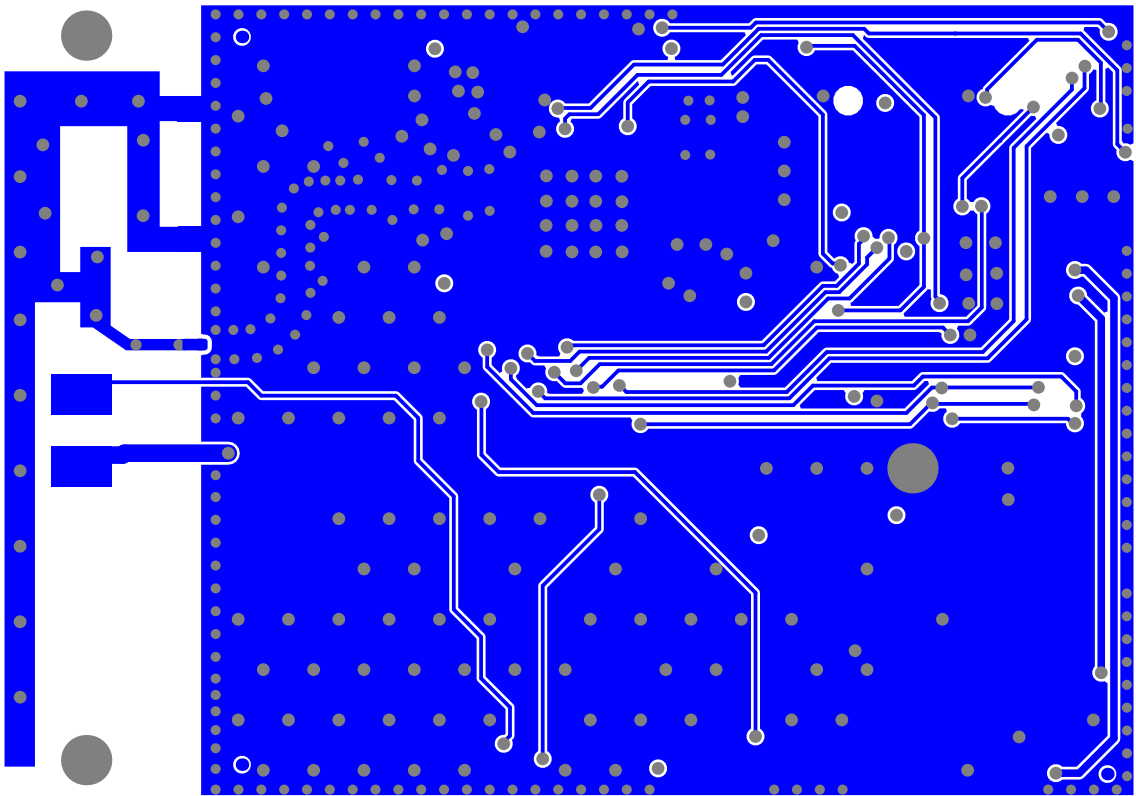

Project: ESL based on STM32WB09		
Layer: Bottom Solder	Gerber: .GBS	
Variant: [No Variations]	Ref: ESLWB0CB	
Date: 01-July-2024	Rev: A	

Project: ESL based on STM32WB09		
Layer: Bottom Overlay	Gerber: .GBO	
Variant: [No Variations]	Ref: ESLWB0CB	
Date: 01-July-2024	Rev: A	



FOR EVALUATION ONLY

NOT FCC APPROVED FOR RESALE



STV\$ESLWB0CBA

PCB SPECIFICATIONS :

A. MATERIAL :

FR-4

☒ TG-170

☐ TG-150

☐ TG-140

B. MATERIAL FAMILY :

N/A

C. SOLDERMASK COLOR :

☒ GREEN

☐ BLUE

☐ RED

☐ BLACK

D. SILKSCREEN COLOR :

☒ WHITE

☐ YELLOW

☐ BLACK

E. SURFACE FINISH :

☒ ENIG

☐ IMMERSION SILVER

☐ IMMERSION TIN

☐ HASL

☐ HASL (PB-FREE)

☐ GOLDEN FINGER

☐ IMPEDANCE CONTROL :

☐ NO

☒ YES (SEE IMPEDANCE TABLE FOR DETAIL INFORMATION)

G. THROUGH VIA :

PLUG THE VIAS WHICH ARE COVERED WITH SOLDERMASK ONE OR TWO SIDE.


PLUG MATERIAL : ☒ SOLDERMASK ☐ NON-CONDUCTIVE EPOXY.

☐ STACK-UP :

SEE LAYER STACK-UP SEQUENCE FOR OVERALL THICKNESS.

Symbol	Count	Hole Size	Plated	Hole Type	Drill Layer Pair	Via/Pad	Pad Shape	Template	Description
○	157	0.200mm (7.87mil)	PTH	Round	Top Layer - Bottom Layer	Via	Rounded	v40h20m0mx0	
□	231	0.254mm (10.00mil)	PTH	Round	Top Layer - Bottom Layer	Via	Rounded	(Mixed)	
▽	2	0.970mm (38.19mil)	NPTH	Round	Top Layer - Bottom Layer	Pad	Rounded	c0hn97m107	
+	3	2.000mm (78.74mil)	PTH	Round	Top Layer - Bottom Layer	Pad	Rounded	c200h200	
	393 Total								

IMPEDANCE TABLE					
LAYER	TRACE	SPACING	IMPEDANCE (Single ended)	IMPEDANCE (Differentiel)	TOL.
TOP	0.34	0.18	50 ohm	NA	+/- 10%

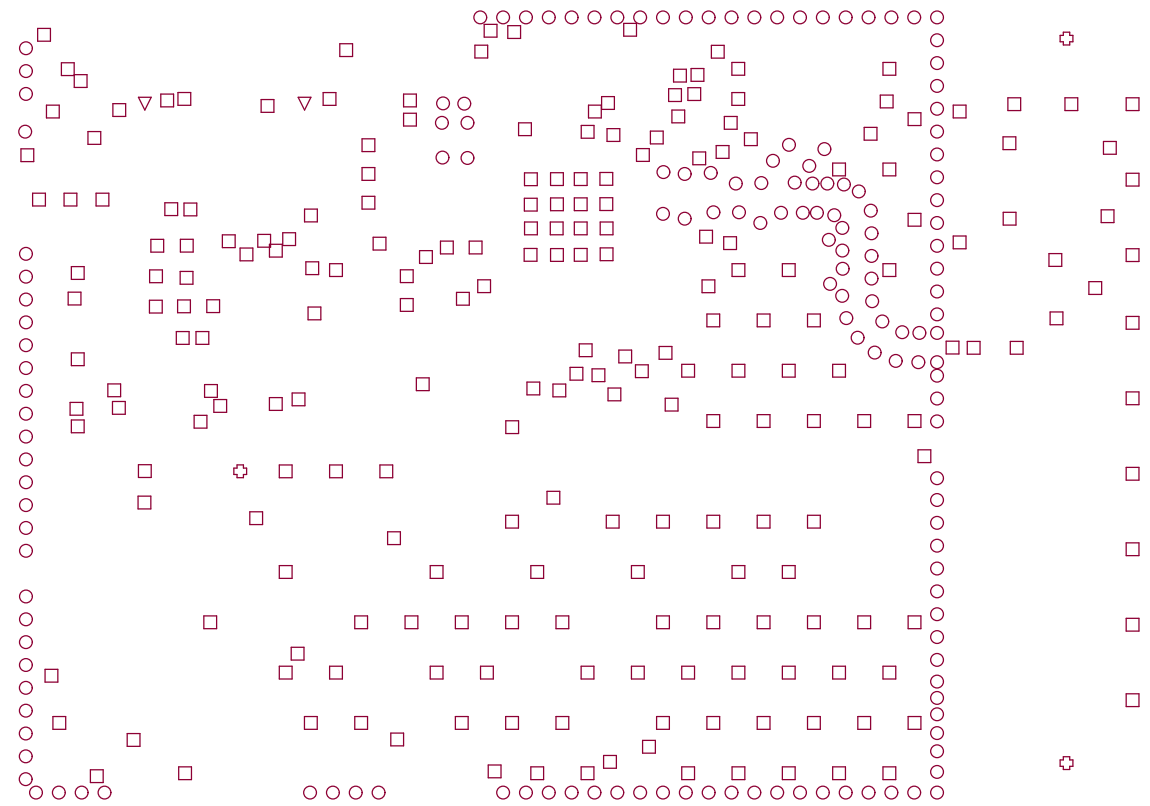

Layer	Name	Material	Thickness	Constant
	Top Overlay			
	Top Solder	Solder Resist	0.010mm	3.5
1	Top Layer		0.035mm	
	Dielectric 1	S-1000-2 (2x2116)	0.240mm	4.34
2	Mid Layer 1		0.018mm	
	Dielectric 2	S-1000-2 (2x1506)	0.300mm	4.6
3	Mid Layer 2		0.018mm	
	Dielectric 3	S-1000-2 (2x2116)	0.240mm	4.34
4	Bottom Layer		0.035mm	
	Bottom Solder	Solder Resist	0.010mm	3.5
	Bottom Overlay			

Total board thickness: 0.906mm

Project: ESL based on STM32WB09		
Layer: Drill Drawing	Gerber: .DRL	
Variant: [No Variations]	Ref: ESLWB0CB	
Date: 01-July-2024	Rev: A	