


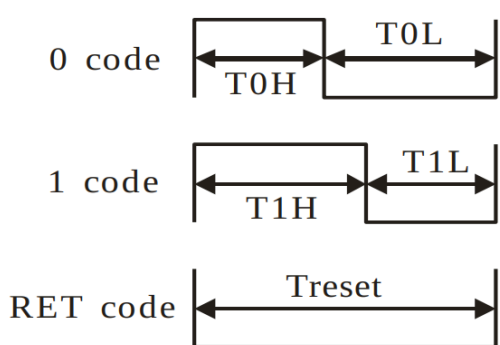
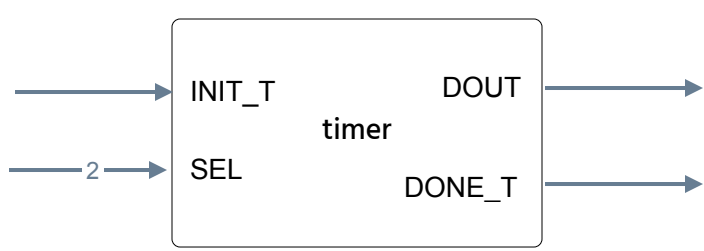
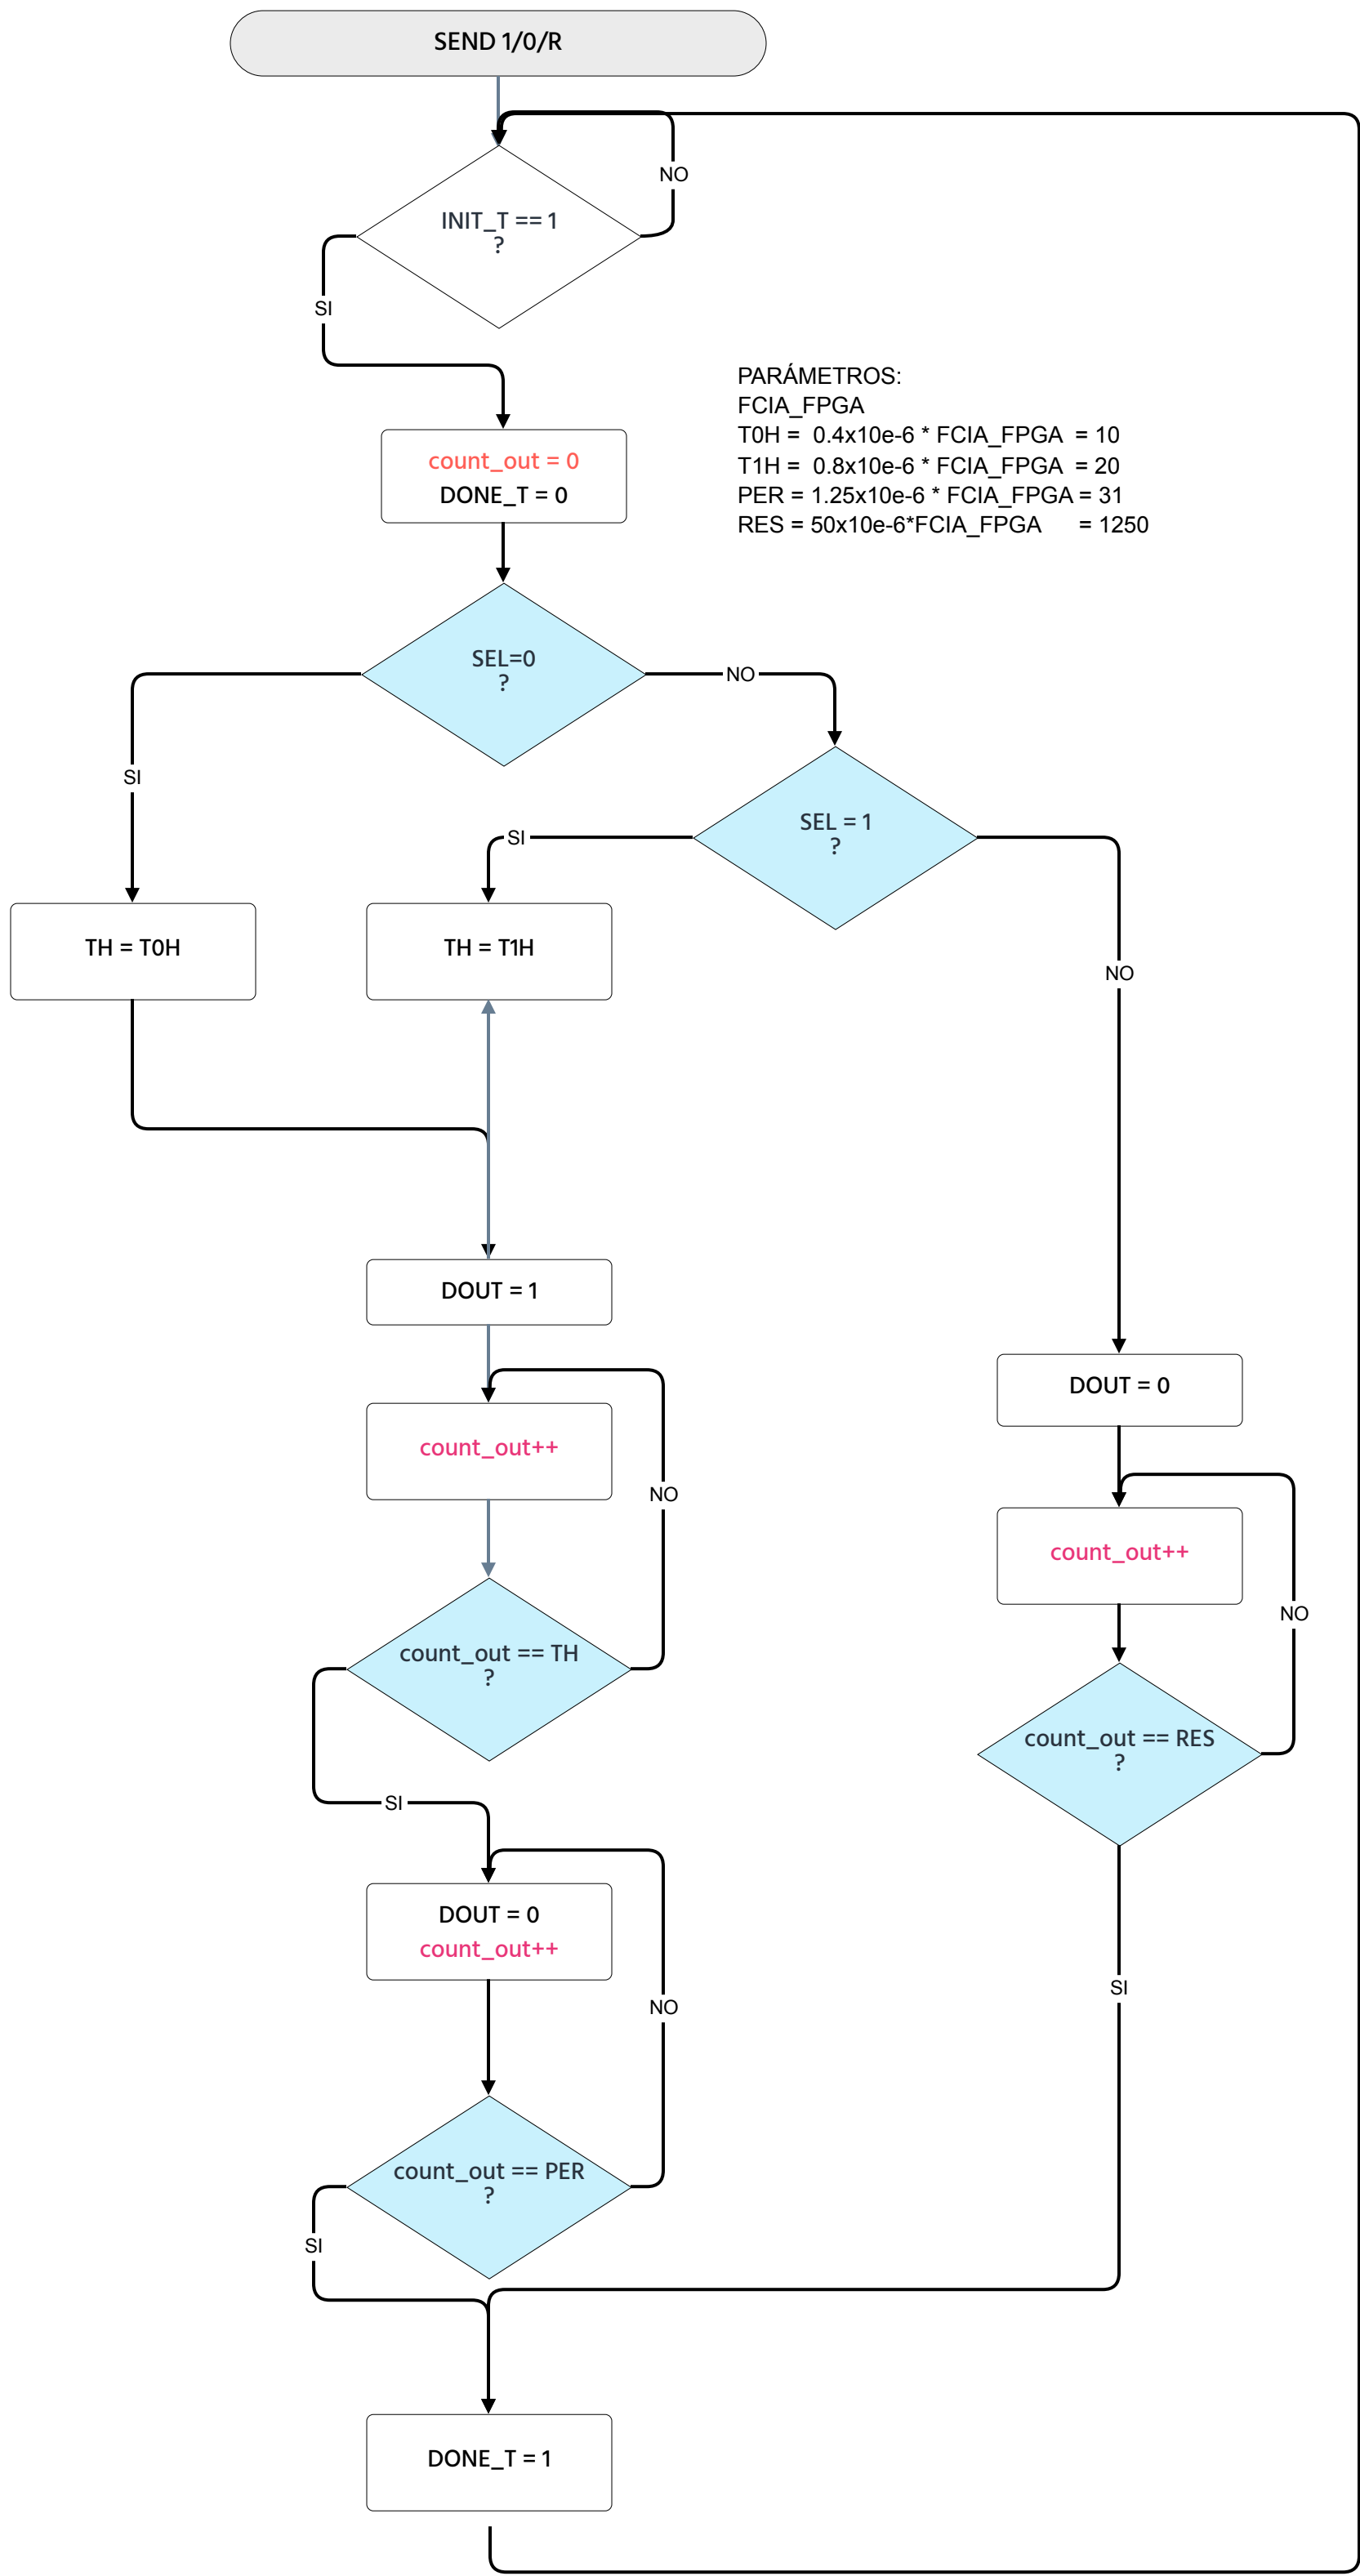
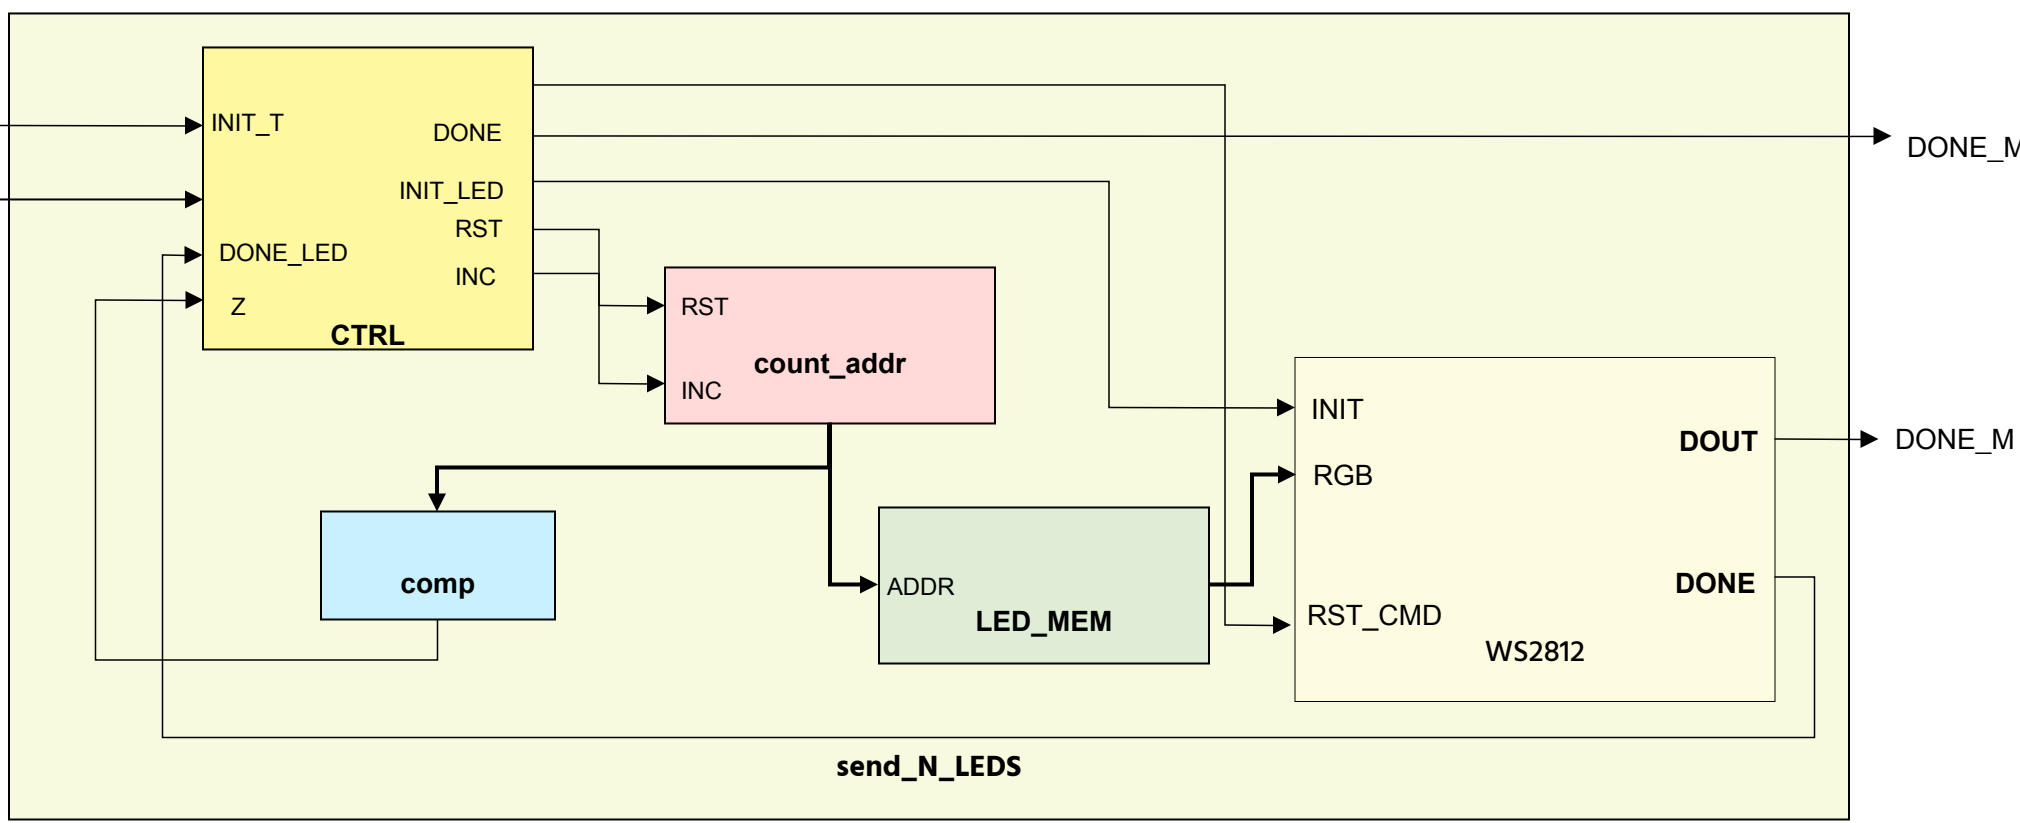
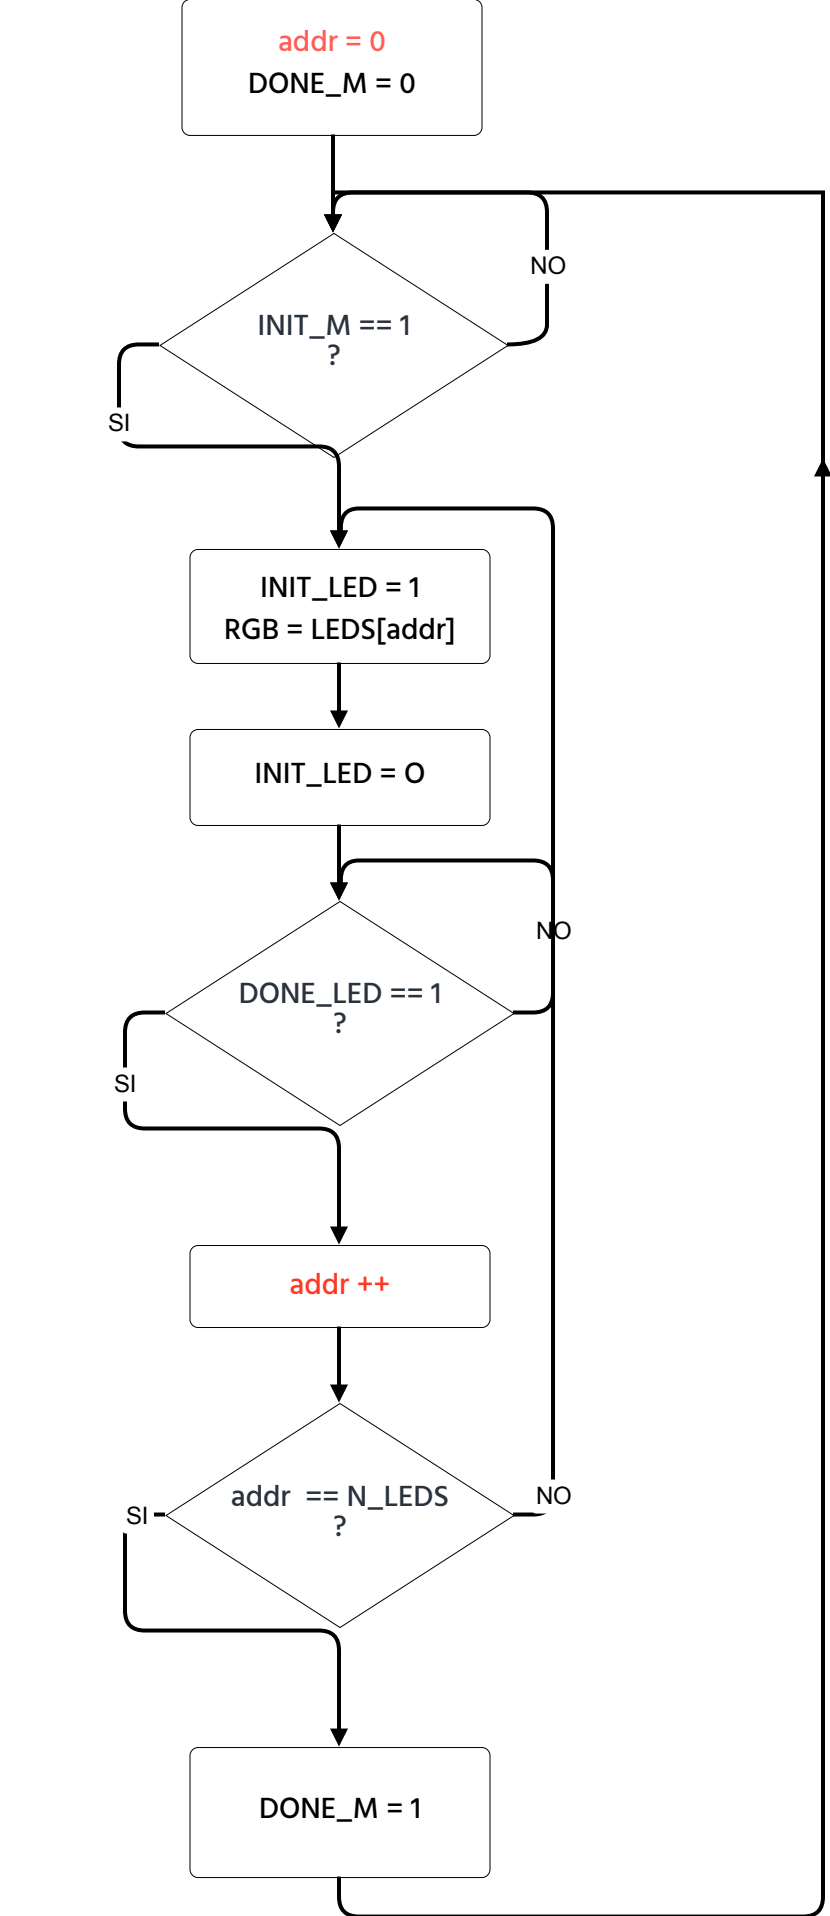

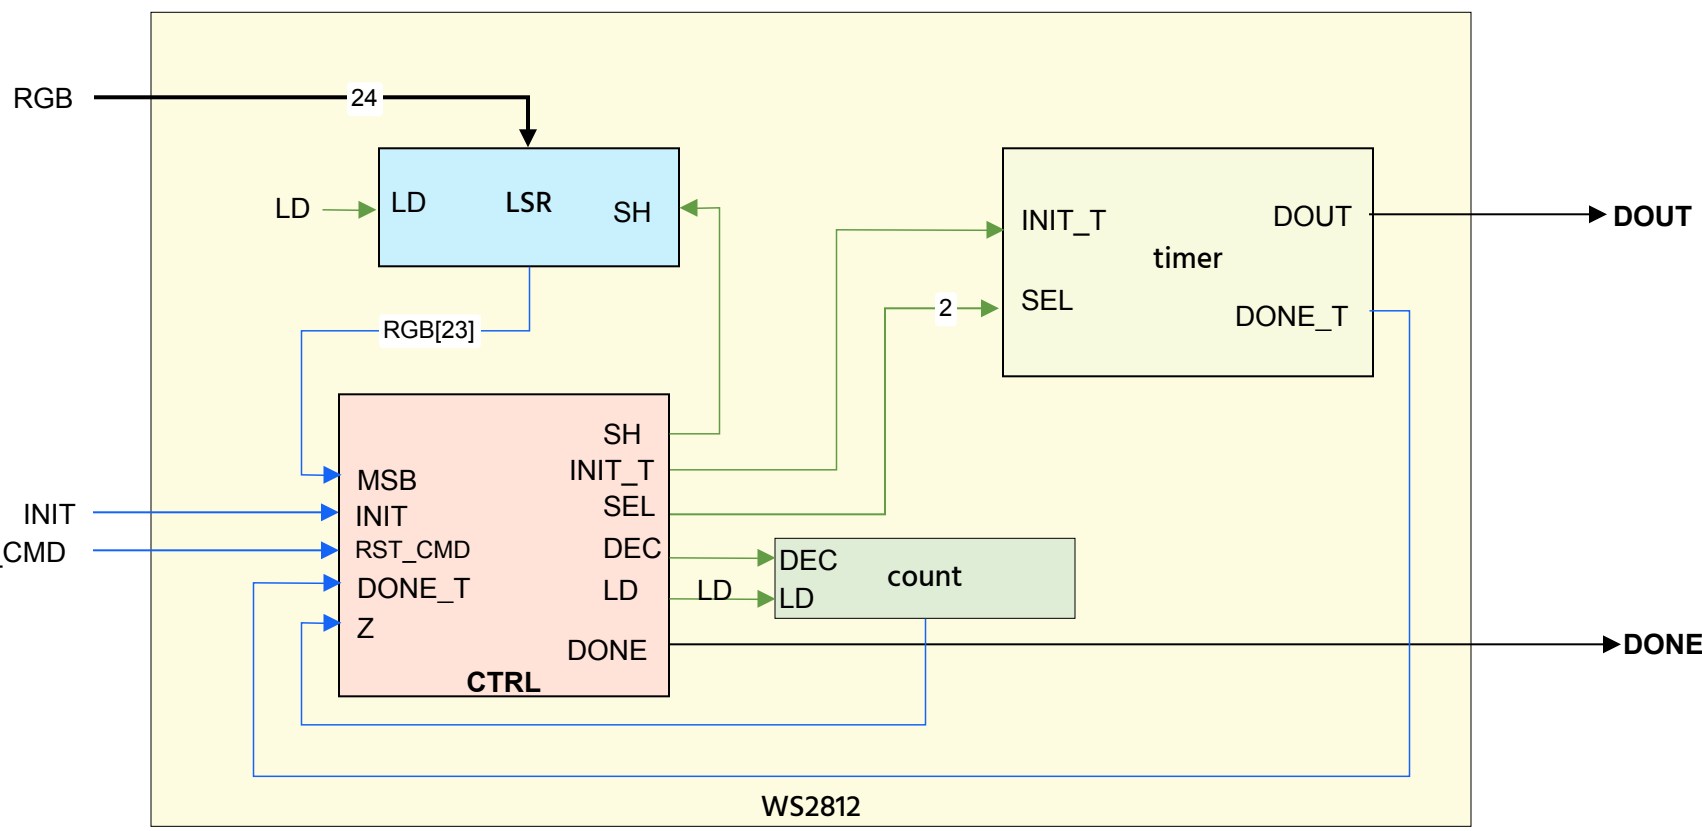


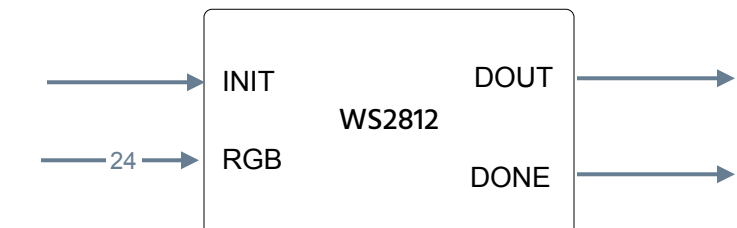

Data transfer time(TH+TL=1.25µs±600ns)			
TOH	0 code ,high voltage time	0.4µs	±150ns
T1H	1 code ,high voltage time	0.8µs	±150ns
TOL	0 code , low voltage time	0.85µs	±150ns
T1L	1 code ,low voltage time	0.45µs	±150ns
RES	low voltage time	Above 50µs	




PARÁMETROS:
FCIA_FPGA
TOH = 0.4x10e-6 * FCIA_FPGA = 10
T1H = 0.8x10e-6 * FCIA_FPGA = 20
PER = 1.25x10e-6 * FCIA_FPGA = 31
RES = 50x10e-6*FCIA_FPGA = 1250

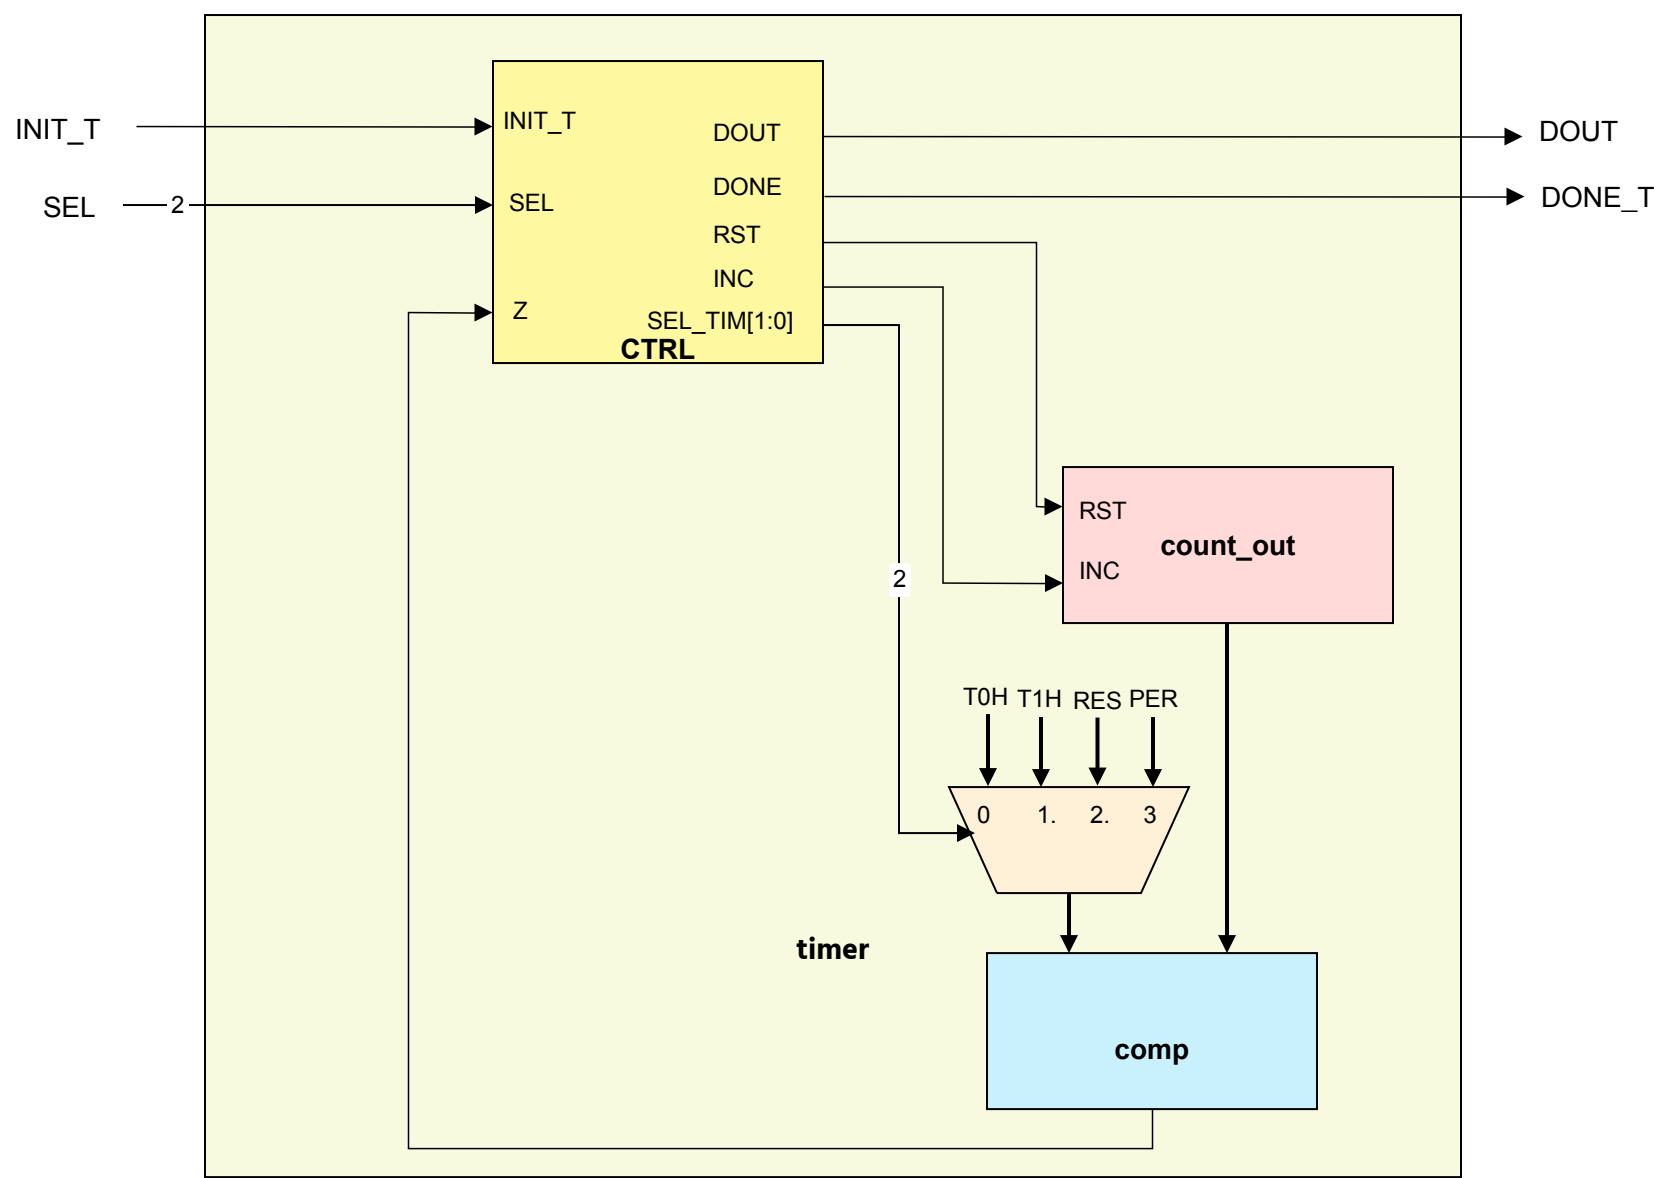


WS2812

Diagrama de transición

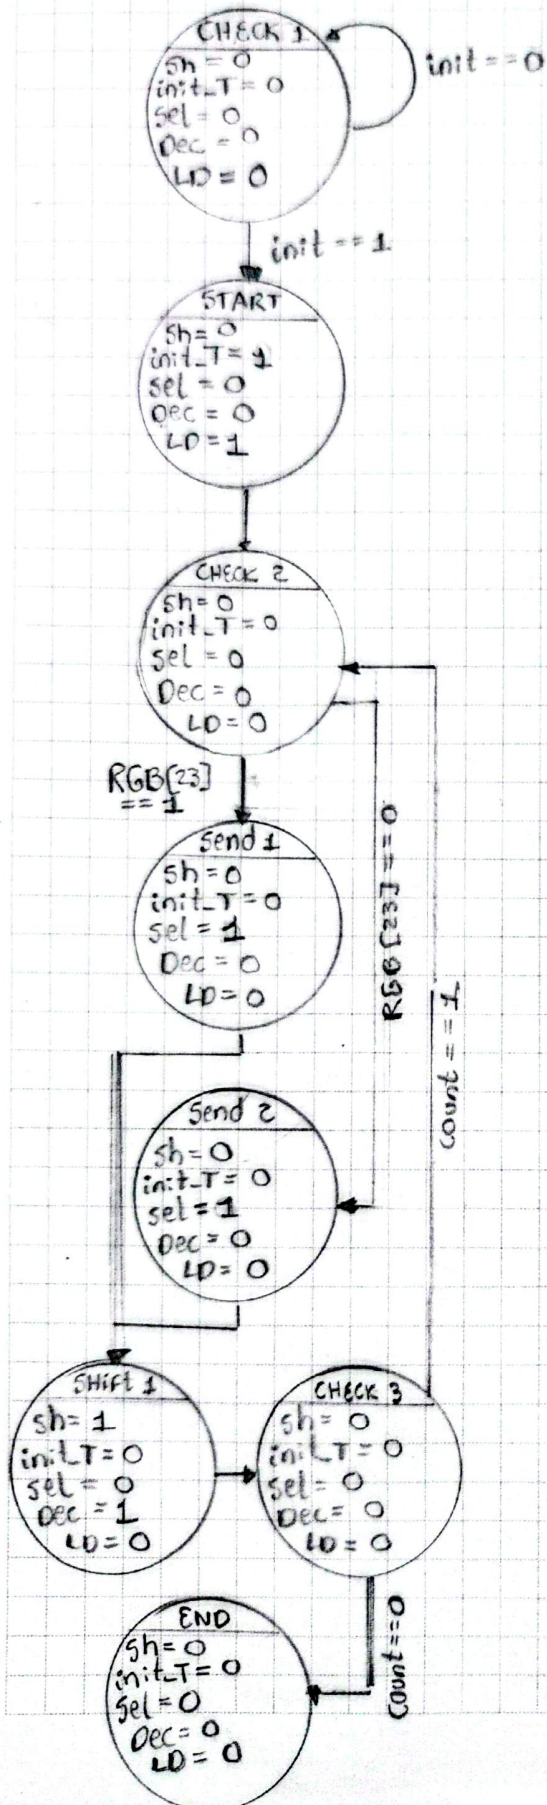

Send_N_LEDS

Diagrama de transición

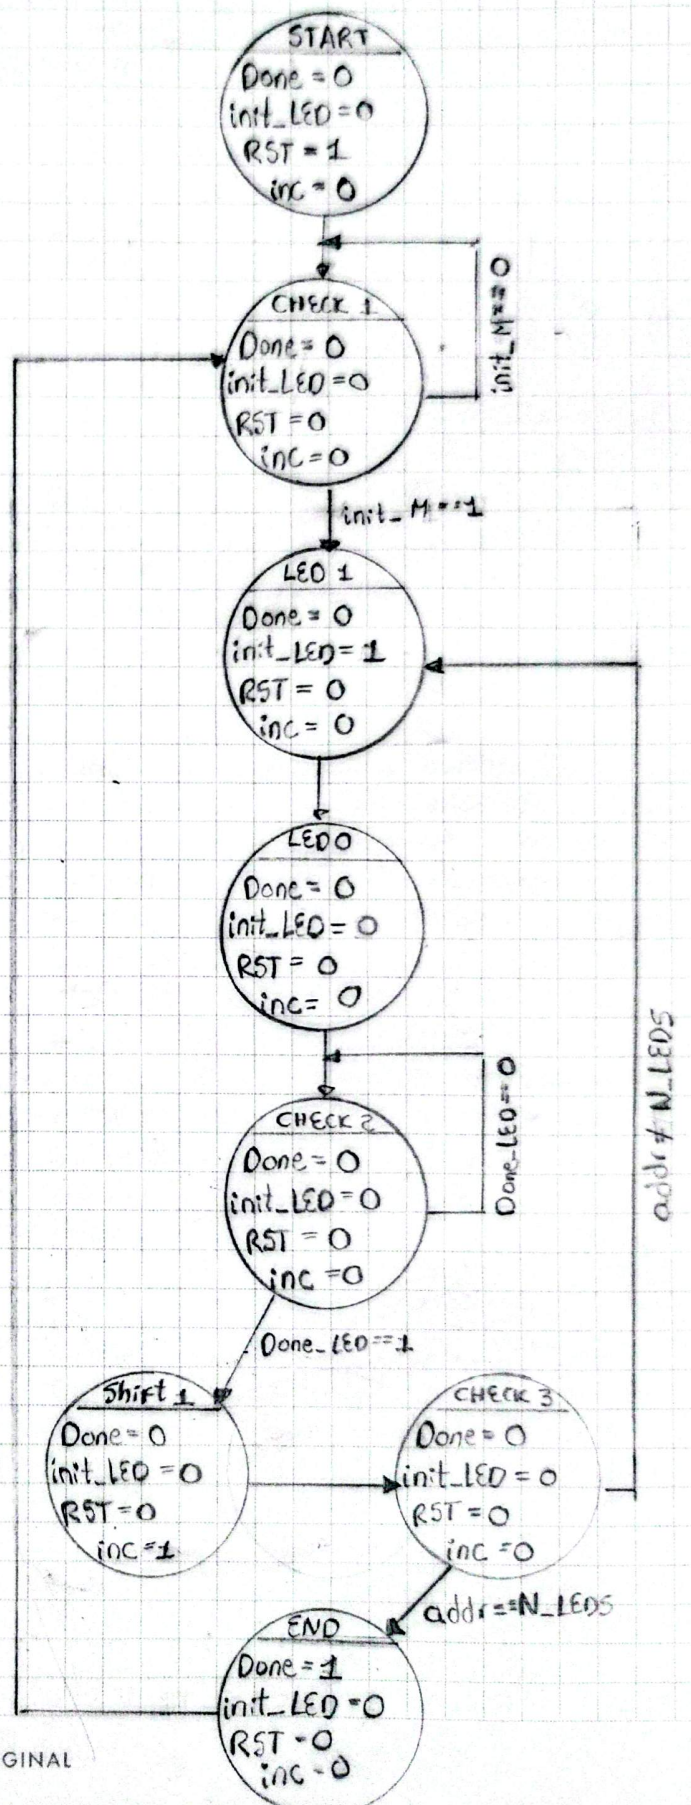

SOS ORIGINAL

SEND 1/0/1/R

