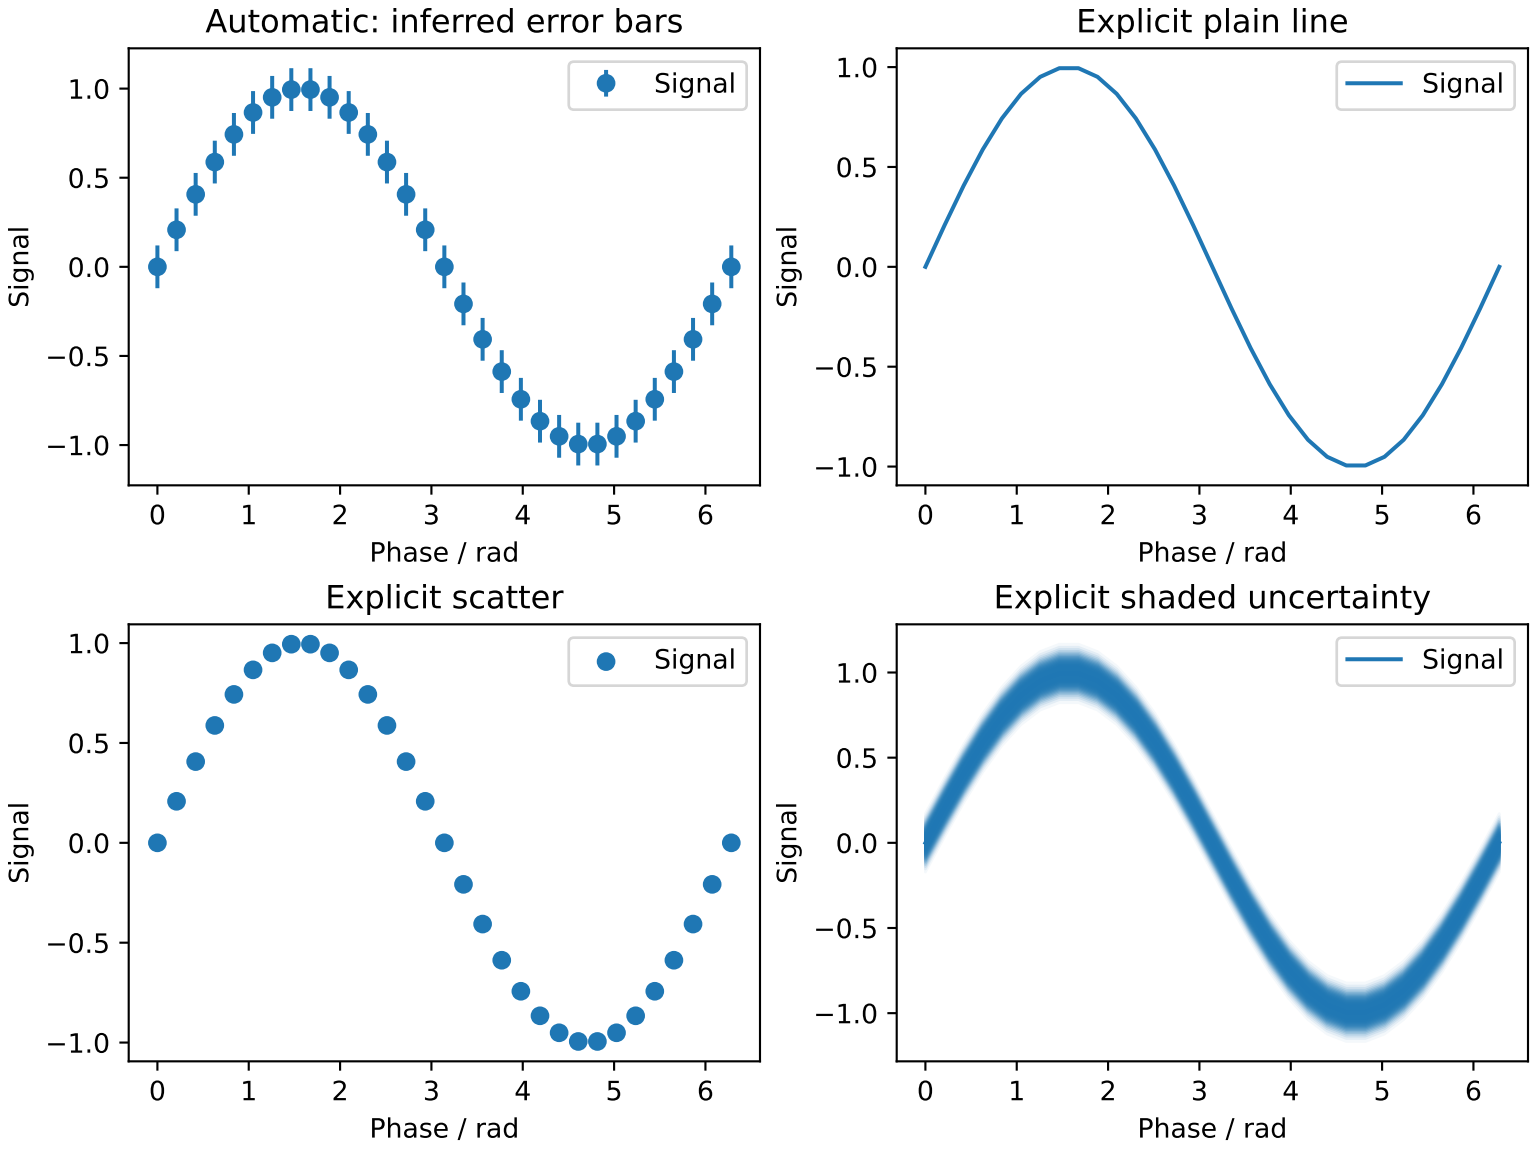
Automatic: inferred error bars
Explicit plain line
Explicit scatter
Explicit shaded uncertainty
Signal
Phase / rad
1.0
0.5
0.0
−0.5
−1.0
0
1
2
3
4
5
6