

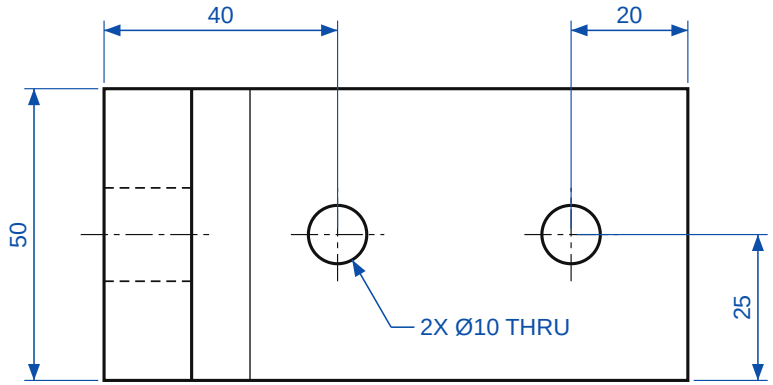


TOP

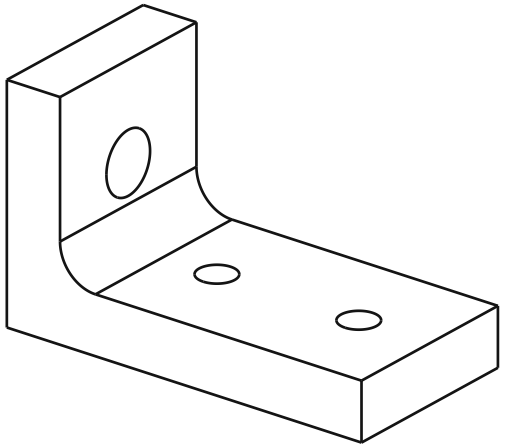

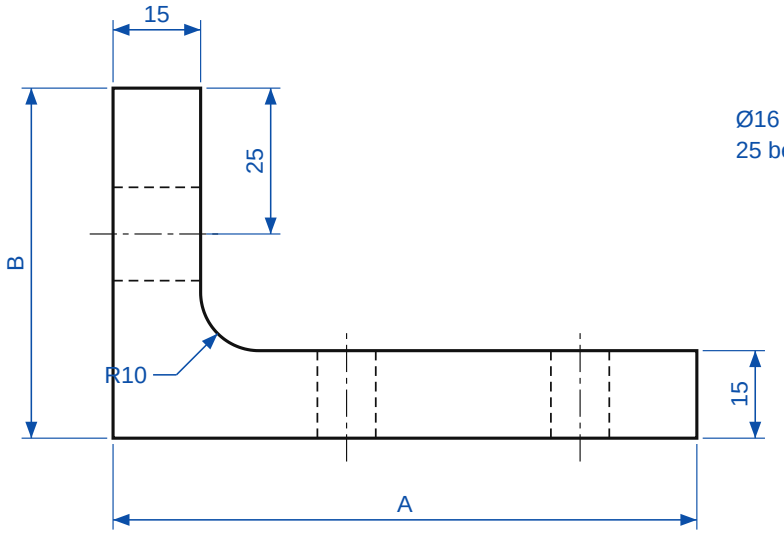


FRONT

Ø16 THRU hole in the upright leg (axis along X), 25 below the top, centered on the 50 depth.


Q6: A = 100, B = 60
Q7: A = 120, B = 75


ANGLE BRACKET	Q6–Q7
MATERIAL: 6061 Alloy	
DENSITY: 2700 kg/m³ (0.0027 g/mm³)	
UNITS: MMGS (mm, g, s) THIRD-ANGLE PROJECTION	

All holes THRU ALL. Hole positions measured as dimensioned (the 20 dim follows the right end).

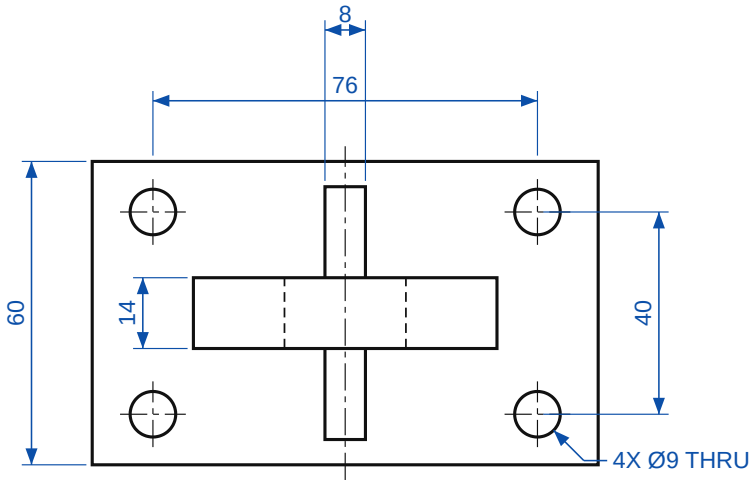


TOP

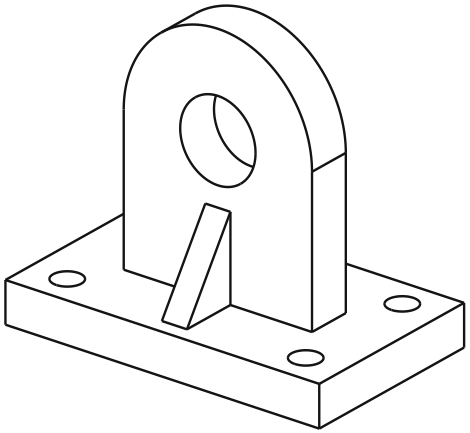

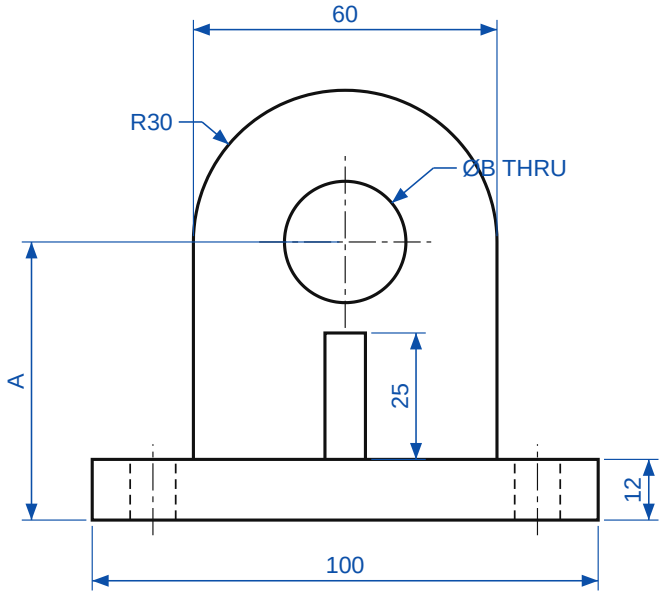

FRONT

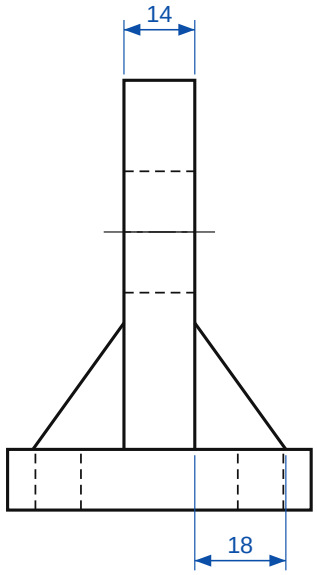


RIGHT


Q8: A = 55, B = 24
Q9: A = 70, B = 30

PILLOW SUPPORT	Q8–Q9
MATERIAL: AISI 1020 Steel	
DENSITY: 7900 kg/m³ (0.0079 g/mm³)	
UNITS: MMGS (mm, g, s) THIRD-ANGLE PROJECTION	


Upright and ribs are centered on the base. Ribs are triangular, 8 thick, front and back.

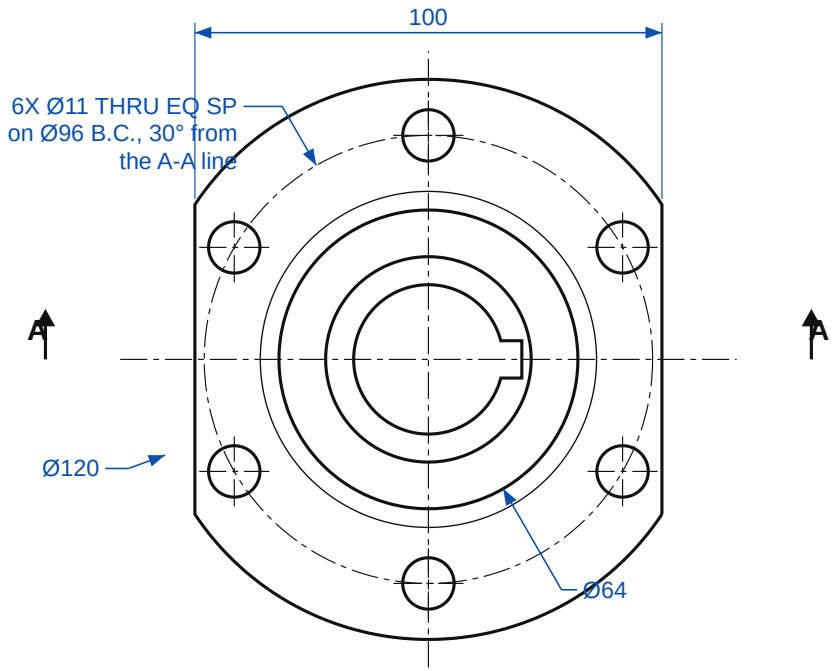

TOP

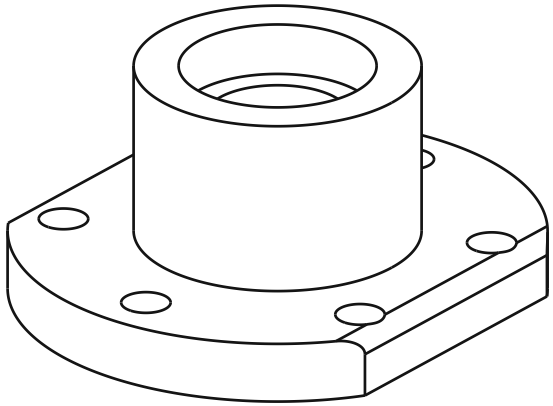

KEYWAY: 8 wide, THRU ALL, on the +X side.
36 is measured across the bore to the keyway floor.
Two flats are 100 apart, parallel to the keyway.

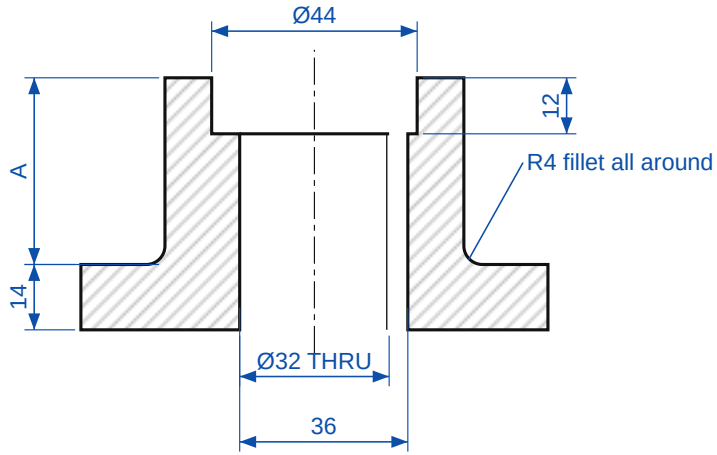

SECTION A-A

Q10: A = 40, 6 bolt holes (as shown)
Q10: A = 60, 4 bolt holes EQ SP, first at 45°

FLANGED HUB	Q10–Q11
MATERIAL: 6061 Alloy	
DENSITY: 2700 kg/m³ (0.0027 g/mm³)	
UNITS: MMGS (mm, g, s) THIRD-ANGLE PROJECTION	

PIVOT ARM ASSEMBLY

Q12: θ = 30° Q13: θ = 60° (θ measured from +X, arm points up and right)


Units: MMGS. Mates: plate fixed; uprights, pin and arm located as dimensioned; pin and arm holes concentric.

Uprights: 10 thick, at Z = 20–30 and Z = 50–60. Arm (18 thick) is centered between them (Z = 31–49).


Pin: Ø12 × 40, ends flush with the outer upright faces. The near upright hides the arm's pivot end in FRONT.

COMPONENTS


#	Part	Size	Material	kg/m³
1	Base plate	120 × 80 × 10 block	AISI 1020 Steel	7900
2	Upright (qty 2)	see detail	6061 Alloy	2700
3	Arm	see detail	6061 Alloy	2700
4	Pin	Ø12 × 40	AISI 1020 Steel	7900

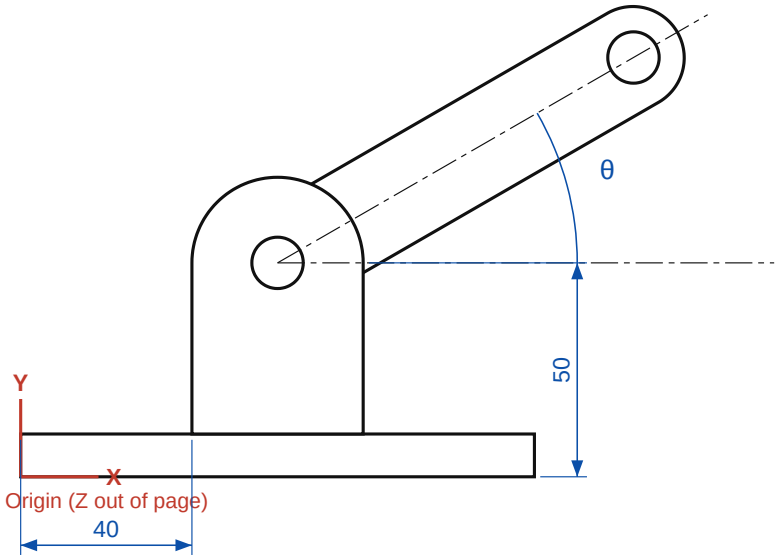


FRONT (assembly)

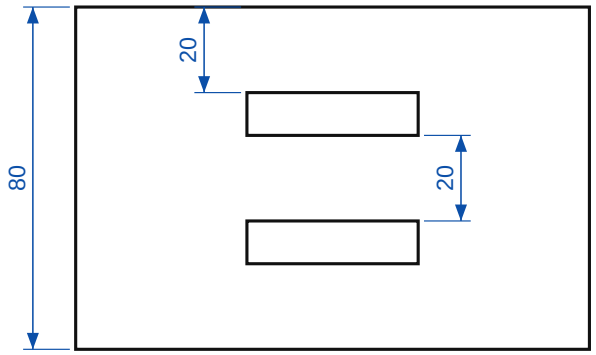

TOP (base plate only + uprights)

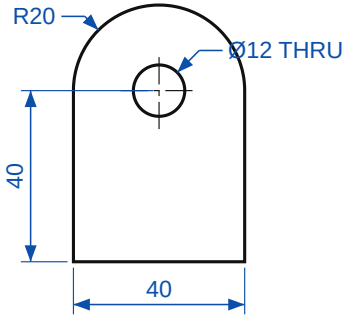

UPRIGHT — 10 thick

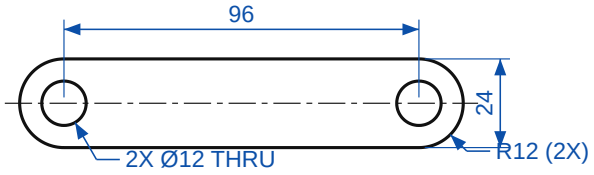

ARM — 18 thick

