




SONG HUEI ELECTRIC CO.,LTD

Tact Switch Series (6x6mm)


TS6601H□




Part Number

Model No.	Knob(L)	Model No.	Knob(L)
TS6601H	4.3	TS6601HI	6.0
TS6601HA	5.0	TS6601HJ	9.0
TS6601HB	7.0	TS6601HK	11.0
TS6601HC	8.0	TS6601HL	11.5
TS6601HD	9.5	TS6601HM	12
TS6601HE	7.3	TS6601HN	13.0
TS6601HF	12.5	TS6601HR	15.0
TS6601HG	13.5	TS6601HX	17.0
TS6601HH	6.5		


Dimensions

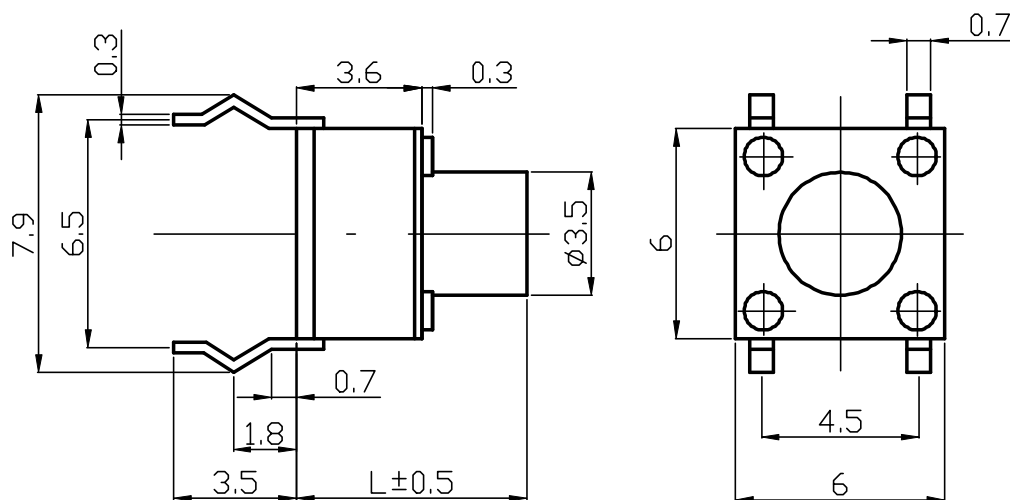

CIRCUIT



Mounting Hole

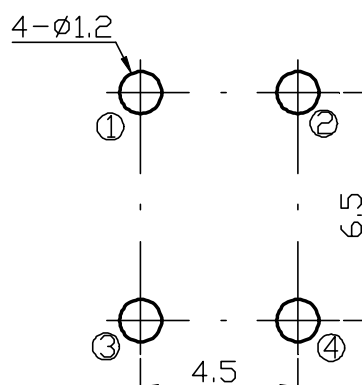

**Tact Switch Series (6x6mm)****General**

Operating temperature	-20 °C ~ +70 °C
Manual soldering	350 °C Max 3sec

Electrical Characteristics

Contact resistance	Less than 100 mΩ
Rated power(W)	DC 12V 50mA
Insulation resistance	More than 100 MΩ at DC 100 V
Withstand voltage	1 Minute at AC 250 V

Mechanical Characteristics

Operating force	<input type="checkbox"/> 100gf±30gf <input type="checkbox"/> 160gf±50gf <input type="checkbox"/> 250gf±100gf
Full travel	0.25±0.1mm
Stop strength	3 Kgf.cm min
Shaft push-pull Strength	2 Kgf.cm min
Operation life	<input type="checkbox"/> 100gf :80000cycles <input type="checkbox"/> 160gf:60000cycles <input type="checkbox"/> 250gf:50000cycles