


Auxiliary (off-board) parts:


- Connex SMPS300REh: Power supply.
- Neutrik NF2D-B-9: RCA jack (white) x3 (Audio inputs)
Neutrik NF2D-B-2: RCA jack (red) x3 (Audio inputs)
- Mueller Electric BU-P3770-0 (black) x2 (Speaker post)
Mueller Electric BU-P3770-2 (red) x2 (Speaker post)
- PIHER PC16IP04103A (10k potentiometer) (balance control)
Omeg PO4S-LIN 100K (100k potentiometer) (Volume control)
- Schurter 4304.6090 (IEC Inlet)
- C&K F-Series (Input selector pushbuttons)


Mechanical parts list:


- 1x Wakefield120-2 (Thermal paste)
8x Aavid 4180G (Al2O3 insulators, TO-3P, for output devices, 4 per channel)
10x Aavid 4171G (Al2O3 insulators, TO-220, for drivers and bias generator, 5 per channel)
18x Bivar SW-185-150 (insulating washer for screw holes, M3 screw, needed for all heatsinked transistors)
18x M3 flat washer, stainless steel
18x M3 spring-lock washer, stainless steel
18x M3 nut, stainless steel
2x Noctua NF-A8 ULN (fans)


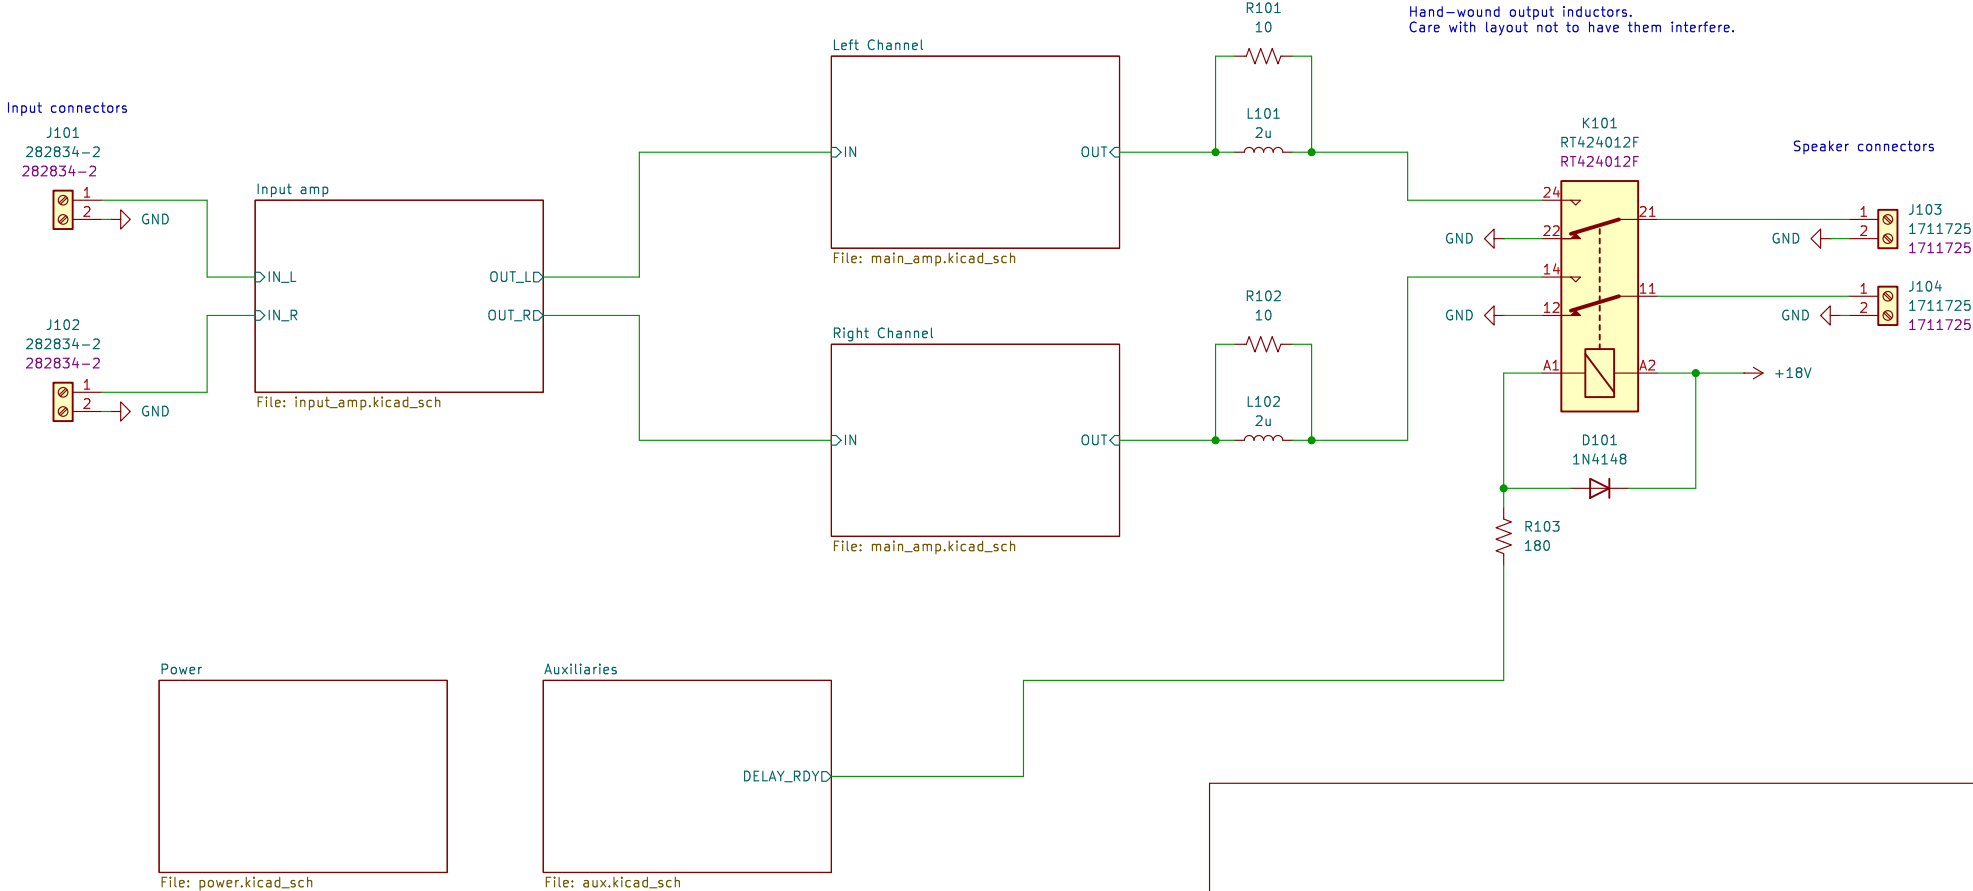


Sheet: /		
File: hybrid-tube-amp.kicad_sch		
Title: 100W Hybrid Audio Amplifier		
Size: A4	Date: 2026-05-03	Rev: 1
KiCad E.D.A. 9.0.6		Id: 1/6

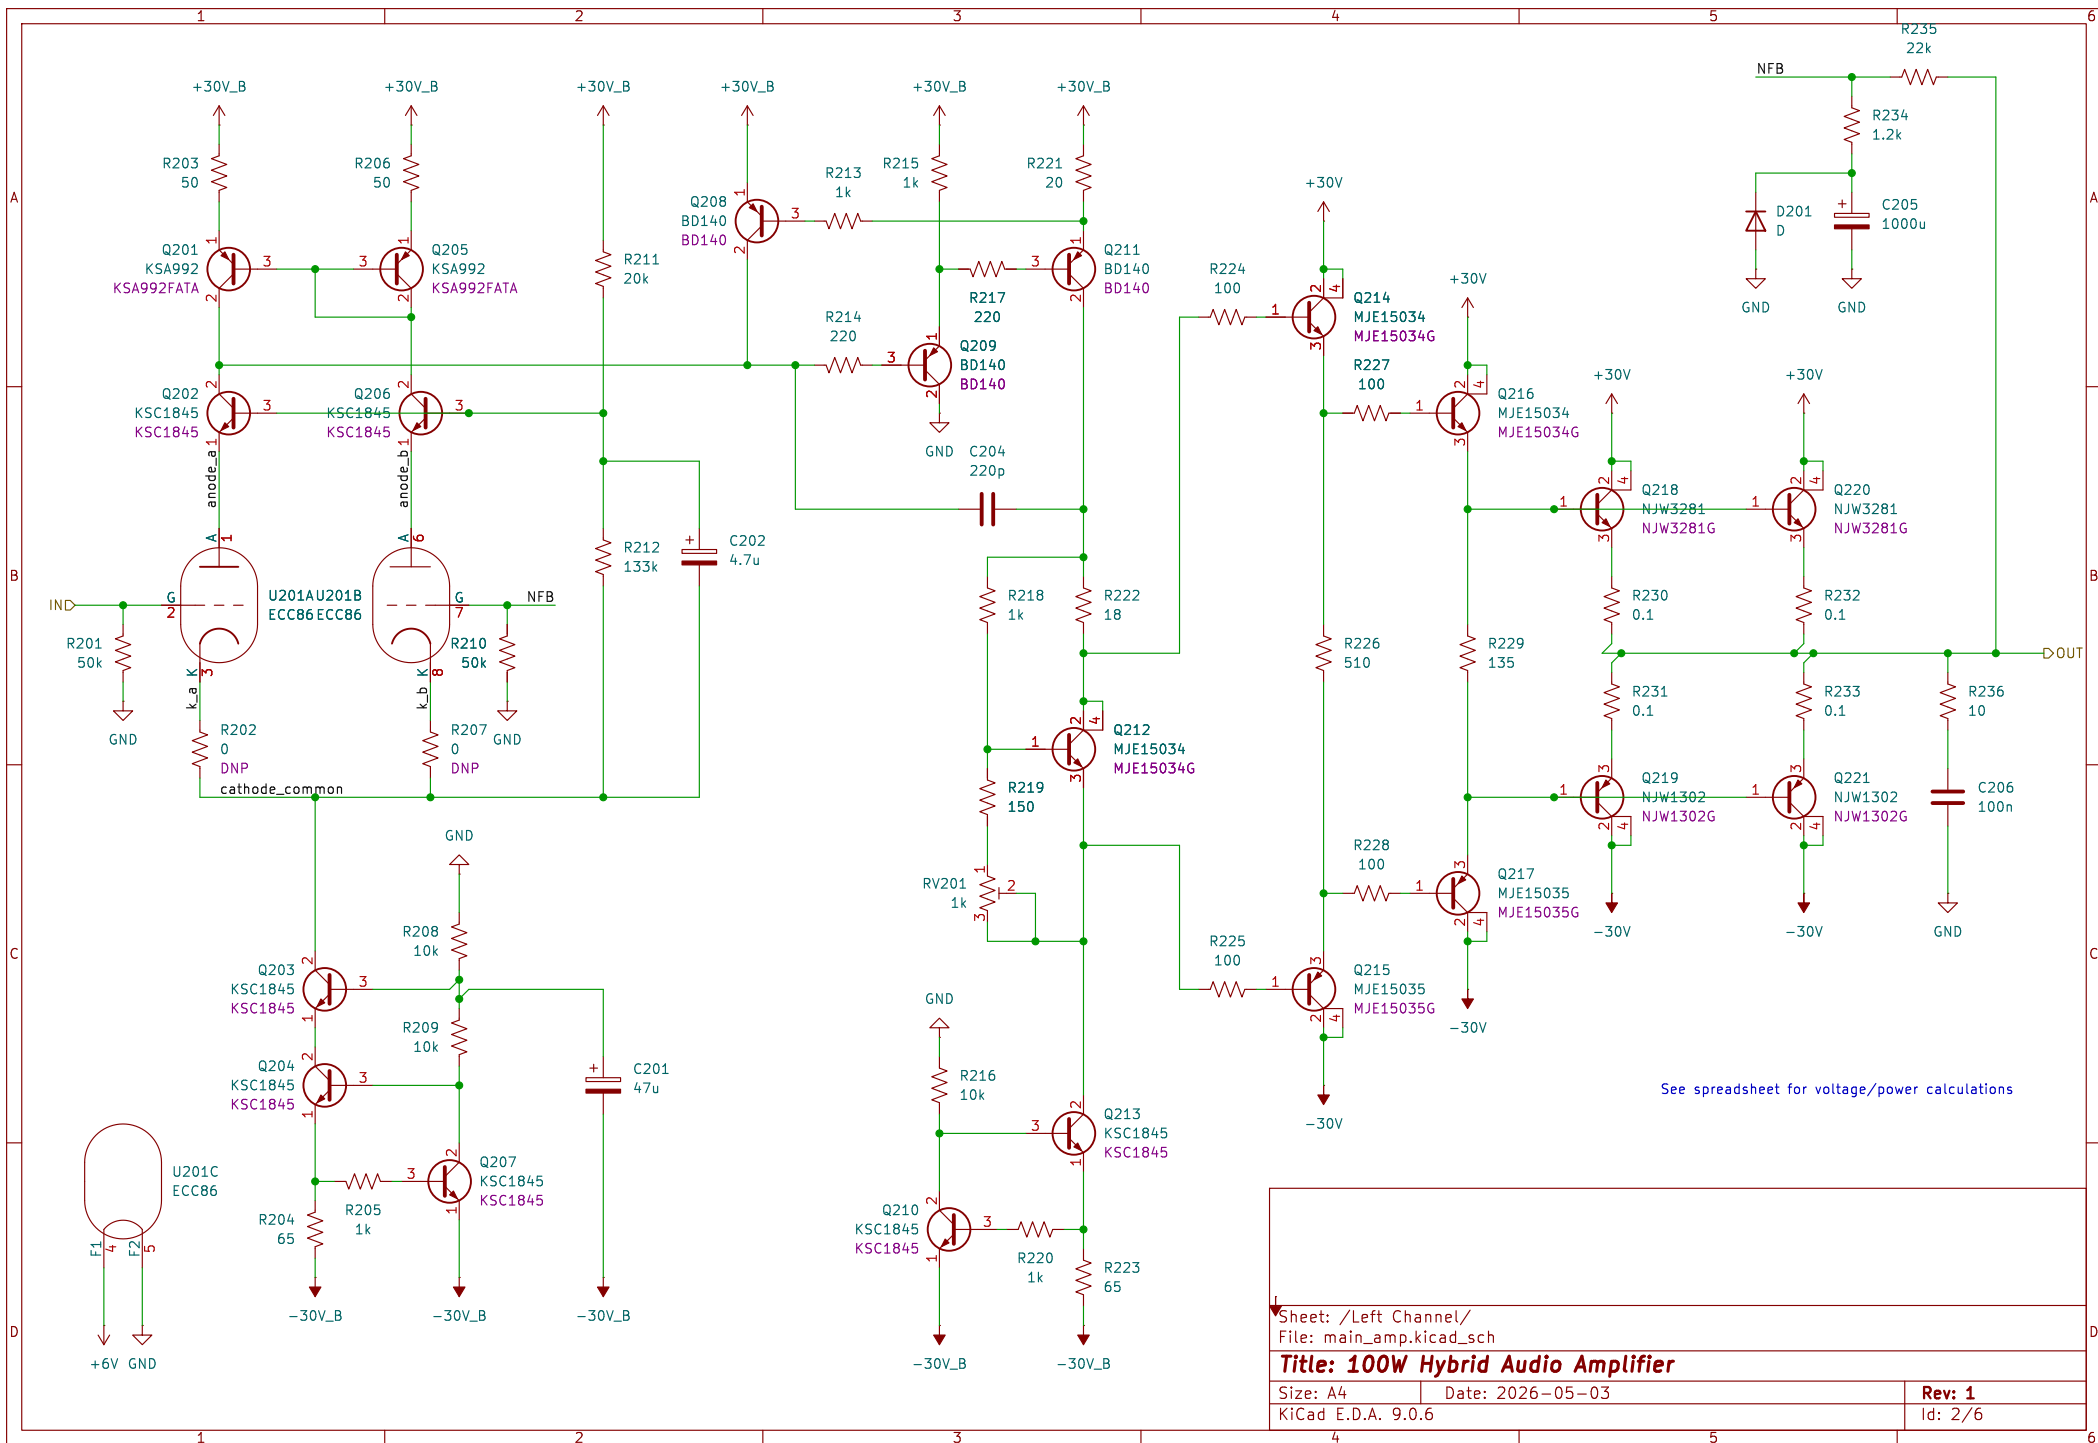

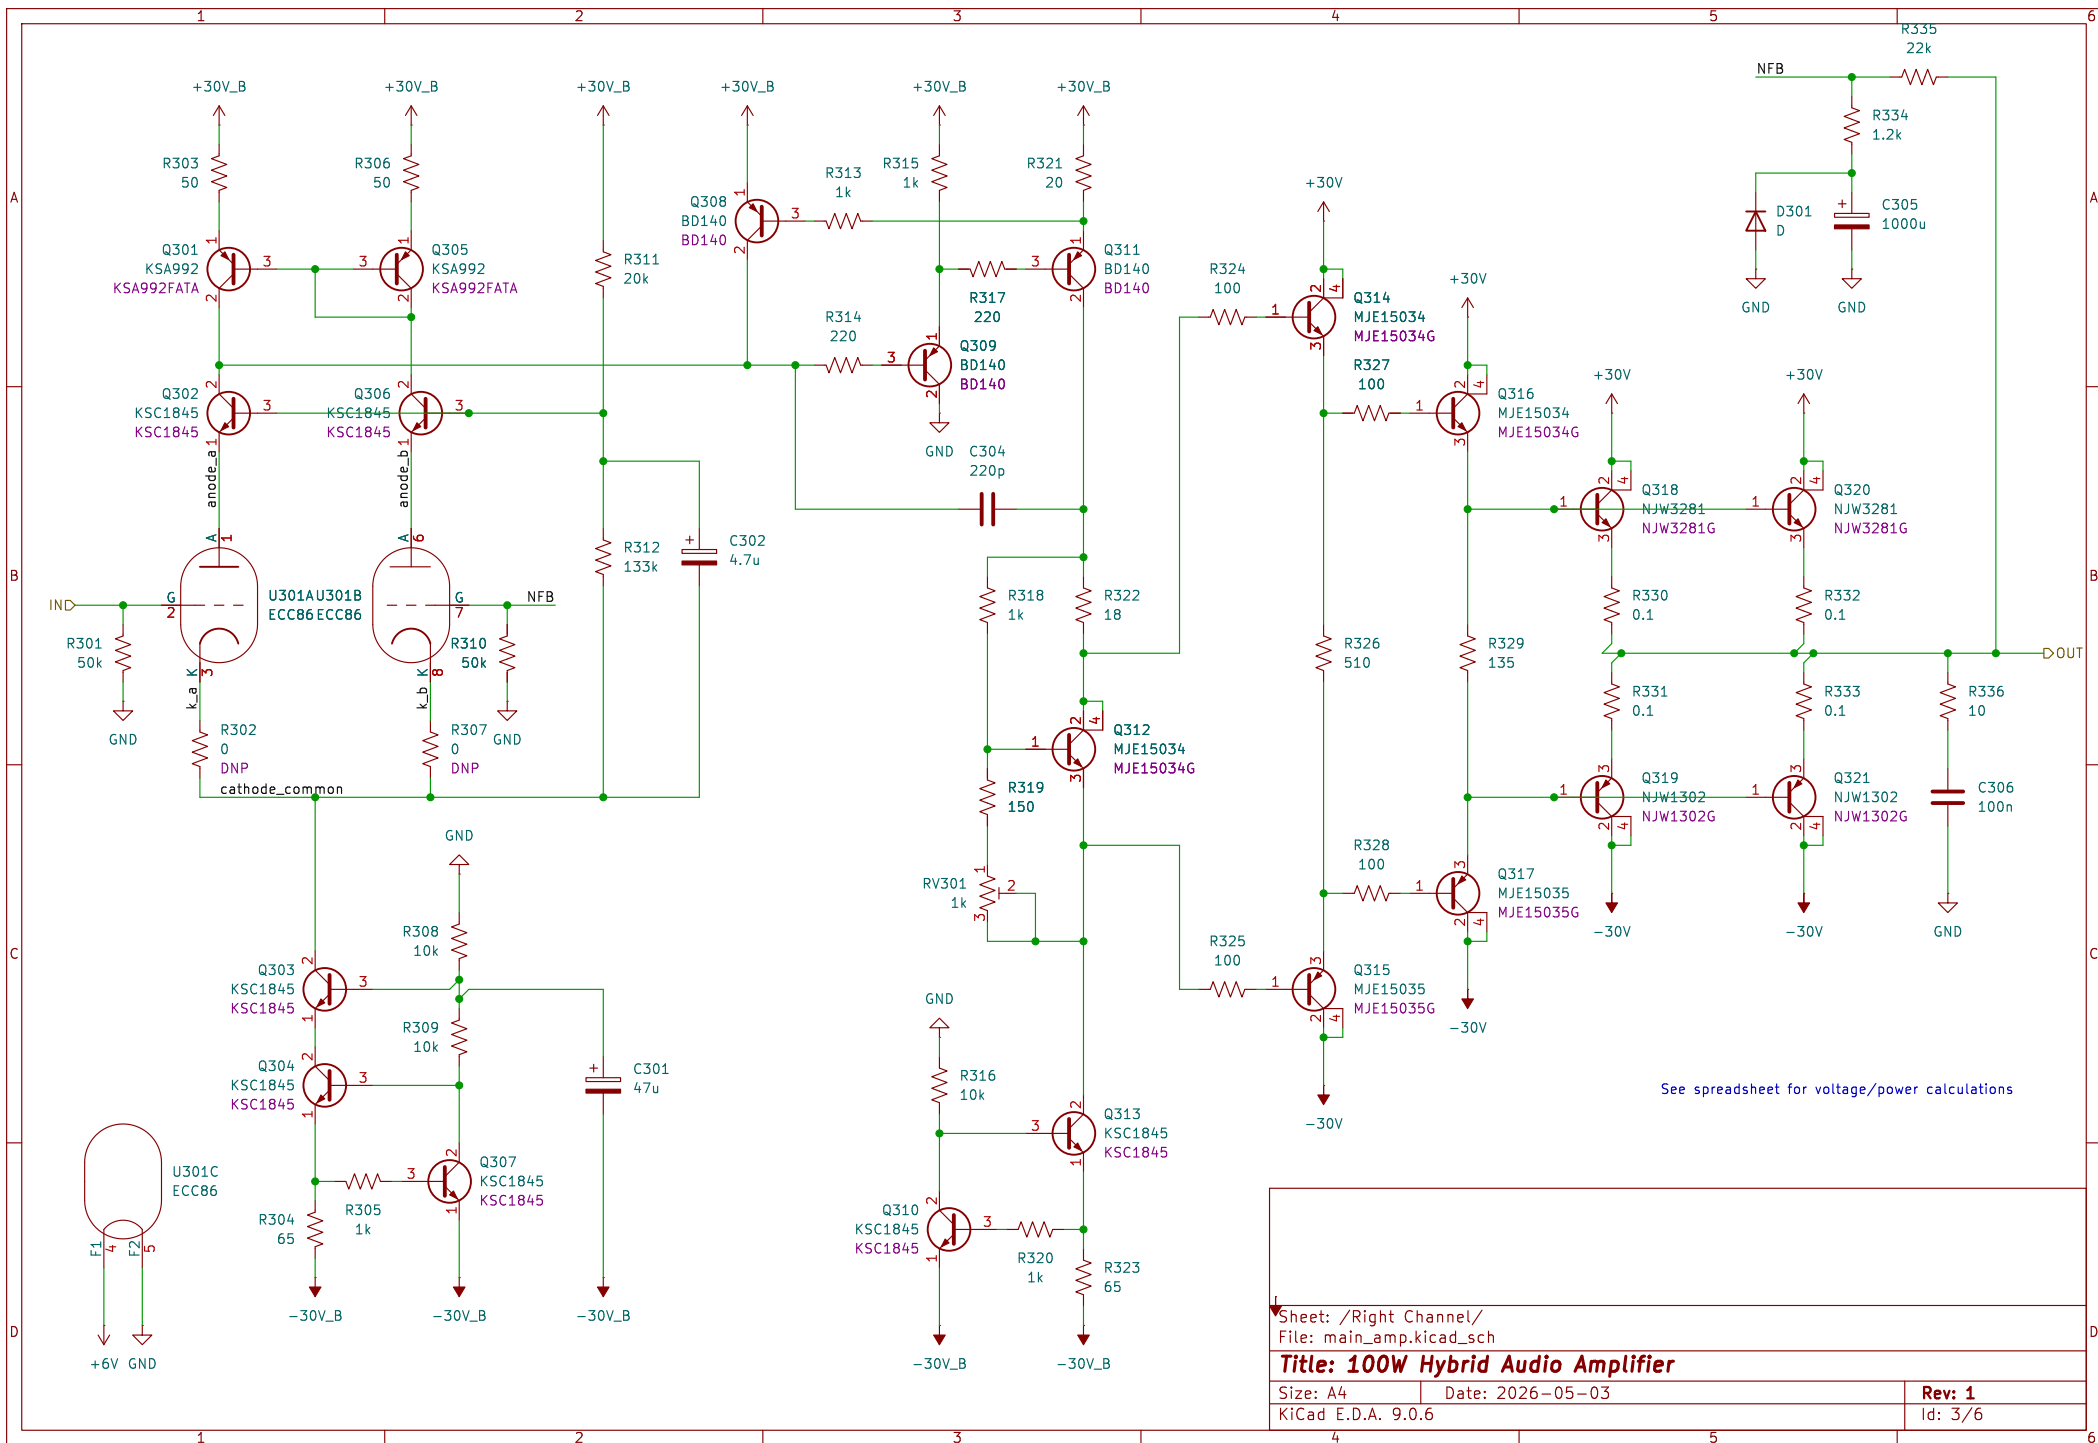


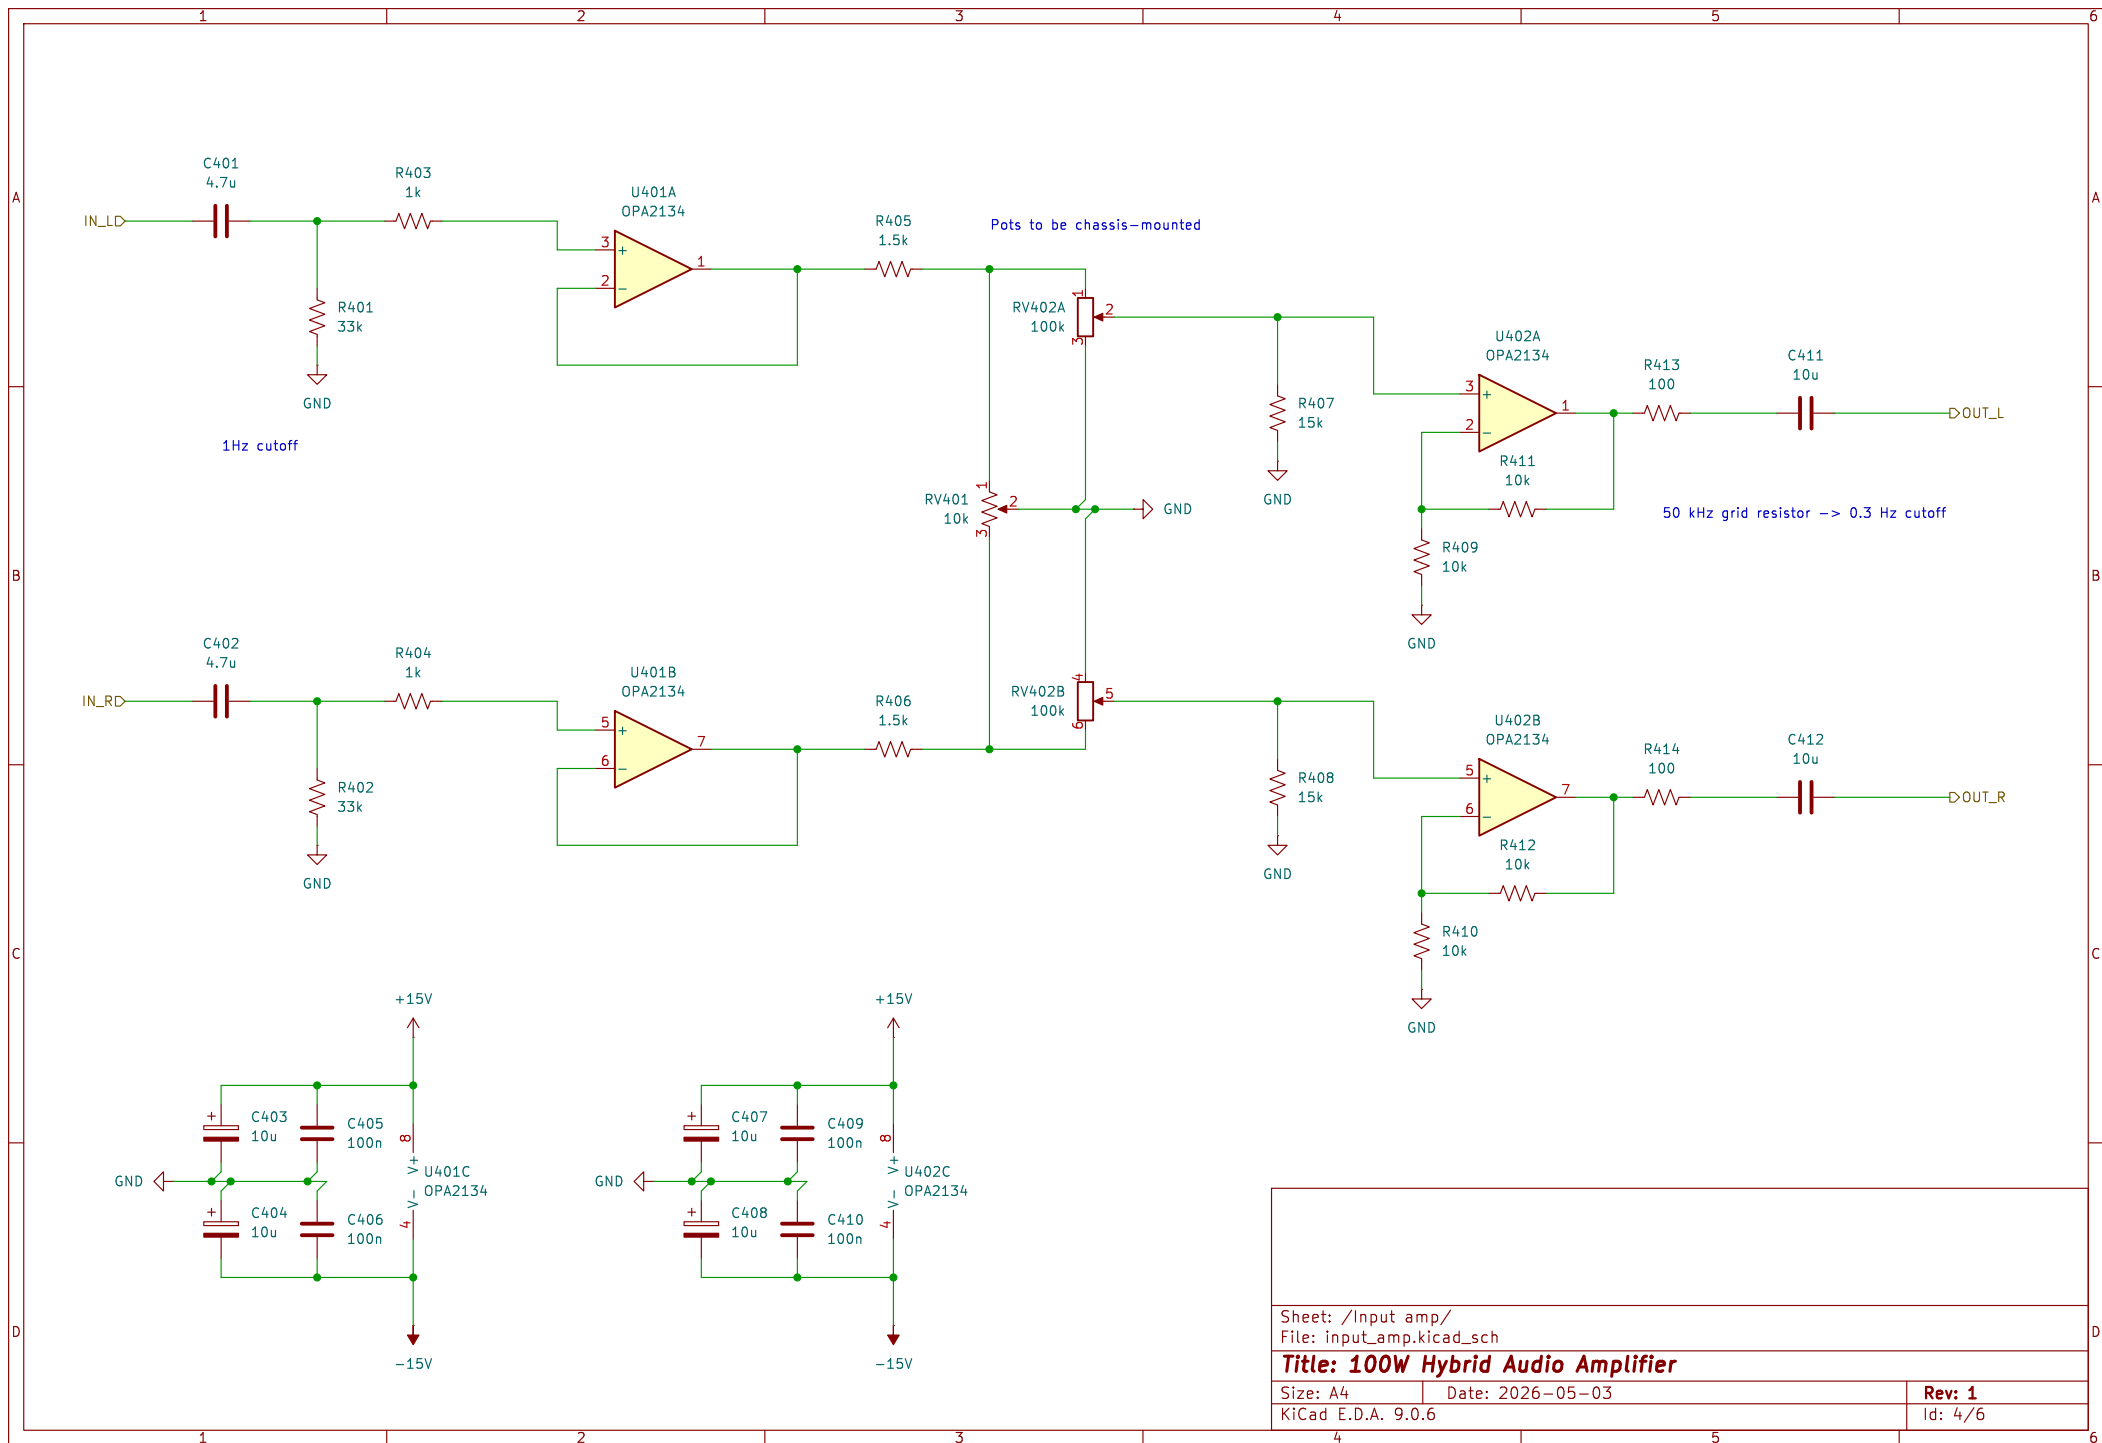

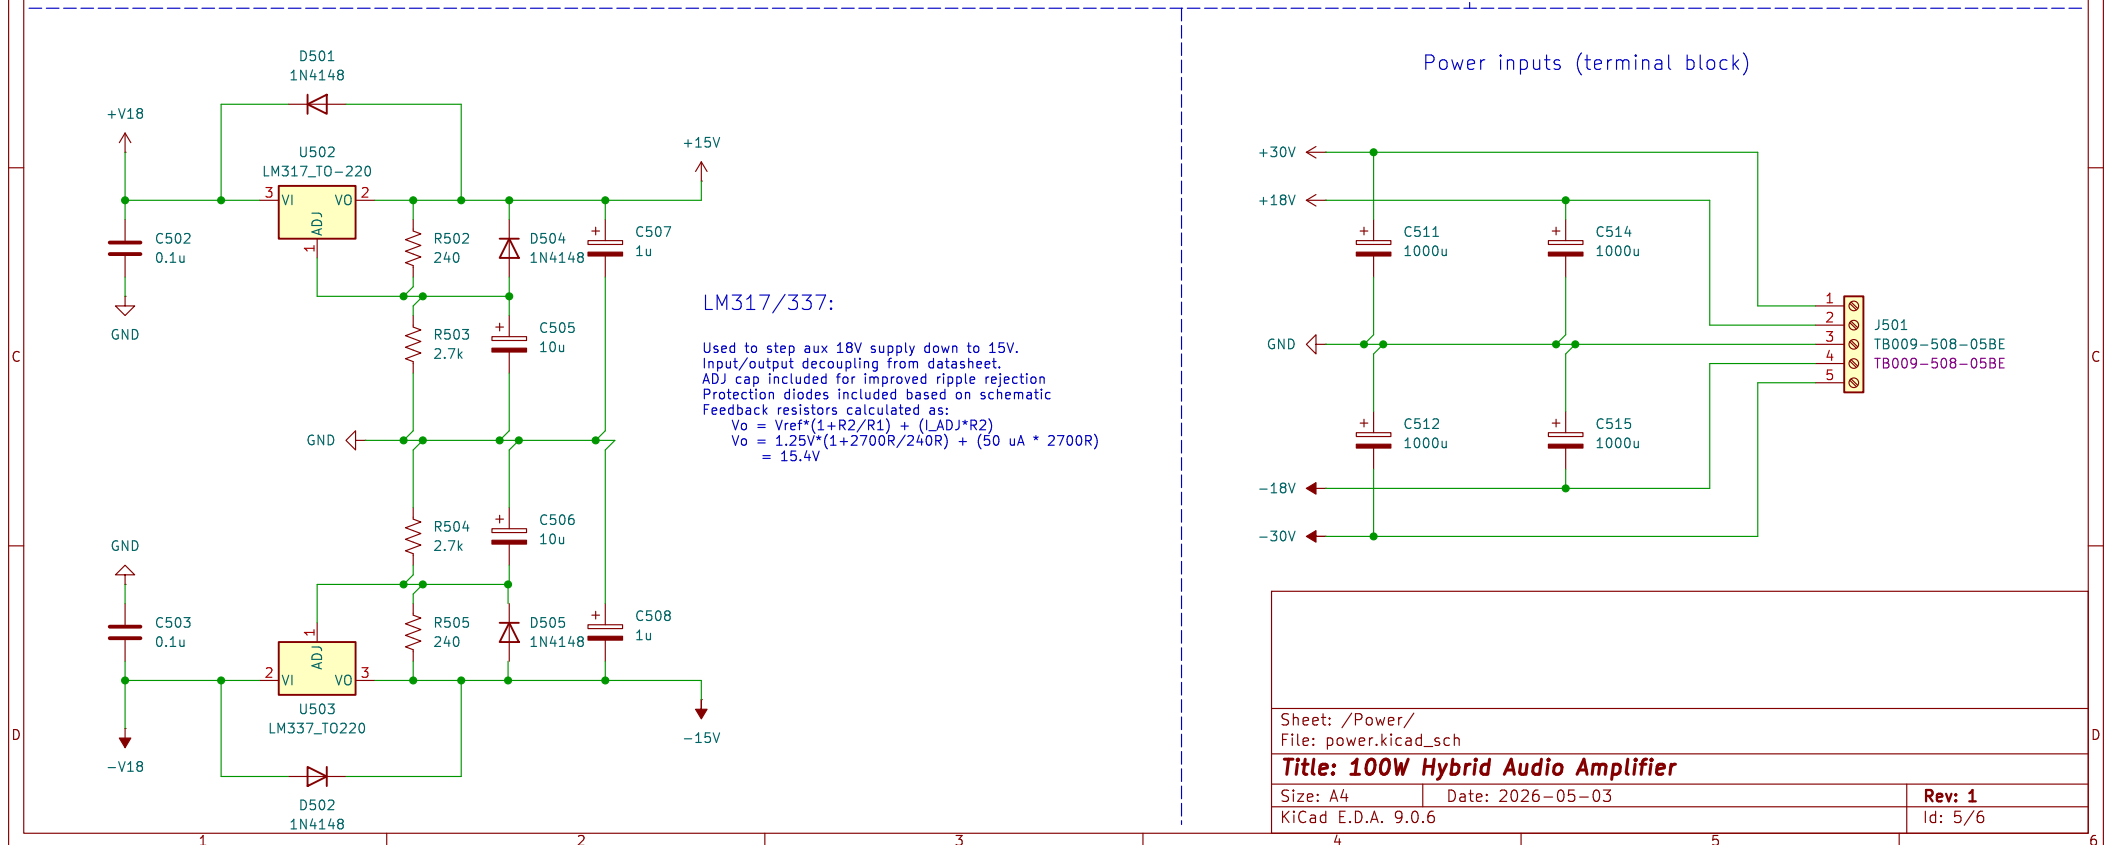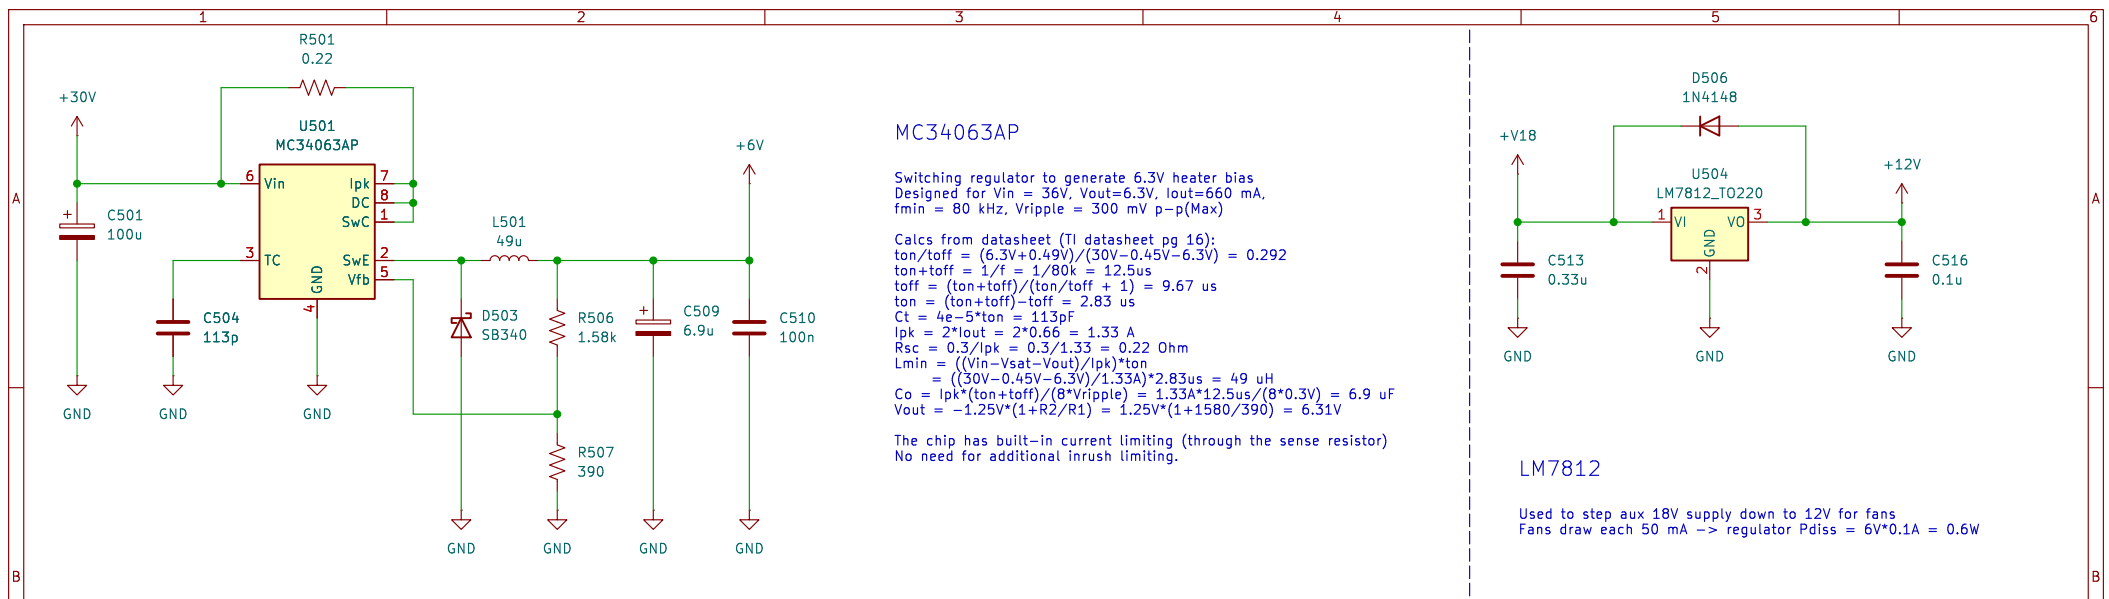




Delay circuit

Charge time roughly 28s until BC517 sees 1.2V. Enough time for tube warm-up.

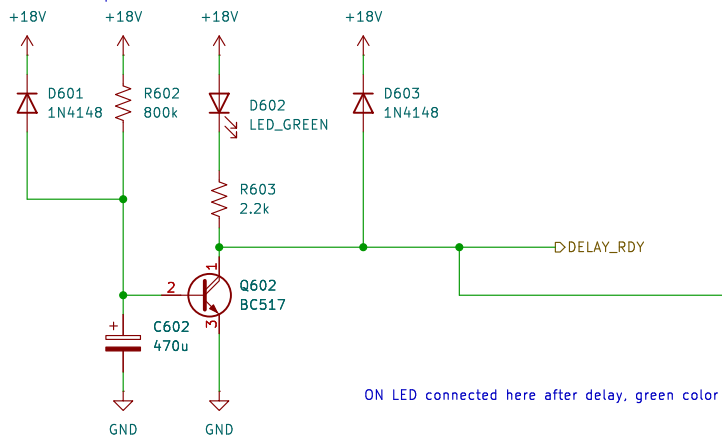

30V Relay

For the input stage and the VAS.
30-40 mA max draw

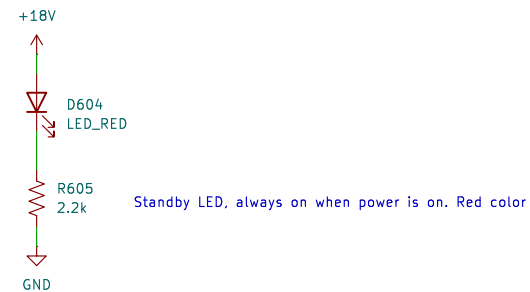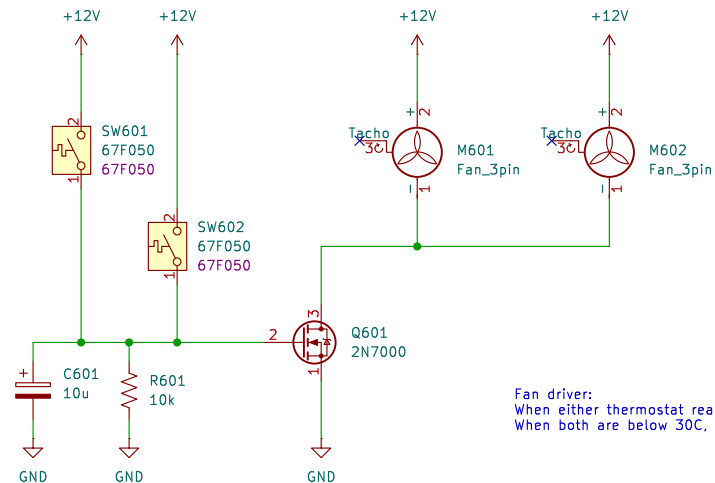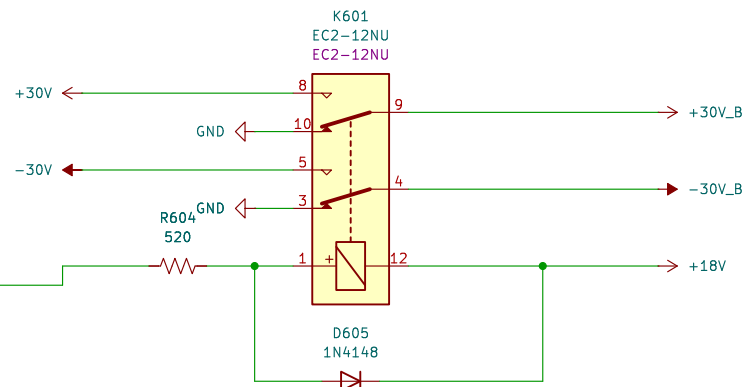

Sheet: /Auxiliaries/
File: aux.kicad_sch

Title: 100W Hybrid Audio Amplifier

Size: A4

Date: 2026-05-03

Rev: 1

KiCad E.D.A. 9.0.6

Id: 6/6