

Simulation report:

Behavioral simulation:


For the inputs taken in test case

```
// FP32 TEST
mode_sel = 2'b10; // FP32
A = 64'h0000000040A00000; // 5.0
B = 64'h0000000040400000; // 3.0


// FP16 TEST (1.0 * 2.0)
mode_sel = 2'b01; // FP16
A = 64'h0000000000003C00; // 1.0 FP16
B = 64'h0000000000004000; // 2.0 FP16

// BF16 TEST (1.0 * 2.0)
mode_sel = 2'b00; // BF16
A = 64'h0000000000003F80; // 1.0 BF16
B = 64'h0000000000004000; // 2.0 BF16


// FP64 TEST (2.0 * 3.0)
mode_sel = 2'b11; // FP64
A = 64'h4000000000000000; // 2.0 FP64
B = 64'h4008000000000000; // 3.0 FP64
```

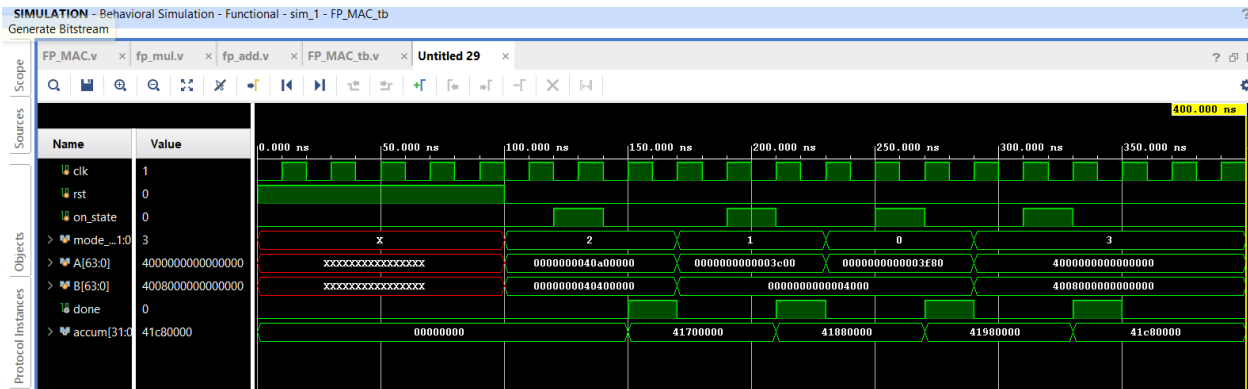

Output F32 is converted to decimal plot in simulation view

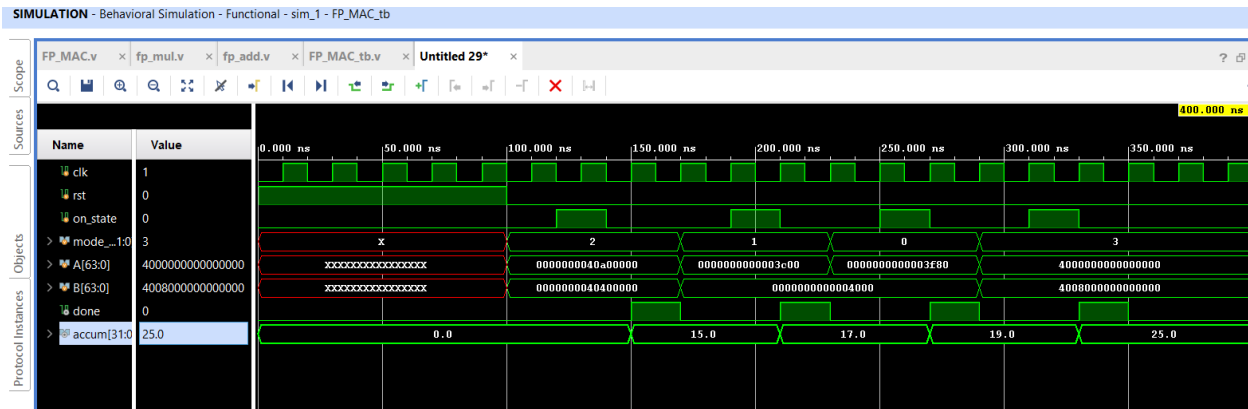

Post synthesis simulation plots:

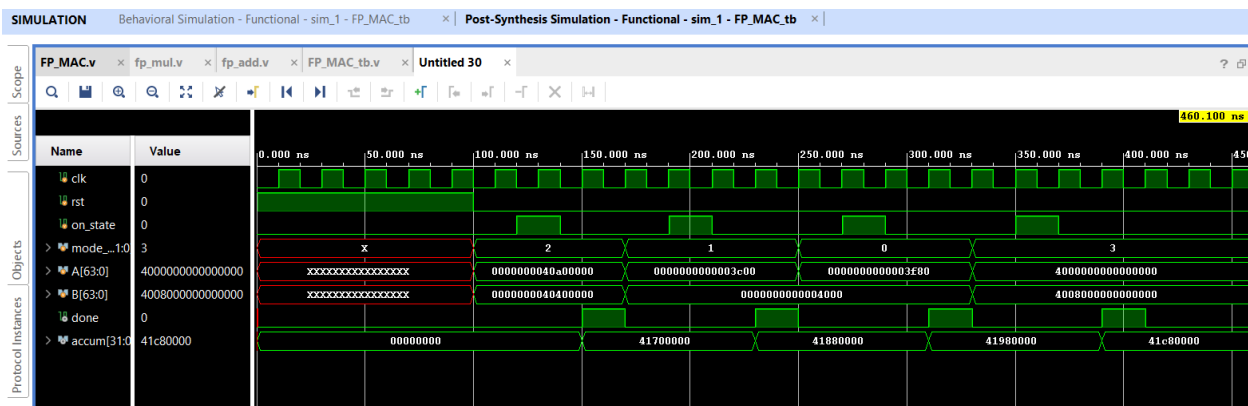

Output F32 is converted to decimal plot in simulation view

