
NOTES : TRIANGLE SYMBOLS IDENTIFY NOTES ON THIS DRAWING.

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A	PILOT RELEASE	02/06/26	A.A.

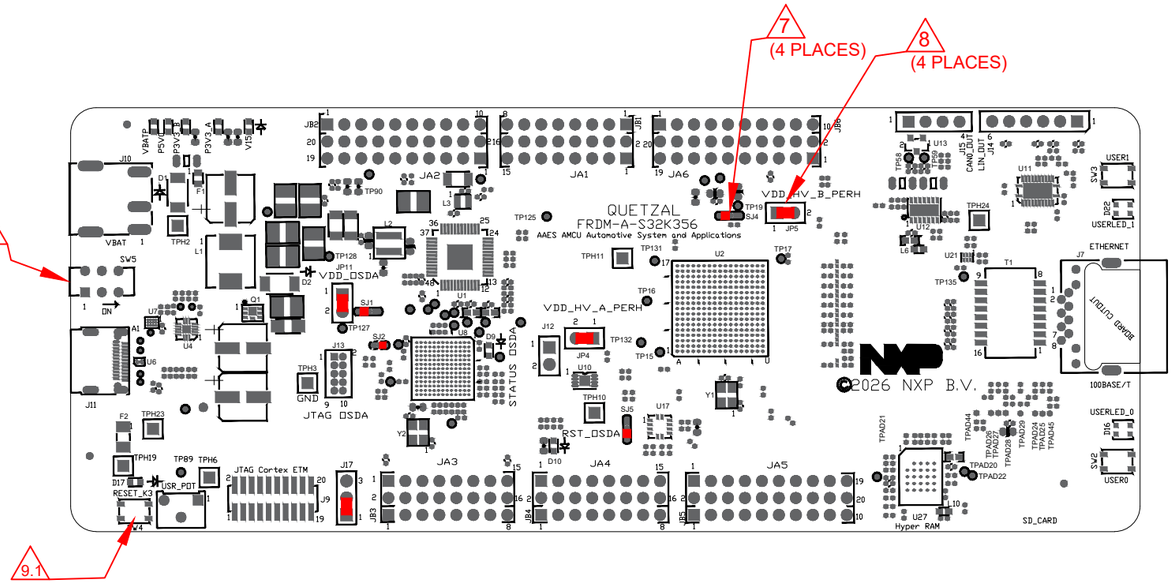

NOTES:

1. ALL COMPONENTS MUST BE ABLE TO WITHSTAND THE Pb-FREE ASSEMBLY PROFILES DESCRIBED IN IPC/JEDEC J-STD-020C (LATEST VERSION)
2. WORKMANSHIP SHALL CONFORM TO IPC-A-610 (LATEST REVISION) - CLASS 2 STANDARD.
3. PART SUBSTITUTION CRITERIA : -

ALL COMPONENT SUBSTITUTIONS, INCLUDING THE PCB, MUST BE APPROVED AND DOCUMENTED BY NXP.

4. MAXIMUM LEAD PROTRUSION ON PRIMARY AND SECONDARY SIDE OF PRINTED WIRING BOARD IS PER IPC-A-610 (LATEST REVISION).
5. IN CASES OF CONFLICT, ALL PLACEMENT LOCATIONS ARE TO BE GOVERNED BY THE X-Y CENTROID FILE (CEN-96536) , UNLESS EXPLICTLY STATED IN THIS ASSEMBLY DRAWING. SILKSCREEN REFERENCE DESIGNATORS ARE INCLUDED FOR CONVENIENCE ONLY. DNP-96536 IS PROVIDED AS A SUPPLEMENTARY DOCUMENT ALSO.
6. MEASURE THE PCB WARPAGE LEVEL AT ALL THE STAGES WHICH INCLUDES PCB INCOMING QUALITY INSPECTION, PCBA - IN PROCESS QUALITY INSPECTION AND OUTGOING QUALITY INSPECTION. REFER IP-A-600 AND IPC-TM650 (2.4.22 BOW & TWIST PERCENTAGE CALCULATION).

7. USE 4 SOLDER SHORTS ON THE FOLLOWING REFERENCE DESIGNATORS AS PER JUMPER CONFIGURATION TABLE, THIS IS THE DEFAULT SHIPPING CONFIGURATION AFTER ANY TESTING.

REF DES	SHORT (DEFAULT)
SJ4	1 - 2
SJ1, SJ2	1 - 2
SJ5	1 - 2

8. USE 4 JUMPERS (ARAS PN: 211-79847) PER JUMPER CONFIGURATION TABLE, THIS IS THE DEFAULT SHIPPING CONFIGURATION AFTER ANY TESTING.

REF DES	JUMPER (DEFAULT)
JP11	1 - 2
JP4, JP5	1 - 2
J12	OPEN
J17	1 - 2

9. DEFAULT POSITION FOR SW5 IS 1-2/4-5

9.1 COMPONENTS REF DES SW2, SW3, SW4, SW5 ARE NOT WATER PROOF. DO NOT WASH THE BOARD AFTER ASSEMBLING THESE COMPONENTS. FOLLOW THE SOLDERING AND ASSEMBLY PROCESS RECOMMENDED BY THE MANUFACTURER

SOLDER PROCESS		
Pb FREE	☒ YES	☐ NO
NO-CLEAN	☒ YES	☐ NO

PRIMARY SIDE

RoHS : ALL PARTS, MATERIALS AND FINISHED ASSEMBLY SHALL MEET THE RoHS COMMISSION DELEGATED DIRECTIVE (EU) 2015 / 863 OF MARCH 31 2015 AMENDING ANNEX II TO DIRECTIVE 2011 / 65 / EU. A CERFFICATE OF COMPLIANCE IS REQUIRED UPON REQUEST.

REACH : ALL PARTS, MATERIALS AND FINISHED ASSEMBLY SHALL NOT CONTAIN ANY OF THE SUBSTANCES OF VERY HIGH CONCERN (SVHC) ABOVE THE THRESHOLD VALUE PER THE CURRENT ECHA LIST OF SVHC'S, AND WITH THE ANNEX XIV OF REACH DIRECTIVE 76 / 769 / EEC.. A CERTIFICATE OF COMPLIANCE IS REQUIRED UPON REQUEST.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
TOLERANCES ARE:
DECIMALS
.XX ±.020
.XXX ±.010
√ RMS ALL MACHINED SURFACES
BREAK ALL SHARP EDGES AND CORNERS, REMOVE BURRS.
UNDERLINED DIM. NOT TO SCALE.
THIRD ANGLE ORTHOGRAPHIC PROJECTION IS USED.

MATERIAL

FINISH

HEAT TREAT

PART NO. 700-96536

THIS DOCUMENT CONTAINS INFORMATION PROPRIETARY TO NXP AND SHALL NOT BE USED FOR ENGINEERING DESIGN, PROCUREMENT OR MANUFACTURE IN WHOLE OR IN PART WITHOUT THE CONSENT OF NXP.

___ PUBI (PUBLIC INFORMATION)
_X_ NXP INTERNAL USE ONLY
___ NXP CONFIDENTIAL PROPRIETARY

APPROVALS		DATE
DRAWN	A. MAGANA	02/06/26
CHECKED	A. ALVAREZ	02/06/26
DESIGN ENGINEER	A. QUIROZ	02/06/26

NXP Semiconductors
6501 WILLIAM CANNON DRIVE
AUSTIN, TEXAS 78735-8598 USA


TITLE
PWB ASSEMBLY
FRDM-A-S32K356

SIZE	FILE NAME	DWG. NO.	REV
B	ASY-96536_X1.DXF	ASY-96536	A

SCALE DO NOT SCALE DRAWING SHEET 1 OF 2

DWG. NO. ASY-96536 REV A


NOTES : TRIANGLE SYMBOLS IDENTIFY NOTES ON THIS DRAWING.

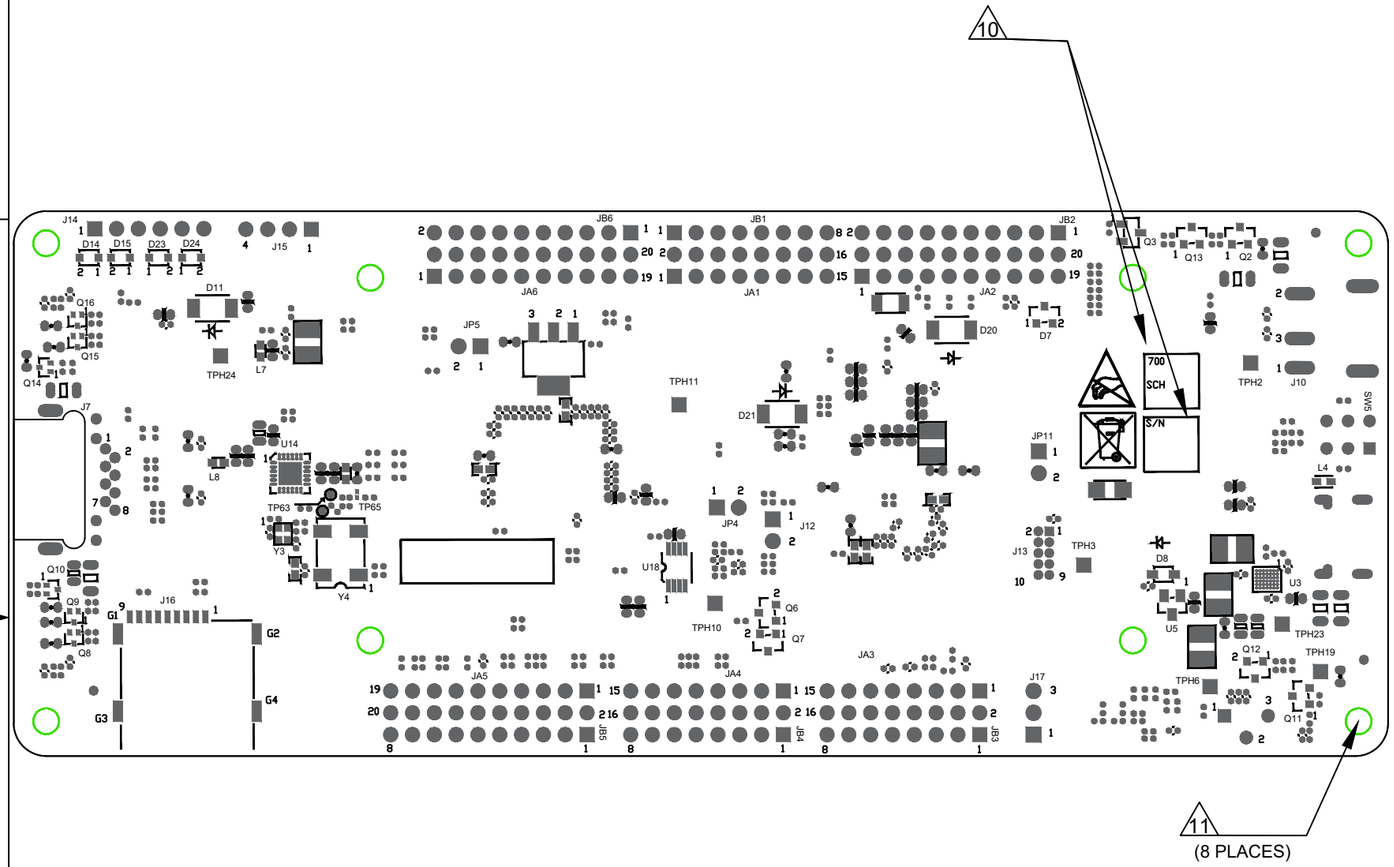

NOTES (Contd):

10. PLACE PRINTED SERIAL NUMBER, ASSEMBLY/REVISION, AND SCH/REVISION LABEL (805-76758) WHERE SHOWN. PRINTED ON THIS LABELS MUST BE THE AGILE REVISION OF THE PWA 700-95893 AND SCH-95893,NOT THE REVISION OF THIS DRAWING.

11. FIX 8 STANDOFF (ARAS PN: 280-10182) ON THE MARKED POSITIONS FROM SECONDARY SIDE.

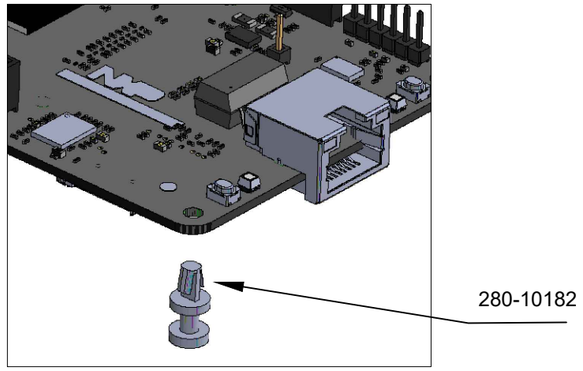

SECONDARY SIDE

DWG. NO. ASY-96536 REV A

6501 WILLIAM CANNON DRIVE
AUSTIN, TEXAS 78735-8598 USA

___ PUBI (PUBLIC INFORMATION)
_X_ NXP INTERNAL USE ONLY
___ NXP CONFIDENTIAL PROPRIETARY

TITLE
PWB ASSEMBLY
FRDM-A-S32K356

SIZE	FILE NAME	DWG. NO.	REV
B	ASY-96536_X1.DXF	ASY-96536	A

SCALE DO NOT SCALE DRAWING SHEET 2 OF 2