

About Us :

At Streamindus Engineering Services Pvt. Ltd., we take pride in being a manufacturer of high-quality Zincalume® liquid storage tanks, built to withstand the test of time. With advanced manufacturing processes, precision engineering, and superior materials, we ensure durability, corrosion resistance, and long-lasting performance. Designed for agriculture, industrial, commercial, and municipal sectors, our tanks provide robust, efficient, and cost-effective storage solutions tailored to your needs.

**We don't just supply tanks—
we manufacture excellence.**



Our Contact

+91-9266766939/8765760697

sales@streamindus.com

www.streamindus.com

**We offer wide range of
Products and Services!**

[More Info](#)



9001:2015



14001:2015



**One Window Solution Provider For
All Your Engineering Needs!**

**Durable & Reliable
ZincAlume Tanks**



TANK CAPACITY CHART

CAPACITY CHART (IN KILO LITRES AS PER NOZZLE & WALL SHEET) 200 MM OVERLAP										
SHEET/RING	3	4	5	6	7	8	9	10	11	12
Diameter	2.723	3.631	4.538	5.446	6.354	7.261	8.169	9.076	9.984	10.892
Nos of Rings										
Tank Heights	1.12	6.52	11.59	18.11	26.07	35.49	46.36	58.67	72.43	87.64
1	1.12	6.52	11.59	18.11	26.07	35.49	46.36	58.67	72.43	87.64
2	2.09	12.16	21.63	33.79	48.66	66.23	86.50	109.48	135.16	163.54
3	3.06	17.81	31.66	49.47	71.24	96.97	126.60	160.29	197.89	239.45
4	4.03	23.46	41.70	65.15	93.82	127.70	166.26	211.10	260.62	315.35
5	5	29.10	51.74	80.84	116.41	158.44	206.94	261.91	323.35	391.25
6	5.97	34.75	61.77	96.52	138.99	189.18	247.09	312.72	386.08	467.15
7	6.94	40.39	71.81	112.20	161.57	219.92	287.24	363.53	448.81	543.06
8	7.91	46.04	81.85	127.88	184.15	250.65	327.38	414.34	511.54	618.96
9	8.88	51.68	91.88	143.57	206.74	281.39	367.53	465.16	574.27	694.86
10	9.85	57.33	101.92	159.25	229.32	312.13	407.68	515.97	637.00	770.76
11	10.82	62.98	111.96	174.93	251.90	342.87	447.82	566.78	699.72	846.67
										1007.60

SHEET/RING	13	14	15	16	17	18	19	20	21	22
Diameter	11.799	12.707	13.615	14.522	15.430	16.338	17.245	18.153	19.061	19.968
Nos of Rings										
Tank Heights	1.12	122.41	141.96	162.97	185.42	209.32	234.67	261.47	289.72	319.42
1	1.12	122.41	141.96	162.97	185.42	209.32	234.67	261.47	289.72	319.42
2	2.09	228.42	264.91	304.11	346.01	390.61	437.92	487.93	540.64	596.05
3	3.06	334.43	387.86	445.25	506.60	571.90	641.16	714.38	791.56	872.69
4	4.03	440.45	510.81	586.39	667.18	753.19	844.40	940.83	1042.47	1149.33
5	5	546.46	633.76	727.53	827.77	934.48	1047.65	1239.27	1293.39	1425.96
6	5.97	652.47	756.71	868.67	988.36	1115.76	1250.89	1393.74	1544.31	1702.60
7	6.94	758.48	879.66	1009.28	1148.95	1297.05	1454.13	1620.19	1795.23	1979.24
8	7.91	864.50	1002.61	1150.96	1309.53	1478.34	1657.38	1846.65	2046.15	2255.88
9	8.88	970.51	1125.56	1292.10	1470.12	1659.63	1860.62	2073.10	2297.06	2532.51
10	9.85	1076.52	1248.81	1433.24	1630.71	1840.92	2063.87	2299.55	2547.98	2809.05
11	10.82	1182.54	1371.46	1574.38	1791.30	2022.21	2267.11	2526.01	2798.90	3085.79
										3386.07


SHEET/RING	23	24	25	26	27	28	29	30	31	32
Diameter	20.876	21.783	22.691	23.599	24.506	25.414	26.322	27.229	28.137	29.045
Nos of Rings										
Tank Heights	1.12	383.15	417.20	452.69	489.63	528.01	567.85	609.14	651.87	696.05
1	1.12	383.15	417.20	452.69	489.63	528.01	567.85	609.14	651.87	696.05
2	2.09	714.99	778.52	844.75	913.68	985.31	1059.65	1136.69	1216.43	1298.88
3	3.06	1046.83	1139.84	1223.81	1337.73	1442.61	1551.45	1664.45	1781.00	1901.71
4	4.03	1378.67	1501.16	1628.87	1761.78	1899.91	2043.25	2191.80	2345.57	2504.54
5	5	1710.51	1862.48	2020.92	2185.83	2357.21	2535.05	2719.36	2910.13	3107.37
6	5.97	2042.35	2223.81	2412.98	2609.88	2814.50	3026.85	3246.91	3474.70	3710.20
7	6.94	2374.19	2585.13	2805.04	3039.93	3271.80	3518.65	3774.47	4039.26	4313.03
8	7.91	2706.03	2946.45	3197.10	3457.99	3729.10	4010.45	4302.02	4603.83	4915.87
9	8.88	3037.87	3307.77	3589.16	3882.04	4186.40	4502.24	4829.58	5168.39	5518.70
10	9.85	3369.71	3669.09	3981.22	4306.09	4643.70	4994.04	5357.13	5732.96	6121.53
11	10.82	3701.54	4030.42	4373.28	4730.14	5100.99	5485.84	5884.69	6297.52	6724.36
										7165.18

WHY CHOOSE ZINCALUME TANKS?

- ✓ Corrosion-Resistant – No rust!
- ✓ Long-Lasting – Decades of durability.
- ✓ Cost-Effective – Saves money long-term.
- ✓ Custom Sizes – Built for your needs

TANK SPECIFICATION

ZincAlume Steel

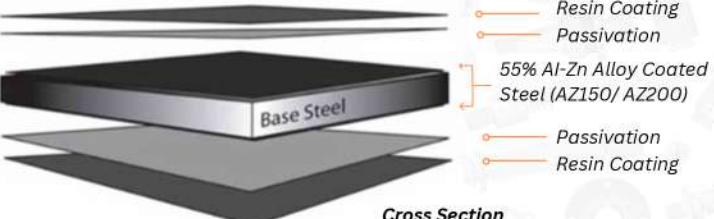

LINER SPECIFICATION



- MOC:** 760 / 900 / 1100 GSM PVC Reinforced UV stabilized
- Thickness:** 0.55 / 0.75 / 0.9 mm (Tolerance +/- 5%)
- Tear Strength:** Wrap- 40 kg & Weft- 45 kg
- Liner Pasting:** 50 mm Overlap
- Both side PVC Coated**
- Water Proofness:** 200 PSI (High Pressure)

ACCESSORIES



OUR CLIENTS



Construction & Infrastructure

Pharmaceutical & Healthcare

Marine & Coastal Application

Textile & Dyeing