




Layer 1 — Wearable input

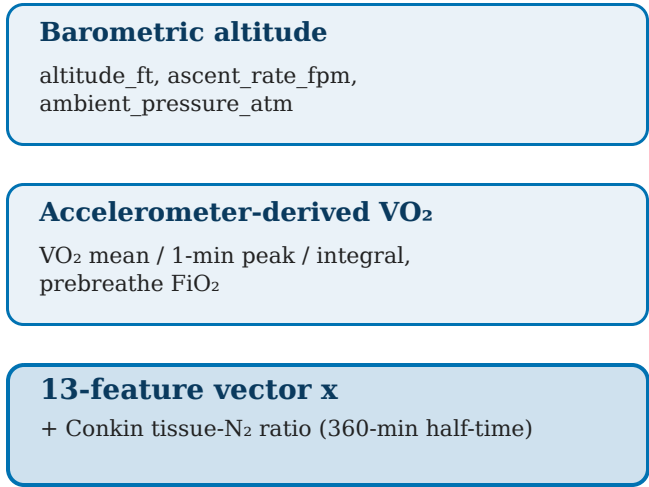

Layer 2 — ML surrogate

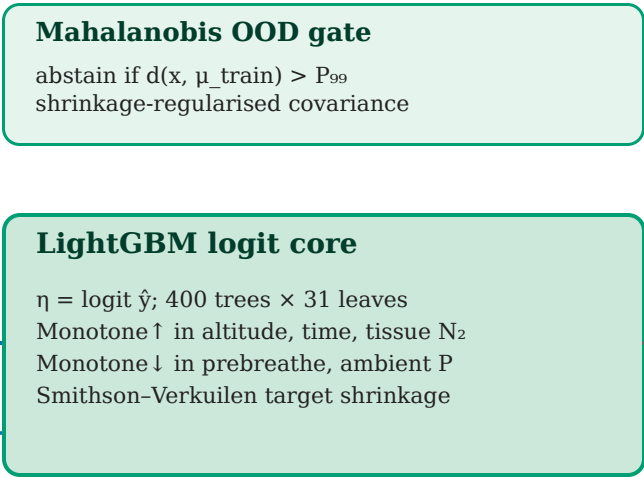

Layer 3 — Calibration & deployment

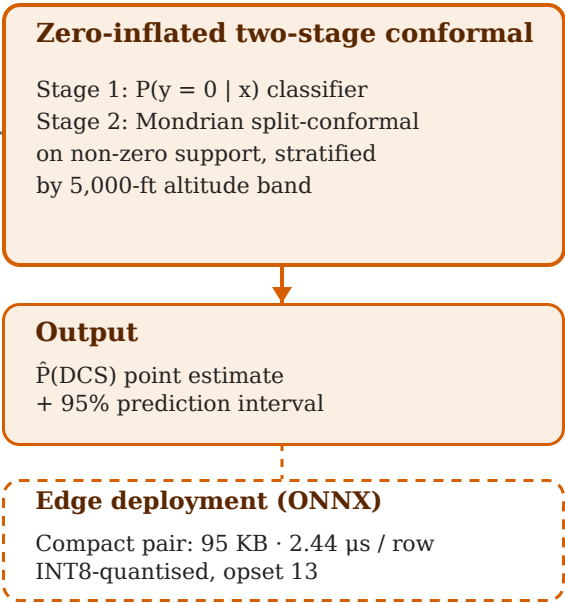

Targets a 2,386-row held-out random fold (apples-to-apples vs ADRAC log-logistic AFT). Headline numbers: MAE 0.020, R^2 0.986, Brier 0.0016, overall 95% conformal coverage 0.960; per-altitude-band ≥ 0.95 in all five bands. Compact ONNX pair: 95 KB combined, 2.44 μs per row at p50.