

CHIRP Radiance Corrections/Offsets Connecting AIRS, SNPP, JPSS-1, and IASI

AIRS Virtual Science Team Meeting

C. L. Hepplewhite^{1,2}, L. Larrabee Strow^{1,2}, and Howard Motteler²

October 2020

¹UMBC Physics Dept.

²UMBC JCET

Summary

- What is CHIRP
- What are radiance offsets for connecting AIRS, CrIS and IASI.
- Data and methods used to derive the radiance offsets.
- Results and Discussion.
- Integration of offsets into the CHIRP L1C.

What is CHIRP

- Climate Hyperspectral InfraRed Product is derived sequentially from multiple similar sensors in low earth orbit to create an on-going radiance record from the start of AIRS to the present.
- CHIRP data are available as level 1 calibrated, geolocated granules. (Details are provided in the accompanying presentation and on-line documentation).
- Current working version of CHIRP connects AIRS to CrIS from SNPP and JPSS1.
- and has the spectral resolution of CrIS in medium resolution, equivalent to: 0.8/0.6/0.4 cm interferometric OPD (LW/MW/SW).
- Of concern in this work is that the radiometric calibration is stable (has a fixed relationship to absolute truth, known to be 'small'), and there is no radiometric change in CHIRP going from one parent (AIRS) to another (CrIS).

What are the Radiance Offsets

- The radiance offset between two sensors is the radiometric calibration difference observed when they are both measuring the same scene at the same time.
- In principle, radiometric calibration offsets could be a function of time and brightness temperature and may be non-linear.
- Ideally the best result would be to cross-calibrate the sensors against a primary standard black body - instead must use data available during the missions.
- Fortunately there is a lot of mission overlap between AIRS, CrIS and IASI (more details to follow).
- In the first version of CHIRP the radiometric offset is a single valued vector representing the difference for each channel of the CHIRP spectral grid.

Data and Methods

- Data used: SNOs and global random statistical samples.
- Periods analyzed include all available mission overlaps.
- Available mission overlaps for
 - AIRS:NPP from Apr 2012 to present (Dec 2015 at FSR).
 - AIRS:J1 from Jan 2018 to present.
 - NPP:J1 from Jan 2018 to present.
 - AIRS:IASI1 from May 2007 to present.
 - NPP and J1:IASI1. (Note: SNOs are not available for NPP:J1).
- The transition date for parent AIRS to parent CrIS SNPP is 01-Sep-2016.
- The switch to JPSS1 is proposed 01-Sep-2018 to avoid the 2019 SNPP CrIS shutdown.

Data and Methods 2

- Two Sources of intercalibration data are available: SNOs and global random samples.
- SNOs have the advantage of being matched pairs of observations, but are spatially less uniformly distributed than global random.
 - AIRS:CrIS SNOs are global but weighted to high latitudes,
 - IASI:CrIS SNOs are restricted to a very narrow latitude band near 70-deg.
- both SNOs and random samples can be used for trending and for scene dependencies.

Results 1. AIRS:NPP bias

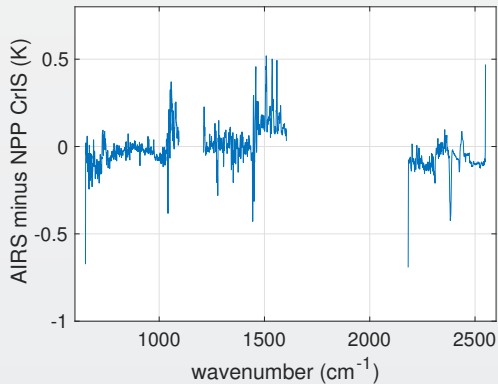


Figure 1: AIRS bias relative to SNPP from global statistics.

Results 2. J1:NPP bias

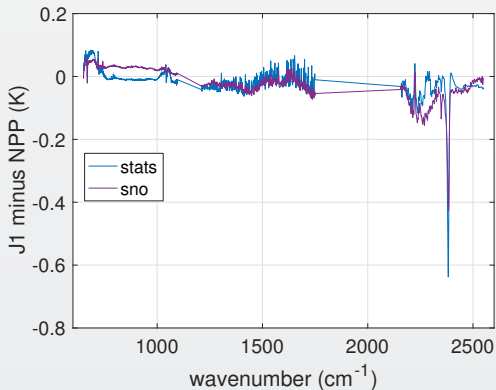


Figure 2: CrIS bias from JPSS-1 relative to SNPP from SNO and global statistics.

Results 3. Samples of Irradiance variation.

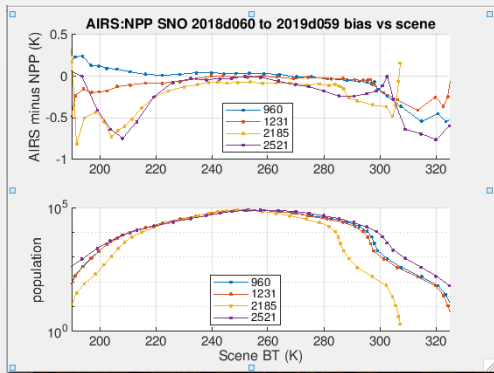


Figure 3: Selected channel variation with irradiance

Results 4. Sample of bias stability.

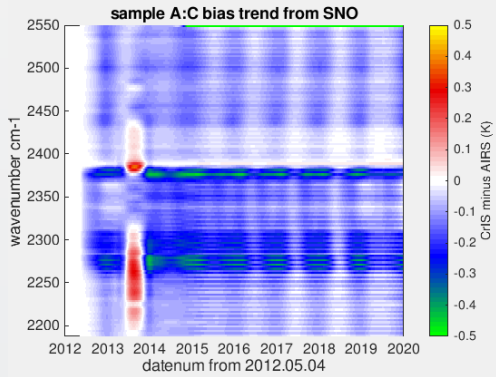


Figure 4: SW bias variation

Summary, Conclusions and Future Work

- Radiometric offset vectors have been determined to tie CHIRP derived from AIRS to NPP:CrIS and J1:CrIS.
- The current CHIRP product includes a single valued vector for every channel.
- The bias has been found to be stable over the period of interest, which is 2016 to 2019.
- The dependency of bias on irradiance has been investigated, and some examples have been illustrated.
- Future work ??