

# CHIRP Radiance Corrections/Offsets Connecting AIRS, SNPP, JPSS-1, and IASI

AIRS Virtual Science Team Meeting

---

C. L. Hepplewhite<sup>1,2</sup>, L. Larrabee Strow<sup>1,2</sup>, and Howard Motteler<sup>2</sup>

October 2020

<sup>1</sup>UMBC Physics Dept.

<sup>2</sup>UMBC JCET

# Summary

- What is CHIRP
- What are radiance offsets for connecting AIRS, CrIS and IASI.
- Data and methods used to derive the radiance offsets.
- Results and Discussion.
- Integration of offsets into the CHIRP L1C.

# What is CHIRP

- Climate Hyperspectral InfraRed Product is derived sequentially from multiple similar sensors in low earth orbit to create an on-going radiance record from the start of AIRS to the present.
- CHIRP data are available as level 1 calibrated, geolocated granules. (Details are provided in the accompanying presentation and on-line documentation).
- Current working version of CHIRP connects AIRS to CrIS from SNPP and JPSS1.
- and has the spectral resolution of CrIS in medium resolution, equivalent to: 0.8/0.6/0.4 cm interferometric OPD (LW/MW/SW).
- Of concern in this work is that the radiometric calibration is stable (has a fixed relationship to absolute truth, known to be 'small'), and there is no radiometric change in CHIRP going from one parent (AIRS) to another (CrIS).

# What are the Radiance Offsets

- The radiance offset between two sensors is the radiometric calibration difference observed when they are both measuring the same scene at the same time.
- In principle, radiometric calibration offsets could be a function of time and brightness temperature and may be non-linear.
- Ideally the best result would be to cross-calibrate the sensors against a primary standard black body - instead must use data available during the missions.
- Fortunately there is a lot of mission overlap between AIRS, CrIS and IASI (more details to follow).
- CHIRP V1 derived from AIRS or J1-CrIS have BT bias offsets applied to convert them to the NPP-CrIS radiometric calibration.


# Data and Methods

- Data used: SNOs and global random statistical samples.
- Periods analyzed include all available mission overlaps.
- Available mission overlaps for
  - AIRS:NPP from Apr 2012 to present (Dec 2015 at FSR).
  - AIRS:J1 from Jan 2018 to present.
  - NPP:J1 from Jan 2018 to present.
  - AIRS:IASI1 from May 2007 to present.
  - NPP and J1:IASI1. (Note: SNOs are not available for NPP:J1).
- The transition date for parent AIRS to parent CrIS SNPP is 01-Sep-2016.
- The switch to JPSS1 is proposed 01-Sep-2018 to avoid the 2019 SNPP CrIS shutdown.

## Data and Methods 2


- Two Sources of intercalibration data are available: SNOs and global random samples.
- SNOs have the advantage of being matched pairs of observations, but are spatially less uniformly distributed than global random.
  - AIRS:CrIS SNOs are global but weighted to high latitudes,
  - IASI:CrIS SNOs are restricted to a very narrow latitude band near 70-deg.
- both SNOs and random samples can be used for trending and for scene dependencies.
- In the following bias plots the mission overlap period March.2018 to Feb.2019 (incl.) is used.

# Results 1. AIRS:NPP bias versus AIRS modules

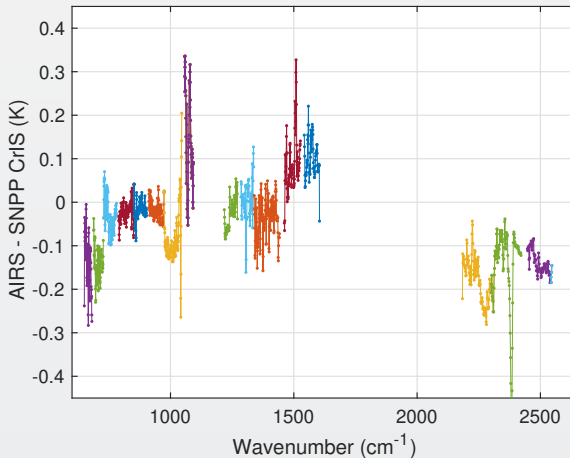

**Figure 1:** AIRS bias relative to SNPP from global statistics. Colors denote AIRS detector modules.


## Results 2. AIRS:NPP bias with fill and bad channels

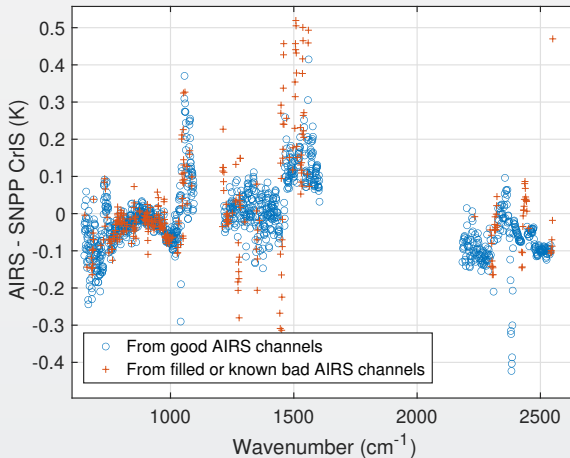

**Figure 2:** AIRS bias relative to SNPP from global statistics. Showing parent bad or fill channels (total of 356).




## Results 3. AIRS:NPP and AIRS:J1 bias

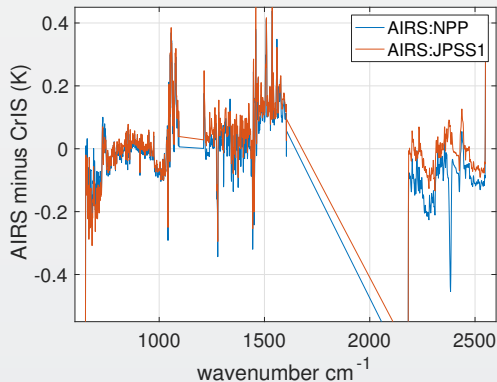


**Figure 3:** CHIRP channels. AIRS bias relative to SNPP and J1 from SNO. One year of data. Double difference can be used for NPP:J1 bias.

## Results 4. AIRS:NPP bias From Stats and SNOs

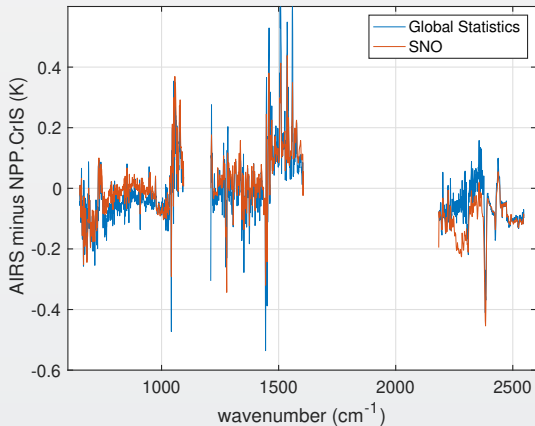


**Figure 4:** AIRS bias relative to SNPP from SNO and global stats. Good agreement,  $\sim 0.03K$ .

## Results 5. J1:NPP bias

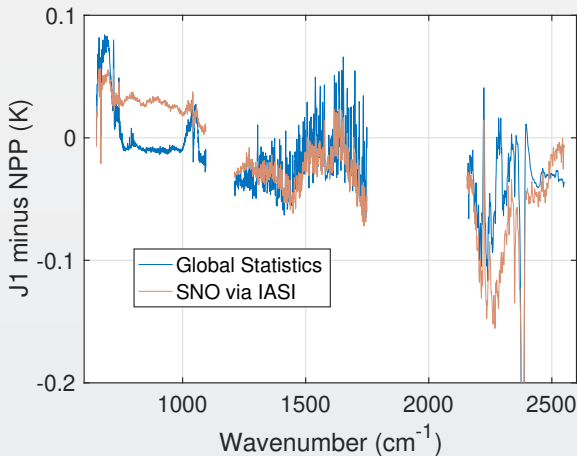

**Figure 5:** CHIRP channels. CrIS bias from JPSS-1 relative to SNPP from SNO using IASI.1 as cross reference and from global random stats.

## Results 6. Bias variation with irradiance.

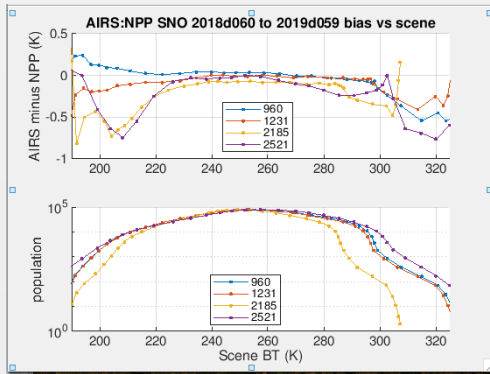

**Figure 6:** Four CHIRP channels. Bias variation with irradiance from SNO.

## Summary, Conclusions and Future Work

- Radiometric offset vectors have been determined to tie CHIRP derived from AIRS to NPP:CrIS and J1:CrIS.
- The current CHIRP product includes a single valued vector for every channel.
- The bias has been found to be stable over the period of interest, which is 2016 to 2019.
- The dependency of bias on irradiance has been investigated, and some examples have been illustrated.
- Future work includes validation of the CHIRP product with particular attention to equivalence of trends of parents sensor.