

TP-LINK TL-WRB41N



TP-LINK TL-WRB41N

היי אילן

היוזר הזמני הוא beecommtes3

סיסמא : Alex2009

כרגע הוא עדיין לא פעיל אעדכן אותך מתי שהוא יהיה תקין.

תומר שלח לפה את המדריך צריך להוריד משם את ה DMZ ולפתוח את הפורטים הבאים :

ip 192.168.0.1 TCP\UDP 5631-5632

ip 192.168.0.2 TCP\UDP 5633-5634

זה רץ לפי מספר העמדות בסדר עולה וכו'

חוץ מזה צריך לפתוח פורט למחשב הראשי של 8010 ו 9010 וכמובן 3389 RDP

אני מצרף תמונות לאיך זה נראה בראוטר ומה עוד צריך לפתוח שימו לב!!

בשביל לבדוק עם היוזר התחבר יש להריץ פינג לכתובת של שב"א 194.194.193.58.

לגבי ההתקנה מחר היוזר שצריך להגדיר בראוטר הוא

burgk סיסמא: yaro1306.

TP-LINK TL-WRB41N

סוג חיבור - PPTP

שם משתמש - beecom-user@Cactcom

כתובת IP - 212.25.127.13



TP-Link Wireless N Router WR841N
Model No. TL-WR841N

Status

Quick Setup

Operation Mode

Network

- WAN

- LAN

- IPTV

- MAC Clone

Wireless

Guest Network

DHCP

Forwarding

Security

Parental Controls

WAN Settings

Connection Type: PPTP ▼ Detect

Username: dedabat@Cactcom

Password: 🔍
Connect Disconnect

Addressing Type: ☒ Dynamic IP ☐ Static IP

Server IP Address/Name: 212.25.127.13

IP Address: 0.0.0.0 🔍

Subnet Mask: 0.0.0.0

Gateway: 0.0.0.0

DNS Server: 0.0.0.0, 0.0.0.0

Internet IP Address: 0.0.0.0

Internet DNS: 0.0.0.0, 0.0.0.0

MTU(Bytes): 1420 { 1420 as default, do not change ur

Connection Mode: ☒ Always on
☐ Connect on demand
☐ Connect manually

Max Idle Time: 15 minutes (0 meaning connection reme

Save

TP-LINK TL-WRB41N

The screenshot displays the web management interface of a TP-Link TL-WRB41N router. The top header is blue with the TP-Link logo and the router's name and model number. A left sidebar contains a menu with various configuration options. The 'Network' section is currently selected and highlighted in yellow. Within this section, the 'LAN' option is chosen. The main content area, titled 'LAN Settings', shows the MAC Address as D8:0D:17:95:32:46. The IP Address is set to 192.168.0.254, and the Subnet Mask is set to 255.255.255.0. A 'Save' button is located at the bottom right of the settings area.

TP-Link Wireless N Router WR841N
Model No. TL-WR841N

tp-link

Status

Quick Setup

Operation Mode

Network

- WAN
- LAN
- IPTV
- MAC Clone

Wireless

Guest Network

DHCP

Forwarding

Security

Parental Controls

Access Control

LAN Settings

MAC Address: D8:0D:17:95:32:46

IP Address: 192.168.0.254

Subnet Mask: 255.255.255.0

Save


TP-LINK TL-WRB41N

Virtual Servers

ID	Service Port	Internal Port	IP Address	Protocol	Status	Modify
1	5631-5632	5631-5632	192.168.0.1	All	Enabled	Modify Delete
2	3389	3389	192.168.0.1	All	Enabled	Modify Delete
3	8010	8010	192.168.0.1	All	Enabled	Modify Delete
4	9010	9010	192.168.0.1	All	Enabled	Modify Delete
5	5633-5634	5633-5634	192.168.0.2	All	Enabled	Modify Delete
6	5635-5636	5635-5636	192.168.0.3	All	Enabled	Modify Delete

[Add New...](#)[Enable All](#)[Disable All](#)[Delete All](#)[Previous](#)[Next](#)

TP-LINK TL-WRB41N

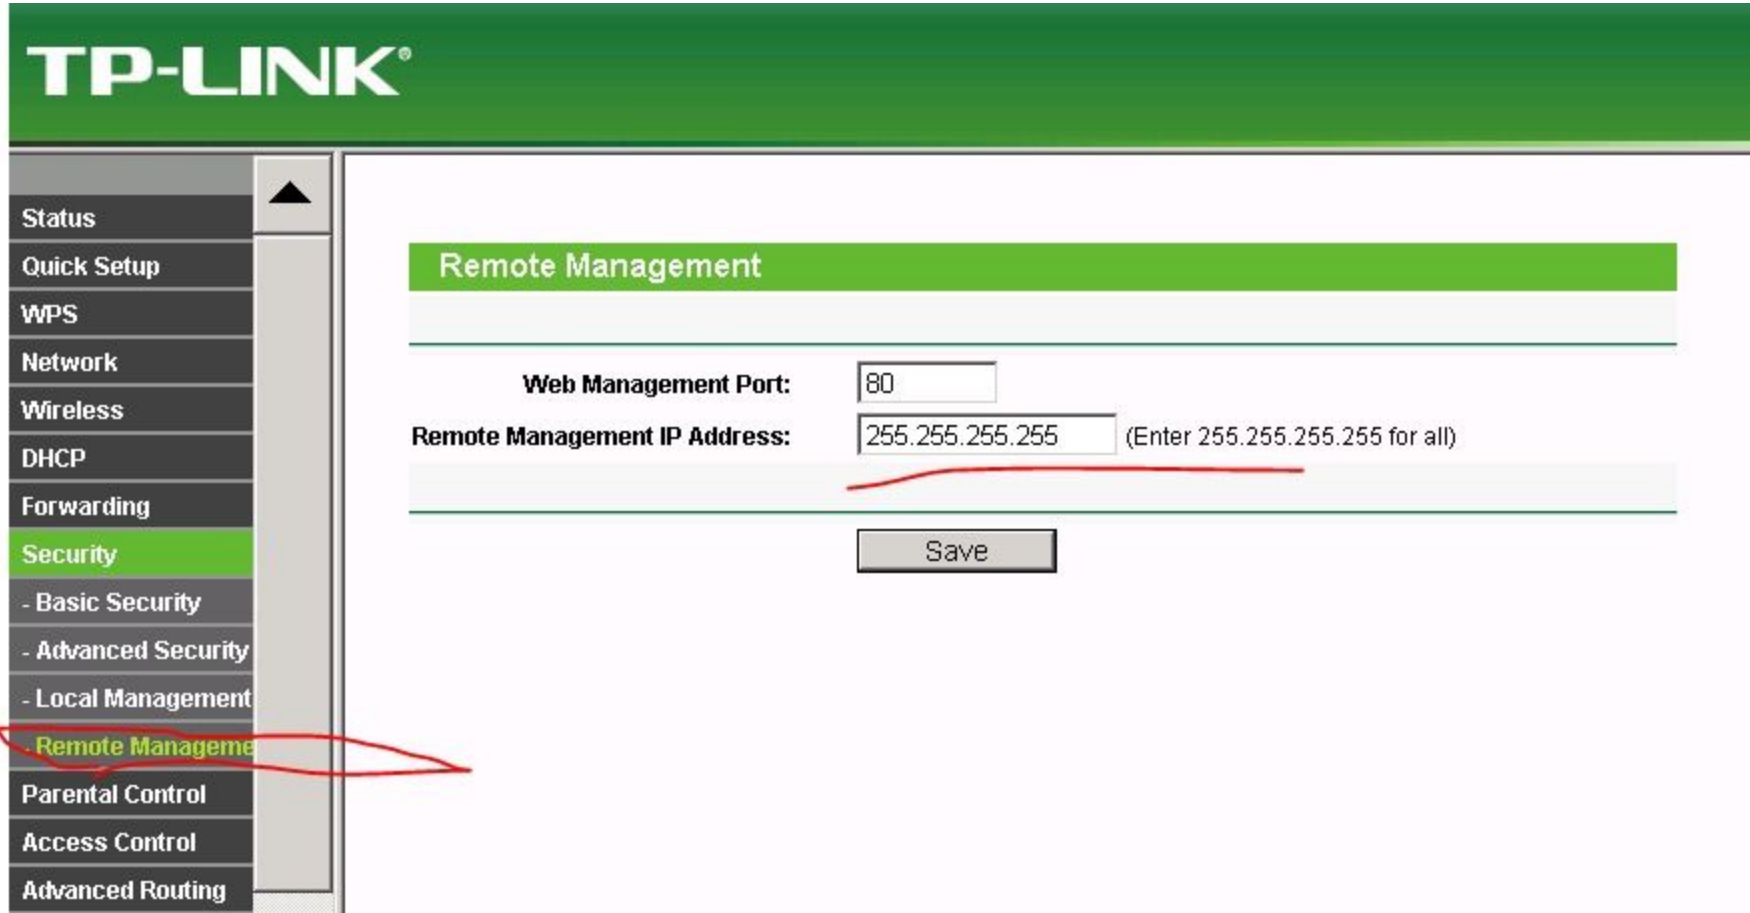

The screenshot shows the TP-LINK web management interface. The left sidebar contains a menu with the following items: Status, Quick Setup, WPS, Network, Wireless, DHCP, Forwarding, Security (highlighted in green), - Basic Security, - Advanced Security, - Local Management, - Remote Management (circled in red with a red arrow pointing to it), Parental Control, Access Control, and Advanced Routing. The main content area is titled 'Remote Management' in a green header. Below this header, there are two input fields: 'Web Management Port' with the value '80' and 'Remote Management IP Address' with the value '255.255.255.255'. A red line is drawn under the IP address field. To the right of the IP address field is the text '(Enter 255.255.255.255 for all)'. Below these fields is a 'Save' button.

TP-LINK®

Remote Management

Web Management Port:

Remote Management IP Address: (Enter 255.255.255.255 for all)

Menu items: Status, Quick Setup, WPS, Network, Wireless, DHCP, Forwarding, Security, - Basic Security, - Advanced Security, - Local Management, - Remote Management, Parental Control, Access Control, Advanced Routing.

TP-LINK TL-WRB41N

Add or Modify a Virtual Server Entry

Service Port: (XX-XX or XX)
Internal Port: (XX, Enter a specific port number or leave it blank)
IP Address:
Protocol: ▼
Status: ▼

Common Service Port: ▼

Save

Back

TP-LINK TL-WRB41N


Add or Modify a Virtual Server Entry

Service Port: (XX-XX or XX)
Internal Port: (XX, Enter a specific port number or leave it blank)
IP Address:
Protocol: ▼
Status: ▼

Common Service Port: ▼

Save

Back

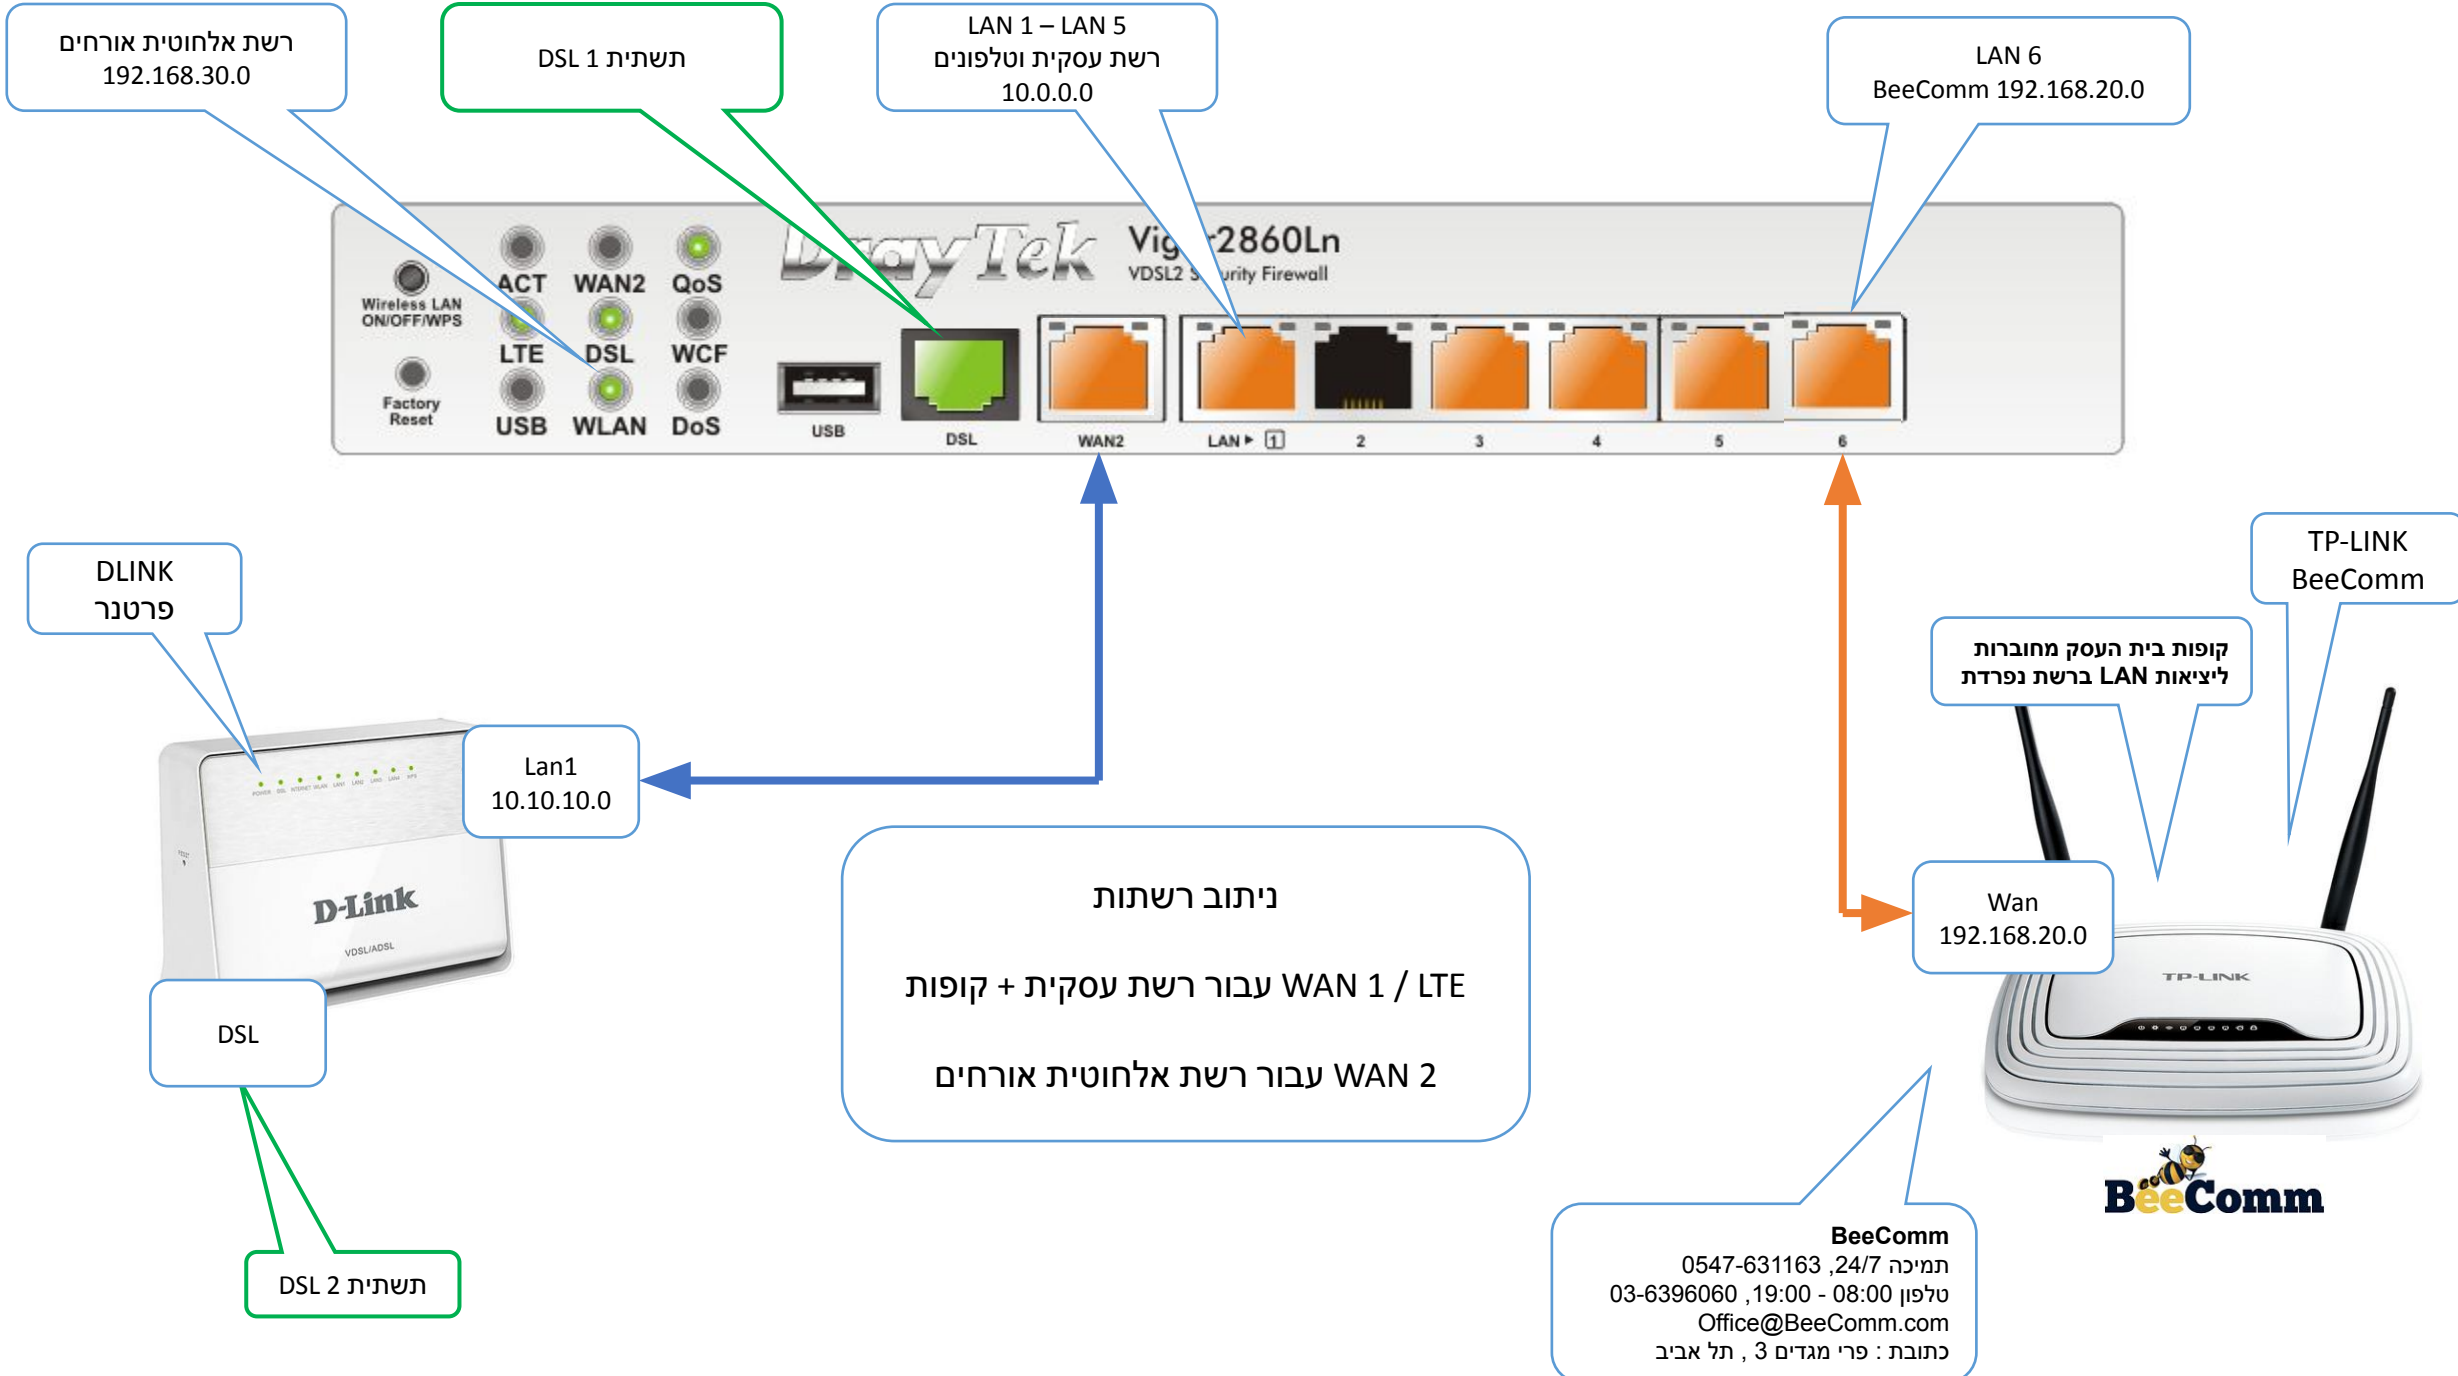

דרייטק Dash Board

DrayTek

Vigor2860 Series



5 min

IPv6

Dashboard
Wizards
Online Status

WAN
LAN
Hotspot Web Portal
Load-Balance/Route Policy
NAT
Hardware Acceleration
Firewall
User Management
Objects Setting
CSM
Bandwidth Management
Applications
VPN and Remote Access
Certificate Management
LTE
Wireless LAN
SSL VPN
USB Application
System Maintenance
Diagnostics

Central Management
VPN
AP
Switch
External Devices

Support Area
Product Registration

All Rights Reserved.

Dashboard



System Information

Model Name	Vigor2860Ln	System Up Time	22:1:20
Router Name	DrayTek	Current Time	2020 Jan 9 Thu 13:48:12
Firmware Version	3.8.4.3_Partner_RC3b_VT1	Build Date/Time	May 24 2017 14:39:54
DSL Version	567517_A/B/C HW: A	LAN MAC Address	00-1D-AA-16-85-E8

IPv4 Internet Access

	Line / Mode	IP Address	MAC Address	Up Time
WAN1	VDSL2 / PPPoE	84.228.28.195	00-1D-AA-16-85-E9	21:59:36
WAN2	Ethernet / DHCP Client	10.10.10.2	00-1D-AA-16-85-EA	22:00:48
LTE	USB / DHCP Client	84.228.28.8	00-A0-C6-00-00-55	22:00:28
WAN4	USB / ---	Disconnected	00-1D-AA-16-85-EC	00:00:00

Interface

DSL	Connected : Down Stream : 93595Kbps / Up Stream : 5021Kbps Vectoring Active
WAN	Connected : 3, WAN1 WAN2 LTE WAN4
LAN	Connected : 0, Port1 Port2 Port3 Port4 Port5 Port6
WLAN	Connected : 0
USB	Connected : 0, USB

Security

VPN	Connected : 0 Remote Dial-in User / LAN to LAN
MyVigor	Activate : 0

System Resource

Status

Status
Operational
Access Tech
LTE
Band
E-UTRA Op Band 3
Operator
42501
Signal
RSRP: -103 dBm (Good)
RSSI: -71 dBm (Good)
New SMS
0

Quick Access

System Status
Dynamic DNS
TR-069
User Management
IM/P2P Block
Schedule
SysLog / Mail Alert

הגדרות LAN

LAN >> General Setup

General Setup

Index	Status	DHCP	IP Address	
LAN 1	V	V	10.0.0.138	Details Page
LAN 2	☒	☒	192.168.20.1	Details Page
LAN 3	☒	☒	192.168.30.1	Details Page
LAN 4	☐	☒	192.168.4.1	Details Page
LAN 5	☐	☒	192.168.5.1	Details Page
LAN 6	☐	☒	192.168.6.1	Details Page
DMZ Port	☐	☒	192.168.7.1	Details Page
IP Routed Subnet	☐	☒	192.168.0.1	Details Page

LAN1
רשת עסקית 10.0.0.0

LAN2
רשת BeeComm 192.168.20.0

LAN3
רשת אורחים 192.168.30.0

הגדרות LAN 1 - רשת עסקית, טלפונים, אלחוטית עסקית

LAN >> General Setup

LAN 1 Ethernet TCP / IP and DHCP Setup	
Network Configuration	DHCP Server Configuration
For NAT Usage	☒ Enable Server ☐ Disable Server
IP Address	☐ Enable Relay Agent
Subnet Mask	Start IP Address
	IP Pool Counts
RIP Protocol Control	Gateway IP Address
	Lease Time
	☒ Clear DHCP lease for inactive clients periodically
	DNS Server IP Address
	Primary IP Address
	Secondary IP Address

Note: Change IP Address or Subnet Mask in Network Configuration will also change HA LAN1 Virtual IP to the same domain IP.

הגדרות LAN 2 – רשת BeeComm

LAN >> General Setup

LAN 2 Ethernet TCP / IP and DHCP Setup	
Network Configuration	DHCP Server Configuration
☒ Enable ☐ Disable	☒ Enable Server ☐ Disable Server
☒ For NAT Usage ☐ For Routing Usage	☐ Enable Relay Agent
IP Address 192.168.20.1	Start IP Address 192.168.20.10
Subnet Mask 255.255.255.0	IP Pool Counts 100
	Gateway IP Address 192.168.20.1
	Lease Time 259200 (s)
	☒ Clear DHCP lease for inactive clients periodically.
	DNS Server IP Address
	Primary IP Address
	Secondary IP Address

Note: Change IP Address or Subnet Mask in Network Configuration will also change HA LAN2 Virtual IP to the same domain IP.

הגדרות LAN 3 – רשת אלחוטית אורחים

LAN >> General Setup

LAN 3 Ethernet TCP / IP and DHCP Setup

Network Configuration

☒ Enable ☐ Disable

☒ For NAT Usage ☐ For Routing Usage

IP Address 192.168.30.1

Subnet Mask 255.255.255.0

DHCP Server Configuration

☒ Enable Server ☐ Disable Server

☐ Enable Relay Agent

Start IP Address 192.168.30.10

IP Pool Counts 100

Gateway IP Address 192.168.30.1

Lease Time 259200 (s)

☒ Clear DHCP lease for inactive clients periodically.

DNS Server IP Address

Primary IP Address

Secondary IP Address

Note: Change IP Address or Subnet Mask in Network Configuration will also change HA LAN3 Virtual IP to the same domain IP.

שיוך פורט LAN ורשתות אלחוטיות

עם סוויץ מנוהל + AP

להפעיל VLAN TAG

VLAN Configuration

☒ Enable														
	LAN						Wireless LAN				Subnet	VLAN Tag		
	P1	P2	P3	P4	P5	P6	SSID1	SSID2	SSID3	SSID4		Enable	VID	Priority
VLAN0	☒	☒	☒	☒	☒	☐	☒	☐	☐	☐	LAN 1 ▼	☐	0	0 ▼
VLAN1	☐	☐	☐	☐	☐	☒	☐	☐	☐	☐	LAN 2 ▼	☐	0	0 ▼
VLAN2	☐	☐	☐	☐	☒	☐	☐	☐	☐	☐	LAN 3 ▼	☒	30	0 ▼
VLAN3	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	LAN 1 ▼	☐	0	0 ▼
VLAN4	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	LAN 1 ▼	☐	0	0 ▼
VLAN5	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	LAN 1 ▼	☐	0	0 ▼
VLAN6	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	LAN 1 ▼	☐	0	0 ▼
VLAN7	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	LAN 1 ▼	☐	0	0 ▼

LAN 1 – LAN 5, SSID1
רשת עסקית, טלפונים,
אלחוטית עסקית
10.0.0.0

LAN 6
BeeComm 192.168.20.0

LAN 5
guest 192.168.30.0

להגדרת מתג מנוהל + AP עבור למצגת הגדרת מתג / AP

שייך פורט LAN ורשתות אלחוטיות

ללא סוויץ מנוהל + AP

LAN >> VLAN Configuration

VLAN Configuration

	LAN						Wireless LAN				Subnet	VLAN Tag		
	P1	P2	P3	P4	P5	P6	SSID1	SSID2	SSID3	SSID4		Enable	VID	Priority
VLAN0	☒	☒	☒	☒	☒	☐	☒	☐	☐	☐	LAN 1 ▼	☐	0	0 ▼
VLAN1	☐	☐	☐	☐	☐	☒	☐	☐	☐	☐	LAN 2 ▼	☐	0	0 ▼
VLAN2	☐	☐	☐	☐	☐	☐	☐	☒	☐	☐	LAN 3 ▼	☐	0	0 ▼
VLAN3	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	LAN 1 ▼	☐	0	0 ▼
VLAN4	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	LAN 1 ▼	☐	0	0 ▼
VLAN5	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	LAN 1 ▼	☐	0	0 ▼
VLAN6	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	LAN 1 ▼	☐	0	0 ▼
VLAN7	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	LAN 1 ▼	☐	0	0 ▼

LAN 1 – LAN 5, SSID1
רשת עסקית, טלפונים,
אלחוטית עסקית
10.0.0.0

LAN 6
BeeComm 192.168.20.0

SSID2
רשת אלחוטית אורחים
192.168.30.0

רשתות אלחוטיות

Wireless LAN >> General Setup

General Setting (IEEE 802.11)

☒ Enable Wireless LAN

Mode :

Mixed(11b+11g+11n) ▼

Channel:

Channel 4, 2427MHz ▼

	Enable	Active	Hide SSID	SSID	Isolate Member	Isolate VPN
1	☒	V	☐	MO	☐	☐
2	☒	V	☐	Mansura	☐	☐
3	☐	X	☐		☐	☐
4	☐	X	☐		☐	☐

Note:

Enabling the Isolate Member configuration will forbid the wireless clients associated to the same SSID from connecting to each other.

The isolate VPN configuration will isolate the wireless traffic from VPN connections and thus, wireless clients will not be able to access the VPN network under this setting.

When **High Availability** is set as Hot-Standby redundant method and displayed as Secondary State with Stable condition on the page of **High Availability Status**, the wireless function will be disabled.

רשת אלחוטית עסקית
10.0.0.0

רשת אלחוטית אורחים
192.168.30.0

במקרה ומותקן AP נא לבטל את ה WIFI בראוטר

הגדרות Load Balance

Load-Balance/Route Policy



Load-Balance/Route Policy

10 ▾

rules per page | [Set to Factory Default](#) |

Index	Enable	Comment	Protocol	Interface	Priority	Src IP Start	Src IP End	Dest IP Start	Dest IP End	Dest Port Start	Dest Port End	Move Up	Move Down
1	☐	SIP	TCP/UDP	WAN1	1	Any	Any	Any	Any	5060	5095		Down
2	☐	RTP	UDP	WAN1	1	Any	Any	Any	Any	10000	35000	UP	Down
3	☒	officeph...	Any	WAN1	1	10.0.0.0	10.0.0.255	Any	Any	Any	Any	UP	Down
4	☒	beecomm	Any	WAN1	1	192.168.0.0	192.168.0.255	Any	Any	Any	Any	UP	Down
5	☒	guest	Any	WAN2	142	192.168.30.0	192.168.30.255	Any	Any	Any	Any	UP	Down
6	☐		Any	WAN1	200	Any	Any	Any	Any	Any	Any	UP	Down
7	☐		Any	WAN1	200	Any	Any	Any	Any	Any	Any	UP	Down
8	☐		Any	WAN1	200	Any	Any	Any	Any	Any	Any	UP	Down
9	☐		Any	WAN1	200	Any	Any	Any	Any	Any	Any	UP	Down
10	☐		Any	WAN1	200	Any	Any	Any	Any	Any	Any	UP	Down

<< [1-10](#) | [11-20](#) | [21-30](#) | [31-40](#) | [41-50](#) >>

[Next](#) >>

- ☐ Wizard Mode: most frequently used settings in three pages
- ☒ Advance Mode: all settings in one page

OK

רשת עסקית
10.0.0.0

BeeComm רשת
192.168.20.0

רשת אורחים
192.168.30.0

הגדרות Load Balance רשת עסקית

Index: 3

☒ Enable

Comment:

Criteria

Protocol:

Source

☐ Any

☒ Src IP Range

Start: End:

☐ Src IP Subnet

Destination

☒ Any

☐ Dest IP Range

☐ Dest IP Subnet

☐ Domain Name

Destination Port

☒ Any

☐ Dest Port Start ~ Dest Port End

Send via if Criteria Matched

Interface

☒ WAN/LAN

☐ VPN

Gateway

☒ Default Gateway

☐ Specific Gateway

Priority

Priority:

Low 250 150 0 High

Default Route Routes in Routing Table

Packet Forwarding to WAN via

☒ Force NAT

☐ Force Routing

☒ Failover to

☒ WAN/LAN

☐ VPN

☐ Route Policy

Gateway

☒ Default Gateway

☐ Specific Gateway

☐ Failback

New sessions affected by this Policy will be sent via primary interface once that interface resumes service; while existing sessions will remain on the failovered interface.

הגדרת תחום כתובות

ניתוב ראשי WAN1

ניתוב גיבוי LTE

הגדרות Load Balance רשת BeeComm

Index: 4

☒ Enable

Comment: beecomm

Criteria

Protocol: Any ▼

Source

- ☐ Any
- ☒ Src IP Range
Start: 192.168.20.0 End: 192.168.20.255
- ☐ Src IP Subnet

Destination

- ☒ Any
- ☐ Dest IP Range
- ☐ Dest IP Subnet
- ☐ Domain Name

Destination Port

- ☒ Any
- ☐ Dest Port Start ~ Dest Port End
 ~

Send via if Criteria Matched

Interface

- ☒ WAN/LAN: WAN1 ▼
- ☐ VPN: VPN 1.??? ▼

Gateway

- ☒ Default Gateway
- ☐ Specific Gateway:

Priority

Priority:

Low 250 150 0 High
Default Route Routes in Routing Table

☐ More Options

Packet Forwarding to WAN via

- ☒ Force NAT
- ☐ Force Routing

☒ Failover to

- ☒ WAN/LAN: LTE ▼
- ☐ VPN: VPN 1.??? ▼
- ☐ Route Policy: Index 1 ▼

Gateway

- ☒ Default Gateway
- ☐ Specific Gateway: 0.0.0.0

☐ Failback

New sessions affected by this Policy will be sent via primary interface once that interface resumes service; while existing sessions will remain on the failovered interface.

הגדרת תחום כתובות

ניתוב ראשי WAN1

ניתוב גיבוי LTE

הגדרות Load Balance רשת אלחוטית אורחים

Index: 5

☒ Enable

Comment

guest

Delete

Criteria

Protocol

Any ▼

Source

☐ Any☒ Src IP Range

Start: 192.168.30.0

End: 192.168.30.255

☐ Src IP Subnet

Destination

☒ Any☐ Dest IP Range☐ Dest IP Subnet☐ Domain Name

Destination Port

☒ Any☐ Dest Port Start

Dest Port End

Send via if Criteria Matched

Interface

☒ WAN/LAN

WAN2 ▼

☐ VPN

VPN 1.??? ▼

Gateway

☒ Default Gateway☐ Specific Gateway

Priority

Priority: 142

Low

High

250

150

0

Default Route

Routes in Routing Table

☒ More Options

Packet Forwarding to WAN via

☒ Force NAT☐ Force Routing☐ Failover to☒ WAN/LAN

Default WAN ▼

☐ VPN

VPN 1.??? ▼

☐ Route Policy

Index 1 ▼

Gateway

☒ Default Gateway☐ Specific Gateway

0.0.0.0

הגדרת תחום כתובות

ניתוב ראשי WAN2

ללא ניתוב גיבוי

טבלת DHCP

Diagnostics >> View DHCP Assigned IP Addresses

DHCP IP Assignment Table

[Refresh](#)

LAN1 : 10.0.0.138/255.255.255.0, DHCP server: On				
Index	IP Address	MAC Address	Leased Time	HOST ID
1	10.0.0.1	80-5E-C0-0E-6F-24	15:44:47	W608
2	10.0.0.4	00-1F-08-02-45-DF	12:25:00	SecuritySystem
3	10.0.0.6	88-63-40-49-68-A4	15:21:58	iPhone
4	10.0.0.23	F8-BC-12-62-1A-FF	15:49:59	office21
LAN2 : 192.168.20.1/255.255.255.0, DHCP server: On				
Index	IP Address	MAC Address	Leased Time	HOST ID
1	192.168.20.10	00-1F-08-02-45-DF	3:44:49	SecuritySystem
LAN3 : 192.168.30.1/255.255.255.0, DHCP server: On				
Index	IP Address	MAC Address	Leased Time	HOST ID
1	192.168.30.10	D8-9C-67-58-27-EB	3:49:08	DESKTOP-2DEUSL8
2	192.168.30.11	C0-E8-62-8A-49-B3	63:19:54	iPhone
3	192.168.30.12	A8-A7-95-A4-17-95	29:14:35	LAPTOP-SKKBIM20
4	192.168.30.13	7C-D6-61-62-D8-C8	29:17:03	
5	192.168.30.14	B2-BE-76-78-F0-38	68:14:23	TL-WA850RE
6	192.168.30.15	B2-BE-76-A4-17-95	68:05:26	LAPTOP-SKKBIM20

☐ Show Comment