

ROBERT GORDON UNIVERSITY

BACHELOR OF SCIENCE IN COMPUTER SCIENCE

HONOURS PROJECT REPORT

---

## A platform for Internet-connected Wireless Sensor Networks

---

*Author:*

Stuart WHITEHEAD

*Supervisor:*

Dr. Nirmalie WIRATUNGA

2016



# Declaration

I confirm that the work contained in this Honours project report has been composed solely by myself and has not been accepted in any previous application for a degree. All sources of information have been specifically acknowledged and all verbatim extracts are distinguished by quotation marks.

Stuart Whitehead  
2nd May 2016

# Abstract

The Internet of Things aims to bridge our physical and digital worlds through innovative technologies, products and services. The purpose of this project is to investigate the current landscape of the Internet of Things, including its main characteristics; why it is attracting attention from large industry players and what challenges have yet to be addressed. The project will pay particular attention to the emerging technologies which are turning this concept into a reality.

An Internet of Things application framework will be implemented based on the findings from background research. The framework shall support the main capabilities of an IoT system with the aim of being a starting point for other developers and their own applications. A full-stack demonstration application will also be developed using the IoT framework. Not only will this present the opportunity to implement specific IoT technologies, but it will also validate decisions made for the IoT framework.

# Acknowledgements

I would like to thank everyone who took an interest and showed support for my project—your encouragement has helped me to tackle what has been a challenging but interesting topic.

In particular I would like thank Dr Nirmalie Wiratunga of Robert Gordon University for her guidance; Marek Pawlowski and Dr Andrew Muir Wood of Mobile User Experience for being the catalysts of my interest in IoT; the guys at FortyTwo Studio for their flexibility and enthusiasm; my parents Alan and May Whitehead for their support and my partner Teri Milton for her encouragement and understanding.

# Contents

<b>Declaration</b>	i
<b>Abstract</b>	ii
<b>Acknowledgements</b>	iii
<b>Contents</b>	iv
<b>List of Figures</b>	vii
<b>List of Tables</b>	viii
<b>1 Introduction</b>	1
1.1 Project Motivation . . . . .	1
1.2 Aims and Objectives . . . . .	2
1.3 Report Structure . . . . .	2
1.4 Legal, Social, Ethical and Professional Considerations . . . . .	3
1.4.1 Public Interest . . . . .	3
1.4.2 Professional Competence and Integrity . . . . .	3
1.4.3 Duty to Relevant Authority . . . . .	3
1.4.4 Duty to the Profession . . . . .	4
<b>2 Background</b>	5
2.1 Opportunities, Motivators and Enablers . . . . .	6
2.2 Challenges and Inhibitors . . . . .	7
2.3 Use Cases . . . . .	9
2.4 Existing Platforms . . . . .	10
2.4.1 Hosting . . . . .	10
2.4.2 Source Availability Model . . . . .	11
2.4.3 Connectivity . . . . .	12
2.4.4 Bidirectional Communication . . . . .	14
2.4.5 Application Triggers . . . . .	15
2.5 Sensor Hardware . . . . .	15
2.5.1 Processor Architecture . . . . .	16
2.5.2 Memory . . . . .	16
2.5.3 Input/Output . . . . .	17
2.5.4 Connectivity . . . . .	17
2.6 Case Study: UK Smart Meters . . . . .	18

2.6.1	Overview . . . . .	18
2.6.2	Governance . . . . .	20
2.6.3	Implementation . . . . .	21
2.7	Conclusions . . . . .	22
<b>3</b>	<b>Specification</b>	<b>24</b>
3.1	Functional Requirements . . . . .	24
3.1.1	Framework . . . . .	24
3.1.2	Demonstration Application . . . . .	26
3.2	Non-functional Requirements . . . . .	28
3.2.1	Constraints . . . . .	28
3.2.2	Performance Requirements . . . . .	28
3.2.3	Security Requirements . . . . .	28
3.2.4	Software Quality Attributes . . . . .	29
<b>4</b>	<b>Design</b>	<b>30</b>
4.1	Haar Engine . . . . .	30
4.1.1	Data Modelling . . . . .	31
4.1.2	Database Connector . . . . .	34
4.1.3	Data Access API . . . . .	34
4.1.4	Real-Time Event API . . . . .	34
4.2	Haar . . . . .	35
4.2.1	Back-End Application . . . . .	35
4.2.2	Front-End Application . . . . .	36
4.2.3	Wireless Sensor Networks . . . . .	37
<b>5</b>	<b>Development Practices</b>	<b>42</b>
5.1	Version Control System . . . . .	42
5.1.1	Pre-commit Hook . . . . .	43
5.2	Docker . . . . .	43
5.3	Continuous Integration . . . . .	44
<b>6</b>	<b>Implementation</b>	<b>46</b>
6.1	Hosting . . . . .	46
6.2	Haar Engine . . . . .	47
6.2.1	Node.js and npm . . . . .	47
6.2.2	MongoDB Database . . . . .	47
6.2.3	MVC Architecture . . . . .	48
6.2.4	Real-Time . . . . .	50
6.2.5	Security . . . . .	50
6.2.6	Testing . . . . .	52
6.3	Haar API . . . . .	53
6.4	Haar Dashboard . . . . .	53
6.4.1	JavaScript Application Framework . . . . .	53
6.4.2	Data Management . . . . .	54
6.4.3	Real-time . . . . .	56
6.4.4	Security . . . . .	56
6.4.5	Testing . . . . .	56
6.5	Haar Nodes . . . . .	57
6.5.1	Hardware . . . . .	57

6.5.2	Energy Efficiency . . . . .	57
6.5.3	Data Transmission . . . . .	59
6.5.4	Testing . . . . .	61
6.6	Haar Bridge . . . . .	61
6.6.1	Hardware . . . . .	62
6.6.2	Software . . . . .	62
6.6.3	Testing . . . . .	63
<b>7</b>	<b>Evaluation</b>	<b>64</b>
7.1	Acceptance Testing . . . . .	64
7.1.1	Haar Engine . . . . .	64
7.1.2	Haar . . . . .	65
7.2	Inter-Packet Rate . . . . .	65
7.3	Improvements . . . . .	66
<b>8</b>	<b>Conclusions</b>	<b>68</b>
8.1	The Internet of Things . . . . .	68
8.2	Future Work . . . . .	69
8.3	Critical Appraisal . . . . .	69
<b>A</b>	<b>Haar Engine Acceptance Tests</b>	<b>71</b>
<b>B</b>	<b>Haar Acceptance Tests</b>	<b>74</b>
<b>C</b>	<b>Project Log</b>	<b>77</b>
<b>D</b>	<b>Credits</b>	<b>80</b>
<b>Bibliography</b>		<b>90</b>

# List of Figures

2.1	The boundary between IoT and other trends in computing . . . . .	6
4.1	Iterative steps when designing for functional requirements . . . . .	31
4.2	A logical view of system architecture for the Haar Engine . . . . .	32
4.3	Entity Relationship Diagram for the Haar Engine . . . . .	33
4.4	UI layout for desktop-sized web browsers . . . . .	36
4.5	System architecture for Haar devices . . . . .	37
4.6	Breadboard layout for RGB LED actuator . . . . .	39
4.7	Breadboard layout for temperature sensor . . . . .	39
4.8	Breadboard layout for colour sensor . . . . .	40
4.9	Breadboard layout for gyroscope sensor . . . . .	40
4.10	Breadboard layout for bridge device . . . . .	41
6.1	Web server request flow . . . . .	47
6.2	Data flow in a Flux React application . . . . .	55
6.3	Complex data structures are easily managed with Redux . . . . .	55
6.4	Prototype temperature device . . . . .	58
6.5	Prototype RGB LED output device . . . . .	58
6.6	Prototype bridge device . . . . .	62
7.1	Success rate of inter-packet intervals . . . . .	66

# List of Tables

2.1	A summary of the current state of the Internet of Things . . . . .	10
2.2	Characteristics of existing IoT platforms . . . . .	15
2.3	Summary of hardware boards . . . . .	19
A.1	User Acceptance Testing for Haar Engine . . . . .	73
B.1	User Acceptance Testing for Haar . . . . .	76
C.1	Project Log . . . . .	79

# Chapter 1

## Introduction

The Internet of Things (IoT) is a computing term which has entered the common lexicon. The general public have been introduced to the idea of Internet-connected devices through frivolous products like self-replenishing fridges or pizza-order buttons (Dominos, 2015). But the potential of Internet of Things devices reach far beyond these marketing gimmicks.

IoT devices can and will generate value through large-scale deployments. Their small size, connectivity and energy efficiency will enable a new generation of services. These services will have the capability to measure our world on a scale and with a precision which has never before been possible. It is hoped that this paper will open your mind to the technology and endless possibilities evident with globally-connected wireless sensor networks.

### 1.1 Project Motivation

My curiosity in IoT has been building for many years. It is difficult to determine exactly when I came across the term, but my current understanding of it and its potential can be traced back to the Mobile User Experience (MEX) conference in London. In 2013 I was awarded a scholarship to attend, and also returned for three subsequent events as a volunteer. The conference itself is small, focused and addresses strategies and design methods for next generation digital experiences. One recurring topic in presentations and discussions was the Internet of Things.

There are two main reasons why this topic was selected as the focus of my honours project. The first reason is that IoT is a very active area of research. Academic institutions and manufacturers alike are investing heavily in order to develop truly valuable solutions. This is also reflected in the 2015 Gartner Hype Cycle. Gartner's market research places IoT at the 'Peak of Inflated Expectations' (Gartner, Inc., 2015), a title given to technologies which have had widespread publicity but are not ready for mainstream adoption.

The second reason for choosing IoT is that it is a genuinely interesting area. IoT is multidisciplinary and can be found at the intersection of computing, design, physics and engineering. I have an active interest in all of these areas so this has helped provide motivation throughout the project.

## 1.2 Aims and Objectives

A number of high-level aims and objectives were defined to orientate the project in a purposeful direction. These were left intentionally broad so that as much of the IoT landscape could be investigated as possible. By keeping the aims broad, it has also allowed background research to guide the project journey. The aims represent the purpose of this project whereas objectives define the main tasks to undertake.

### Aims

Three aims were defined for this project:

1. To satisfy the requirements of the BSc (Hons) Computer Science course
2. To satisfy my curiosity of the research area
3. To demonstrate skills to potential employers

### Objectives

These aims were achieved through the completion of four main objectives:

1. Research and synthesise IoT concepts and techniques
2. Research and evaluate technologies which support IoT
3. Design and implement an IoT application framework
4. Design and implement a full-stack IoT application based on the framework

## 1.3 Report Structure

The structure of this report reflects the software development lifecycle. The contents of each section are described below.

**Background** A broad literature review on IoT concepts, practices and technologies.

**Specification** Functional and non-functional requirements of the IoT framework and demonstration application. These are derived from information gathered in the preceding chapter.

**Design** System architecture and high-level implementation decisions such as programming language and hardware schematics for the IoT framework and demonstration application.

**Development Practices** A discussion of professional development practices used to structure the implementation.

**Implementation** Specific implementation details for each of the software and hardware components.

**Evaluation** A discussion on the effectiveness of the developed software components.

**Conclusions** A reflection on the IoT landscape, a critical appraisal and potential work leading on from this project.

## 1.4 Legal, Social, Ethical and Professional Considerations

There are a number of legal, social, ethical and professional issues to consider at all points throughout this project. It is my responsibility and my responsibility alone to ensure that these considerations are upheld.

The ultimate aim of this project is to satisfy requirements for my Computer Science course—a course which is accredited by the British Computer Society. The BCS maintain a Code of Conduct (British Computer Society, 2015) so it is logical that it should inform the responsibilities of this project. More specifically, the code covers four main areas: public interest; professional competence and integrity; duty to relevant authority and duty to the profession.

### 1.4.1 Public Interest

The public interest clause ensures that the legitimate rights of the public and other third parties are respected. With respect to the project focus on the Internet of Things, point 1 (a) of the BCS Code of Conduct should be considered: “have due regard for public health, privacy, security and wellbeing of others and the environment.”

Internet of Things devices have the potential to harvest large volumes of private data about people and places. Health-monitoring devices in particular have the specific capability to measure sensitive medical information; devices like this will not be considered for this project. The devices which have been developed (ambient temperature, colour and gyroscopic motion) are intentionally generic and have no particular privacy requirements. Any users who have been invited to use the devices will be explained as to their purpose.

The developed application has the capability to store basic identifiable information. In particular, a user profile includes: first and last names; username; password and email address. For the purposes of testing and demonstration, the information database will be seeded with fake data so no user information is at risk. Nonetheless, steps have been taken in order to protect data as far as feasibly possible, including: hardened web hosting with strict a firewall policy; Docker-based deployment environments; random and suitably long alphanumeric passwords for root/admin users.

Consideration has also been given towards environmental responsibility. Any hardware waste has been disposed of in a responsible manner. For example, spent batteries have been disposed of in a battery bin at a local shop. Hardware devices (wired or battery powered) are switched off when not in use in order to conserve electrical power. Documents have only been printed when needed in order to prevent paper wastage.

### 1.4.2 Professional Competence and Integrity

The professional competence clause ensures that an individual exhibits a true portrayal of their knowledge and capabilities. Effort will be made in every case to understand a topic to the required level. Point 2 (e) is particularly important for the academic nature of this project: “respect and value alternative viewpoints and, seek, accept and offer honest criticisms of work.”. Opinions and criticisms of this project are welcomed and responses will be made where appropriate.

### 1.4.3 Duty to Relevant Authority

The ‘Duty to Relevant Authority’ clause ensures that due care is exercised with regards to any applicable legislation. First of all, as author I accept responsibility for all work detailed as part of this project. This project will also take all foreseeable measures in order to avoid a conflict of

interest with the relevant authority. In the event where information is requested, an appropriate response and disclosure will be made.

#### **1.4.4 Duty to the Profession**

The final clause of the BCS Code of Conduct ensures that the project contributes to and upholds the professional reputation of the computing industry. Point 4 (d) states: “act with integrity and respect in your professional relationships”. This should be considered with particular attention to software copyright and licensing conditions. Full credit will be given to the authors of software included within the output of this project. Where required, the licensing terms of software (especially Open Source Software) will be upheld.

# Chapter 2

## Background

The term ‘Internet of Things’ captures the essence of the vision well; the vision of a world where everyday, physical objects are gateways to web-based services. These so-called ‘smart objects’ comprise of sensors to perceive their environment or context, as well as a notion of interconnectivity with other objects or services. Connected objects or services may react to collected data to trigger actions, and these actions may be digital or physical. The Internet of Things could be summarised as data collection, aggregation and reaction in the physical domain.

The boundaries between IoT and other trends help to define its place in computing. For instance the research area of Wireless Sensor Networks (WSN) carries similarities in hardware requirements and challenges. In particular, WSN also comprise of connected sensors and actuators (Mottola and Picco, 2011). WSNs differ from IoT because of the scope of connectivity—they are limited to specific applications and area coverage, such as a production line or a single building. In comparison, IoT applications have a global scope which encourages co-operation between devices, networks and services. Wireless Sensor Networks can, however, form one aspect of an IoT application.

The research area of ‘Wearables’ also overlaps with IoT. Wearables are smart devices designed to be worn or embedded within the body. They combine sensors with some form of connectivity, typically integrating with a smartphone (Wei, 2014). Consumer Wearables products are already on the shelves, such as Fitbit—a wrist-worn personal health tracker. The Fitbit wristband connects to a smartphone with Bluetooth Low Energy (BLE) and this smartphone then provides global connectivity through its wireless connection. Users can sign-in to a web-based dashboard which will collate and organise personal data. In this scenario, Wearables are collecting, aggregating and reacting to data in the physical domain. Wearables could therefore be described as a subset of IoT (as shown by Figure 2.1) because they are an application in a specific domain.

IoT can also take advantage of research conducted for the ‘Big Data’ trend. Over the past three decades, scalable and distributed data management have been a focus for the database research community (Agrawal et al., 2011). This research originally focused on traditional enterprise applications, but it has expanded to include the Cloud Computing paradigm across two classes of systems: update-heavy applications and ad hoc analytics & decision support. IoT is expected to generate large volumes of data and so by leveraging Big Data analytical processes, valuable information can be deduced. For example, Fitbit’s web-based dashboard could use Big Data analytics to analyse personal health statistics and to find data trends.

IoT also goes some way to realise the Ubiquitous Computing concept. Ubiquitous Computing (also known as pervasive computing) envisages a world where users are surrounded by connected technology—technology in our homes, workplaces and recreational activities. In his seminal

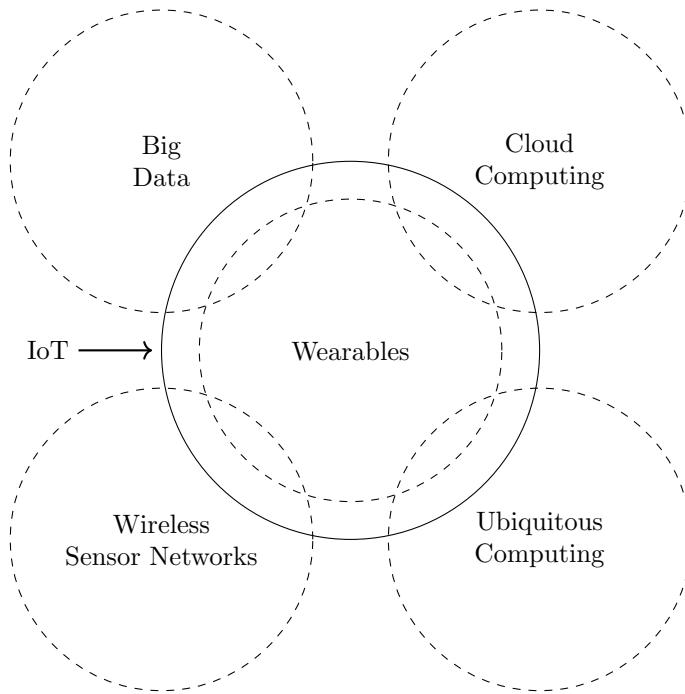


Figure 2.1: The boundary between IoT and other trends in computing

article, Weiser (1999) notes that “specialized elements of hardware and software, connected by wires, radio waves and infrared, will be so ubiquitous that no one will notice their presence”. Lyttinen and Yoo (2002) take this further and suggest that we will not only be surrounded by technology, but it will be embedded in our social and physical interactions. Research areas such as this not only contribute to the IoT concept but also benefit from its research endeavours.

## 2.1 Opportunities, Motivators and Enablers

Why should we develop IoT solutions? Would our society actually benefit from them? These are the questions posed by stakeholders of all backgrounds. Pilot projects as well as industrial and academic research have shown that there are wide-reaching opportunities to be grasped. Until recently, these opportunities were achievable only in theory or laboratory scenarios, but due to performance improvements and cost reductions in the supporting technology, IoT is very much a reality.

Mattern and Floerkemeier (2010) describe a number of opportunities created by the evolving technical capabilities of IoT systems. Since much of the value of IoT is derived from the communication of data, the technologies supporting inter-device communication and cooperation are particularly important. Wireless Personal Area Network (WPAN) technologies such as Wi-Fi, Bluetooth, ZigBee and 6LoWPAN give objects the ability to network with Internet resources or each other. These WPAN technologies also provide device addressability mechanisms which allow objects to be uniquely identified from anywhere in the world, through extensions to protocols like MAC Addressing or IPv6. With this level of global interconnectivity, novel services and products become possible.

Another main characteristic of IoT is the ability to interact with the physical domain. Digital applications will interact with the physical world in two ways: through the monitoring and sensing of physical properties and through the actuation of the physical world in reaction to data. There are a massive variety of sensors available, even to hobby markets, and can measure any imaginable physical property. The reduced cost and improved support by hardware manufacturers will allow measurements to be collected at a scale and precision not previously possible.

Since IoT microcontrollers are becoming more powerful, there are opportunities for embedded information processing. Embedded information processing refers to end devices performing some form of data processing or storage before transmitting their data; for example, an end device might analyse its own data and only transmit if a specific threshold is met, rather than relying on Cloud Computing-based processing. This is an active area of research called edge computing (or fog computing) and allows for novel methods of data processing and is another method to optimise bandwidth and power consumption.

Along with these technical capabilities are big-picture societal and economic opportunities. The European Union is a strong example of an economy which can benefit from IoT uptake. The governmental body of the EU, The European Commission, recognises the potential opportunity: “One major next step in this development [of the Internet] is to progressively evolve from a network of interconnected computers to a network of interconnected objects, from books to cars, from electrical appliances to food, and thus create an ‘Internet of things’.” In 2009 the Commission published an action plan for embracing the Internet of Things.

The action plan (The European Commission, 2009) describes how IoT will improve citizen well-being both now and into the future. In the present, citizens will benefit from specific IoT initiatives—for instance, Internet-connected health monitoring systems could alleviate pressure on medical services for the ageing society. Other applications such as connected cars or smart waste management are expected to reduce the EU’s carbon footprint and therefore protect resources for future generations.

The Commission’s action plan also describes economic opportunities. IoT has the potential to provide many new income streams to businesses as well as finding other money through efficiency savings. First of all IoT opens up new markets which were previously not feasible nor even considered. These markets may include consumer products or novel service solutions in areas such as home security and monitoring. For organisations with complex supply chains or processes, IoT could help to maximise resources and stock control through large-scale automation and efficient information exchange.

## 2.2 Challenges and Inhibitors

It is apparent that IoT is still an evolving area of research with numerous challenges to be addressed. In order for IoT to become a mainstream paradigm, the technologies and ecosystem surrounding them must converge and become more mature. Mattern and Floerkemeier (2010) state that IoT is not the result of a single novel technology but rather several complementary technical developments, so invariably, the challenges span many technical disciplines.

A good user experience must be offered by these technologies to encourage adoption. Mattern and Floerkemeier (2010) state that devices “need to establish connections spontaneously, and organize and configure themselves to suit their particular environment” which they coin ‘Arrive and Operate’. The process of connecting a laptop to a home Wi-Fi router is representative of the current experience a user might have. They will turn on the Wireless Network Interface Card via a mouse and a Graphical User Interface and select their wireless network before inputting a password with a keyboard. This experience is far from ideal for constrained devices with a

simplistic user interface, or no interface at all. The challenge here is to develop technology which allows consumers to use smart objects with little or no configuration.

Device discovery and interoperability is required to build an open and extensible Internet of Things. Since the world of things is diverse, each type of device is likely to have different capabilities. Mineraud and Tarkoma (2015) state that the heterogeneity of existing platforms is considerable (numerous hardware, technologies, requirements and objectives) and as a result, IoT would benefit from a generic architecture which provides IoT developers with a common toolkit. Research efforts have gone some way to address these challenges, such as the IoT ‘meta-hub’ offered by Mineraud and Tarkoma, which provides a feed of available features for a given service.

IoT infrastructures must be scalable to handle the large number of connections and volume of data. By all estimates, IoT will have a much larger scope and footprint when compared to the existing Internet of computers. The European Commission puts this figure at 50–70 billion devices (on average, 10 per human). Mattern and Floerkemeier (2010) also note that things will be cooperating mainly within a local environment. This means that IoT devices, software and infrastructure must work equally efficiently in both small- and large-scale environments. This complexity is also reflected with the volume and variety of data being generated; a challenge currently being addressed with research around Big Data.

Fault tolerance, power supply and efficient wireless communication are challenges facing hardware manufacturers. There are a number of possible operating environments for IoT devices, such as office spaces, homes, public spaces and remote areas, so smart objects might depend on a self-sufficient power source. The industry is therefore challenged to produce long-lasting batteries. As well as improving power supply solutions, the industry should maximise power efficiency in other areas such as existing wireless communication technologies which consume too much overhead and power.

Technical challenges will continue to be addressed through academic and industrial research, however IoT will not achieve widespread uptake without social acceptance. This is the risk that the industry is carefully attempting to balance; the social acceptance of IoT products is imperative to their success but consumers and markets could be less accepting if industries try too much too soon. The European Commission’s action plan describes practical challenges which need to be addressed.

Many aspects of digital technology is governed by public bodies and the Commission believes that IoT should not be any different. They note that technology will advance due to a normal cycle of innovation and that “simply leaving the development of IoT to the private section is not a sensible option in view of the deep societal changes that IoT will bring about.” The main areas which may need to be governed are identification, information security and ethical & legal accountability. In terms of device identification, Mattern and Floerkemeier (2010) and (The European Commission, 2009) suggest that some form public registry (similar to those governed by the Institute of Electrical and Electronics Engineers) will be necessary. In terms of legal accountability, users may be reluctant to use IoT services unless there are safeguards in place. Without effective governance of these areas, IoT may suffer from stifled innovation; a mistrust with data and jeopardised system integrity.

Standardisation is a technical consideration but also impacts on the economic potential of IoT. The purpose of a standard is to give different entities and stakeholders a common language to design, build or communicate. The widespread adoption of a standard gives businesses of all sizes the opportunity to develop interoperable solutions. In being interoperable, standards-based solutions will be suitable for a wider market and in turn, this will encourage innovation and improve international competitiveness. If IoT is to maximise economic impact and to benefit from widespread adoption, there must be accepted practices or formal standards in place.

The greatest challenges to social acceptance are security and data privacy, particularly in

the EU where the protection of privacy and personal data are two fundamental rights. The challenge with this, in respect to IoT, is that new methods of collecting and using data will be invented. Does current legislation and safeguards protect the interest of EU citizens adequately? Who will own the data—the user whom it is about or the organisation that captured it? The Commission suggests that in response to this challenge, IoT components should be designed from their inception with a privacy- and security-by-design mindset.

## 2.3 Use Cases

Use-cases are a helpful mechanism for demonstrating the IoT concept. It is a difficult concept to explain because there are many cooperating components and ideas and for this reason, research papers exemplify their arguments with practical examples. Although IoT applications could be developed for virtually any industry there are domains where its application is more obvious. Table 2.1 presents six such domains for IoT, together with opportunities, challenges and related areas of research.

‘Smart Cities’ is a vision which convincingly demonstrates many benefits of IoT. The Department for Business Innovation & Skills (2013) describes the main issues facing local authorities which includes: piecemeal urban infrastructure, climate change targets, the changing nature of the high street and elderly social care. The economic downturn has also reduced budgets assigned to local authorities by as much as 30% between 2010 and 2013 making cost efficiencies another issue. By developing or retrofitting urban infrastructure with IoT connectivity, local authorities can monitor services in much finer detail. For instance, Bigbelly Solar is a smart waste and recycling system. The Internet-connected waste bins allow local authorities to monitor their status and to schedule collections when they are full. Bonomi et al. (2012) also describe a system of smart, connected traffic lights which can control the traffic flow through a whole city, reducing congestion and improving safety.

IoT in the utilities sector is one use-case which has started to become realised. The British Government is requiring energy companies to install smart meters for their customers and expect most to have a smart meter installed by 2020 (The Department of Energy & Climate Change, 2013). Smart meters monitor domestic energy usage on a per-site basis and can give real-time information about how much electricity is being used, expressed in pounds and pence. For individual households this has the benefit of enabling homeowners to save money and to reduce emissions. At a national level, smart meters are a step towards reducing energy consumption and meeting climate change goals. This use case is particularly interesting and well documented, so section 2.6 investigates the smart meter concept further. Additionally, smart thermostats like Nest also allow households to minimise their gas consumption and to reduce heating bills. This is achieved through usage optimisation based on occupancy patterns.

Logistics is one area which demonstrates the efficiency savings that an IoT application can make. The European Commission (2007) states that “Freight Transport Logistics focuses on the planning, organisation, management, control and execution of freight transport operations in the supply chain” and notes that it is one of the drivers of European competitiveness. To remain competitive, this industry must continue to improve and streamline infrastructure, fleet management and goods tracking. IoT could be used to share content-related data and location information for regulatory or commercial purposes. This is achieved through the use of inexpensive RFID tags (which store specific information about the item) and GPS sensors (which can identify precise locations). This would reduce time spent by workers manually recording goods and it will reduce errors at interchange points. The Commission has coined this the ‘Internet for Cargo’.

Overlapping Research	Opportunities		Challenges		Example Use Cases
	Economic & Societal	Technical	Economic & Societal	Technical	
Cloud Computing	Citizen Well-Being	Communication & Cooperation	Governance	'Arrive and Operate'	Smart Cities
Big Data	Economic Prosperity	Addressability	Standardisation	Interoperability	Waste Management
Ubiquitous Computing	Ageing Society	Identification	Security	Discovery	Smart Traffic Lights
Wireless Sensor Networks	New Markets	Sensing	Data Privacy	Software Complexity	Utilities
Wearables	Business Optimisation	Actuation	Trust	Scalability	Smart Meters
Edge Computing		Localisation		Data Management	Logistics
		Embedded Information Processing		Fault Tolerance	
		User Interfaces		Power Supply	
				Wireless Communication	

Table 2.1: A summary of the current state of the Internet of Things

## 2.4 Existing Platforms

There are a number of IoT platforms both in service and under active development; in fact, Amazon announced their own platform, Amazon IoT, when writing this very comparison (Amazon Web Services, Inc., 2015). The aim of an IoT platform and the tools which it provides does differ from vendor to vendor, however common characteristics are beginning to emerge. We propose to compare platform offerings across five dimensions: hosting model, source availability model, connectivity, bidirectional communication support and trigger support.

### 2.4.1 Hosting

The hosting model offered by an organisation defines which stakeholder is responsible for maintaining the IoT application and its hardware infrastructure; either the platform provider or the customer. This is a notable differentiator between platforms and can be indicative of the platform vendor's business objectives. There are generally two variations in hosting models: Platform as a Service (PaaS) or self-hosting.

#### Platform as a Service

A Platform as a Service (PaaS) is a Cloud Computing concept. It is an abstraction of the complete application technology stack including both hardware and software. An organisation providing a PaaS would be responsible for the management and maintenance of the hardware such as servers, RAID backing storage and networking appliances like routers or switches. Depending on the software on offer, the vendor would also be responsible for managing and maintaining the server operating system as well as any supporting software packages and applications. Customers are typically provided access to this abstraction through a control panel or an Application Program Interface (API).

Carriots is an example of a centralised PaaS and their website describes various benefits to a customer (Carriots, 2015). Primarily the customer does not need to allocate resources for infrastructure maintenance since this is managed by them, with the result being more time for the customer to focus on business needs. There is also less investment required on behalf of the customer—PaaS resources can be provisioned when and if they are needed, rather than purchasing hardware upfront. Another benefit is the extra layer of support—system scalability, stability and fault tolerance are the responsibility of Carriots.

### Self-hosted

An alternative to a PaaS is the self-hosted option. As the name implies, this option makes customers responsible for the maintenance and management the application infrastructure (although software updates may still be provided by the platform vendor). There are technical and legal arguments to support such a business decision.

The main technical aspect is that of control. With the self-hosted option, the system architecture can be optimised for specific use-cases, such as the global location of servers to reduce application latencies (the time taken for network transmissions between devices and servers). This also gives customers direct access to the core software and makes it easier to modify it for their own purposes (if the licence or software allows for that).

Self-hosting may also be necessary for legal compliance, especially in the realm of data protection. Depending on the country of operation, it may be necessary to retain data within country boundaries and this may not be enforceable with a PaaS. In October 2015 the Court of Justice of the European Union ruled that the Safe Harbour agreement between the EU and United States is invalid (Case C-362/14). This case found that the United State's data protection legislation was not adequate and means that any organisation sharing data under this agreement is now acting unlawfully. This problem could be avoided, or at least remedied more quickly, if data is managed from within the European Union. One example of a self-hosted platform is Nitrogen.io.

#### 2.4.2 Source Availability Model

The Source Availability Model chosen by a platform developer defines the level of accessibility for their source code. This model comes in two forms—open or closed source—and can be further refined by a software license framework.

The source code of Open Source Software (OSS) is made publicly available. This could be served as a standard file download or, as is becoming common practice, on a code sharing service such as GitHub or Bitbucket. OSS will typically be provided under the conditions defined in a license, such as the GPL, MIT or Apache license frameworks. These vary on points like distribution, modification and notification of copyright (Github, Inc., 2015).

Closed Source Software is proprietary source code not made publicly available, although it may be necessary to distribute compiled binaries. This just means that the organisation does not wish to make source code available for modification or knowledge sharing.

In conjunction with the hosting model, the source availability is indicative of business objectives. Organisations wishing to commercialise their platform as a product offering will use a Closed Source model to protect their intellectual property. Conversely those organisations where knowledge sharing is an aim, or where the platform is a mechanism to sell other products or services (such as Sparkfun and their electronic hardware) may use an Open Source model.

### 2.4.3 Connectivity

The IoT concept *is* interconnectivity and communication, making device and application connectivity a very important topic. The platforms investigated support a range of connectivity protocols and concepts. These range from widely-accepted HTTP-based APIs to more niche protocols like CoAP and MQTT.

#### HTTP

The Hypertext Transfer Protocol (HTTP) underpins the internet. It benefits from widespread support and most notably, is used by web browsers to interface with web servers. RFC 2616 (Fielding et al., 1999) defines the specification for HTTP version 1.1 and notes:

It is a generic, stateless, protocol which can be used for many tasks beyond its use for hypertext, such as name servers and distributed object management systems, through the extension of its request methods, error codes and headers.

As hinted at by this RFC 2616 quote, three important features of HTTP are: request methods, error codes and headers. To generalise the HTTP life cycle, a user agent will send a request to an origin server, the server will process the request and will return a response. The request will use an HTTP *verb* to define the action to take, such as GET or POST, and will include headers to specify other parameters. The response has an associated status code, such as 200 OK or 404 Not Found.

Most of the platforms investigated here support HTTP requests through a Representational State Transfer (REST) API. Fielding (2000) states that the REST architectural style emphasises scalability, independence of components, minimises latency and maximises security. These characteristics are achieved by applying constraints to the application, such as stateless communication, a uniform component interface and a layered approach to infrastructure technologies. REST methods are based on the HTTP verbs like GET, POST, PUT and DELETE. For IoT application developers, a REST API provides a scalable, uniform and robust interface between devices and the Internet.

Software engineers working on specifications for the Internet have foreseen the Internet of Things, even if it was taken in jest. RFC 2324 (Masinter, 1998) is an April Fool's joke and defines the Hyper Text Coffee Pot Control Protocol version 1.0 (HTCPCP/1.0). It specifies methods by which an Internet-connected coffee pot can be controlled, and even adds a new error code: “Any attempt to brew coffee with a teapot should result in the error code ‘418 I’m a teapot’. The resulting entity body MAY be short and stout.”

#### WebSockets

The WebSocket Protocol is an independent TCP-based protocol that enables two-way communication. It uses an HTTP request as part of the handshaking process, which is treated as a connection upgrade request. RFC 6455 (Fette and Melnikov, 2011) states “The goal of this technology is to provide a mechanism for browser-based applications that need two-way communication with servers that does not rely on opening multiple HTTP connections (e.g., using XMLHttpRequest or <iframe>s and long polling).” This technology plays a vital role in enabling bidirectional communication between web browsers and servers, as will be covered in section 2.4.4.

WebSockets use standard HTTP ports for communication by default (port 80 and 443 for unencrypted and encrypted connections respectively). This has the added benefit of being compatible with common network and firewall configurations.

## MQTT

MQ Telemetry Transport (MQTT) is a simple and lightweight messaging protocol. It is based on a publish/subscribe model and is specifically designed for constrained devices and low-bandwidth, high-latency or unreliable networks. In general, MQTT is used in conjunction with a message broker. Clients subscribe to topics on this broker which will then forward any relevant messages. Clients are then free to do whatever they please with these messages (Banks and Gupta, 2014).

MQTT uses TCP/IP to transmit messages and operates on ports 1883 and 8883 for unsecured and secured uses respectively. Since these ports are not common, firewalls will typically block access. For this reason, MQTT can be tunneled using WebSockets (and means this can be used in the browser, too).

## CoAP

Constrained Application Protocol (CoAP) is another protocol designed with the Internet of Things in mind. Shelby et al. (2014) describe CoAP as “a specialised web transfer protocol for use with constrained nodes and constrained networks.” Some headline features align with principles used with HTTP, such as utilisation of the REST model. RFC 7252 defines the proposed specification for CoAP. It specifically notes some main features:

- Web protocol fulfilling M2M requirements in constrained environments
- UDP [RFC0768] binding with optional reliability supporting unicast and multicast requests
- Asynchronous message exchanges
- Low header overhead and parsing complexity
- URI and Content-type support
- Simple proxy and caching capabilities

CoAP is likened to HTTP throughout the specification however there are some notable differences. HTTP uses the TCP/IP transport protocol whereas CoAP uses UDP, a protocol with significantly less overhead. UDP is not a request/response protocol so to provide a request/response interaction model, CoAP must deal with this through a logic layer.

## UDP

One of the researched platforms also offers the User Datagram Protocol (UDP) as a connectivity option. RFC 768 (Postel, 1980) notes “this protocol provides a procedure for application programs to send messages to other programs with a minimum of protocol mechanism.” To achieve ‘a minimum of protocol mechanism’, UDP does not establish a connection with the receiving device, so unlike TCP/IP it is connectionless. The protocol also specifies no mechanism for error correction so if a packet is lost in transit, it is lost forever.

Since data can be lost, this protocol should only be used in applications which can tolerate data loss. To give a real-world example, a battery-powered hygrometer sensor may be collecting data about the environmental humidity. If UDP was used as the connectivity protocol, it would allow this sensor to wake up, transmit its reading and then fall back to sleep without being concerned about the packet’s progress. If a packet was lost, it would not have business or safety impacts.

#### 2.4.4 Bidirectional Communication

One main opportunity of IoT, as described in Section ??, is to drive actuators in response to data. There are three aspects which define whether unidirectional or bidirectional communication is possible: the connectivity protocol, the software application and the network environment. To illustrate the following points, a hypothetical scenario will be used, where one server and one actuator are connected together through the internet. In this case, unidirectional communication means that only the actuator can initiate network requests whereas bidirectional communication allows either the server or actuator to initiate.

If the actuator is publicly addressable with a dedicated IP address, bidirectional communication is trivial to implement. Supposing that the HTTP protocol is being used for communication, both the actuator and server can initiate requests to each other by using the appropriate IP address. The server may send an HTTP request instructing the actuator to do something. In real-world scenarios, there are three factors which make bidirectional communication like this difficult: firewalls, Network Address Translation and IPv6 uptake.

Firewalls are common-place both in businesses and at home. They are a network security tool and can be either a dedicated hardware unit or software built into other devices, such as a domestic router. Their purpose is to screen both in and outbound connections which may have a malicious or compromising effect on the network integrity. The side effect which this has on IoT systems is that non-common protocols may be blocked, such as MQTT (since it uses ports 1883 and 8883). While devices behind a firewall may be publicly addressable, they may not be reachable, depending on the IoT application.

While obtaining a public IP address for each IoT device is a worthy aim, it is not achievable in many situations due to Network Address Translation. Network Address Translation (NAT) is a tool used to delay the depletion of IPv4 addresses and is very common with domestic internet connections. RFC 2663 (Srisuresh and Holdrege, 1999) states “NAT devices are used to connect an isolated address realm with private unregistered addresses to an external realm with globally unique registered addresses.” In essence, this allows a number of privately addressed devices to communicate through one public address. In terms of IoT, this means than any devices connected behind NAT will not be publicly addressable—the server can not directly send a request to the actuator.

Internet Protocol version 6 (IPv6) will solve the issue of IP address depletion. It will offer over 340 undecillion possible addresses, compared to just under 4 billion available from IPv4, and will allow every connected device to have its own IP address for the foreseeable future (The European Commission, 2008). With regards to the Internet of Things, this is still not achievable. IPv6 is still not supported by many internet service providers (ISPs) and networks, including that of Robert Gordon University. For the Internet of Things, this means that universally supported IPv6 is still a while off.

There are some useable techniques to overcome these three issues and to enable (or mimic) bidirectional communication. The first of these solutions is HTTP polling. With standard polling, the actuator would periodically ask the server for updates. If this period was 1 second, the communication may feel like it was real-time and bidirectional. This is however wasteful because not every request will result in an update. A more efficient form of polling is called long polling. The actuator will send a request to the server, but if there are no updates yet, the server will not respond. When the server does have a message to send to the actuator, it will respond and then end the request. This is better, but implementations suffer from the added complexity of managing connections.

A final and more effective solution is to implement communication using WebSockets. As previously described, the WebSocket protocol allows for bidirectional, full duplex communication

Service	Hosting	Source	Connectivity	Bidirectional	Triggers
Amazon IoT	PaaS	Closed	MQTT, HTTP	Yes	Yes
Bug Labs Dweet	PaaS	Closed	HTTP	Yes (app)	No
Carriots	PaaS	Closed	HTTP, MQTT	No	Yes
Sparkfun	PaaS or self-hosted	Open	HTTP	No	No
Exosite	PaaS	Closed	CoAP, HTTP, UDP	No	Yes
Digi	PaaS	Closed	HTTP	Yes	Yes
IFTTT	PaaS	Closed	HTTP	No	Yes
Newaer	PaaS	Closed	HTTP	No	Yes
Nimbits	Self-hosted	Open	HTTP	No	Yes
nitrogen.io	Self-hosted	Open	MQTT, HTTP	Yes	Yes
ThingSpeak	PaaS or self-hosted	Open	HTTP	No	Yes

Table 2.2: Characteristics of existing IoT platforms

and it can solve every challenge already addressed. WebSockets use the same communication ports as HTTP (port 80 and 443) by default, meaning that firewalls will allow them. Networks that support web browsing will support WebSockets. Also, the WebSocket connection can be initiated by the client and still allow bidirectional communication. In this case, the actuator can open a WebSocket connection to the server and overcome any Network Address Translation in place because it does not require a public IP address.

#### 2.4.5 Application Triggers

An application-level feature common across investigated platforms is event triggers or rules. Where supported, platforms can trigger actions based on the data received from sensors and third-party APIs. Combining examples already mentioned, a hygrometer may send data to an IoT application. An application trigger could be configured to turn on a dehumidifier actuator if the humidity passes a certain threshold. If bidirectional communication is supported, this trigger would react in real-time. Triggers could also be configured to interact with other third-party software APIs.

### 2.5 Sensor Hardware

The Internet of Things is a multidisciplinary area of research and is just as dependant on advancements in electrical and electronics engineering as it is computer science. Since the hardware driving IoT sensor nodes is intertwined with the upper layers of software, it would be appropriate to investigate the current state of this area too. Rather than research the intricacies of how these pieces of hardware work, this paper will investigate existing end device hardware with regards to their implementation in IoT applications, particularly technical capability and energy efficiency.

With a similar method to Section 2.4, various makes and models of hardware boards were analysed to find comparable characteristics. The manufacturers chosen—Arduino, Raspberry Pi, Intel and Samsung—represent a cross-section of the field. These manufacturers aim their products at different markets, from the DIY ‘maker’ market of the Arduino to the professional, consumer electronics market of Samsung. This section will compare and contrast hardware

models produced by these manufacturers across a range of key areas: processor architecture, memory, input/output options and wireless connectivity. Table 2.3 summarises each model and their specifications.

### 2.5.1 Processor Architecture

Just like any other computer system, the processor is the heart of the hardware board. It is responsible for running the operating system, orchestrating the various system components and for running the user application. The type and specification of the processor defines what can be processed and how quickly, which is ultimately reflected in the responsiveness and capability of the IoT device. Processor throughput is not the only consideration when scoping an IoT device however—energy consumption is also an important factor. The specification of the processor can be categorised into smaller areas: processor type, instruction set, number of bits, clock speed and the number of cores.

There are two broad types of processor systems, namely microcontrollers and microprocessors. A microcontroller (also known as an embedded controller) is a complete computer in one chip. A single microcontroller chip will typically combine a central processing unit (CPU), small amounts of program memory and Random Access Memory (RAM) and input/output lines (Ibrahim, 2011). In comparison, a microprocessor requires other system components to function, such as external memory, input/output lines and a clock circuit. In this regard, microprocessor hardware cannot be upgraded because it is integrated whereas a microprocessor system can, but they are cheaper to manufacture.

Processor architecture can also vary between makes and models. (Ibrahim, 2011) notes that processors can be classified by the number of bits they process, with 8 bits being the most popular for microcontrollers. Processors with a greater number of bits are more powerful but are also more expensive. The instruction set used also effects the performance of the processor; Reduced Instruction Set Computer (RISC) instructions take only one CPU cycle to complete whereas Complex Instruction Set Computer (CISC) instructions can take multiple cycles.

Clock speed and the number of cores are two final factors of a processor's performance. The clock speed describes how many cycles the CPU executes in one second and is regulated by a crystal timer or internal digital clock oscillator (DCO). A greater clock frequency means more instructions which can be processed in a time period, and the more powerful the processor. Microcontrollers typically have clock speeds in the tens of Megahertz whereas microprocessors might run at hundreds of Megahertz or a number of Gigahertz. However due to physical limitations of hardware components, there is a practical limit in possible clock speed. In this case more cores are added to the processor allowing it to evaluate multiple instructions concurrently. With regard to power consumption, Mikhaylov and Tervonen (2010) state that clock speed is one factor affecting the lifetime of a battery powered device so the CPU should be carefully considered for its application.

### 2.5.2 Memory

In any computer system, different types of memory are used to store program instructions and the temporary data associated with them. While these types of memory can be split into more discrete categories, there are generally two types of memory: non-volatile and volatile. Non-volatile memory, such as Read-Only Memory (ROM) or Programmable Read-Only Memory (PROM), is used to store program instructions and fixed user data. Non-volatile memory is used to store this kind of data because it is not lost when power is disconnected. In comparison, volatile memory loses its contents when power is removed and so it is used for temporary or

intermediate data.

Memory characteristics also contribute to the capabilities and performance of the hardware system. Primarily, the available memory size defines how much data can be stored. The Arduino boards researched have 32KB of program memory available compared to the Gigabytes available on some Samsung Artik boards. This constrains the number of program instructions which can be stored and means the software running on the Samsung Artiks could be much more complex. Memory word length also has implications. The word length is the number of bits which a single unit in memory can store, and is commonly found to be 8, 16, 32 or 64 bits. Larger word lengths can store larger pieces of instructions or data, such as larger numbers.

### 2.5.3 Input/Output

The Input/Output (I/O) lines of a hardware board are the interface between sensors or actuators and the processor (or beyond). Without this physical connectivity, developers would not be able to capture information about the physical world, stopping the IoT concept in its tracks. This aspect of hardware boards is therefore important to the flexibility and future potential of IoT applications. To ensure compatibility between hardware platforms and external hardware like sensors, various industry standards have been developed.

Before any I/O standards are discussed though, it is first important to establish the importance of the operating voltage for an individual electronics circuit. The hardware boards analysed operate at various logic voltages; for instance most Arduino boards run at 5V whereas the native voltage of the Intel Edison is 1.8V. The standard logic voltage also effects I/O operation. Digital sensors may have their own, incompatible standard logic voltage—a microcontroller running at 5V would damage a sensor running at 3.3V. If directly interfacing between processors and sensors, a logic level shifter might have to be implemented so careful planning is required. Logic voltage is another aspect which affects the lifetime of a battery-powered node (Mikhaylov and Tervonen, 2010).

General Purpose Input Output (GPIO) pins are a blank canvas for engineers and developers. They are digital I/O pins with no default use and as their name suggests, can be configured as input or output. Since they are digital, GPIO pins can only read or write with 2 discrete values, logic high (1) or logic low (0), and these values usually respect the standard system voltage. Depending on the device, a number of GPIO pins might support Pulse Width Modulation (PWM). PWM is a technique for emulating analogue levels by pulsing the digital value at differing frequencies. Using a light bulb as an example, PWM could emulate the effect of dimming the light, like what could be achieved with an analogue potentiometer.

While GPIO pins allow for basic I/O operations, there is a need for communicating with more complex data. There are various available standards for interfacing between low-level electronics components. The datasheets for the selected model note some common standards, namely: Serial Peripheral Interface (SPI), Universal Asynchronous Receiver/Transmitter (UART), Inter-Integrated Circuit ( $I^2C$ ) and Integrated Interchip Sound ( $I^2S$ ). There are a variety of uses for these standards so this paper will go no further than noting that they exist.

### 2.5.4 Connectivity

Interconnectivity is yet one more important aspect to hardware designed for the Internet of Things. Since IoT devices are becoming increasing mobile and wire-free, connectivity is being discussed almost exclusively in regards to wireless communication protocols and standards. As was discussed in Section ??, some IoT-specific wireless standards have already been established. Many of these technologies are supported by the various hardware platforms investigated, val-

idating their purpose. The standards supported by these hardware platforms are IEEE 802.11 (Wi-Fi), Bluetooth and IEEE 802.15.4 (Low-Rate Wireless Personal Area Network).

Wi-Fi is a technology which has become synonymous with wireless connectivity and the Internet. The IEEE 802.11 standard states that the purpose of Wi-Fi is “to provide wireless connectivity for fixed, portable, and moving stations within a local area” where a local area could refer to a home, classroom or office space. Wi-Fi benefits from wide utilisation in all areas and industries so wireless coverage is likely to be in place already. Aust et al. (2012) state that the radio frequencies used by Wi-Fi (2.4GHz and 5GHz bands) are becoming crowded and are increasingly resulting in radio interference. This is being addressed in a new standard, IEEE 802.11.ah, which makes use of the 900MHz frequency band. The two main potential advantages of this standard are greater range and less power consumption, which is beneficial to IoT devices. Even with this standard, however, end devices are impeded by the large overhead of upper layer protocols used in conjunction with Wi-Fi.

The Bluetooth standard has been repurposed as an effective wireless communication protocol for IoT devices. Prior to the introduction of Bluetooth 4.0 in 2010, it was primarily used in multimedia applications such as streaming stereo audio (Chang, 2014). With the introduction of Bluetooth 4.0 came new features, namely Bluetooth Low Energy (BLE), which consumes such a small amount of power that a sensor can run from a coin battery for months or years. For an average usage scenario, BLE could be expected to achieve a practical maximum range of 77 meters (Labs, 2015) which makes it ideal for use-cases such as body sensors and intelligent transport systems.

One final wireless connectivity standard supported by the investigated hardware is IEEE 802.15.4 Low-Rate Wireless Personal Area Networks (WPAN). The standard states that it “provides for ultra low complexity, ultra low cost, ultra low power consumption, and low data rate wireless connectivity among inexpensive devices” and covers the physical layer (PHY) and Medium Access Control (MAC) sublayer specifications. This IEEE standard has manifested into various competing technologies, in particular ZigBee and 6LoWPAN. ZigBee is a set of layers built on top of 802.15.4 and adds three important features: routing, ad-hoc network creation and self-healing mesh (Faludi, 2010). In comparison, 6LoWPAN is an adaptive layer defined in RFC 4944 and allows IPv6 packets to be transmitted using the short addresses in 802.15.4 (Hui and Culler, 2008). The average range for ZigBee and 6LoWPAN is 291 and 191 meters respectively (Labs, 2015).

## 2.6 Case Study: UK Smart Meters

### 2.6.1 Overview

The smart meter project by the British government serves as an ideal case study to exemplify an Internet of Things application. In Section 2.3, this paper described some stand-out use cases, which were collated from various sources. Upon researching the smart meter concept further, this massive governmental project—currently being developed for the United Kingdom utilities sector—was discovered. As more research on this project was carried out, it became clear that it represents a significant commentary in regard to the IoT concept.

In comparison to other potential case studies, the smart meter project is important for many reasons. First of all, the transparent and objective nature of public projects does prevent an operational bias. It would be possible to evaluate case studies provided by commercial organisations; for instance, Digi provide case studies across a number of industries. This however introduces the risk of bias—it is in the business’s interest to make a sale. In order to satisfy stakeholders, it is also necessary for the public project to unambiguously document discussions,

Make	Board	Processor			Memory			Input/Output			Voltage	Connectivity
		Model	Bits	Cores	Speed	App	RAM	Analogue	Digital	PWM		
Arduino	Uno	8	1	16MHz	32KB	2KB	6	14	6	5V	-	-
	Yún	8	1	16MHz	32KB	2.5KB	12	20	7	5V	Ethernet Wi-Fi	-
Raspberry Pi	Pro Mini	8	1	8MHz/16MHz	32KB	2KB	6	14	6	3.3V/5V	-	-
	2	32	4	900MHz	SD Card	1GB	0	40	0	5V	Ethernet	-
Intel	A+	32	1	700MHz	SD Card	256MB	0	40	0	5V	-	-
	Zero	32	1	1GHz	SD Card	512MB	0	40	0	5V	-	-
Samsung	Edison	64	2	500MHz	4GB	1GB	6	20	4	1.8V/3.3V	Wi-Fi a/b/g/n Bluetooth 4.0	-
	Artik 1	32	1	240MHz	4MB	1MB	2	0	0	Unknown	Bluetooth 4.0	-
	Artik 5	32	2	1GHz	4GB	512MB	2	47	2	1.8V/2.4V	Wi-Fi a/b/g/n Bluetooth 4.0 ZigBee/802.15.4	-
	Artik 10	32	4+4	1.3GHz/1GHz	16GB	2GB	6	51	2	1.8V/2.4V	Wi-Fi a/b/g/n Bluetooth 4.0 ZigBee/802.15.4	-

Table 2.3: Summary of hardware boards

actions and expectations. Furthermore, the scale, purpose and complexity of this project truly puts the Internet of Things concept to the test.

Before analysing the technical details of this project, it is first important to understand the purpose of smart meters. The project was announced by the Department of Energy and Climate Change (Decc) in 2009. It ambitiously aims to replace the electricity and gas meters for all residents of the United Kingdom with so-called ‘Smart Meters’ by 2020, giving a projected time frame of 10 years (The Telegraph, 2009). For consumers, these systems comprise of two main components: the electricity/gas meter and the in-home display. The display will wirelessly connect to the meter and will provide a near real-time indication for the resources being consumed, expressed in pounds and pence (The Department of Energy and Climate Change, 2009). Utility companies will also be provided with remote access to the meter, primarily allowing them take readings.

With an estimated cost of £10.9 billion (The Department of Energy and Climate Change, 2014a), the project must deliver benefits to consumers, suppliers and the government. One of the main drivers for meters are the potential financial savings. For the consumer, they are more aware of their own energy usage which allows them to reduce their spending. Into the future, this could become automated with Smart Appliances which wait for cheap energy. For the supplier, large savings will be made through the automation of meter readings and billing. Operational maintenance will also become streamlined as smart meters can immediately identify faults. For the government, efficiency savings will reduce the national environmental impact and will help the United Kingdom meet climate change targets (Thomas and Jenkins, 2012). The total projected savings from the combination of these points is £17.1 billion, resulting in a net benefit to the British economy of at least £6 billion (The Department of Energy and Climate Change, 2014a).

### 2.6.2 Governance

Effective governance and organisation is imperative for the success of the smart meter roll-out in the United Kingdom. Governance was discussed, in board terms, as part of Section ?? and found three main areas which may require governing: device addressability, information security and ethical & legal accountability. Similar issues face the British government. The Department for Energy and Climate Change have been responsible for managing the smart meter programme since April 2012 and delegates governing roles to various actors in the project. Some of the main actors include the Office of Gas and Electricity Markets (Ofgem), the purpose-built Data and Communications Company (DCC) as well as various subcontractors and licensees. These bodies govern the smart meter project roll-out across many areas, including two which are of special interest to this paper: consumer protection and technical implementation.

Widespread social acceptance is one of the main challenges facing IoT products and services; consumer protection offered by Decc and its subcontractors goes some way to earn this public trust. First and foremost, the energy data generated by smart meters is useful to consumers, suppliers and the government. In response to the privacy issues which this creates, the Decc has developed the Data Access and Privacy Framework (DAPF). The Department of Energy and Climate Change (2015) notes that this governing framework serves three main purposes:

- Protect consumers’ interests, including by addressing concerns that consumers may have about privacy;
- Enable proportionate access to data by authorised parties to ensure that benefits can be delivered; and
- Promote competition and innovation in the developing energy services market.

The DAPF is expected to be finalised by 2018. The Decc also addresses specific consumer concerns with governance and legislation. For instance, there are restrictions in regards to the supplier-led installation as detailed by the Smart Meter Installation Code of Practice, including: prohibition of sales during installation visits and the mandatory provision of energy advice.

Governance also extends to the technical standards and specifications used for the smart meter project. One important challenge facing this project is hardware and software interoperability between the large number of parties. The Smart Metering Equipment Technical Specifications (SMETS) document was drawn up in 2012 and represents the technical standards to be followed by suppliers and systems developers for the in-home products. The responsibility of Wide Area Network communication has been delegated to the Data and Communications Company (DCC). This organisation specifies its own standards for connecting to the WAN, which go as far as XML schema for inter-system communication.

### 2.6.3 Implementation

From the perspective of this paper, the technical implementation is the most interesting aspect of the smart meter project. There is a huge level of complexity and interconnectivity covered by SMETS and DCC specifications. The completed system will be a distributed and connected platform for smart meters in the United Kingdom and can be split into three constituent components: energy consumers, wide-area connectivity and service users. The implementation is summarised in Figure x.x.

Before discussing the implementation of specific technologies it is first worthwhile to understand the high-level system architecture. The energy consumers for the smart meter project are homes and small businesses. As was previously noted, there are three product types which each premises will have: smart meters (gas and electric), in-house displays and communication hubs. The communication hubs have two responsibilities, namely to provide premises-wide wireless connectivity—dubbed the Smart Meter Home Area Network (SM HAN)—and to connect each SM HAN to the nationwide Wide Area Network (WAN) provided by the Data and Communications Company. Service users are the utility companies like British Gas or Scottish and Southern Energy (SSE) as well as authorised third-parties such as online energy comparison websites. Authorised service users will gain bidirectional connectivity with their customer's smart meters through the DCC WAN.

The SMETS and Communications Hub Technical Specification (CHTS) documents complement one another to unambiguously define the functional requirements for smart meters and the home area networks. Since the communication hub will provide wireless connectivity across a single premises, its functional requirements are indicative of how this network will operate. The Department of Energy and Climate Change (2014b) state that the HAN interface of the communications hub will use ZigBee over the 2.4GHz frequency band. The CHTS also notes the minimum capacity of the SM HAN: four Electricity Smart Metering Equipment (ESME), one Gas Smart metering Equipment (GSME), one Gas Proxy Function (GPF), seven Type 1 devices and three Type 2 devices. Type 1 devices are those which can issue any command to ESME or GSME meters whereas Type 2 devices can only issue read requests (The Energy & Utilities Alliance, 2014).

Individual metering devices have their own functional requirements which will inform their hardware implementation. The high-level expectations of a ESME or GSME device are: a clock, a data store, meter containing one measure element, a HAN interface, a load switch, a Random Number Generator and a user interface (The Department of Energy and Climate Change, 2014c). It is also important to note that ESME or GSME devices must be capable of storing 13 months of readings taken at 30-minute intervals, even after power loss. Thomas and Jenkins (2012)

compared the UK requirements against an existing smart meter, the Elster REX2. This meter has an 8-bit Texas Instrument SoC with a clock speed of 32MHz, 4KB of RAM, 256KB of application memory along with 21 GPIO lines and up to 8 analogue inputs. These specifications would place the required hardware in the realm of the Arduinos researched in 2.5 however the authors argue that the UK devices would need to be more powerful and with greater memory due to the data storage and potential computational requirements.

The final piece to the smart meter project is the Wide Area Network managed by the Data and Communications Company. The DCC is responsible for secure communication, access control and scheduled data retrieval for this project. Since the installation environments will differ from premises to premises, various connectivity methods are being employed, such as cellular, broadband and 802.15.4 mesh radio. This is, in essence, the platform supporting the whole project. The DCC will maintain a web-based service where service users can issue HTTP requests with XML document payloads to achieve tasks. The possible functions are defined in the DCC User Interface Specifications (DUIS).

## 2.7 Conclusions

This chapter has discussed the key characteristics of the Internet of Things. What was once a ‘what if’ thought exercise is now a reality thanks to incredible advancements in technical knowledge and manufacturing prowess. IoT covers such a broad spectrum of possibilities that it is difficult to define absolutely; instead, this chapter has shown how the boundaries between other key areas of research can help to define its place in computing. We have come to summarise IoT as data collection, aggregation and reaction in the physical domain.

Research and development in IoT is driven by a perfect storm of technical capability and potential reward. Maturing wireless communication standards, miniaturised processing power and accessible hardware are factors which are inspiring a new generation of services. That word—services—is also important; we should make the distinction that IoT devices play one part in a wider paradigm shift.

A number of predictable, practical concerns must first be addressed for this paradigm shift to be realised. IoT has been met with an understandable scepticism from consumers and businesses. IoT devices promise a level of insight into our lives never before seen and the public have yet to decide whether this is an intrusion of their privacy. In order to alleviate concerns and to encourage adoption, standardisation and governance should be introduced. IoT as a concept will become more successful and indispensable as it scales.

New infrastructure and tools are required to facilitate the predicted growth for IoT. This chapter investigated the solutions provided by a number of IoT frameworks and platforms—some offered by established players and others by lean technology-driven initiatives. The iterative development performed by these companies has exposed some best-practices and go-to technologies for IoT platforms. The HTTP protocol is used extensively for configuration and data access by every provider investigated, commonly through a RESTful API. With regards to device connectivity, the robustness, scalability and flexibility offered by MQTT has seen its adoption by industry leaders like Carriots and Amazon IoT.

MQTT almost completely solves challenges inherent in common network environments. It is compatible with devices running behind Network Address translation and therefore it does not require IPv6 support (which is still a long way off of widespread adoption). One challenge which it still faces is its use of uncommon networking ports—a characteristic which may make devices unappealing to the average consumer and the challenge of reconfiguring their domestic firewall. Maybe there is room in the domestic router market for a router which explicitly supports MQTT

(with appropriate firewall rules) for connected homes and small offices. Where MQTT is not feasible, tunnelling through a WebSocket connection is a ‘dirty’ solution.

A well-rounded IoT implementation is dependent not only on computer science theory but also a variety of design disciplines and electrical and electronics engineering. IoT is truly multidisciplinary. In order to satisfy increasingly challenging design criteria, engineers have been tasked with developing a new breed of hardware chips and some of the results have been nothing short of amazing. Samsung’s Artik family of boards pack an incredible number of technologies in tiny packages, such as the Artik 5: dual-core 1GHz CPU, 512MB RAM, WiFi, Bluetooth BLE, ZigBee and a comprehensive software suite including a Linux-based OS, CoAP, MQTT, IPv6, hardware protocols and a security suite. That is all in a chip measuring just 29 x 25 x 3.5mm.

As the operational requirements of these new-age hardware platforms become more strict, engineers are forced refine every aspect, especially wireless connectivity. Wireless technologies for IoT are being developed for resource efficiency over raw throughput in order to conserve scarce battery power. Other protocol features such as mesh networking and support for sleeping nodes have been developed to embrace the characteristics of IoT networks. The ZigBee protocol is emerging as the go-to WPAN protocol.

This chapter also presented a case study on the UK Smart Meter program. The challenges addressed and solutions implemented by the UK government provide a commentary on the current state of IoT. The case study describes many organisational bodies, acronyms and specifications which in itself suggests that the IoT ecosystem is currently too complex. As part of this deployment, a dedicated Wide Area Network has also been developed. This is a massive undertaking and begs the question: why not utilise the existing copper and fibre telephony network? Finally, this project will see the deployment of ZigBee devices to the majority of UK households and it has spawned a number of governing bodies. Maybe this major, government-backed project will encourage the widespread social acceptance of IoT devices and services.

# Chapter 3

# Specification

To obtain a complete and practical understanding of the IoT paradigm, the software implementation accompanying this paper will comprise of two distinct components: a generic IoT application framework and a demonstration application. Mineraud and Tarkoma (2015) state that developers of IoT applications would benefit from a generic, standardised architecture, and that is the aim of the framework component. The second component has two main purposes. First of all, it will implemented the framework component with the aim of validating design decisions. The second purpose is to demonstrate the opportunities present in IoT. This chapter will define the requirements for both of these components.

To help reference these two software components throughout the remainder of this paper, they have been given product names. Haar is a cold sea fog which forms on the east coast of Scotland and is a fitting metaphor for IoT being all around us. It is also a nod towards the Fog Computing paradigm, and towards Robert Gordon University's location in Aberdeen. The generic framework will be called the Haar Engine and the demonstration application will be named Haar.

## 3.1 Functional Requirements

### 3.1.1 Framework

The target users of the Haar Engine are designers and developers of IoT services and applications. The general aim of a framework is to encapsulate design decisions into a logical and elegant toolkit. The Haar Engine aims to perform the same task by encapsulating the knowledge which has been collated in Chapter 2. The following subsection specifies its main requirements.

#### User and Device Management

The following requirements have been derived from the analysis of existing platforms and the requirements of use cases.

1. The framework shall model users
  - (a) A user shall be identified by a unique username
  - (b) A user shall have an associated profile including: full name, email address
  - (c) Users shall be assigned a privilege level: standard or administrator

2. The framework shall authenticate genuine users only
3. The framework shall model connected IoT devices
  - (a) A device shall be identified by a unique identification number
  - (b) A device shall be designated as either an input (sensor) or output (actuator)
4. The framework shall authenticate genuine devices only
5. The framework shall authorise and facilitate the management of devices
  - (a) A device will have one owner
  - (b) Access to device data and configuration options shall be restricted to the device owner by default
  - (c) The device owner shall be able to make device data public
  - (d) A device owner shall be able to grant access permission to specified users

### Device Connectivity

A main aspect of the IoT concept is the interconnection of devices. The Haar Engine is responsible for managing the connectivity between devices and itself. The issues surrounding bidirectional communication was described in Section 2.4.4, and these should be addressed by this framework.

1. The framework shall establish a connection with end devices
  - (a) Devices shall be addressable and identifiable whilst the connection is open
  - (b) The connection shall remain open under normal operating conditions
  - (c) Under error conditions, the connection shall be re-established
2. The connection shall be bidirectional
  - (a) Input devices shall be able to transmit data packets to the framework
  - (b) The framework shall be able to transmit data packets to output devices
  - (c) The connection shall be tolerant of network obstacles such as firewalls and Network Address Translation

### Data Storage

IoT applications will collect a large volume of data. The data collected by these applications will vary in structure and type, so the Haar Engine must be tolerant of this. The developers potentially using this framework will have specific domain knowledge and so should be empowered to tailor the system for their needs.

1. The framework shall store data received by devices
2. The framework shall provide an interface for using different database types
  - (a) The framework shall provide a default ‘out of the box’ database connector
  - (b) Application developers shall be able to create their own database connectors

### Data Access API

The Haar Engine must be able to provide access to stored data. Primarily this access will be for use in its own application, however third-party access would enable interoperability between external services and applications.

1. The framework shall provide structured access to stored data
  - (a) Access shall be granted to authenticated and authorised users only
2. Application developers shall be able to modify data access
  - (a) Application developers shall be able to add custom data searches
  - (b) Application developers shall be able to add custom data filters

### Real-Time Event API

The ability to react to data in real-time enables novel use cases. As with the Data Access API, the primary purpose is to satisfy the needs of a specific application. However, third-party access to this API would allow for further real-time integrations.

1. The framework shall provide a real-time event API
  - (a) Client applications shall be able to listen for device events
  - (b) The real-time API shall leverage bidirectional connectivity with devices
2. The API shall provide real-time access to data received from devices
3. The real-time API shall enable developers to create application rules and triggers

#### 3.1.2 Demonstration Application

Haar is the second software component for this project. The aim of Haar is to validate the Haar Engine in practice, as well as to demonstrate the opportunities present in the IoT concept. This will be achieved through the implementation of an arbitrary web-based application which sufficiently covers key features.

##### Devices

The IoT concept enables the interconnection of devices so this is a logical requirement to begin with. Haar should comprise of at least two separate local device networks to demonstrate global interactivity. These local networks should themselves comprise of a number of devices with enough variety to validate Haar Engine use cases.

1. The application shall comprise of two local area device networks
2. Devices of these networks shall be capable of establishing a connection between themselves and the web application
3. The device networks shall comprise of two sensor devices
  - (a) The device network shall contain a sensor device which measures a single data point, such as temperature

- (b) The device network shall contain a sensor device which measures more complex data, such as a vector of wind direction and speed
- 4. The device networks shall comprise of a single actuator device
  - (a) The actuator device shall be flexible enough to represent a variety of data types

## Dashboard

The web-based dashboard will be the main interface between a user and their devices.

- 1. The dashboard shall be accessible on the World Wide Web
- 2. The dashboard shall authenticate users with a username and password
- 3. The dashboard shall list profile details
- 4. The user shall be able to manage their devices
  - (a) The dashboard shall list devices owned by the user
  - (b) The user shall be able to add a new device
  - (c) The dashboard shall show whether devices are connected or not
  - (d) The user shall be able to transfer ownership of the device
  - (e) The user shall be able to grant access permissions to other users
- 5. The dashboard shall enable users to manage application rules
  - (a) The dashboard shall list existing rules
  - (b) The user shall be able to create new rules
  - (c) An actuator device shall be able to react to sensed data
  - (d) User devices shall be able to integrate with third-party services
- 6. The dashboard shall display data for a given device [see Data Visualisation below]
- 7. The dashboard shall be able to trigger actuators with virtual controls

## Data Visualisation

There is an opportunity to develop a rich user interface for the dashboard. Since so much of IoT relies on data, it would be appropriate to develop example data visualisation tools for it.

- 1. A section of the dashboard shall be dedicated to data visualisation
- 2. A generic visualisation tool shall plot temporal data as a graph
  - (a) The date range shall be configurable
  - (b) Multiple data sources shall be comparable on one graph interface
  - (c) The graph shall leverage the real-time event API to update when new data is received
- 3. Specialised visualisation tools shall reflect specific device types. For example, a virtual thermometer would visualise a temperature
  - (a) Specialised visualisation tools shall leverage the real-time event API to update when new data is received

## 3.2 Non-functional Requirements

In addition to the features required for Haar and the Haar Engine, there are a number of additional considerations. Since both of these software components are destined for use in the same system, this section will detail their non-function requirements collectively.

### 3.2.1 Constraints

#### Network Environment

The potential operating environments in which IoT devices could be implemented vary from domestic household appliances to heavy industrial applications. These networks will all have different configurations, capabilities and customisability. In order to reduce deployment issues, the software components must operate in a common network scenario. A typical home network will be used as a baseline, where only common firewall ports will be allowed.

#### Public IP Address

IPv6 is the successor to IPv4 and will allow every connected device to have a unique, globally addressable IP address. While this is the direction the industry is heading in, many businesses and Internet Service Providers are not prepared for its adoption. Network Address Translation (NAT) is still commonly deployed and prevents devices on these networks from being publicly addressable. It should therefore be assumed that end devices will not have a public IP address.

#### Initial Setup

In a domestic situation, consumers would be expected to connect products to their internet connection by themselves. This is an important user experience to get right. While this project acknowledges the importance of this, it will not be considered a requirement for Haar so more effort can be afforded to developing a robust application.

#### Sensor Nodes

To demonstrate the various framework use cases, the application should connect a variety of sensor types. To ensure this project remains achievable, sensor nodes will be limited to those whose data can be represented by a single data interchange format like XML or JSON. Binary data such as images or audio will not be considered for this project.

### 3.2.2 Performance Requirements

Since this project is a research endeavour, it neither requires nor promises any performance benchmarks. In saying that, the implemented product should meet general performance expectations, especially in regards to any web-based user interfaces.

### 3.2.3 Security Requirements

This particular software product will not store sensitive personal details, nor will it need to satisfy criteria for professional accreditation. However security is an important topic in IoT and so real-world security measures should be implemented. In particular, any device or application connectivity should be implemented over encrypted connections to prevent potential network

sniffing. Also any live demonstration versions of this software should be hosted on up-to-date hosting services to prevent any bug exploitations.

### 3.2.4 Software Quality Attributes

#### Extensibility

The application domain of an IoT project could be in virtually any industry. It is important that this software product is extensible, meaning that the core functionality can be extended to cover specific use-cases.

#### Portability

The server infrastructure supporting a generic platform such as this could vary between organisations and use-cases. For instance it may be beneficial to use a Platform as a Service such as Heroku or conversely a range of dedicated servers may be in use. This project should be platform agnostic.

#### Scalability

It is difficult to predict the exact number of sensor nodes and the data which they will produce. The software components should be scalable, either horizontally and/or vertically.

#### Testability

It is important that core system functions execute as designed. This project should therefore be testable through assertions where possible and appropriate.

#### Robustness

With many devices relying on a system for data and connectivity, system stability is an important focus. The framework should strive to be as fault tolerant as possible, however this is the sum of many parts. Reliable hardware infrastructure and high quality tested code all play a part.

#### Reusability

Of course a main feature of a generic framework is the ability to be reused. Two different organisations with different use-cases should both be able to use the framework without issue.

# Chapter 4

## Design

The purpose of this chapter is to document architectural design decisions for Haar and the underlying Haar Engine. It is an important stage in the development of these system components because it combines the requirements specified in Chapter 3 and the knowledge gained in Chapter 2. The process has been highly iterative and has led to the upcoming system architecture.

One fact which has become clear throughout the design process is that the design and implementation are not mutually exclusive. Some ideas presented in Chapter 2 are dependant on specific technologies, such as the ability to facilitate bidirectional communication (Section 2.4.4). For this project, the available tools and technologies have therefore informed the design, and this has been integrated to the design process.

The design process for each functional requirement has consisted of three iterative stages, as shown in Figure 4.1. First of all, the initial research is consulted to check if any knowledge could inform the design. The requirement and existing knowledge were then used as a basis as a small feasibility investigation for various technologies. Based on these findings, the design was updated. This process was repeated for individual requirements, as well as between requirements to ensure the complete system will operate adequately.

### 4.1 Haar Engine

The first component to get design attention is the Haar Engine. Since this will support the main system functions required for IoT applications, its design is heavily informed by the available technologies.

One major design decision is the programming environment used to implement the Haar Engine. It is important because it informs how the code can be structured. First of all, the chosen programming language and ecosystem must be able to support the requirements outlined in the previous chapter. Beyond that, the language and framework must provide suitable constructs so application developers can easily extend and modify for their own needs. Various languages and architectures were investigated (such as PHP, Ruby, Python and Go), however one stood out as being most suitable for this project: Node.js.

Node.js is a server-side implementation of JavaScript. More specifically it implements Google's V8 JavaScript engine and it is ideal for this project due to its event-driven nature. In general, it is based on the event loop concurrency model - a single-threaded process which loops continuously over a message queue (Mozilla Developer Network, 2016). Haar Engine is expected to be focussed on input and output (IO) operations. IO operations using more traditional technologies such as PHP, Python and Ruby are synchronous in nature and block further execution of the process. In

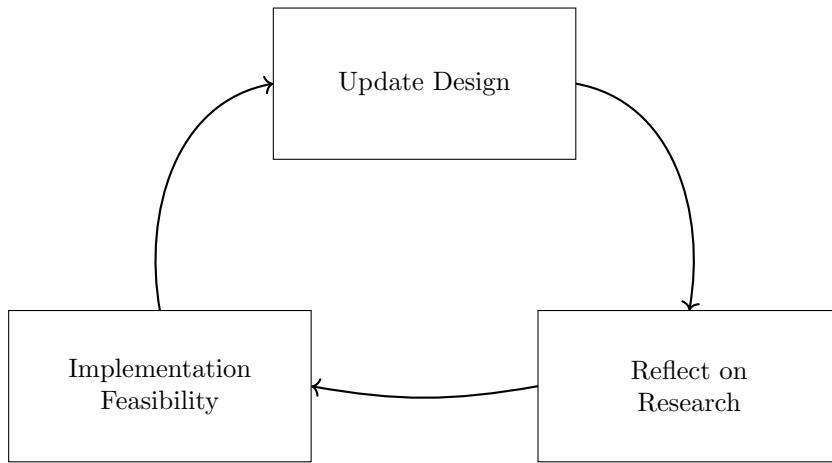


Figure 4.1: Iterative steps when designing for functional requirements

comparison, JavaScript (and therefore Node.js) can continue processing other instructions while waiting for an IO operation to complete.

There are various web application frameworks developed on top of Node.js, with the *de facto* standard being Express. The Express framework is based on the concept of middleware, where middleware functions anonymously pass objects to the next one until a web request has been completed. This concept could therefore be used to an advantage for system aspects like authentication.

Bearing these language features in mind, a final design for the framework has been defined. A logical view of the main system components can be seen in Figure 4.2. The design decisions for each of these framework components have been described in the following subsections.

#### 4.1.1 Data Modelling

The functional requirements in Chapter 3 make reference to a number of modellable objects. In particular these are users, devices and rules, and they all have a notion of ownership and authorisation within the framework. During initial research, it was found that an existing platform (Nitrogen.io) abstracts similar objects into a collection called principals. Throughout the design process, users, devices and rules have proven to be first-class citizens of the framework, so the Haar Engine will adopt the same terminology.

The three principal objects set foundations for the complete data model as well as other framework components, so it is important that they are modelled correctly. This subsection will first describe the traits of each principle before expanding their relationships into an entity-relationship model. Figure 4.3 illustrates the relationship between the principals.

##### Users

The user principal is fundamentally responsible for authorisation within the Haar Engine. This will model an end-user account such as an individual person or a company, who will access their account using a unique username and a password. The user is responsible for managing their own devices and rules. The Haar Engine will identify user principals with a unique identifier. This would allow users to change their username while maintaining relationships with other principals.

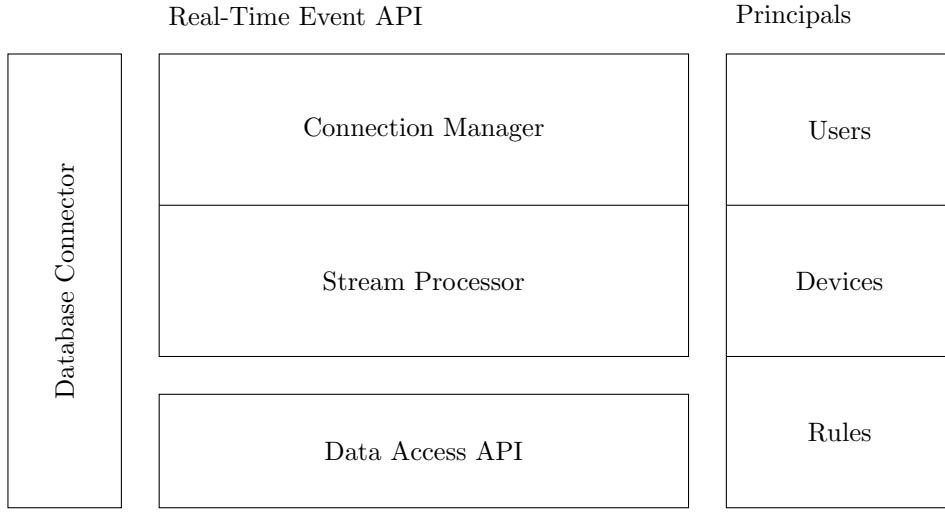


Figure 4.2: A logical view of system architecture for the Haar Engine

User principals will be the gatekeeper to devices associated with their account. First of all, they will be able to attach new devices to their account. Users will also have the ability to share access to sensor devices with specific users, or make that data publicly available. Finally, user principals will have the ability to transfer ownership of the device to another Haar Engine user account and relinquish administration control over it.

User principals will also be able to create, modify and delete rules. When a new rule is created, the user will be designated as the owner of it. Unlike devices, users cannot share rules with another user, nor can they transfer ownership. It is foreseeable that a rule is configured to watch sensor data which is owned by another user. Since access to a third-party sensor cannot be granted, the rule would not have appropriate access permissions to run.

## Devices

The device principal will model a single IoT device. The device can be one of two types (either a sensor or an actuator). Devices will be owned by one user, however further users may be granted access to sensor data. Devices will be identifiable with a unique identifier in the Haar Engine. This identifier will be used for the purpose of authentication and authorisation against user principals.

The device model will also describe the type of data which it supports. For sensor devices, the principal will note the type of measurement (a single value or a vector of values) and the unit(s) of measurement. In the case of actuators, the principal will describe possible output types (single value or a vector of values), as well as value limits. These data type descriptions will be used when defining rules.

## Rules

Rule principals define triggers within the Haar Engine. They are created and owned by a user principal. A rule will consist of a watch target, trigger criteria (such as threshold values), an action target and an action. The watch target is a sensor to monitor and when changes are

detected, its output values will be compared against trigger criteria. If the criteria is met, the action target (actuator) will be updated in accordance with the action to take.

### Entity Relationship Model

1. Entity Relationship Diagram using Bachman Notation.

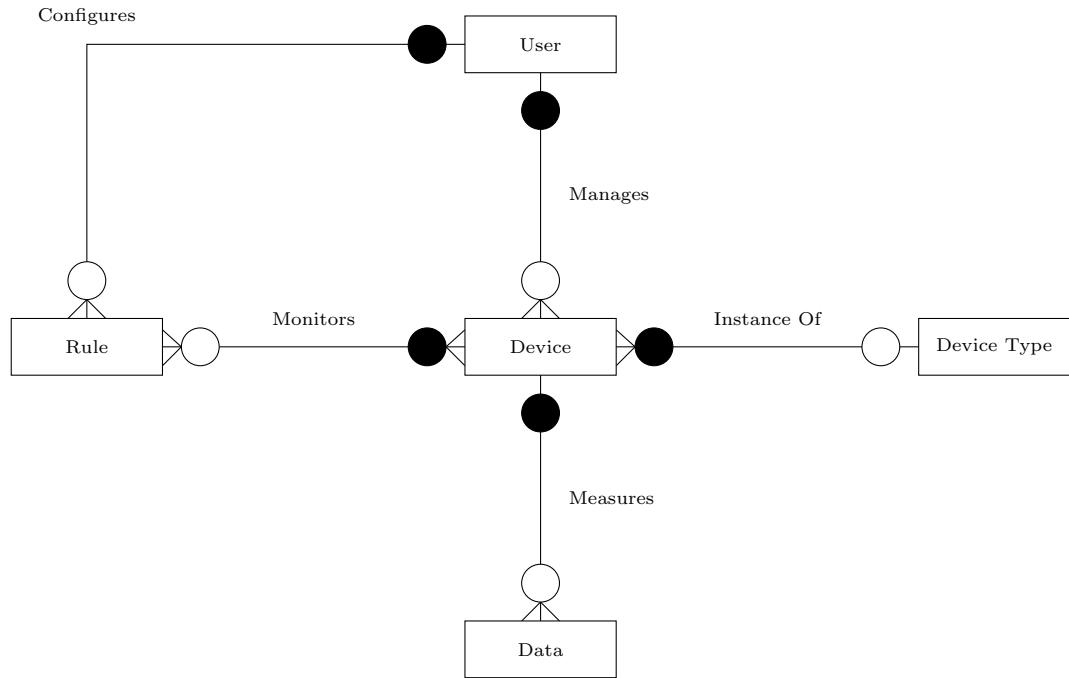


Figure 4.3: Entity Relationship Diagram for the Haar Engine

### 2. Entity Sets

- User(id, username, password, role)
- Device(id)
- Device Type(id, type, structure)
- Data(id, values)
- Rule(id, watch target, criteria, action target, action)

### 3. Relationships

- Manages — User manages Device [ $1:m$ ][ $m:0$ ]
- Configures — User configures Rule [ $1:m$ ][ $m:0$ ]
- Instance Of — Device instance of Device Type [ $m:1$ ][ $0:m$ ]
- Measures — Device measures Data [ $1:m$ ][ $m:0$ ]

- Monitors — Rule monitors Device [m:1][o:m]
4. Constraints and Assumptions
- Device Type structure is an array of objects. Each object describes a possible measurement.
  - The Device Type of a device will never change

#### 4.1.2 Database Connector

Efficient data storage is an important performance consideration. The requirements in Chapter 3 also state that application developers should have the ability to change the database type to suit their own application. The design solution arrived at for this requirement is a database connector API.

The database connector API will provide a set of foundation methods for operating on principal models and data generated by devices. The framework will use a consistent programming interface and this will allow application developers to change the connector for one of their own design. In a more strictly-typed programming language, object-oriented constructs such as abstract classes or interfaces might be used to define class signatures. With JavaScript, programming techniques like function composition might be more appropriate.

Whilst the Haar Engine will provide the capability of changing the database connector, an ‘out of the box’ connector will be provided. A NoSQL database fits the purpose of the framework better than an SQL-based database because the data stored could be of varying formats and structures. There are a variety of NoSQL databases available, which will be discussed in the implementation chapter.

#### 4.1.3 Data Access API

There are a number of mature standards used for structured data access on the web, so this requirement of the project is about choosing the most appropriate. Two widely-used access standards are Simple Object Access Protocol (SOAP) and Representational State Transfer (REST). These standards also use data interchange formats such as eXtensible Mark-up Language (XML) or JavaScript Object Notation (JSON).

A REST API was found to be a better fit than SOAP for the Haar Engine. The REST access operators integrate much easier with potential implementation technologies like Node.js and Express and it is a simpler standard to use. The JSON data interchange format is based on JavaScript object constructs so it naturally integrates with a JavaScript-based application.

Authentication will have to be enforced by every component of the Haar Engine, including the Data Access API. One characteristic of REST APIs is that they are stateless, meaning no session data is stored server-side and that every request will have to be inspected for appropriate access permissions. Two authentication techniques which will be used are a username and password combination, as well as token-based authentication. Clients will first authenticate with their username and password and if accepted, the REST API will return a unique access token for use in subsequent requests.

#### 4.1.4 Real-Time Event API

One main characteristic of IoT is the ability to react on sensor data in real-time. This makes a robust and effective real-time API a priority for any given application. Giving structured access to this feature is challenging due to the points described in Section 2.4.4. For this reason, the problem has been divided into two constituent components: opening and maintaining a true

bidirectional communication channel, and efficiently handling messages between the two nodes of the channel.

One technology which goes some distance in helping with this is MQTT. As described in Section 2.4.3, MQTT is a publish-subscribe protocol which facilitates the transmission of messages. MQTT is a very robust protocol however given project constraints and the additional complexity which it might create, it has been deemed unfeasible for this project. Instead, the JavaScript project Socket.io can open and maintain WebSocket connections, with fallbacks if the WebSocket protocol is unavailable. The message-passing concepts of MQTT could be applied to Socket.io.

### Connection Manager

The connection manager is responsible for navigating potential network issues to maintain a bidirectional communication channel. Choosing to use Socket.io and the WebSocket protocol should alleviate any of the issues regarding firewalls and NAT. Socket.io provides an API for managing WebSocket connections. Clients can connect to namespaced URIs which encapsulate different categories of client—the Haar Engine will use two default namespaces: sensors and actuators.

It is also the responsibility of the connection manager to authenticate clients, whether they are users or devices. Socket.io also solves this problem with the use of its own middleware capability. This middleware could make use of authentication mechanisms already in place for the Data Access API.

### Stream Processor

Once a connection has been established, it is the responsibility of the stream processor to act on messages. The Socket.io API allows clients to join one or more rooms within a given namespace and this capability will be leveraged by the stream processor. For example, multiple sensors will each have their own room under the sensor namespace. The stream processor can listen for any sensor events and store the data. Alternatively, stream processing rules (based on the rule principal object) could listen for messages in a single sensor room and act accordingly.

## 4.2 Haar

The main purpose of the second component, Haar, is to validate the implementation of the Haar Engine. Most of the heavy lifting will be done by the Haar Engine, however this application also requires design attention, especially in regards to the end devices. There are three main components to be investigated: the back-end application, front-end application (dashboard) and the wireless sensor network itself.

### 4.2.1 Back-End Application

The back-end application is simply an instance of the Haar Engine. It is expected that the data models will be extended for one or two application-specific fields (such as a profile picture and biography for users) however it will generally be left as designed. The back-end application will be self-contained and separate from the front-end application.

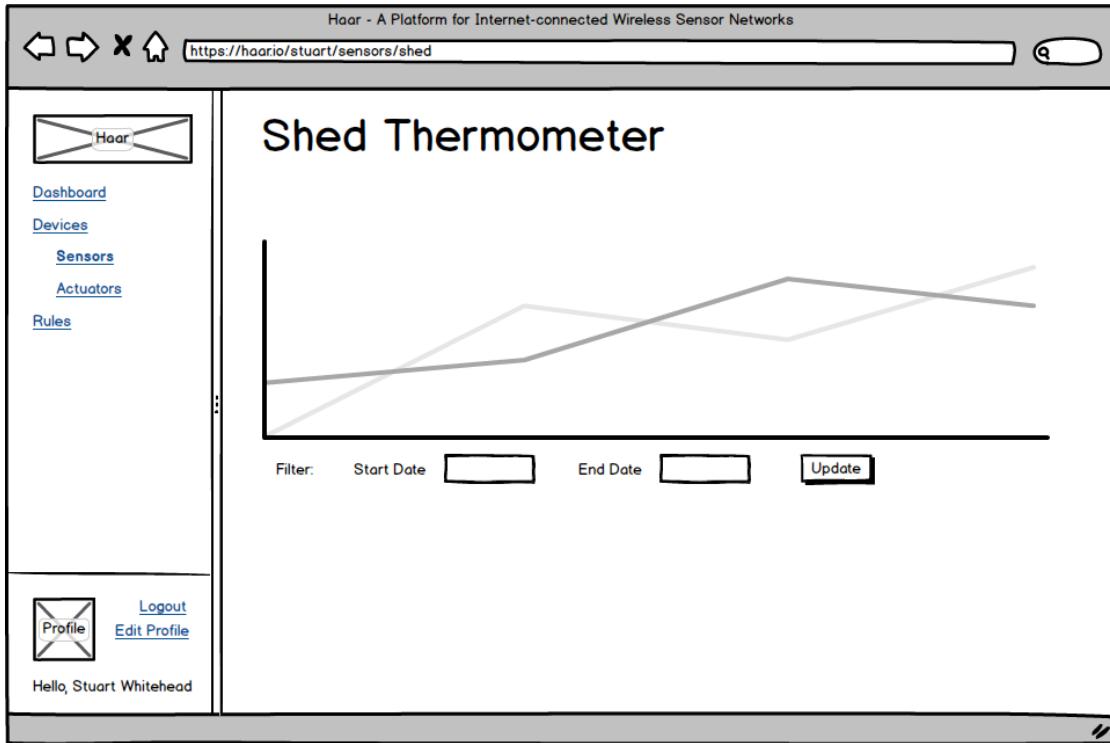


Figure 4.4: UI layout for desktop-sized web browsers

#### 4.2.2 Front-End Application

The front-end application is, in essence, simply a user interface for the back-end APIs. It will make use of the Data Access API and Real-Time Event API to manage users, devices, rules and the authentication for all of them. The main challenge presented by the dashboard is handling very dynamic, real-time data in a structured and efficient way for a variety web browsers. The implementation details of this will be discussed in detail as part of the next chapter.

What can be discussed at this stage is the design, layout and behaviour of the user interface. Figure 4.4 illustrates the general layout which will be used. On desktop-sized web browsers, the window will be split into two panes—one used for navigation, and one for displaying the current page content. On mobile-sized web browsers, only one pane will be displayed at a time. By default, this will be the content pane and when the navigation button is clicked, the navigation pane will be shown.

The behaviour of the user interface is a challenging aspect. It is expected that aspects of the user interface will react in real-time to new data, so it will also have to open a connection to the Real-Time Event API. This will be possible by using the Socket.io library client-side. The challenges begin when the user starts to navigate to different pages of the dashboard. Traditionally this would load a completely new page, however real-time connections would have to be renegotiated and this is inefficient. Instead, dashboard pages will be loaded asynchronously. Care must then be taken to achieving this in a structured way with its implementation.

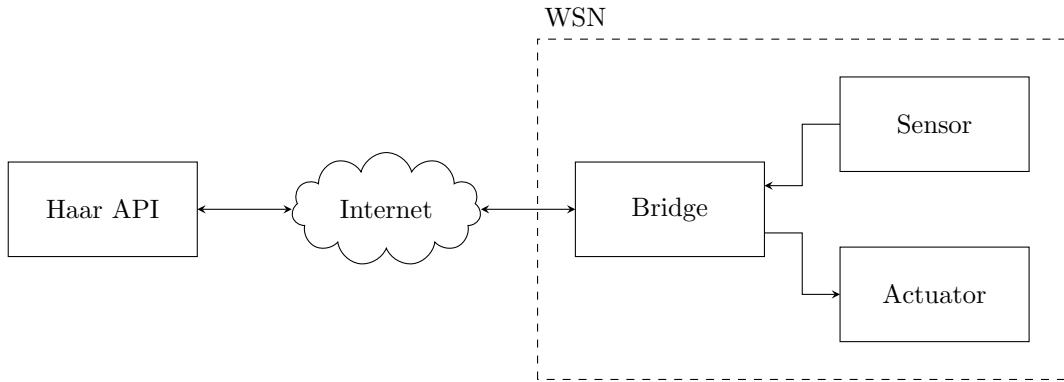


Figure 4.5: System architecture for Haar devices

#### 4.2.3 Wireless Sensor Networks

The third and final component for the Haar application is the Wireless Sensor Network. The WSN comprises of the physical sensors and actuators which create an interface between the physical and digital worlds. To fully demonstrate the capability of the Haar Engine, there is a requirement for a variety of sensor types.

Before designing individual devices it is first important to plan the data flow between them. It has already been decided that the Haar Engine will support bidirectional communication through the use of the WebSocket protocol, meaning that end devices must also support it. However, to maintain a persistent WebSocket connection any given end device must be awake 100% of the time. IoT devices should be as power efficient as possible and maintaining a WebSocket connection would prevent them from being able to sleep. Similarly, the WebSocket protocol requires extra software overhead to manage connections; simpler, more efficient protocols already exist for IoT device communication.

As described in Section 2.5.4, ZigBee is a lightweight wireless communication protocol ideal for use in IoT solutions. ZigBee, however, is not compatible with the TCP/IP protocol used for Internet communications. To compromise on this issue, a bridge solution will be used. A bridge device will maintain the WebSocket connection with the Real-Time Event API; when a WebSocket packet is received, the bridge will translate it into a ZigBee packet and vice-versa. This system architecture is shown in Figure 4.5.

#### End Devices

To successfully demonstrate the IoT framework, a number of devices are required. Ideally, these devices should be a true representation of an IoT device and not just mocked using software emulation. For the purpose of this project, a true IoT device is considered as: constrained resources, low power and inexpensive.

Out of the hardware platforms investigated in Section 2.5, the Arduino development platform is the most suited. The Arduino hardware boards and software tools are open source giving complete transparency to their implementation. The Arduino IDE also comes packaged with all the software required to develop and install the c/c++ based programs. There are a variety of hardware boards and accessories and they are all inexpensive and widely available.

Most Arduino boards have limited connectivity and very rarely have a wireless option built in. As a result, an additional Radio Frequency (RF) hardware component is required. After

researching available hardware, the XBee radio chip is the only feasible solution which supports the ZigBee protocol. The XBee chip is a very flexible device and actually contains its own microcontroller. This characteristic will allow Haar devices to delegate communication duties to the XBee device whilst only needing to manage the interpretation of sensor data itself. Another benefit of using XBee is that configuration and debugging software is available for computers.

As described in Section 3.1.2, devices with enough diversity are required to fully demonstrate the IoT concept. Thought was first given to the output device; this was required to be flexible enough to reflect a variety of sensor data. An existing IoT product called the Good Night Lamp provided inspiration for this device. The Good Night Lamp is a cellular-connected bedside lamp in a master-slave configuration. When the slave lamp is turned off, the master lamp will also turn off, no matter where in the world they may be located. The developers behind this product suggest that this creates an emotive connection with a loved one, such as that between a child and their travelling parent.

To build on the concept of the Good Night Lamp, the output device for Haar will be an RGB colour lamp. Firstly, an RGB actuator like this has three data channels - red, green and blue. This characteristic can be used to demonstrate a vector of sensor data being transformed and used to trigger an output. Additionally, colours can add additional meaning to a context. For example, if used to reflect a temperature, a blue colour suggests coldness whereas a red colour suggests warmth. This subjectiveness adds a nice human aspect to the device.

Three different input devices will also be built. In order to demonstrate the temperature example just discussed, a sensor which measures the ambient temperature will be developed. The temperature sensor only measures one datapoint, so further devices which measure a vector of data will also be required. Since the output device is an RGB lamp, it would be nice to demonstrate an RGB colour sensor, too. Each channel of the RGB sensor could be mapped to the respective channel on the output so it simply relays the sensor colour. Finally, a 3-axis gyroscope sensor will be built. Since the gyroscope has 3 axis (x, y and z), they can each be mapped to a channel of the output device. Depending on its sensitivity, a gyroscope could produce a high volume of data, so it will be useful when testing the limitations of the system.

The next stage in planning the devices is to design their schematics. Section 2.5.3 discussed how the operating voltage is an important consideration and that it affects battery life and compatibility with sensor chips. Most Arduino boards operate at 5V however a number of models operate at 3.3v, such as the Arduino Pro Mini as noted in Table 2.3. The XBee radio chip also operates at 3.3v, so this would be a suitable system voltage to use.

In terms of the sensors components, there are two varieties to choose from: analogue or digital. Analogue components are very cheap, widely available and very robust but often require extra calibration steps to glean accurate results. In comparison, digital components are more expensive but often come packaged with helper libraries, use well-supported digital protocols and take accurate readings ‘out of the box.’ Since this project is up against tough time constraints, the extra support provided by digital components makes them more suitable for this project.

The following diagrams illustrate prototype circuits for all device types. There are a number of common characteristics between them which should be explained first. The XBee Explorer is an expander board for XBee radio chips and exposes a prototype-friendly pinout. The basic pins (power, ground, serial in and serial out) are connected to the Arduino board, along with two more pins: CTS and DTR. These are represented by the yellow and orange wires respectively. The CTS pin can be used to determine when the XBee chip is ready to receive data, and the DTR pin can be used to send the XBee chip to sleep. Additionally, the grey and brown wires are used to connect digital sensor chips to the Arduino.

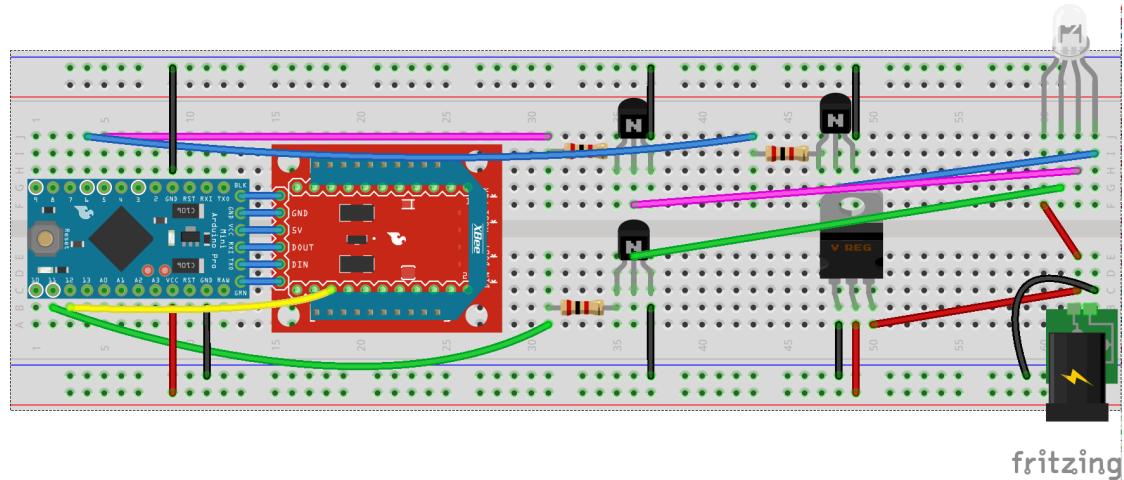


Figure 4.6: Breadboard layout for RGB LED actuator

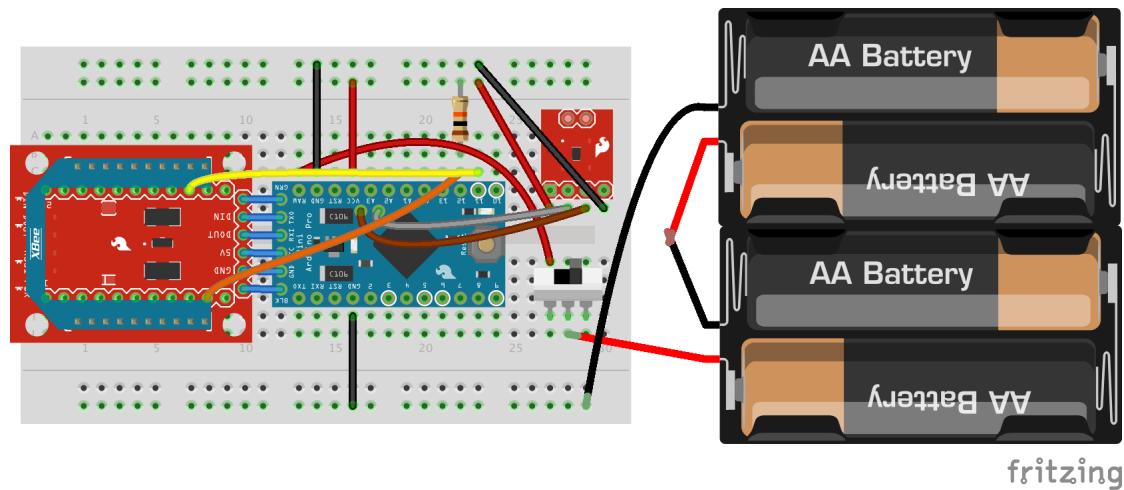


Figure 4.7: Breadboard layout for temperature sensor

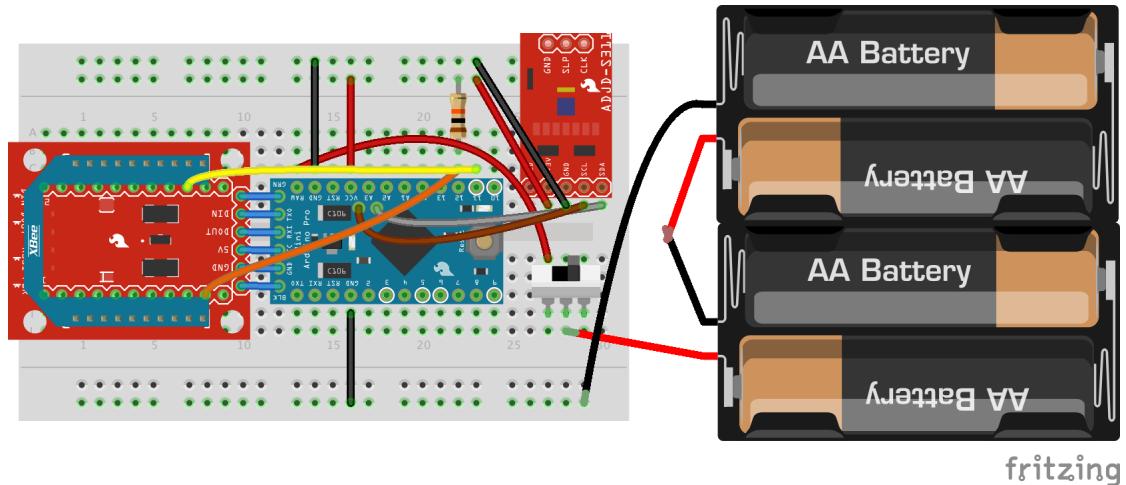


Figure 4.8: Breadboard layout for colour sensor

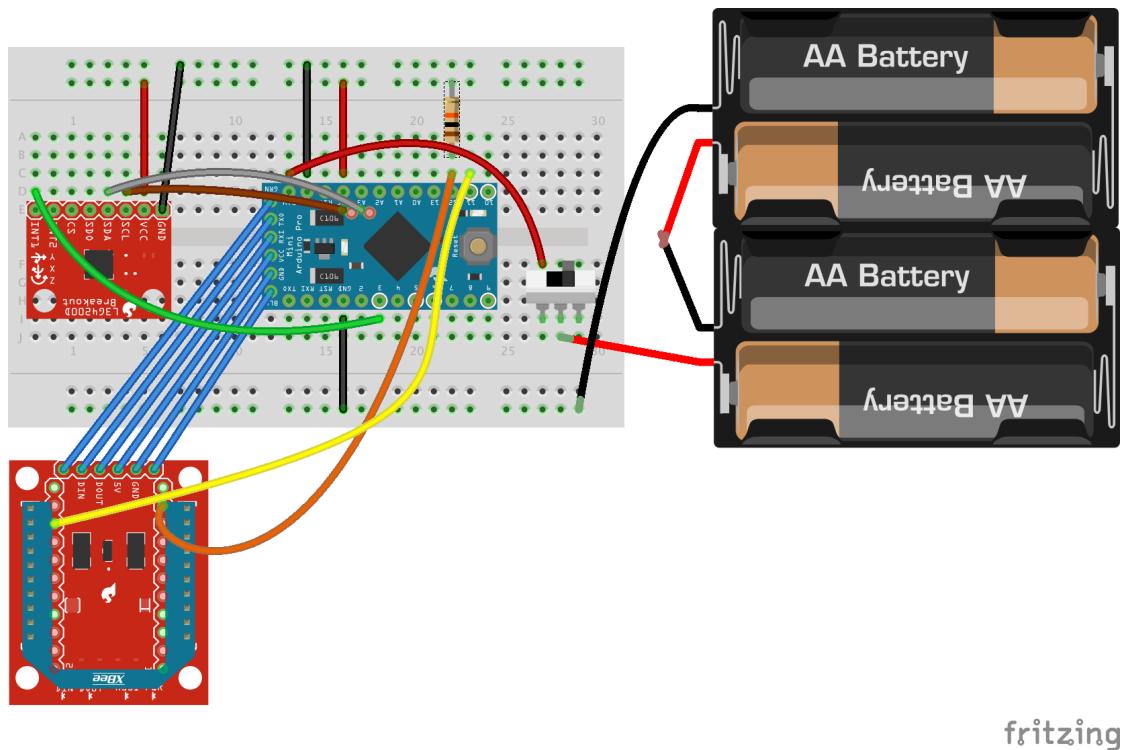


Figure 4.9: Breadboard layout for gyroscope sensor

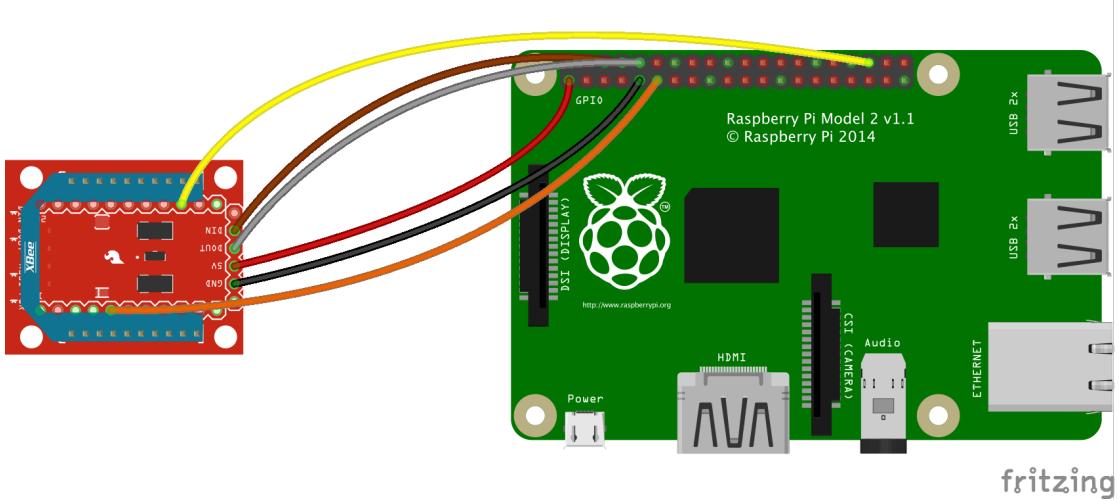


Figure 4.10: Breadboard layout for bridge device

### Bridge

Since the purpose of the bridge device is to translate packets between TCP- and ZigBee-based protocols, it requires a different design approach to the end devices. This device must be able to support multiple modes of connectivity. Its software stack must be able to open and maintain a WebSocket connection as well as to parse and transmit ZigBee packets. The additional overhead of supporting multiple communication protocols means that this device will require more system resources than a simple microcontroller. At the same time, this prototype device should remain inexpensive and developer-friendly.

Out of the hardware platforms summarised in Table 2.3, the Raspberry Pi model 2 (RPi2) bests fits this criteria. The RPi2 has a native ethernet port which would allow it to interface with the Internet. Additionally, it provides a number of GPIO pins which could be used to interface with its own XBee radio chip. A combination of these two features means it can satisfy the connectivity requirements. The RPi2 is also a fully-fledged computer with a 32-bit, quad-core CPU running at 900MHz and 1GB of RAM. These specifications are more than sufficient to service resource demands.

The Raspberry Pi community manage a Linux distribution for use on the platform. Since this will be used as the operating system, any program which runs on Linux could be used to implement the bridge software. For the same reasons Node.js is being used to develop the Haar Engine (non-blocking I/O operations, real-time libraries) it will be used to implement the Haar Bridge. The Socket.io client library can also be used for managing the WebSocket connection on the RPi2. The RPi2 will interface with the XBee chip using the serial GPIO pins.

The following diagram illustrates the bridge device prototype. Since this device is expected to handle many more IO operations than an end device, both of the hardware flow control pins (CTS and RTS) from the XBee have been connected to the RPi2. These are illustrated by the yellow and orange wires.

# Chapter 5

# Development Practices

A software implementation can be set up for success or failure before any code has been written, especially whilst working within a team. This is down to the development process and policies in place. Of course, one process may work for one team or project and not another.

A well implemented process can provide many benefits. First and foremost, everyone in a development team clearly understands their roles and responsibilities. The process can also enforce a hierarchy of decision making, or encourage peer collaboration. Beyond these people-based benefits, a development process can aid in the development of a robust, maintainable codebase. A developer who can understand a codebase and make confident updates is an efficient one.

Although the output of this project is the work of one person, arguments supporting a process-first implementation still apply. The following section will detail the main tools used in supporting this project.

## 5.1 Version Control System

The use of a Version Control System (VCS) is highly recommended in any project. As the name suggests, a VCS manages iterative updates of project files. To generalise its functionality, a VCS maintains a timeline of file states. Different states of the same file can be compared to investigate which changes were made and by whom, and if needed a file can be reverted to a previous state. This means that the complete history of a codebase is recorded. Without using a VCS, code updates would simply overwrite the existing file and old states would be lost forever.

There are a number of Version Control Systems available to developers, such as Mercurial and Subversion. Git is another VCS and was created by Linus Torvalds, creator and maintainer of the Linux kernel. Git is arguably the most popular VCS amongst the open source community, thanks to its use in the development of the Linux kernel. Its command-line interface is highly portable and many community-oriented services support it extensively, such as GitHub and Bitbucket.

Git along with the web-based service GitHub have been chosen for use in this project thanks to their universal support. But simply selecting a tool is not enough when implementing a development process - guidelines on how to use it should also be decided. There are a number of well-defined development workflows using Git. This project has chosen to implement the ‘Git Flow’ workflow. Git Flow utilises various features of Git and GitHub, including branching, merging and pull requests.

Describing the Git and the Git Flow workflow could fill an article on its own, so this description will be very brief. In Git, a branch is an instance of the complete codebase. Multiple

branches with different versions of the same codebase can be developed in parallel. The merge command copies the changes of one branch into another. A Pull Request is a request to merge one branch into another, which can be inspected and commented on before the merge is completed.

The Git Flow workflow adds structure to these features. The master branch is the production codebase. The develop branch is the in-progress codebase. Feature branches (such as feature/-menu or feature/users-controller) are used to develop a specific feature of the project. Once the feature has been built, a pull request is raised to merge it into the develop branch. Once all features have been merged and tested, a pull request is raised to merge the develop branch into master which is then deployed. This workflow has been employed for this project.

### 5.1.1 Pre-commit Hook

The Git VCS also supports lifecycle hooks. These hooks allow developers to run bespoke scripts to enforce custom policies, such as limiting access to specific branches. One helpful trick has also been employed for this project through the use of the pre-commit hook.

No matter how descriptive or strict development policies are, developers are only human. Humans can make mistakes and they can be lazy, meaning that poor quality code can be committed to the codebase. The pre-commit hook can be used to enforce a specific coding standard. It works by testing the committed code against a set of rules. If the tests pass, the code is committed to the codebase but if they fail, a warning message is displayed. By using this technique, the code for this project is guaranteed to be of a certain standard.

## 5.2 Docker

Developers face a number of challenges when developing and deploying modern web-based applications. Primarily, the environment in which code is executed can differ wildly. For any given project, one developer might use a Windows machine whilst their colleague could use an Apple Mac. The staging environment could use one version of Linux whereas the production environment could use another. All of these environments could potentially run differing versions of the same software meaning that bugs in the project might not be traceable or reproducible. Development teams have attempted to normalise these environments through the use of package managers, however these still leave room for misconfiguration.

A relatively new tool called Docker has been taking the development world by storm since its release in 2013. Docker builds on a technology called Linux Containers. Traditional virtual machines run a complete operating system (kernel, program binaries and any other files) on top of a host machine. In comparison, Docker (and Linux Containers) allow images to use the same kernel of the host operating system. This means that each container is very lightweight but can still benefit from the complete isolation of program processes.

Docker containers are instances of a Docker image. Docker images are compiled according to a Dockerfile which comprise of commands such as COPY (to copy source files to the image) and RUN (to run Unix commands within the Linux Container). This is where the advantages of Docker become clear - explicit, reproducible environments can be built as if working directly on a server. Since Docker is a portable tool, every developer working on a project can run exactly the same environment as each other. When the application is ready to be deployed, the same Docker image can be executed on a production server.

Docker also has powerful composition tools. Anything beyond a simple script or application is typically the sum of many smaller, more specific applications. A simple example of this would be a dynamic web application backed by a database. In Docker terms, this application would be composed of two images - one image for the dynamic web application, and another for the

database. Docker can configure automatic links between instances of these images and this is aided with the helped command-line interface ‘docker compose’.

Docker Compose makes use of another configuration file, ‘docker-compose.yml’. In this file it is possible to specify which Docker images make up a complete application (which can be custom builds using a Dockerfile, or pre-built images from the global Docker repository). Using this file Docker Compose will intelligently start Docker images in order of their dependencies. Using the dynamic web application and database example, the database would be started first and then the application. Docker will also set up lots of other clever tools, such as a long list of environment variables referring to specific links. These environment variables can then be used within applications to configure things like database connections.

Once applications have been wrapped up into Docker images and compositions, it is then necessary to deploy them to servers. This can of course be achieved manually using the docker CLI, however the Docker ecosystem also includes Docker Cloud, a first-party container deployment service. Docker Cloud uses four more important terms to describe an application:

**Node** a server which can host Docker containers

**Node Cluster** a grouping of multiple servers which can host Docker containers

**Service** one or more running container instances of a Docker image

**Stack** an application composed of multiple services

Docker Cloud is very simple but hugely powerful. Scaling is an important aspect of any web application and is handled with grace. Docker Cloud will intelligently distribute container instances across all available nodes based on their loads. It will then lay a private network between all services of a stack (irrespective of its host node) so all containers can transparently communicate. This makes load balancing truly simple.

Docker has been chosen as a critical piece of infrastructure for this project. Flexibility, robustness and maintainability are three important aspects when developing any application and Docker aids these areas very effectively.

### 5.3 Continuous Integration

The development process has so far defined how the codebase will be developed and how it will be hosted, but there is still an important step missing. How does newly developed code get deployed in a way which ensures no downtime and without bugs? This is where a technique called Continuous Integration (CI) is used.

Continuous Integration is the glue between the processes at each end of the development cycle. The main ethos behind it is to deploy little and often. This allows developers to catch issues early and to pin-point its cause quickly. ThoughtWorks, Inc. (2015) describe CI with a number of key points, including: automated, self-testing builds and automated deployments. As it turns out, the Git Flow workflow, Docker and Continuous Integration all work incredibly well together.

As has already been discussed, Docker images provide explicit, reproducible environments and this is great for testing purposes. Since all Docker environments will be built equal, it means tests run on a local machine will behave the same on a production server. And because Docker Compose can specify which images needs to be used, any service with access to this information can build the correct application dependencies.

Travis CI is one such continuous integration service which supports the Docker ecosystem. It has been employed in this project to enforce a CI workflow and it follows these steps:

1. Code is developed using the Git Flow workflow
2. All commits to branches and pull requests trigger tests on Travis CI
3. Each test builds the Docker environment to ensure consistency
4. If tests pass, the Docker image is published to the Docker repository
5. The Docker repository will deploy new images through Docker Cloud

This workflow contributes to a solid development process which can be scaled to a large codebase and team of developers.

# Chapter 6

# Implementation

This chapter will discuss the specific implementation details for both project components: the Haar Engine and Haar demonstration application.

## 6.1 Hosting

The software components for this project were hosted on a public web server for demonstration and testing purposes. There are a large number of hosting solutions available; in this case, a Virtual Private Server (VPS) was chosen. A VPS was chosen over competing solutions (such as a Platform as a Service like Heroku) because it offers complete control over installed software and their configuration. The VPS chosen is also scalable, meaning that it can be configured with more or fewer system resources in response to demand.

The VPS was installed with the open source Debian 8 Linux operating system. Debian was created in 1993 making it one of the oldest Linux distributions available; the open source community has been actively patching bugs and implementing new features ever since. Debian comes with very little pre-installed but it does have access to access to the Aptitude package registry, from which many popular applications can be installed. These characteristics make Debian the ideal foundation for a web server.

Very little configuration was made to the VPS itself. Beyond some basic user and SSH configuration, the only additional packages required were Uncomplicated Firewall (UFW) and the Docker Cloud agent. UFW was used to create a strict firewall policy in order to protect the server from unauthorised access. Section 5.2 (Docker) explained that Docker images can be compared to virtual machines. Since Docker images contain all software which they require to run, nothing extra must be installed on the host. The Docker Cloud agent is simply used to connect the VPS to the Docker Cloud deployment service.

A reverse proxy was used to expose Docker containers to the Internet. The Nginx web server was chosen for this purpose because it is event-based (as opposed to process-based like the Apache web server) which makes it more efficient at handling concurrent connections. Nginx also has great first-party support for proxy and caching functionality. The reverse proxy had two main responsibilities: TLS and HTTP/2 termination. These enable the API and dashboard to be served over a secure HTTPS tunnel and for web browsers to leverage performance-enhancing features. Figure x.x illustrates this implementation. In keeping with the development practices used, the Nginx reverse proxy was also wrapped up into a Docker image.

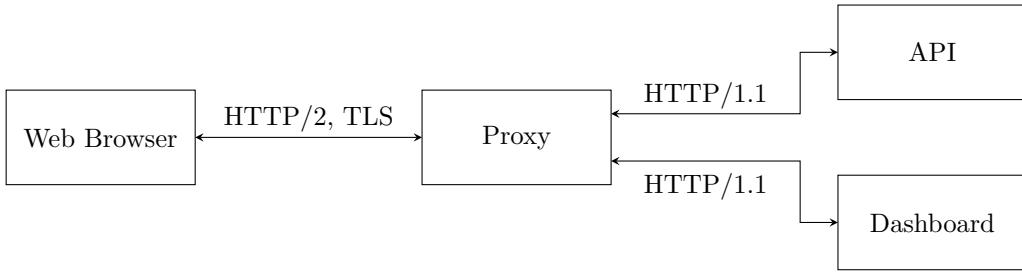


Figure 6.1: Web server request flow

## 6.2 Haar Engine

### 6.2.1 Node.js and npm

Chapter 4 (Design) identified Node.js as the most suitable programming environment for the Haar Engine. There are a number of characteristics about Node.js which have been employed in this implementation, including: functional composition, package management and incremental standard support.

The development ethos of the Node.js and wider JavaScript community is to embrace the functional programming paradigm and to compose applications with increasingly specific modules. To support this ethos, Node Package Manager (npm) is used as a global open source registry of reusable modules. To be compatible with this registry, any given module must provide a ‘package.json’ file in the project root. This file includes (amongst other options): a version number; author details; any npm dependencies and lifecycle commands like start or test.

Haar Engine employed the features of npm to aid development and to encourage extensibility. In particular, a number of open source npm packages were used for this project and were specified in the ‘package.json’ file. In accordance with the professional considerations described in Chapter 1.4, full credit has been given to the authors of these projects in Appendix D. Additionally, the Haar Engine itself can be included as a project dependency since it adheres to the requirements of npm. This is exactly the purpose of this software component—to be an extensible framework to build from.

One final detail regarding Node.js is the version of JavaScript used. JavaScript itself is an implementation of a standard: ECMAScript. The latest version of ECMAScript (ES2015) was ratified in June 2015 (Babel, 2016) and as a result, new language features and syntax are slowly being implemented by JavaScript engines. Embracing cutting-edge features for client-side JavaScript has historically been troublesome due to the number of available browsers, however this problem does not exist in Node.js. Developers of server-side applications can support whichever language features that are installed on the server. Given this opportunity, Haar Engine has been implemented using native ES2015 syntax. This requirement has been specified in ‘package.json’.

### 6.2.2 MongoDB Database

The main goal of the Haar Engine is to provide an extensible framework for IoT applications. One of the key features in support of this was a database connector layer which would enable developers to support a variety of database types. As the implementation progressed, it became clear that this feature would introduce too much complexity, given the constraints of this project. Rather than implementing a layer which supported a variety of strict database schemas, only one,

```

const express = require('express');
const router = express.Router();

router.get('/users/:user', (req, res) => {
    // Perform controller action
    // URL token is available from 'req.params.user'
    // Response is sent with 'res.json({data: 'The Data'})'
});

```

Listing 6.1: An example Express controller

highly flexible database solution is supported. This method resolved the extensibility requirement from a different angle.

The NoSQL database ‘MongoDB’ was chosen for a number of reasons. First of all, the flexibility of a NoSQL versus a relational SQL database allows the schema to be very dynamic and to change with the data. This makes it simpler for a developer to add new data structures. In comparison, to modify an SQL database the developer would have to first update the database schema using a Data Definition Language (DDL). MongoDB was selected from the available NoSQL database solutions because its data structure is based on JavaScript Object Notation (JSON). This makes it easy to interface with the Node.js application code. There are also a number of helper packages available for Node.js (including Mongoose which is described below).

### 6.2.3 MVC Architecture

A Model-View-Controller (MVC) architecture formed the basis of the Haar Engine implementation. This architecture is widely employed in web application development. Google (2016) state that “MVC offers architectural benefits over standard JavaScript” and go on to explain that an MVC architecture helps to develop organised, more maintainable code.

Models were implemented using the Mongoose Object Data Mapping (ODM) package. As has been explained, the underlying NoSQL database was chosen because of its superior flexibility. However, this flexibility can introduce its own challenges in maintaining a standardised schema. The Mongoose package helps to control the flexibility through schema definitions and field validation. Mongoose also adds additional app-layer tools on top of MongoDB, such as document population (expanding child documents based on an ID) and virtual getters (computed fields). Document population in particular was used for the Haar Engine.

The Express web application framework was used to implement controllers. These controllers represent the RESTful Data Access API endpoints. Listing 6.1 illustrates an example Express controller, comprising of a URL structure and a handler. The URL structure can contain static segments like ‘/users’ or dynamic tokens like ‘/:user’ (which would then be made available to the handler). Each controller handler is passed ‘req’ and ‘res’ objects. As would be expected, the ‘req’ object provides information about the current request (such as form data) and the ‘res’ object is used to handle the response.

The Data Access API returns JSON strings and these are considered views of the system. A standard response format was created in order to maintain consistency for API requests. The possible keys of the JSON response is illustrated in Listing 6.2.

```
{  
    "status": "success",  
    "meta": {  
        "message": "A response message",  
        "validation": {  
            "errors": {  
                "field": "Validation error"  
            },  
            "values": {  
                "field": "Existing value"  
            }  
        },  
        "paginate": {  
            "total": 22,  
            "pages": 2,  
            "currentPage": 1,  
            "previousPage": null,  
            "nextPage": 2  
        }  
    },  
    "data": [  
        {  
            "field1": "Field1 Data",  
            "field2": "Field2 Data"  
        },  
        ...  
    ]  
}
```

Listing 6.2: The standard JSON format

### 6.2.4 Real-Time

The *raison d'être* of this project is to implement real-time, bidirectional machine-to-machine communication. This was to be implemented as a WebSocket service managed by the Socket.io package. The implementation progressed as planned until Haar Engine began to expose limitations of Socket.io—or rather, the capability of Socket.io was being stretched in directions it was not designed for. The issues stemmed from the publish/subscribe model being applied to Socket.io; device and user authentication was not feasible using the package's built-in namespace and room features.

An alternative package called Primus was found to be more suitable. Primus supports a number of lower-level communication libraries (including Engine.io, the library which Socket.io is built on) and is ultimately more flexible. Primus also exposes a plugin architecture which allows third-party developers to implement new features. Two such plugins were included to provide the desired features: Primus Rooms and Primus Responder. Primus Rooms supports a room hierarchy (like ‘subscribe:sensor:device’) which mimics the hierarchical structure of MQTT topics. Also, Primus does not send acknowledgement messages by default; Primus Responder provides this feature.

The Primus Responder plugin demonstrates both the fragility and strengths of Open Source Software. When initially building Primus into the Haar Engine, Primus Responder failed to execute. Due to updates in one of its dependencies, Primus Responder had developed a software bug. Whilst waiting for the package author to implement a fix, a ‘fork’ of the project was made for use in the Haar Engine. The fork fixed the bug and allowed implementation to continue.

The operation of the real-time connection manager successfully supports publish/subscribe behaviour. Listing 6.3 illustrates an important excerpt from the file ‘/lib realtime/index.js’. The excerpt shows the declaration of an array of handler functions. When a new message is received by the connection manager, the received room option is tested against the regular expressions defined in each array item. If the room matches, its sibling key ‘handler’ is executed. For example, a message sent to the room ‘input:stream:a1b2c3d4e5f6g7h8i9j0k1l2’ will be subscribed to data events for the device with ID ‘a1b2c3d4e5f6g7h8i9j0k1l2’ (pending authentication).

The operation of the ‘publish’ action also merits further discussion. This represents the stream processor component that was discussed in Chapter 4 (Design). After the datapoint has been persisted to the database, it is necessary to execute any active rules. Rules for the Haar Engine are a complete JavaScript script with access to standard runtime functions. It is dangerous and often discouraged to accept and execute untrusted third-party code, but this is necessary for this use-case.

A sandboxed runtime environment is used to safely execute rules. This feature is provided by a native Node.js module called ‘vm’. It executes the user-provided rule in a separate Google V8 engine instance and then returns the result. A side-effect of using this module is that it also catches syntax errors in the rule—a capability which has been used when validating new or updated rules.

### 6.2.5 Security

Sound application security is the sum of many parts. It is the responsibility of this software component to enforce user authentication and authorisation, as well as protecting access to supporting software like backing databases. The security of Haar Engine has been hardened through the careful consideration and implementation of: configuration variables, strong password hashing, token-based authentication, application middleware and Cross-Origin Resource Sharing (CORS).

```
10 const handlers = [
11   {
12     room: /^(\input):( add)$/,
13     action: 'publish',
14     handler: input.publish,
15   },
16   {
17     room: /^(\input):( stream ):( [ a-fA-F0-9]{24})$/,
18     action: 'subscribe',
19     handler: input.subscribe,
20   },
21   {
22     room: /^(\input):( stream ):( [ a-fA-F0-9]{24})$/,
23     action: 'unsubscribe',
24     handler: input.unsubscribe,
25   },
26   {
27     room: /^(\output):( stream ):( [ a-fA-F0-9]{24})$/,
28     action: 'subscribe',
29     handler: output.subscribe,
30   },
31   {
32     room: /^(\output):( stream ):( [ a-fA-F0-9]{24})$/,
33     action: 'unsubscribe',
34     handler: output.unsubscribe,
35   },
36 ];
```

Listing 6.3: Excerpt from ‘/lib/realtime/index.js’

Haar Engine must be provided configuration settings in order to execute. These configuration settings contain, amongst other things, the database server URL and access credentials. The Haar Engine delegates the responsibility of managing these credentials to the developer, but they are encouraged to use environment variables. Environment variables have local scope meaning that they are available only to the process in which they were set Ubuntu (2016). This is ideal behaviour for confidential credentials and ensures that they are available to software which requires them.

Strong password hashing is used to store user passwords. Best practices can be used to secure the servers running database applications, however if the database is accessed by a malicious actor additional safeguards must be in place to protect sensitive data. Hashing is a process which irreversibly obscures data. A number of algorithms exist for this purpose such as MD5 and the SHA family of algorithms, however bcrypt is currently considered the *de facto* standard for password hashing Lucas Kauffman (2013). Bcrypt is particularly strong due to its memory requirements and due to this, it would take too long for a malicious actor to crack. The bcrypt hashing algorithm has been implemented to securely store passwords.

JSON Web Tokens (JWT) are used to authenticate API requests. The Data Access API has been implemented using the RESTful architecture and is therefore stateless—every request sent to the API must contain all required information. The process begins when a user authenticates using their username and password combination. If successful, the API will return a signed JSON Web Token, containing information about the user and an expiration date. For every subsequent request to the API the token must also be sent in order to be granted access. When compared to stateful server-side sessions, the use of stateless tokens is more secure because it protects against Cross-Site Request Forgery (CSRF) attacks.

Haar Engine uses middleware to ensure that user authentication is applied consistently. Both Express (used for Data Access API) and Primus (used for Real-Time Event API) support the notion of middleware—functions which are executed in series and can stop a request or pass it onto the next middleware handler. Authentication middleware interrogates the request for a valid JSON Web Token. If the JWT is invalid or does not exist, the middleware will stop the request and prevent access.

### 6.2.6 Testing

Extensive testing was carried out during the implementation of the Haar Engine. The purpose of the tests was to ensure that code was of a certain quality and that the application functioned as expected. Testing existed in three forms: code quality assertion, unit testing and acceptance testing.

The pre-commit hook as describe in Section 5.1.1 was used to ensure good code quality. JavaScript is a very flexible language and the same problem can be solved with many different methods. Over time, the community has learnt from mistakes to develop widely-accepted best practices. A tool called ESLint tests JavaScript files against a pre-defined list of rules, flagging syntax or conventions which are considered poor practice. For this project, ESLint is triggered by the pre-commit hook in Git VCS and prevents poor code from being committed to the database.

A suite of 96 unit tests was developed to ensure that system components functioned correctly. Testing dynamic web applications such as the Haar Engine is made difficult due to the additional dependencies which they require, such as databases. One solution to test database-dependent code is to mock queries with dummy data structures rather than a live database connection. This is however not a true representation of the system. Since Docker was being used to enforce a consistent development environment, it could also be used to run the unit tests against a live database. For the purposes of testing, a test database was seeded with example data.

The Data Access API is a main system component and was also challenging to test effectively. In order to test the execution of the API, an HTTP request must be made to the controller and the response body interrogated. An npm package called Supertest was used for this purpose. It allows HTTP endpoints to be tested programmatically, interrogating the response for specific headers and body properties.

The final category of testing performed on the Haar Engine is acceptance testing. The purpose of acceptance testing is to compare the finished product against requirements specifications defined. The results of this testing can be found in Appendix ?? and will be discussed in further detail as part of the next chapter.

## 6.3 Haar API

The second software component produced for this project is Haar, a demonstration implementation of Haar Engine. The main purpose of this demonstration application is to validate the design decisions and to show, by example, that the theory behind this IoT framework works. The implementation of Haar has been split further into four sub-components: API, Dashboard, Bridge and Nodes.

Haar API is the actual implementation of Haar Engine. Since the aim of Haar Engine is to provide a starting point for an IoT application, the sole purpose of Haar API is to bootstrap the framework and show that it can be included as a project dependency. Quite simply, Haar API includes Haar Engine as a dependency from Github.

## 6.4 Haar Dashboard

Haar Dashboard is a web-based user interface built on top of the suite of Haar Engine APIs. It utilises both the Data Access API to configure system settings and the Real-Time API to subscribe to live data events. Whilst not necessary for the operation of the underlying IoT framework, the Haar Dashboard UI makes configuring devices simple and illustrates how a viable consumer solution might work.

Section 4.2.2 (Front-End Application) briefly discussed the challenges facing this user interface. In particular, certain components of the user interface must react to real-time events. The solution selected to address the challenges was a single-page JavaScript web application (SPA). The following section will describe the implementation of this technique, how it satisfies design goals and how it addresses these challenges.

### 6.4.1 JavaScript Application Framework

There are a wide variety of JavaScript frameworks which aid in the development of single-page web applications. While these frameworks differ in what problems they solve and how they solve them, they share some common characteristics.

The general aim of a single-page web application is to create a more responsive and user friendly interface, much like would be experienced with a desktop application. This is achieved through the use of asynchronous AJAX requests; rather than navigate to new web pages, the correct data is requested and loaded into the existing web page. This also requires all of the application logic to be retrieved with the initial page request. Since the web page will not be reloaded, this makes it ideal for opening and maintaining the WebSocket connection required for this component.

Single-page web applications also introduce new challenges. One of the hurdles to overcome is the initial load time. Since all of the application logic must be loaded before the web app can be used, users can experience long initial delays. There are also accessibility and usability challenges due to how the content is loaded. The initial HTML response from the server will be empty or will contain very basic content because content is loaded dynamically by the application. This means that search engine crawlers or users without JavaScript enabled cannot view the web page content.

The features offered by the React JavaScript framework implemented for this project go some distance in resolving these challenges. React is a project developed by software engineers at Facebook. It is based on the concept of a tree composable components, where a single component encapsulates all of the logic which it requires to execute, including CSS styles. What is most clever about React is its use of a virtual Document Object Model (DOM). React will first build up the tree of components using this virtual DOM before comparing it against the actual DOM. If anything has changed, React will only update the affected components.

React can use this virtual DOM to render web pages server-side. React will build up a webpage and send it as the body of an HTML response. Once the client-side code has loaded, React will then bootstrap the application based on the existing body. This concept is known as Isomorphic or Universal JavaScript. Since an HTML body is returned, most features of an application can be used straight away. Search engine crawlers and accessibility tools can also parse the body, solving the challenges traditional single-page JavaScript web applications.

As was discussed for the implementation of Haar Engine, the latest features of JavaScript are defined in the ECMAScript 2015 standard. Some web browsers can be slow to implement new features whilst other, older browsers may not implement them at all. This is a headache for developers; new features and syntax might solve problems in a more effective way, but they may not be supported by every target browser. This is where so-called front-end tooling is used. A variety of tools exist to convert new, uncompatible syntax into older, widely supported syntax. In particular a package called Babel has been used in this project to compile ES2015 syntax into ECMAScript 5 compatible code, meaning it can be run in all modern browsers. Additionally, a tool called Webpack has been used to package server-side JavaScript modules for use within the browser.

#### 6.4.2 Data Management

The features which React provides solve half of the front-end engineering problem. React defines how data is manipulated and displayed, but it does not specify how the data itself is managed. For that reason, Facebook have also invented a development pattern called Flux. Flux provides a strict method by which data is added or updated then introduced to the React component tree. The fundamental rule of Flux is that the data flow is unidirectional; that is, data cannot be mutated directly but rather through a pre-defined process. Figure 6.2 illustrates this process. Redux has become the *de facto* implementation of this pattern and will be used in this project.

Redux makes managing complex data more simple and this has proven particularly effective when managing forms. There are many forms used by Haar Dashboard to collect data from the user. Some forms, such as when adding a new user, have simple fields which can be represented by standard HTML constructs. However there is a requirement to manage more complex form data, such as an array of data descriptors for the device types. It would be very easy for the JavaScript code managing this to become unwieldy. However, the structure which Redux gives to data makes mirroring the database model structure straightforward. Figure x.x. illustrates that objects and arrays have been modelled in HTML forms using this technique.

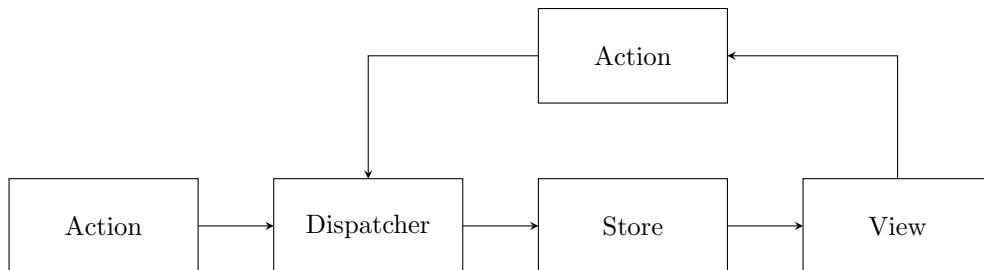


Figure 6.2: Data flow in a Flux React application

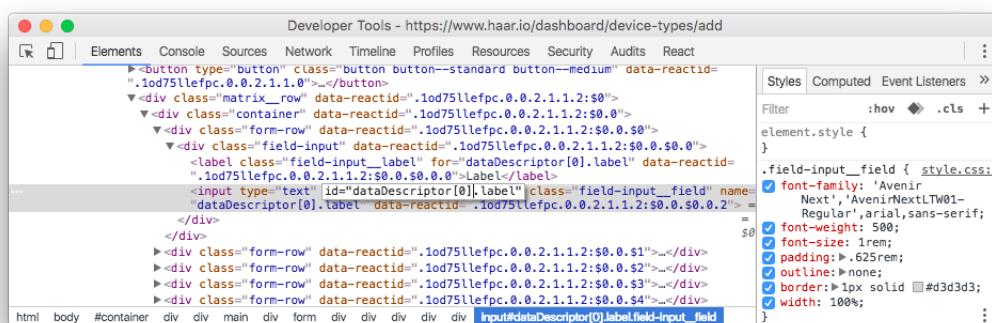


Figure 6.3: Complex data structures are easily managed with Redux

### 6.4.3 Real-time

One of the most interesting features which Haar Dashboard demonstrates is its real-time event handling. Most of the front-end implementation details have been chosen in order to make real-time interactivity feasible. In particular, the single-page application architecture makes it possible to maintain a bidirectional WebSocket connection; the virtual DOM feature of React makes updating the web page fast and efficient, and finally, the data management offered by the Flux pattern ensures that data updates can be controlled. When combined, these three characteristics not only make real-time connectivity possible, but they make it efficient and maintainable.

The Primus package used to manage WebSocket connections in Haar Engine also generates a client-side library. This library is used in Haar Dashboard to negotiate and maintain the actual WebSocket tunnel. Once the connection has been opened, it is then the responsibility of the Redux actions to authenticate the user and to subscribe/unsubscribe to the appropriate sensor event streams. When a new sensor event is received, a Redux action will be dispatched and handled appropriately. This functionality can be demonstrated with the ‘live data’ feature of sensor data pages.

### 6.4.4 Security

Haar Dashboard has its own role to play in the security of the complete application. First of all, the user interface must only be accessible to users with correct and authenticated credentials as proven by a valid JWT token. Although Haar API will not return application data without the presence of a valid token, Haar Dashboard should take responsibility to ensure authentication is respected. More importantly, however, is the protection of a valid JWT token. If a malicious actor were to obtain the token, they could perform any action as that user through the set of APIs. This is made more difficult to solve due to the use of Universal JavaScript, where users with or without JavaScript enabled must be protected.

The mechanism used to address these security concerns are HTTP-only cookies. All users (whether JavaScript is enabled or not) must authenticate with a plain HTML form. This ensures that the authentication will be managed in the same way by the Haar Dashboard server component. The server component will make an API call to Haar API in order to authenticate the user. If the user is successfully authenticated, the server component will respond with an HTTP-only cookie. By setting the HTTP-only option, the cookie cannot be manipulated by client-side JavaScript, thus protecting the cookie from malicious tampering. Additionally, the cookie will be attached to every HTTP request made to Haar API.

### 6.4.5 Testing

As with all software components of an application, testing should be performed to ensure correct operation. Compared to testing server-side components, testing client-side user interfaces is more cumbersome. Server-side code will always be tested in the same environment with control over all possible variables, whereas there is an element of uncertainty with client-side code. First of all different web browser vendors implement their own JavaScript rendering engine, such as Google Chrome’s V8 engine, Mozilla Firefox’s SpiderMonkey engine or Microsoft’s Chakra engine. In addition to that, users can introduce unexpected or unusual behaviour by engaging different buttons; pressing forwards or backwards in their web browser’s history or by navigating directly to a new URL.

The tools used to implement Haar Dashboard puts it in the best position possible for automated testing. Automated testing is made possible mainly due to the use of React. As has

already been described, React makes use of a virtual DOM and therefore is not dependent on an actual DOM API being available. It is possible to write unit tests which emulate user behaviour on the virtual DOM (such as button clicks) and then interrogate the result. The implementation of tests using this method is still verbose and time-consuming and was deemed unsuitable given the constraints for this project. Instead, testing has been conducted manually.

Manually testing Haar Dashboard was made simpler thanks to the Flux development pattern. The previous sub-section on data management explained that so-called actions are defined as part of that pattern. Since these actions define what the system can do, they formed the basis for manual unit tests.

## 6.5 Haar Nodes

The end devices built to demonstrate the IoT concept have been named Haar Nodes. Although they measure arbitrary properties (temperature, RGB colour and gyroscopic movement), the implementation of them still required appropriate hardware and software. This section will discuss the pertinent points about the implementation of the sensor hardware, software and the optimisation of their energy usage.

### 6.5.1 Hardware

The sensors and actuators were developed with prototype-friendly hardware. Although 4 (Design) specified the main components and schematics, prototype-friendly breadboards were used in case the designs had to be changed along the way. Another benefit in using breadboards is that all components are reusable for future research. If the implementation of these devices was taken further, they could be built with semi-permanent solderable breadboards and then production-ready printed circuit boards (PCBs).

The devices were built starting with the Arduino boards. The Arduino Pro Minis used for this implementation were delivered without pin headers, so male pin headers were soldered on first. Once the Arduino boards were in place the breadboard power rails were wired up. All of the sensors are battery powered. The Arduino has a built-in power regulator which can step the 6v of the battery pack down to the 3.3v it requires. An external voltage regulator was used to step the voltage down for the RGB LED actuator since a 12v power supply is used.

All of the sensor boards which were implemented use the same digital interface. In comparison to Chapter 4, the sensor boards implemented are newer, more refined models but they all still use the I2C communication protocol. This protocol requires four lines to be wired between the Arduino and the sensor, namely: Vcc (+), Ground (-), SDA (data) and SCL (clock). In terms of the RGB LED actuator, the transistor circuits were true to the design. Rather than using a single RGB LED, an RGB LED strip was wrapped around the breadboard.

The addition of the XBee radio chips complete the implementation. As was illustrated in the design, the XBee radio chips have a 2mm pin pitch which is incompatible with the standard 2.54mm pitch of the breadboards and therefore require an additional breakout board. During the implementation it became clear that the XBee breakout board has the same pinout as the FTDI header of the Arduino and this allowed the boards to sit on top of each other. Figures 6.4 and 6.5 illustrate the completed sensor and actuator prototypes.

### 6.5.2 Energy Efficiency

One of the main concerns for the battery-powered devices was the battery life. In order for the application of devices to be practical, the batteries must not require constant charging or

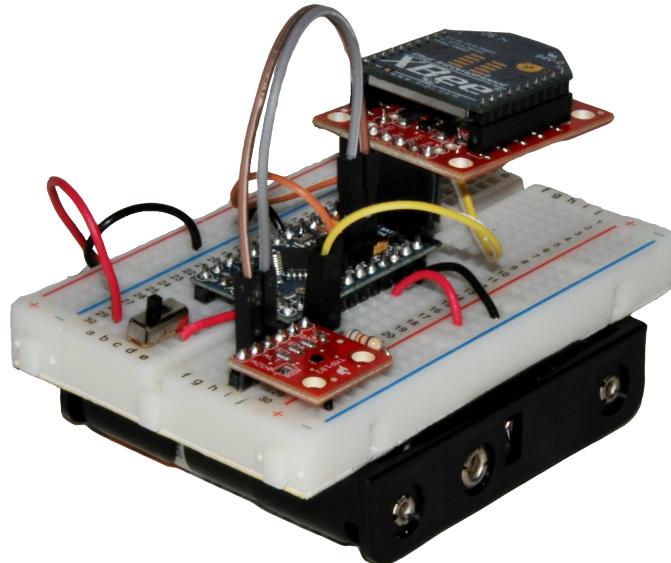


Figure 6.4: Prototype temperature device

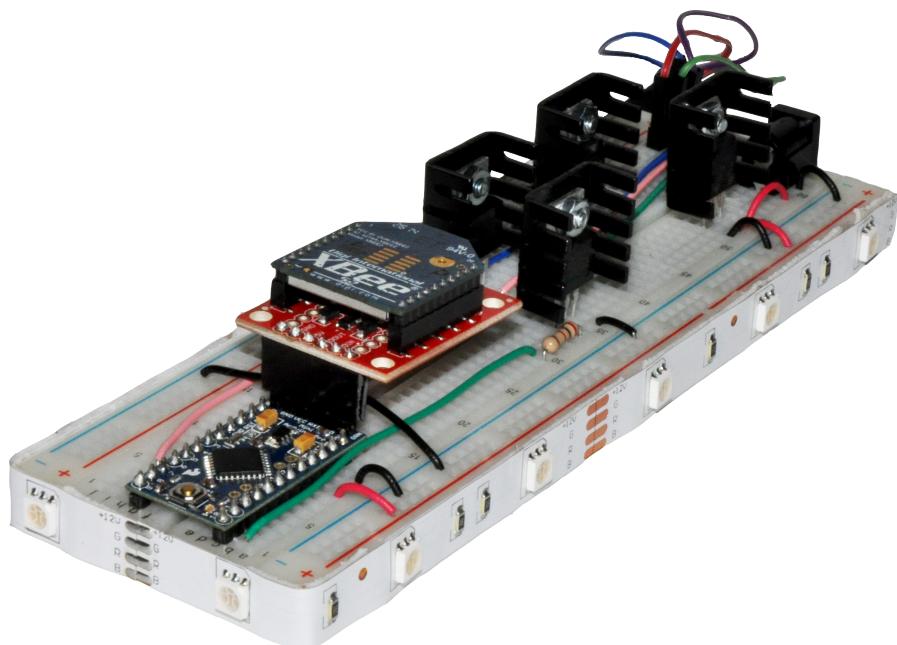


Figure 6.5: Prototype RGB LED output device

changing. Each device has two microcontroller units—the Arduino and the XBee radio chip. Both of these microcontrollers support various sleep modes, so these were employed to conserve energy.

The deepest sleep mode available to the Arduino was implemented. Once the Arduino enters this deep sleep, it can only be awoken with an interrupt signal. For cyclic sensor devices which send a reading at regular intervals (temperature and RGB colour), the watchdog timer interrupt was used. This allows the Arduino to wake up after a pre-set length of time which is stored in the Watchdog Control Register.

The watchdog timer technique was not appropriate for use with the gyroscope sensor. Data from the gyroscope sensor should be sent whenever motion is detected rather than at a set interval. The gyroscope sensor chip provides a hardware interrupt line exactly for this purpose. When motion is detected, the hardware interrupt is triggered and the Arduino is awoken from its deep sleep.

An attempt was made to implement a hardware-based sleep mode with the XBee radio chips too. One of the XBee sleep modes allows the DTR (data ready) pin to be used as a hibernation pin; when it is brought high (3.3v) the XBee will enter a deep sleep and when it is brought low (0v), it will wake up. This technique uses a pull-up resistor to bring the DTR pin high by default and then relies on the Arduino sinking the current when it wants the XBee chip to wake up. The operation of this was sporadically unsuccessful and the root cause of the problem could not be identified. As a result, this feature was left out with the acknowledgement that more battery power will be consumed.

### 6.5.3 Data Transmission

The Arduino board communicates with the XBee chip using a serial communication channel and there are a number of implementation details to discuss. First of all, the XBee can operate in two modes: transparent or API. With transparent mode, the XBee chip simply emulates a wired serial link whereas the API mode allows more advanced features to be used. API mode was chosen for this project due to the extra features it provides.

Secondly, the end goal of the Haar Nodes is to interface with the Haar API. In order to do that, the sensed data must be communicated to the API. A common data-interchange format is required so that both the devices and the API are compatible. Arguably, the choice of format should belong in the design chapter, however it is dependent on the implementation of the Haar Engine APIs and models. Four different formats were considered: comma-separated value (CSV), JSON DB Schema, Compressed JSON DB Schema and Compressed JSON Map.

Each of the formats have been described and explained below and there were a number of aims to satisfy. Firstly, size of data transmitted has an effect on power usage. More data means that the XBee chip has to transmit for longer periods, consuming battery power. The maximum packet size of an XBee transmission is 72 bytes (Digi International Inc, 2016). In order to limit transmission to one packet, data size should aim to be less than this limit. Additionally, the format chosen should be robust and make it simple to distinguish the datapoints collected.

### Comma-separated value

The first data format explored was a simple comma-separated string. This created the smallest payload size (11 bytes for the given example).

This format is not flexible, however. It requires the datapoints to maintain strict order, and requires all devices to know what this order is. The CSV string does not describe its contents at all - a developer would have no indication what the data refers to.

### JSON DB Schema

The second format explored replicates the format of the Data Mongoose model used in the Haar Engine. Haar Engine explicitly defines ‘name’ and ‘value’ properties for use in validation. The size of the given example is 76 bytes, more than the 72 byte limit.

This is the most descriptive format and requires no extra transformation before being sent to the Haar API. However, it is unsuitable because of its payload size.

```
123,123,123
```

```
[  
  {  
    "name": "x",  
    "value": 123  
  },  
  {  
    "name": "y",  
    "value": 123  
  },  
  {  
    "name": "z",  
    "value": 123  
  }  
]
```

### Compressed JSON DB Schema

Whilst investigating the previous format, it became apparent that it was unnecessarily expanding on the syntax of a JSON object. By their very nature, they are a key-value store. This means that the format can be condensed into the shown example (36 bytes).

This format is both machine and human readable. Additionally, it does not require much additional trasformation in order to be submitted to the Haar API.

```
[  
  {  
    "x": 123  
  },  
  {  
    "y": 123  
  },  
  {  
    "z": 123  
  }  
]
```

### Compressed JSON Object

Looking at the previous example, it is clear that there is a redundant structure in place. This format compresses the datapoints into a single JSON object, rather than an array with multiple nested objects. This yields an example payload size of 25 bytes.

```
{
  "x": 123,
  "y": 123,
  "z": 123
}
```

No information is lost between this format and the full JSON DB Schema option, meaning that it can be expanded to be successfully submitted to the Haar API and pass validation rules. This is the most effective format and has been chosen for use in the Haar Nodes.

Figures 6.4 and 6.5 show the finished prototype hardware for the temperature sensor and RGB LED actuator. The RGB colour and gyroscope sensors are similar to the temperature sensor.

#### 6.5.4 Testing

The constrained nature of this component required a different approach to testing. There were two main debugging methods used to assert correct operation for the Arduino boards: feedback messages via serial communication and simple signalling using the onboard LED. The programs for these devices were also simple, so they could be tested in a linear, start-to-finish fashion.

The Arduino boards were connected with USB to a host computer for program compilation. Using this same USB connection it is possible to monitor serial transmissions from the Arduino board. Print statements were used at breakpoints in the program to inspect variable values and this was helpful when asserting the correct operation of sensor chips. The onboard LED was used as a simple flag and was especially useful when debugging Arduino sleep cycles. For example, when the board was awake the LED would be on and when the Arduino was put to sleep, the LED would be turned off.

The final component which required testing was the XBee radio chip. The wiring used to connect the XBee to the Arduino used the FTDI (data communication) interface which is normally used by the USB connection when programming. This meant that serial communication of the Arduino could not be monitored. Instead, an additional XBee radio chip was connected to a computer using a breakout board which exposes USB. Software provided by the manufacturer called Digi XCTU was then used to monitor and interrogate transmission packets.

## 6.6 Haar Bridge

The final and crucial component of the demonstration application is Haar Bridge. This component acts like a router; it translates the ZigBee-based packets of the Wireless Sensor Network into TCP/IP packets compatible with the wider Internet. In fact, Haar Bridge performs a bit more than simple translation—it also expands the data packet from the format discussed in Section 6.5.3 into an API-compatible format. This brief section will discuss the hardware implementation as well as details of the software implementation.

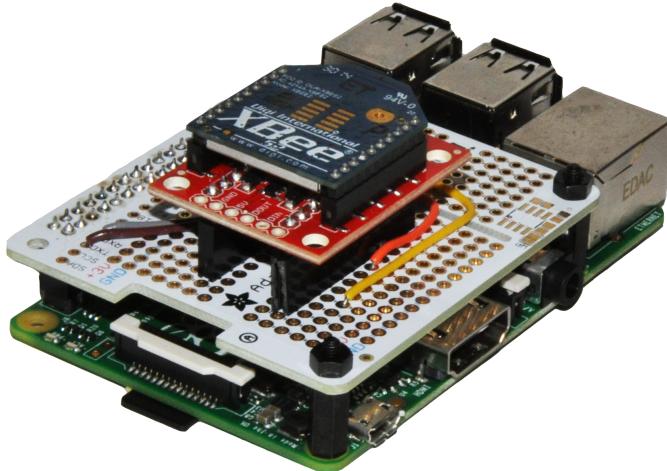


Figure 6.6: Prototype bridge device

### 6.6.1 Hardware

The hardware implementation made use of an Raspberry Pi model B+ (RPiB+) instead of the RPi2 as discussed in the design. The main reason for this was price; the RPiB+ was cheaper than the RPi2. The RPiB+ has a single-core 700MHz processor and 512MB RAM compared to a quad-core 900MHz processor and 1GB RAM, but it is still sufficiently powerful for this project. When sourcing the RPi devices an additional component, the RPi Hardware on Top (HAT) prototype board, was found. Rather than connecting the RPi to the XBee chip with simple wires, this prototype board was used to build a more professional prototype.

The RPi HAT is a semi-permanent board so unlike the breadboards used for the Arduino devices, some soldering was required to build the device. To ensure that the components were reusable for future projects, female pin headers were soldered onto the HAT so the XBee breakout board could be added or removed if necessary. The resulting form factor is quite pleasing and is shown in Figure 6.6.

### 6.6.2 Software

As planned, the RPi-maintained distribution of Linux was installed on the RPiB+. This gave a foundation for Haar Bridge software which, like the other Haar components, was developed as a Node.js application. This application used some of the same JavaScript packages which were implemented in the Haar Engine and Dashboard. There are two main functions which Haar Bridge must perform in order to operate correctly, namely: maintain a WebSocket connection with Haar API and maintain a serial connection with the XBee radio chip. These two functions are intertwined.

Haar Bridge uses the Primus JavaScript package to open and maintain a single WebSocket connection. There are two stages in negotiating this WebSocket connection: user authentication and then topic subscription. When the application is started, an HTTP request is made to the Data Access API in order to retrieve a JWT token. The WebSocket connection is then initiated using this token. Once the WebSocket has been opened, the application can then subscribe to any appropriate event streams based on which devices it is connected to.

Haar Bridge also uses the serialport and xbee-api JavaScript packages to maintain and parse

serial communication between itself and the XBee radio chip. In order to support serial connections, the Raspberry Pi must first be configured to use its GPIO pins for a serial interface. The XBee radio chip and the Raspberry Pi support hardware flow control using clear-to-send (CTS) and request-to-send (RTS) pins. They are however not compatible and so hardware flow control was not implemented as designed.

Once the WebSocket and serial communication channels were established, Haar Bridge could then perform its routing duties. If a WebSocket message is received, its contents will be forwarded to the appropriate ZigBee device. Conversely, if a serial message is received, it will be parsed by the `xbee-api` package. The data format will be expanded (as described in Figure 6.6) and then a WebSocket message will be sent.

### 6.6.3 Testing

# Chapter 7

## Evaluation

The two software components of this project—the IoT framework and demonstration application—were successfully implemented. Most importantly, they *work* and demonstrate the execution of some arbitrary IoT devices. Going into this project there was always a risk that a working solution could not be developed given the available resources, so the fact a solution has been developed is important to note.

The purpose of this chapter is to evaluate the effectiveness of the two main software components. The IoT framework and demonstration application will first be compared against the functional requirements in Chapter 3 (Specification). There are some features which were not implemented and this will be discussed.

A load testing experiment was also conducted. The data generated by a sensor must traverse a number of hardware and software components before being persisted to a server-side database. The aim of this experiment was to stress test the end-to-end system with regards to packet volume. A minimum inter-packet rate was established from the results of this experiment.

Finally, this chapter will finish off by discussing areas which could be improved. Although the project did meet the main goals and functional requirements, there are a number of improvements which would be advised for a production-ready application.

### 7.1 Acceptance Testing

Acceptance testing is the stage of the development lifecycle where software is determined to be fit for purpose. In order to be fit for purpose, software must conform to the requirements specification as defined earlier in the process.

The demonstration application also helps to validate the implementation of the IoT framework. Since the purpose of the framework is to provide a starting point for IoT application, the fact that an application has been developed with it is evidence of functioning software.

#### 7.1.1 Haar Engine

33 out of the 36 of the Haar Engine requirements were successfully implemented. A complete list of the requirements and their status can be seen in Table A.1 of Appendix A. The features which were not implemented are granular user access control and a DB connector API.

The first of those features—granular access control—was to enable users to grant specific access for private devices to other users. As it stands, devices can be classified as public or private. It was decided that granular user access control such as this would be unfeasible within

the time constraints. If a user would like to grant access for a device to another user, they have the opportunity to make it a public device instead.

The second and third requirements which were not implemented are related to one feature, a DB connector API. This was discussed briefly as part of Chapter 6. In order to be as extensible as possible the initial requirements stated a DB connector API should allow different database types to be changed transparently. Again, this feature was determined to be too complex for the given constraints. Rather than provide the option for a variety of strict database management systems, Haar Engine provides a single, highly flexible database management system in the form of MongoDB.

### 7.1.2 Haar

24 out of 31 of the Haar demonstration application requirements were fully implemented. A complete list of the requirements and their status can be found in Table B.1 of Appendix B. The requirements that were not implemented include: a user access control UI, device connectivity status, real-time virtual control and specialised visualisation tools.

First of all, an interface for managing user access control was not created. As was described above, the IoT framework did not implement granular user access control. This means that no user access control endpoints existed for the interface to call.

The remaining requirements were not implemented due to time constraints rather than a lack of technical capability. For example, one idea was to represent real-time data streams with specialised visualisation tools, such as a virtual thermometer for the thermometer sensor. Another idea was to enable a virtual control of output devices, such as a colour wheel which would control the RGB LED actuator. These features were ‘nice-to-haves’ rather than critical application components and were left out at the end.

## 7.2 Inter-Packet Rate

Once a fully-functioning system was developed, a small experiment was undertaken in order to measure *how* well the system performed. The metric used to evaluate the system is an inter-packet transmission rate. This was an interesting experiment because it tested the effectiveness of the system as a whole and identified potential bottlenecks.

The experiment was conducted over the course of one day with the following method. One of the sensor devices was reprogrammed to send exactly 100 measurements at a specific interval (initially 2000ms). Once the sensor device had sent all 100 measurements (as signalled by the onboard LED), the database would be queried for a count of received packets and then emptied. The experiment was repeated 10 times for each interval value in order to obtain an average. This process was repeated for an increasingly small interval value.

The results obtained from this experiment (shown in Figure 7.1) illustrate a number of points. First of all, the smallest inter-packet rate that was successfully tested was 60ms. When an inter-packet rate of less than this was attempted, the Arduino itself began to display error activity suggesting that for this implementation, it can handle a minimum of 60ms between taking measurements.

An inter-packet rate of 90ms was the smallest possible value without any error activity. When reviewing the capability of each device in the system, it was discovered that the XBee radio chips have an input buffer of 202 bytes (Digi International, 2009). The payload alone for each measurement could be 40 bytes in size and this does not include any header bytes. As a result, the XBee radio chip could be the source of the error activity due to a buffer overflow. The value of 90ms was set as an inter-packet limit for Haar Nodes.

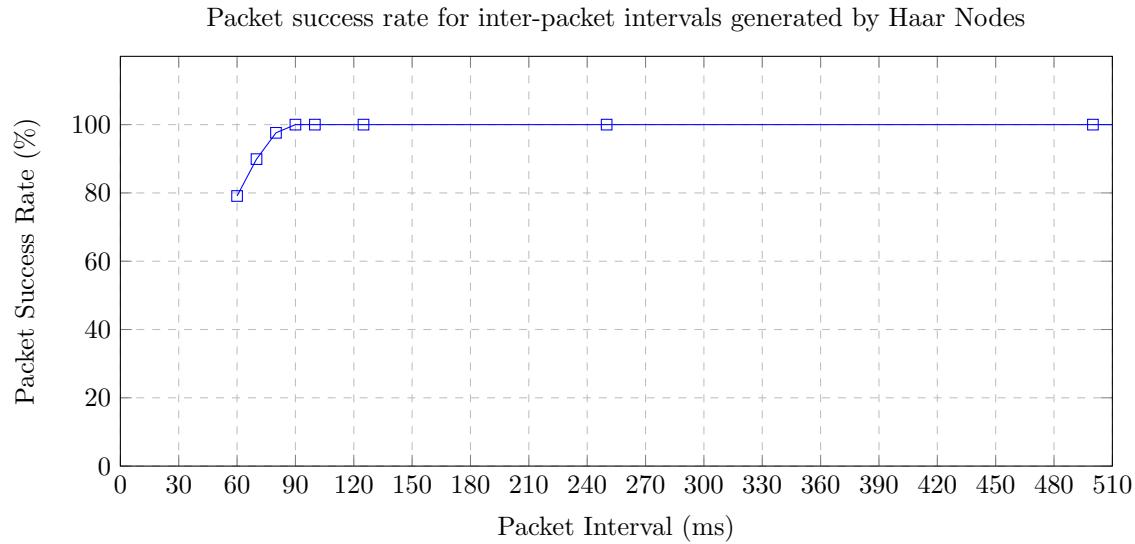


Figure 7.1: Success rate of inter-packet intervals

### 7.3 Improvements

For the purpose of this exploratory project the software implementation has been very successful. However, the IoT framework and demonstration application have highlighted some shortcomings which should be addressed for a production-ready implementation. These improvements fall under three areas: system architecture, user access control and hardware functionality.

One characteristic of the IoT framework is that all features are encapsulated in a single software package. Although this makes it quick to get up and running, this characteristic also has a downside—it introduces complexity if a feature had to be completely overhauled. For example, a better real-time architecture may be devised but it would be difficult to completely replace the existing implementation. A production-ready application might make use of a microservice architecture instead. A collection of distinct software packages could communicate with a messaging protocol like RabbitMQ. If a new real-time architecture was developed, only a single component has to be upgraded.

The example of an overhauled real-time component was given because that is another improvement which could be made. The real-time implementation for Haar Engine used WebSockets and was based on features of the MQTT protocol. MQTT is a mature standard, is more scalable and provides additional quality of service options. Based on the experience from this project, an IoT application should consider MQTT for a real-time event API. A downside to this method is than additional servers and software must be used—a microservice architecture would help to control this complexity.

User access and authentication was considered at all stages of the project. Whilst the IoT application does enforce strict authentication, only two user types are defined making the available permissions quite broad. A more granular user access control system would allow the framework to provide or revoke access to single devices or to perform specific actions. The OAuth authentication protocol could also be implemented in order to control authorisation flow for third-party services.

Finally, there are some improvements which could be made to the hardware prototypes. Aspects of energy efficiency were discussed in Section 6.5.2; this section also stated that a sleep mode was not implemented for the XBee radio chip. One major improvement would be to get the pin hibernation mode working effectively.

Another improvement (which would help to debug issues like the sleep mode) would be to implement a debug interface. The Arduino platform supports the SoftwareSerial library, which allows serial connections to be implemented on arbitrary pins. Communication with the XBee radio chip could take place over a software serial interface, leaving the FTDI header free as a hardware debug interface. Helpful debug messages and error codes could be emitted through this interface.

# Chapter 8

# Conclusions

To recap, this project specified four main objectives in order to satisfy three high-level aims. The objectives were to research IoT practices and concepts; to research supporting technologies; to develop an IoT application framework and to develop a demonstration application using the framework. These objectives have been successfully achieved.

This chapter will discuss the main lessons learnt during the course of the project. This discussion will cover the current state of the Internet of Things and the challenges it still faces. Additionally, topics of future work will be discussed based on the challenges uncovered. Finally, this chapter will critically appraise my conduct for the project and I will give a brief personal reflection of the honours experience.

## 8.1 The Internet of Things

The easiest conclusion to draw about IoT is that it is an unsettled area of research. The diversity of research shows that academic institutions and manufacturers are investing a lot of time and money into the concept. They are motivated to do so by the potential opportunities lying in wait, like smart cities and the connected home. Undoubtedly there are many use cases which have not yet been imagined.

One downside to the volume of research being conducted is the increasingly fragmented array of technologies available. In some cases there are numerous competing technologies which address the same challenge, such as the various implementations of the IEEE 802.15.4 Low-Rate Wireless Personal Area Networks standard. ZigBee and 6LowPAN are only two of many 802.15.4 implementations. It would appear that the IoT concept is now at a consolidation stage where best practices and go-to technologies will be identified.

Some technologies are already emerging as a standard tool for IoT applications. The frameworks and platforms investigated in Chapter 2 (Background) support a variety of connectivity protocols and techniques, including HTTP, UDP single-shot, CoAP and MQTT. HTTP is already established as the *de facto* Internet communication protocol, making it the ideal choice for the distribution of meta and configuration data for IoT applications. HTTP however lacks the mechanisms to facilitate real-time, bidirectional event streams. MQTT is emerging as the technology of choice for this purpose as indicated by Amazon's support for it.

A final conclusion to draw on IoT is that it is a truly multidisciplinary concept. Successful IoT applications will rely on an effective collaboration between computer scientists, designers, user researchers and engineers. Organisations like Google, Amazon and Samsung will strive in the respect because they have access to the necessary expertise and already implement mature

product development processes. The user experience is a crucial aspect to get right; the best IoT applications will be those which are invisible or second-nature to its users.

## 8.2 Future Work

There remains a lot of work to complete in the realm of IoT. One of the challenges not addressed in this project was the association of IoT devices to other devices and networks. There were eight XBee radio chips used across two ZigBee networks for the Haar demonstration application. These devices and networks were all configured through a manual and laborious process; a process which is not possible for the average consumer. So how, then, can constrained devices with little or no human-computer interaction be set up? Maybe Near Field Communication (NFC) could be used to configure network settings of nearby devices. This is as much a challenge for product designers as it is for computer scientists.

The unfortunate necessity for a bridge device is another aspect to be addressed. The bridge device is in essence a router to translate data between the Internet and wireless smart devices. As was described in Section 2.4.4, the configuration of the Local Area Network and its firewall can also impact the available technologies. There is potentially a market for a smart network hub which integrates traditional networking components like a router, firewall and a WiFi access point with IoT-specific technologies like an IEEE 802.15.4 radio transceiver. A ‘Smart Home Hub’ such as this could facilitate the association of IoT devices and their network requirements.

Haar Bridge is a response to what is the most pronounced challenge in facilitating end-to-end global connectivity for IoT devices. The Internet infrastructure relies on the TCP/IP protocol but this is, in large, not compatible with the optimised wireless communication protocols implemented in constrained devices. Some protocols like ZigBee IP and 6LoWPAN attempt to extend TCP/IP compatibility but there is still work to be done. In particular, these protocols rely on IPv6 and the uptake of this has been slow.

## 8.3 Critical Appraisal

Overall I am satisfied with my conduct and the effort put into this project. I feel that I have worked to the best of my ability and made the best use of the time available. The time spent working on the implementation is small when compared to the time spent researching and designing; as an estimate, one-third of the time was spent on implementation whereas two-thirds of the time was spent reading, designing, writing and evaluating.

One improvement which could be improved is the approach to user research and evaluation. This project was very much driven by the momentum in the IoT area; the implementation was based on a consolidation of the emerging IoT practices and technologies. Future projects could perform user research to determine which features of a framework would be the most useful, for example. External users could then be used in order to evaluate the effectiveness and flexibility of the software.

For me, the most difficult aspect of the whole project was at the design stage. It took many design iterations to arrive at a solution which both satisfied the information uncovered in Chapter 2 and was feasible to implement. I think that the difficulty came from the fact that IoT is still an immature area and that there are few established practices already in place.

Going into this project, I had a curiosity in the Internet of Things but not an active interest. Now that the project has been completed, I would say that I am now more interested in the field and would be keen to continue learning about this subject. I think the implementation and the

potential it demonstrates has also captured the interest of other students, lecturers and work colleagues. That is what I am most proud of.

## Appendix A

# Haar Engine Acceptance Tests

Requirement	Status	Notes
The framework shall model users	Implemented	
A user shall be identified by a unique username	Implemented	
A user shall have an associated profile including: full name, email address	Implemented	
Users shall be assigned a privilege level: standard or administrator	Implemented	Haar Engine understands privileges as ‘user’ or ‘admin’
The framework shall authenticate genuine users only	Implemented	Implemented with a combination of user credentials, Bcrypt password hashing and signed JSON Web Tokens
The framework shall model connected IoT devices	Implemented	
A device shall be identified by a unique identification number	Implemented	Devices are assigned a random, unique ID for use in data modelling. Haar Engine also stores their globally unique MAC address.
A device shall be designated as either an input (sensor) or output (actuator)	Implemented	
The framework shall authenticate genuine devices only	Implemented	
The framework shall authorise and facilitate the management of devices	Implemented	
A device will have one owner	Implemented	

Requirement	Status	Notes
Access to device data and configuration options shall be restricted to the device owner by default	Implemented	This feature is restricted solely to the device owner and cannot be delegated.
The device owner shall be able to make device data public	Implemented	
A device owner shall be able to grant access permission to specified users	Not Implemented	
The framework shall establish a connection with end devices	Implemented	
Devices shall be addressable and identifiable whilst the connection is open	Implemented	Through the use of a publish/subscribe architecture
The connection shall remain open under normal operating conditions	Implemented	
Under error conditions, the connection shall be re-established	Implemented	Facilitated through the Primus real-time library
The connection shall be bidirectional	Implemented	Implemented with WebSockets, supported by the Primus real-time library
Input devices shall be able to transmit data packets to the framework	Implemented	
The framework shall be able to transmit data packets to output devices	Implemented	
The connection shall be tolerant of network obstacles such as firewalls and Network Address Translation	Implemented	
The framework shall store data received by devices	Implemented	
The framework shall provide an interface for using different database types	Not Implemented	Only one database type is supported: MongoDB. Its implementation is however extensible and allows developers to modify schemas.
The framework shall provide a default ‘out of the box’ database connector	Implemented	There is only one.
Application developers shall be able to create their own database connectors	Not Implemented	

Requirement	Status	Notes
The framework shall provide structured access to stored data	Implemented	
Access shall be granted to authenticated and authorised users only	Implemented	
Application developers shall be able to modify data access	Implemented	Developers have the opportunity to implement new controllers or override existing
Application developers shall be able to add custom data searches	Implemented	Developers have the opportunity to implement new controllers or override existing
Application developers shall be able to add custom data filters	Implemented	Developers have the opportunity to implement new controllers or override existing
The framework shall provide a real-time event API	Implemented	Based on MQTT's publish/subscribe model
Client applications shall be able to listen for device events	Implemented	
The real-time API shall leverage bidirectional connectivity with devices	Implemented	
The API shall provide real-time access to data received from devices	Implemented	
The real-time API shall enable developers to create application rules and triggers	Implemented	

Table A.1: User Acceptance Testing for Haar Engine

## Appendix B

### Haar Acceptance Tests

Requirement	Status	Notes
The application shall comprise of two local area device networks	Implemented	
Devices of these networks shall be capable of establishing a connection between themselves and the web application	Implemented	This is facilitated through the bridge device
The device networks shall comprise of two sensor devices	Implemented	Network A comprises temperature and RGB colour sensors; Network B comprises temperature and gyroscope sensors
The device network shall contain a sensor device which measures a single data point, such as temperature	Implemented	Implemented in the form of a temperature sensor
The device network shall contain a sensor device which measures more complex data, such as a vector of wind direction and speed	Implemented	Implemented in the form of RGB colour sensor (red, green and blue values) and gyroscope sensor (x, y and z values)
The device networks shall comprise of a single actuator device	Implemented	Implemented as an RGB LED lamp
The actuator device shall be flexible enough to represent a variety of data types	Implemented	
The web-based dashboard will be the main interface between a user and their devices.	Implemented	
The dashboard shall be accessible on the World Wide Web	Implemented	Hosted using DigitalOcean cloud server

Requirement	Status	Notes
The dashboard shall authenticate users with a username and password	Implemented	
The dashboard shall list profile details	Implemented	
The user shall be able to manage their devices	Implemented	
The dashboard shall list devices owned by the user	Implemented	
The user shall be able to add a new device	Implemented	
The dashboard shall show whether devices are connected or not	Not Implemented	Sensors have the ability to sleep and are therefore not ‘connected’ all of the time, but are still active
The user shall be able to transfer ownership of the device	Not Implemented	The required permission system to facilitate this is too involved given the time constraints
The user shall be able to grant access permissions to other users	Not Implemented	The required permission system to facilitate this is too involved given the time constraints
The dashboard shall enable users to manage application rules	Implemented	
The dashboard shall list existing rules	Implemented	
The user shall be able to create new rules	Implemented	
An actuator device shall be able to react to sensed data	Implemented	
User devices shall be able to integrate with third-party services	Implemented	Possible through the use of Data Access and Real-Time Event APIs
The dashboard shall display data for a given device	Implemented	
The dashboard shall be able to trigger actuators with virtual controls	Not Implemented	This ‘nice to have’ was not implemented given time constraints
A section of the dashboard shall be dedicated to data visualisation	Implemented	
A generic visualisation tool shall plot temporal data as a graph	Implemented	
The date range shall be configurable	Implemented	

Requirement	Status	Notes
Multiple data sources shall be comparable on one graph interface	Partial	Multiple data points from a single device can be displayed (e.g. red, green and blue); the data from multiple devices cannot be compared
The graph shall leverage the real-time event API to update when new data is received	Implemented	
Specialised visualisation tools shall reflect specific device types. For example, a virtual thermometer would visualise a temperature	Not Implemented	This ‘nice to have’ was not implemented given time constraints
Specialised visualisation tools shall leverage the real-time event API to update when new data is received	Not Implemented	This ‘nice to have’ was not implemented given time constraints

Table B.1: User Acceptance Testing for Haar

## Appendix C

### Project Log

W/C	Tasks
05/10/2015	<ul style="list-style-type: none"><li>• Recap project aims</li><li>• Review summer reading</li><li>• Define objectives</li><li>• Discuss project management</li></ul>
12/10/2015	<ul style="list-style-type: none"><li>• Research existing IoT platforms</li><li>• Write summary of IoT paper from summer reading</li><li>• Transcription of Marek Pawlowski interview</li><li>• Learn LaTeX and BibTeX basics</li></ul>
19/10/2015	<ul style="list-style-type: none"><li>• Continue learning LaTeX</li><li>• Complete Ethics Form deliverable</li><li>• Prepare IoT platform comparison</li><li>• LaTeX summary of IoT paper</li></ul>
26/10/2015	<ul style="list-style-type: none"><li>• Complete Project Specification deliverable</li><li>• Complete Gantt Chart deliverable</li><li>• Kick off BibTeX database</li><li>• Find IoT platform case studies</li></ul>
02/11/2015	<ul style="list-style-type: none"><li>• Evaluate IoT platform case studies</li><li>• Improve summaries of IoT papers</li><li>• Draft structure for Background chapter</li></ul>
09/11/2015	<ul style="list-style-type: none"><li>• Investigate sensor node hardware</li><li>• Read paper on IPv6</li><li>• Summarise EU Action Plan paper</li><li>• Summarise IoT platform capabilities</li><li>• Kick off LaTeX project for report</li></ul>
16/11/2015	<ul style="list-style-type: none"><li>• Combine summaries into chapter draft</li><li>• Read ACM survey journal examples</li><li>• Read papers on IEEE 802.15.4</li><li>• Summarise IoT platform capabilities</li></ul>

W/C	Tasks
23/11/2015	<i>Due to extenuating circumstances, no work was conducted this week</i>
30/11/2015	<i>Due to extenuating circumstances, no work was conducted this week</i>
07/12/2015	<ul style="list-style-type: none"> <li>• Review research into sensor hardware</li> <li>• Write section on sensor hardware</li> <li>• Write section on wireless communication technologies</li> </ul>
14/12/2015	<ul style="list-style-type: none"> <li>• Investigate Smart Meter program further</li> <li>• Draft case study on smart meter program</li> <li>• Draft conclusion of background chapter</li> </ul>
21/12/2015	<i>No work was conducted this week due to the Christmas break</i>
28/12/2015	<ul style="list-style-type: none"> <li>• Review critique on Background chapter</li> <li>• Edit Background chapter</li> </ul>
04/01/2016	<ul style="list-style-type: none"> <li>• Make Background chapter more concise</li> <li>• Synthesise requirements for an IoT framework</li> </ul>
11/01/2016	<ul style="list-style-type: none"> <li>• Write functional requirements for IoT framework</li> <li>• Write functional requirements for demo application</li> <li>• Write non-functional requirements for all software</li> </ul>
18/01/2016	<ul style="list-style-type: none"> <li>• Evaluate abstract design architectures</li> <li>• Reflect on background research for inspiration</li> <li>• Evaluate potential hardware components</li> </ul>
25/01/2016	<ul style="list-style-type: none"> <li>• First pass at Design chapter</li> <li>• Investigate supporting hardware and software</li> <li>• Procure sensor components</li> </ul>
01/02/2016	<ul style="list-style-type: none"> <li>• Research development processes</li> <li>• Set up local development environments</li> <li>• Kick off GitHub repositories</li> <li>• Create project poster deliverable</li> </ul>
08/02/2016	<ul style="list-style-type: none"> <li>• Configure Dockerfiles</li> <li>• Configure Travis CI continuous integration</li> <li>• Begin soldering hardware components</li> </ul>
15/02/2016	<ul style="list-style-type: none"> <li>• Piece together sensor and actuator devices</li> <li>• Experiment with XBee radio chips</li> <li>• Kick off sensor programs</li> </ul>
22/02/2016	<ul style="list-style-type: none"> <li>• Kick off development of Haar Engine</li> <li>• Investigate package management with npm [Haar Engine]</li> <li>• Work out application init API [Haar Engine]</li> <li>• Kick off tests [Haar Engine]</li> </ul>
29/02/2016	<ul style="list-style-type: none"> <li>• Develop Mongoose models [Haar Engine]</li> <li>• Implement controllers for Data Access API [Haar Engine]</li> </ul>

W/C	Tasks
07/03/2016	<ul style="list-style-type: none"> <li>• Improve configuration management [Haar Engine]</li> <li>• Set up real-time connection management [Haar Engine]</li> <li>• Fork broken Primus plugin [Haar Engine]</li> </ul>
14/03/2016	<ul style="list-style-type: none"> <li>• Implement Cross-Origin Resource Sharing [Haar Engine]</li> <li>• Improve validation error management [Haar Engine]</li> <li>• Kicking off Haar Dashboard implementation</li> <li>• Setting up software compilation and build steps [Haar Dashboard]</li> </ul>
21/03/2016	<ul style="list-style-type: none"> <li>• Implement filtering for API listings [Haar Engine]</li> <li>• Defining Haar Dashboard file structure</li> <li>• Kick off user authentication [Haar Dashboard]</li> </ul>
28/03/2016	<ul style="list-style-type: none"> <li>• Develop main components and styles [Haar Dashboard]</li> <li>• Work through views and actions for users and device types [Haar Dashboard]</li> </ul>
04/04/2016	<ul style="list-style-type: none"> <li>• Work through views and actions for devices and rules [Haar Dashboard]</li> <li>• Implement real-time connectivity [Haar Dashboard]</li> </ul>
11/04/2016	<ul style="list-style-type: none"> <li>• Develop Haar Bridge software</li> <li>• Ensure end-to-end connectivity between devices and API</li> <li>• Evaluate end-to-end performance</li> </ul>
18/04/2016	<ul style="list-style-type: none"> <li>• Write implementation for Haar Engine component</li> <li>• Write up implementation for Haar application components</li> <li>• Build PowerPoint presentation</li> <li>• Honours information event presence</li> </ul>
25/04/2016	<ul style="list-style-type: none"> <li>• Presentation and demonstration delivery</li> <li>• Writing evaluation and conclusions for report</li> <li>• Final report edits</li> <li>• Submission</li> </ul>

Table C.1: Project Log

# Appendix D

## Credits

### Async

**Maintainer** Caolan McHanon

**Usage** Managing application concurrency for features like simultaneous database queries

**License** Copyright (c) 2010-2016 Caolan McMahon

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

### Axios

**Maintainer** Matt Zabriskie

**Usage** Universal, promise-based HTTP request library

**License** Copyright (c) 2014 Matt Zabriskie

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

## Babel (including helpers and plugins)

**Maintainer** Sebastian McKenzie

**Usage** Compiling ES2015 syntax into ECMAScript 5

**License** Copyright (c) 2014-2016 Sebastian McKenzie [jsebmck@gmail.com](mailto:jsebmck@gmail.com)

MIT License

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

## Bcrypt

**Maintainer** Nick Campbell

**Usage** Hashing and comparing user passwords

**License** Copyright (c) 2010 Nicholas Campbell

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

## Body Parser

**Maintainers** Jonathan Ong, Douglas Christopher Wilson

**Usage** Express middleware for parsing JSON and application/x-www-form-urlencoded request data into JavaScript object

**License** (The MIT License)

Copyright (c) 2014 Jonathan Ong [jme@jongoberry.com](mailto:jme@jongoberry.com); Copyright (c) 2014-2015 Douglas Christopher Wilson [jdoug@somethingdoug.com](mailto:jdoug@somethingdoug.com)

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the 'Software'), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED 'AS IS', WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A

PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

## Chart.js

**Maintainer** Nick Downie

**Usage** Drawing charts for data pages

**License** The MIT License (MIT) Copyright (c) 2013-2016 Nick Downie

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

## Classnames

**Maintainer** Jed Watson

**Usage** Build classname strings for React JavaScript components

**License** The MIT License (MIT)

Copyright (c) 2016 Jed Watson

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

## Cookie Parser

**Maintainers** TJ Holowaychuk, Douglas Christopher Wilson

**Usage** Express middleware for getting and and setting cookies

**License** (The MIT License)

Copyright (c) 2014 TJ Holowaychuk [tj@vision-media.ca](mailto:tj@vision-media.ca); Copyright (c) 2015 Douglas Christopher Wilson [jdoug@somethingdoug.com](mailto:jdoug@somethingdoug.com);

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the 'Software'), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED ‘AS IS’, WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

## CORS

**Maintainer** Troy Goode

**Usage** Express middleware for configuring Cross-Origin Resource Sharing (CORS)

**License** The MIT License (MIT)

Copyright (c) 2013 Troy Goode [troygoode@gmail.com](mailto:troygoode@gmail.com);

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the “Software”), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED “AS IS”, WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

## Dotenv

**Maintainer** Scott Motte

**Usage** Define environment variables from configuration file

**License** Copyright (c) 2015, Scott Motte All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

\* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

\* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS “AS IS” AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

## Engine.io

**Maintainer** Guillermo Rauch

**Usage** Underlying transport for use in the Primus real-time framework

**License** (The MIT License)

Copyright (c) 2014 Guillermo Rauch [jguillermo@learnboost.com](mailto:jguillermo@learnboost.com);

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the ‘Software’), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED ‘AS IS’, WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

## Express

**Maintainers** TJ Holowaychuk, Roman Shtylman, Douglas Christopher Wilson

**Usage** Web application framework

**License** (The MIT License)

Copyright (c) 2009-2014 TJ Holowaychuk [jtj@vision-media.ca](mailto:jtj@vision-media.ca); Copyright (c) 2013-2014 Roman Shtylman [jshtylman+expressjs@gmail.com](mailto:jshtylman+expressjs@gmail.com); Copyright (c) 2014-2015 Douglas Christopher Wilson [jdoug@somethingdoug.com](mailto:jdoug@somethingdoug.com);

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the ‘Software’), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED ‘AS IS’, WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

## Jsonwebtoken

**Maintainer** Auth0, Inc.

**Usage** Creating and validating JSON Web Tokens

**License** The MIT License (MIT)

Copyright (c) 2015 Auth0, Inc. [support@auth0.com](mailto:support@auth0.com) (<http://auth0.com>)

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the “Software”), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED “AS IS”, WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

## Lodash

**Maintainer** jQuery Foundation

**Usage** JavaScript functional programming utility library

**License** Copyright jQuery Foundation and other contributors <https://jquery.org/>

Based on Underscore.js, copyright Jeremy Ashkenas, DocumentCloud and Investigative Reporters & Editors <http://underscorejs.org/>

This software consists of voluntary contributions made by many individuals. For exact contribution history, see the revision history available at <https://github.com/lodash/lodash>

The following license applies to all parts of this software except as documented below:

=====

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

=====

Copyright and related rights for sample code are waived via CC0. Sample code is defined as all source code displayed within the prose of the documentation.

CC0: <http://creativecommons.org/publicdomain/zero/1.0/>

## Mongoose

**Maintainer** LearnBoost

**Usage** Object Data Mapping for MongoDB

**License** Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the 'Software'), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED 'AS IS', WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

## Nconf

**Maintainer** Charlie Robbins

**Usage** Configuration settings management

**License** Copyright (C) 2011 Charlie Robbins and the Contributors.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the “Software”), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED “AS IS”, WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

## Primus

**Maintainer** Arnout Kazemier**Usage** Real-time connection management**License** The MIT License (MIT)

Copyright (c) 2015 Arnout Kazemier, the Contributors.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the “Software”), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED “AS IS”, WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

## Primus Responder

**Maintainer** Manuel Alabor**Usage** Message acknowledgement plugin for Primus**License** Copyright (c) 2013 Manuel Alabor

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the “Software”), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED “AS IS”, WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

## Primus Rooms

**Maintainer** Jonathan Brumley

**Usage** Hierarchical rooms plugin for Primus

**License** (The MIT License)

Copyright (c) 2013 Jonathan Brumley jcayasso@gmail.com;

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the 'Software'), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED 'AS IS', WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

## Qs

**Maintainer** Nathan LaFreniere

**Usage** Parse query strings into JavaScript object

**License** Copyright (c) 2014 Nathan LaFreniere and other contributors. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: \* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. \* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. \* The names of any contributors may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS AND CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

\* \* \*

The complete list of contributors can be found at: <https://github.com/hapijs/qs/graphs/contributors>

## React

**Maintainer** Facebook, Inc.

**Usage** Front-end JavaScript view layer

**License** BSD License

For React software

Copyright (c) 2013-present, Facebook, Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

\* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

\* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

\* Neither the name Facebook nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

## React Router

**Maintainer** Ryan Florence, Michael Jackson

**Usage** Route management in React

**License** The MIT License (MIT)

Copyright (c) 2015 Ryan Florence, Michael Jackson

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

## Redux (including React bindings and Redux Thunk)

**Maintainer** Dan Abramov

**Usage** State management in React

**License** The MIT License (MIT)

Copyright (c) 2015 Dan Abramov

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

## Redux Form

**Maintainer** Erik Rasmussen

**Usage** Form component decoration for React

**License** The MIT License (MIT)

Copyright (c) 2015 Erik Rasmussen

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the “Software”), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED “AS IS”, WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

## Serialport

**Maintainer** Christopher Williams

**Usage** Access serial connection from Node.js

**License** Copyright 2010, 2011, 2012 Christopher Williams. All rights reserved.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the “Software”), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED “AS IS”, WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

## XBee API

**Maintainer** Jan Kolkmeier

**Usage** XBee API packet parsing

**License** Copyright (c) 2013 Jan Kolkmeier

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the “Software”), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED “AS IS”, WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

# Bibliography

- Divyakant Agrawal, Sudipto Das, and Amr El Abbadi. Big data and cloud computing: Current state and future opportunities. In *Proceedings of the 14th International Conference on Extending Database Technology*, EDBT/ICDT '11, pages 530–533, New York, NY, USA, 2011. ACM. ISBN 978-1-4503-0528-0. doi: 10.1145/1951365.1951432. URL <http://doi.acm.org/10.1145/1951365.1951432>.
- Amazon Web Services, Inc. Announcing aws iot, now in beta. Seattle, WA: Amazon Web Services [Online], Oct 2015. URL <https://aws.amazon.com/about-aws/whats-new/2015/10/announcing-aws-iot-now-in-beta/>. [Accessed 10 October 2015].
- S. Aust, R.V. Prasad, and I.G.M.M. Niemegeers. IEEE 802.11ah: Advantages in standards and further challenges for sub 1 ghz wi-fi. In *Communications (ICC), 2012 IEEE International Conference on*, pages 6885–6889, June 2012. doi: 10.1109/ICC.2012.6364903.
- Babel. A detailed overview of ecmascript 2015 features. Babel [Online], Apr 2016. URL <https://babeljs.io/docs/learn-es2015/>. [Accessed 6 April 2016].
- Andrew Banks and Rahul Gupta. Mqtt version 3.1.1. OASIS Standard, Oct 2014. URL <http://docs.oasis-open.org/mqtt/mqtt/v3.1.1/os/mqtt-v3.1.1-os.pdf>.
- Flavio Bonomi, Rodolfo Milito, Jiang Zhu, and Sateesh Addepalli. Fog computing and its role in the internet of things. In *Proceedings of the First Edition of the MCC Workshop on Mobile Cloud Computing*, MCC '12, pages 13–16, New York, NY, USA, 2012. ACM. ISBN 978-1-4503-1519-7. doi: 10.1145/2342509.2342513. URL <http://doi.acm.org/10.1145/2342509.2342513>.
- British Computer Society. Bcs code of conduct. British Computer Society [Online], Jun 2015. URL <http://www.bcs.org/category/6030>. [Accessed 13 April 2016].
- Carriots. What is carriots. Madrid: Carriots [Online], November 2015. URL <https://www.carriots.com/what-is-carriots>. [Accessed 12 November 2015].
- Case C-362/14. Maximillian Schrems v Data Protection Commissioner. OJ C351, Oct 2015. URL <http://curia.europa.eu/juris/document/document.jsf?text=&docid=172254&pageIndex=0&doclang=EN&mode=req&dir=&occ=first&part=1&cid=199525>.
- Kuor-Hsin Chang. Bluetooth: a viable solution for iot? [industry perspectives]. *Wireless Communications, IEEE*, 21(6):6–7, December 2014. ISSN 1536-1284. doi: 10.1109/MWC.2014.7000963.
- Digi International. Product manual v1.xex - 802.15.4 protocol. Minnetonka, MN: Digi International, Sep 2009.

- Digi International Inc. Sending data through an 802.15.4 network latency timing. Digi International [Online], Apr 2016. URL [http://knowledge.digi.com/articles/Knowledge\\_Base\\_Article/Sending-data-through-an-802-15-4-network-latency-timing](http://knowledge.digi.com/articles/Knowledge_Base_Article/Sending-data-through-an-802-15-4-network-latency-timing). [Accessed 9 April 2016].
- Dominos. How the new domino's easy order button will change your life. Dominos [Online], Dec 2015. URL <https://www.dominos.co.uk/blog/easy-order-button/>. [Accessed 29 April 2016].
- Robert Faludi. *Building Wireless Sensor Networks: With ZigBee, XBee, Arduino, and Processing*. O'Reilly Media, Inc., 1st edition, 2010. ISBN 0596807732, 9780596807733.
- I. Fette and A. Melnikov. The WebSocket Protocol. RFC 6455 (Proposed Standard), December 2011. URL <http://www.ietf.org/rfc/rfc6455.txt>.
- R. Fielding, J. Gettys, J. Mogul, H. Frystyk, L. Masinter, P. Leach, and T. Berners-Lee. Hypertext Transfer Protocol – HTTP/1.1. RFC 2616 (Draft Standard), June 1999. URL <http://www.ietf.org/rfc/rfc2616.txt>. Obsoleted by RFCs 7230, 7231, 7232, 7233, 7234, 7235, updated by RFCs 2817, 5785, 6266, 6585.
- Roy Thomas Fielding. Architectural styles and the design of network-based software architectures. Irvine, CA: University of California, 2000. URL [https://www.ics.uci.edu/~fielding/pubs/dissertation/rest\\_arch\\_style.htm](https://www.ics.uci.edu/~fielding/pubs/dissertation/rest_arch_style.htm).
- Gartner, Inc. Gartner's 2015 hype cycle for emerging technologies identifies the computing innovations that organizations should monitor. Stamford, Conn: Gartner, Inc. [Online], Aug 2015. URL <http://www.gartner.com/newsroom/id/3114217>. [Accessed 29 April 2016].
- Github, Inc. Choose a license. San Francisco, CA: Github, Oct 2015. URL <http://choosealicense.com/>. [Accessed 14 October 2015].
- Google. Mvc architecture. Google [Online], Apr 2016. URL [https://developer.chrome.com/apps/app\\_frameworks](https://developer.chrome.com/apps/app_frameworks). [Accessed 14 April 2016].
- Jonathan W. Hui and David E. Culler. Ip is dead, long live ip for wireless sensor networks. In *Proceedings of the 6th ACM Conference on Embedded Network Sensor Systems*, SenSys '08, pages 15–28, New York, NY, USA, 2008. ACM. ISBN 978-1-59593-990-6. doi: 10.1145/1460412.1460415. URL <http://doi.acm.org/10.1145/1460412.1460415>.
- Dogan Ibrahim. Advanced pic microcontroller projects in c. Oxford: Newnes, 2011. URL <http://www.myilibrary.com?ID=127324>. [Accessed 1 December 2015].
- Link Labs. M2m & iot technologies explained. Annapolis, MD: Link Labs, 2015.
- Lucas Kauffman. About secure password hashing. BlogOverflow [Online], Sep 2013. URL <http://security.blogoverflow.com/2013/09/about-secure-password-hashing/>. [Accessed 15 April 2016].
- Kalle Lyytinen and Youngjin Yoo. Introduction. *Commun. ACM*, 45(12):62–65, December 2002. ISSN 0001-0782. doi: 10.1145/585597.585616. URL <http://doi.acm.org/10.1145/585597.585616>.
- L. Masinter. Hyper Text Coffee Pot Control Protocol (HTCPCP/1.0). RFC 2324 (Informational), April 1998. URL <http://www.ietf.org/rfc/rfc2324.txt>. Updated by RFC 7168.

- Friedemann Mattern and Christian Floerkemeier. From active data management to event-based systems and more. chapter From the Internet of Computers to the Internet of Things, pages 242–259. Springer-Verlag, Berlin, Heidelberg, 2010. ISBN 3-642-17225-3, 978-3-642-17225-0.
- K. Mikhaylov and J. Tervonen. Optimization of microcontroller hardware parameters for wireless sensor network node power consumption and lifetime improvement. In *Ultra Modern Telecommunications and Control Systems and Workshops (ICUMT), 2010 International Congress on*, pages 1150–1156, Oct 2010. doi: 10.1109/ICUMT.2010.5676525.
- Julien Mineraud and Sasu Tarkoma. Toward interoperability for the internet of things with meta-hubs. Technical Report arXiv:1511.08063v1, University of Helsinki, Helsinki, Finland, nov 2015. URL <http://arxiv.org/pdf/1511.08063v1.pdf>.
- Luca Mottola and Gian Pietro Picco. Programming wireless sensor networks: Fundamental concepts and state of the art. *ACM Comput. Surv.*, 43(3):19:1–19:51, April 2011. ISSN 0360-0300. doi: 10.1145/1922649.1922656. URL <http://doi.acm.org/10.1145/1922649.1922656>.
- Mozilla Developer Network. Concurrency model and event loop. Mozilla Developer Network [Online], Apr 2016. URL <https://developer.mozilla.org/en/docs/Web/JavaScript/EventLoop>. [Accessed 6 April 2016].
- J. Postel. User Datagram Protocol. RFC 768 (INTERNET STANDARD), August 1980. URL <http://www.ietf.org/rfc/rfc768.txt>.
- Z. Shelby, K. Hartke, and C. Bormann. The Constrained Application Protocol (CoAP). RFC 7252 (Proposed Standard), June 2014. URL <http://www.ietf.org/rfc/rfc7252.txt>.
- P. Srisuresh and M. Holdrege. IP Network Address Translator (NAT) Terminology and Considerations. RFC 2663 (Informational), August 1999. URL <http://www.ietf.org/rfc/rfc2663.txt>.
- The Department for Business Innovation & Skills. Smart cities background paper. London: Department for Business Innovation & Skills Publications, Oct 2013. URL [https://www.gov.uk/government/uploads/system/uploads/attachment\\_data/file/246019/bis-13-1209-smart-cities-background-paper-digital.pdf](https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/246019/bis-13-1209-smart-cities-background-paper-digital.pdf).
- The Department of Energy & Climate Change. Smart meters: a guide. London: Department of Energy & Climate Change, Oct 2013. URL <https://www.gov.uk/guidance/smarter-meters-how-they-work>. [Accessed 29 November 2015].
- The Department of Energy and Climate Change. Smart meters: a guide. London: Department of Energy and Climate Change [Online], Oct 2009. URL <https://www.gov.uk/guidance/smarter-meters-how-they-work>.
- The Department of Energy and Climate Change. Third annual report on the roll-out of smart meters. London: Department of Energy and Climate Change, Dec 2014a.
- The Department of Energy and Climate Change. Communications hub technical specifications. London: Department of Energy and Climate Change, Nov 2014b.
- The Department of Energy and Climate Change. Smart metering equipment technical specifications. London: Department of Energy and Climate Change, Nov 2014c.

- The Department of Energy and Climate Change. Consultation on the timing of the review of the data access and privacy framework. London: Department of Energy and Climate Change [Online], Mar 2015. URL <https://www.gov.uk/government/consultations/consultation-on-the-timing-of-the-review-of-the-data-access-and-privacy-framework>.
- The Energy & Utilities Alliance. Smart metering device assurance scheme operator services. Kenilworth: Energy & Utilities Alliance [Online], Sep 2014. URL [http://www.eua.org.uk/sites/default/files/SMDA%20Scheme%20operator%20RFP%20v1.2%20\(Final\).pdf](http://www.eua.org.uk/sites/default/files/SMDA%20Scheme%20operator%20RFP%20v1.2%20(Final).pdf).
- The European Commission. Freight transport logistics action plan. Luxembourg: Publications Office of the European Union, COM/2007/0607, Oct 2007. URL <http://www.ipex.eu/IPEXL-WEB/dossier/dossier.do?code=COM&year=2007&number=0607>.
- The European Commission. Action plan for the deployment of internet protocol version 6 (ipv6) in europe. Luxembourg: Publications Office of the European Union, COM/2008/0313, May 2008. URL <http://www.ipex.eu/IPEXL-WEB/dossier/document/COM20080313FIN.do>.
- The European Commission. Internet of things — an action plan for europe. Luxembourg: Publications Office of the European Union, COM/2009/0278, June 2009. URL <http://eur-lex.europa.eu/legal-content/EN/TXT/?uri=celex:52009DC0278>.
- The Telegraph. Energy suppliers to install smart meters in all households by 2020. Dec 2009. URL <http://www.telegraph.co.uk/news/earth/energy/6708822/Energy-suppliers-to-install-smart-meters-in-all-households-by-2020.html>. [Accessed 5 December 2015].
- Lee Thomas and Prof. Nick Jenkins. Smart metering for the uk. HubNet [Online], Jun 2012. URL [http://www.hubnet.org.uk/position\\_papers](http://www.hubnet.org.uk/position_papers).
- ThoughtWorks, Inc. Eliminate blind spots so you can build and deliver software more rapidly. Chicago, IL: ThoughtWorks [Online], Apr 2015. URL <https://www.thoughtworks.com/continuous-integration>. [Accessed 5 April 2016].
- Ubuntu. Environmentvariables. Ubuntu [Online], Apr 2016. URL <https://help.ubuntu.com/community/EnvironmentVariables>. [Accessed 15 April 2016].
- J. Wei. How wearables intersect with the cloud and the internet of things : Considerations for the developers of wearables. Consumer Electronics Magazine, IEEE, 3(3):53–56, July 2014. ISSN 2162-2248. doi: 10.1109/MCE.2014.2317895.
- Mark Weiser. The computer for the 21st century. SIGMOBILE Mob. Comput. Commun. Rev., 3(3):3–11, July 1999. ISSN 1559-1662. doi: 10.1145/329124.329126. URL <http://doi.acm.org/10.1145/329124.329126>.