

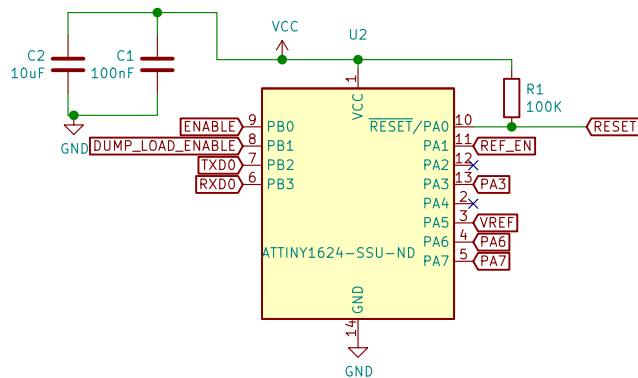
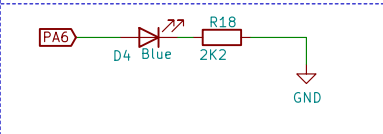
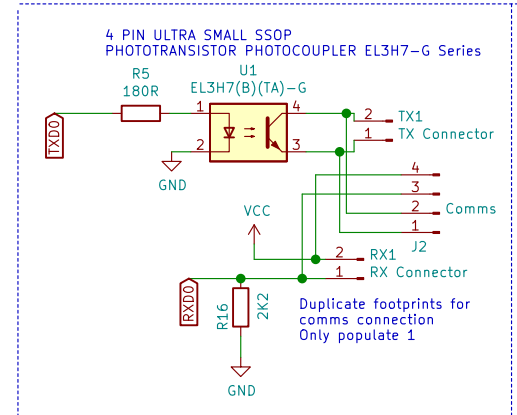
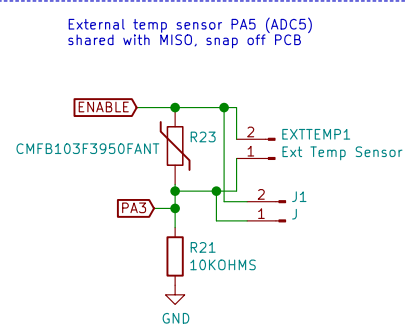


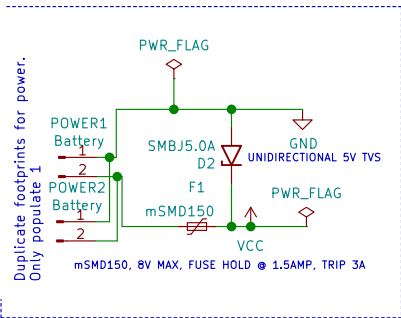
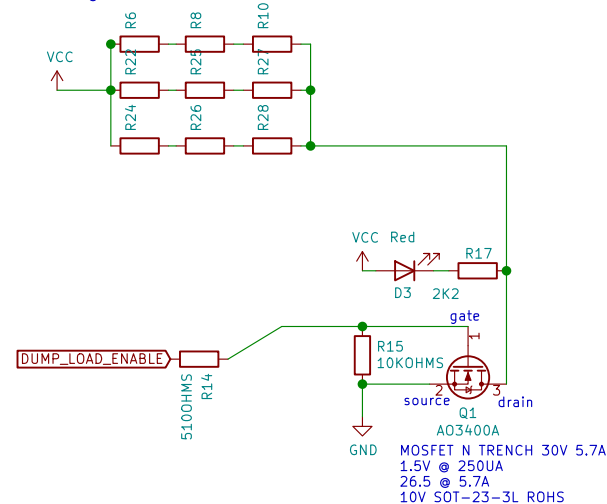


FOR LITHIUM VOLTAGE RANGES (18650 etc.) 2.0V – 4.2V

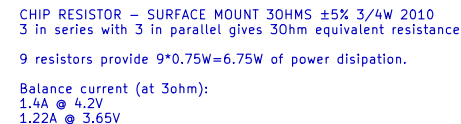

Change pin for Reference EN – its 2nd TX serial port so useful for DEBUG?

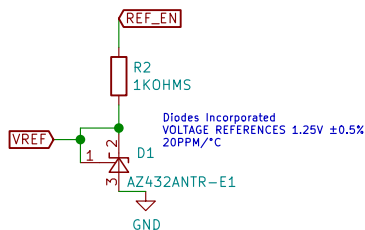

Stuart Pittaway

Sheet: /
File: ModuleV450.sch

Title: DIYBMS cell monitoring module

Size: A4	Date: 2021-01-31
----------	------------------

KiCad E.D.A. eeschema 5.1.9+dfsg1-1+deb11u1

Rev: 4.5

Id: 1/1