

Asamblare Desktop



Carcasa



Sursă



Placa de bază



Procesorul




Cooler procesor



Coolere carcasă



Memorie RAM

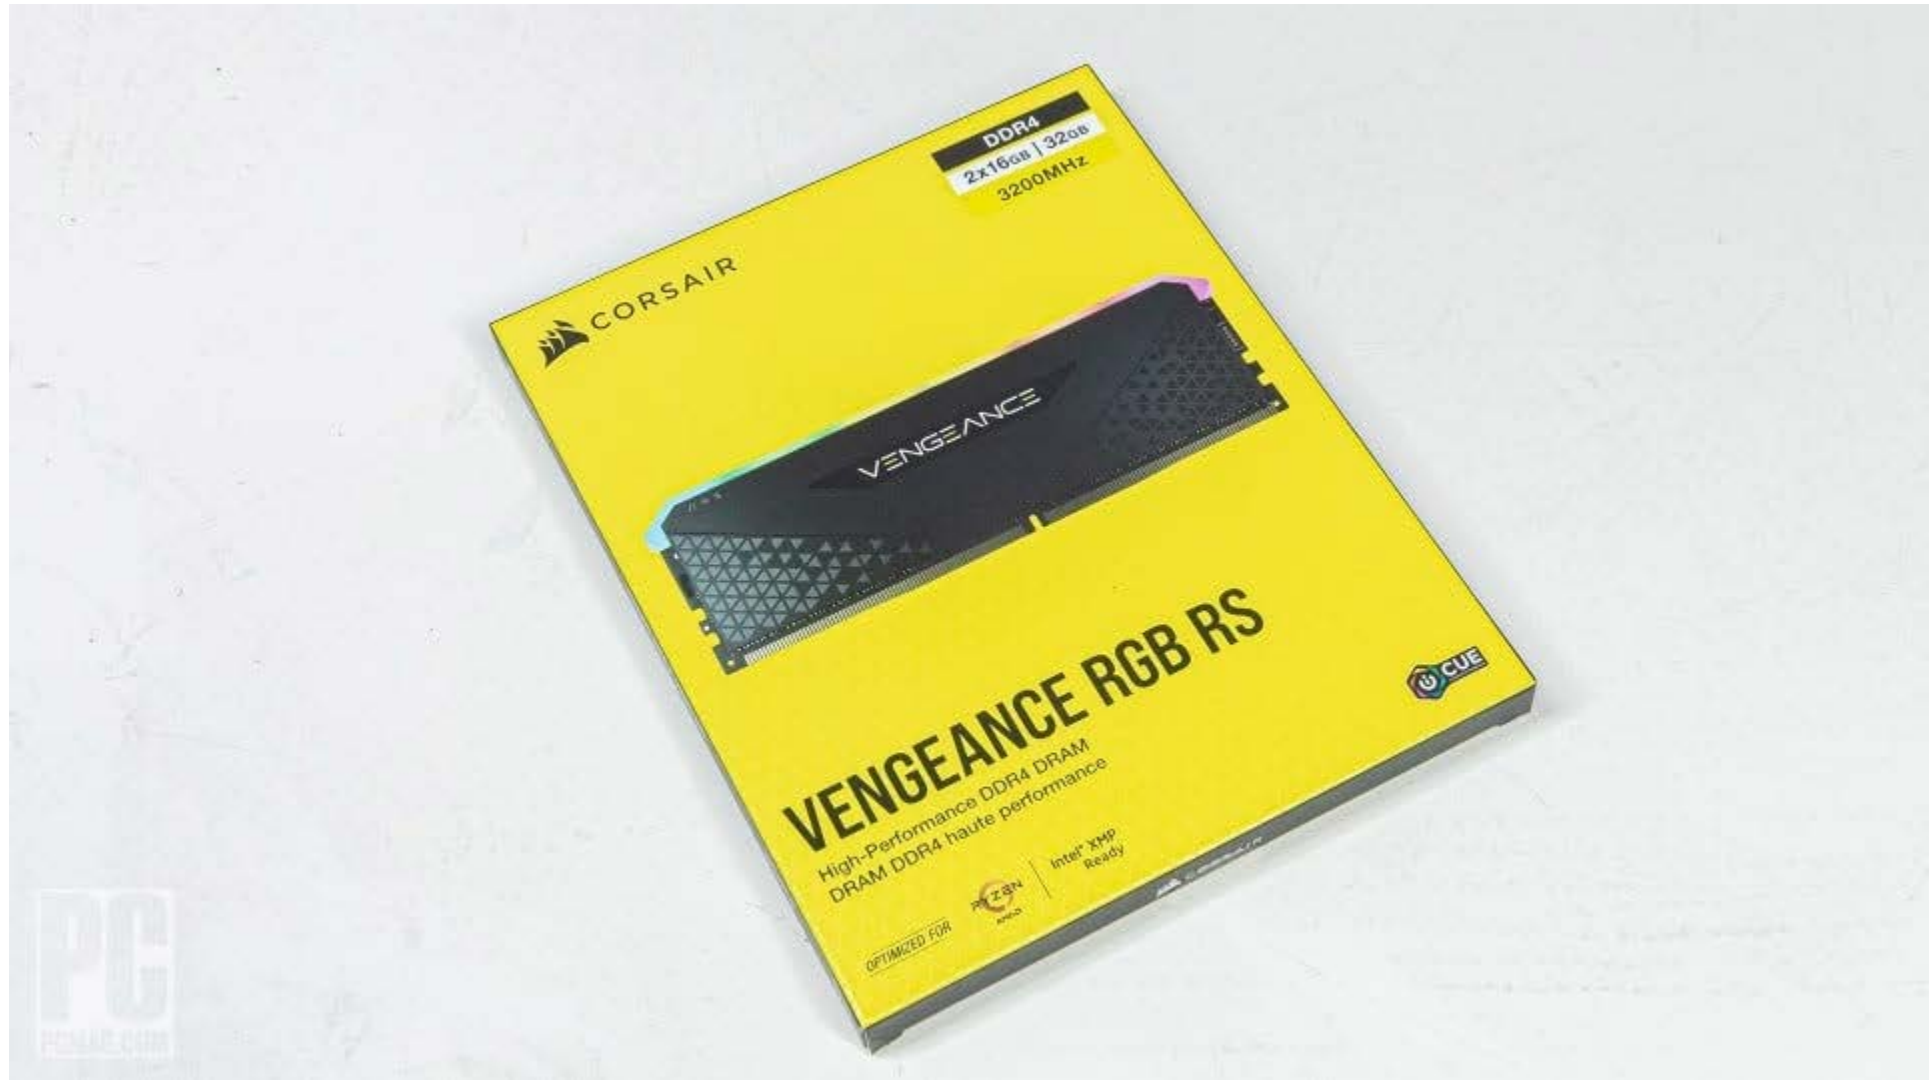

SSD M2 NVMe




Placa video







Instrumente necesare pentru instalare


Instalare procesor pe placa de bază

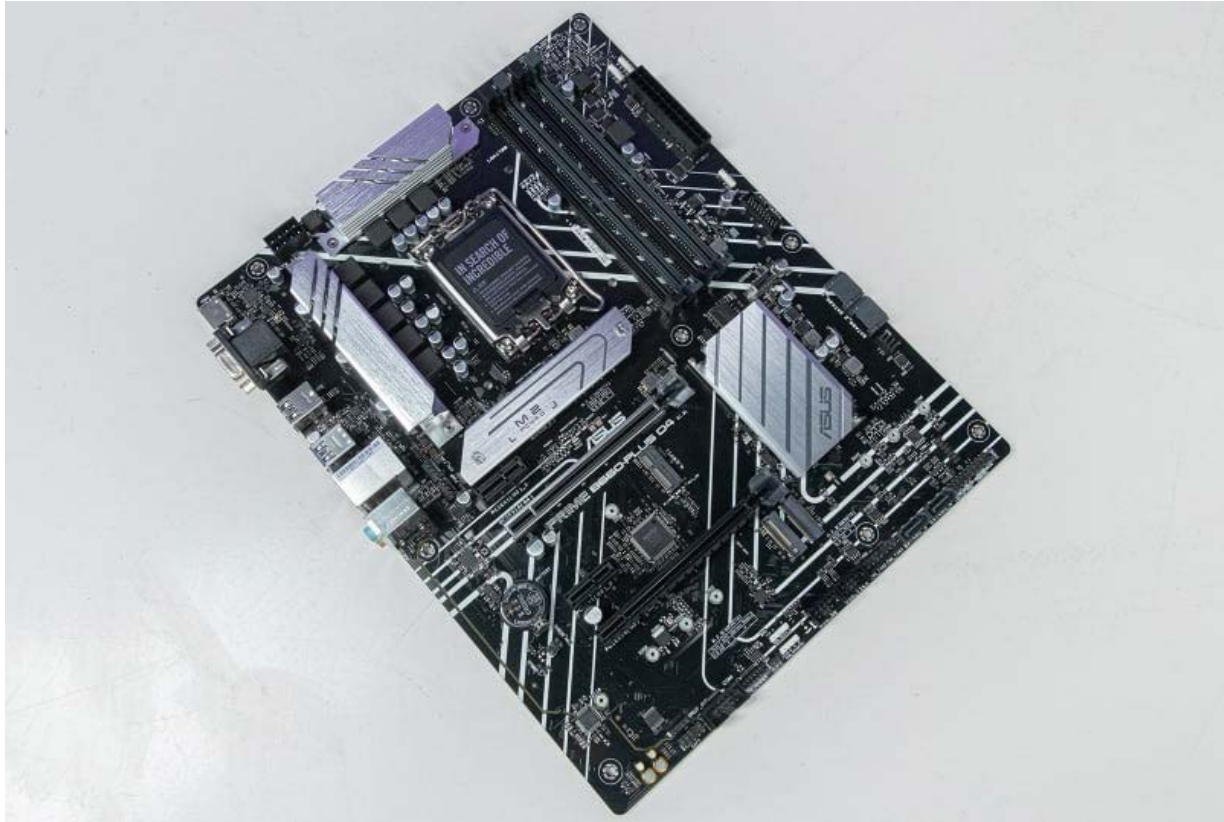




Instalarea memorie RAM

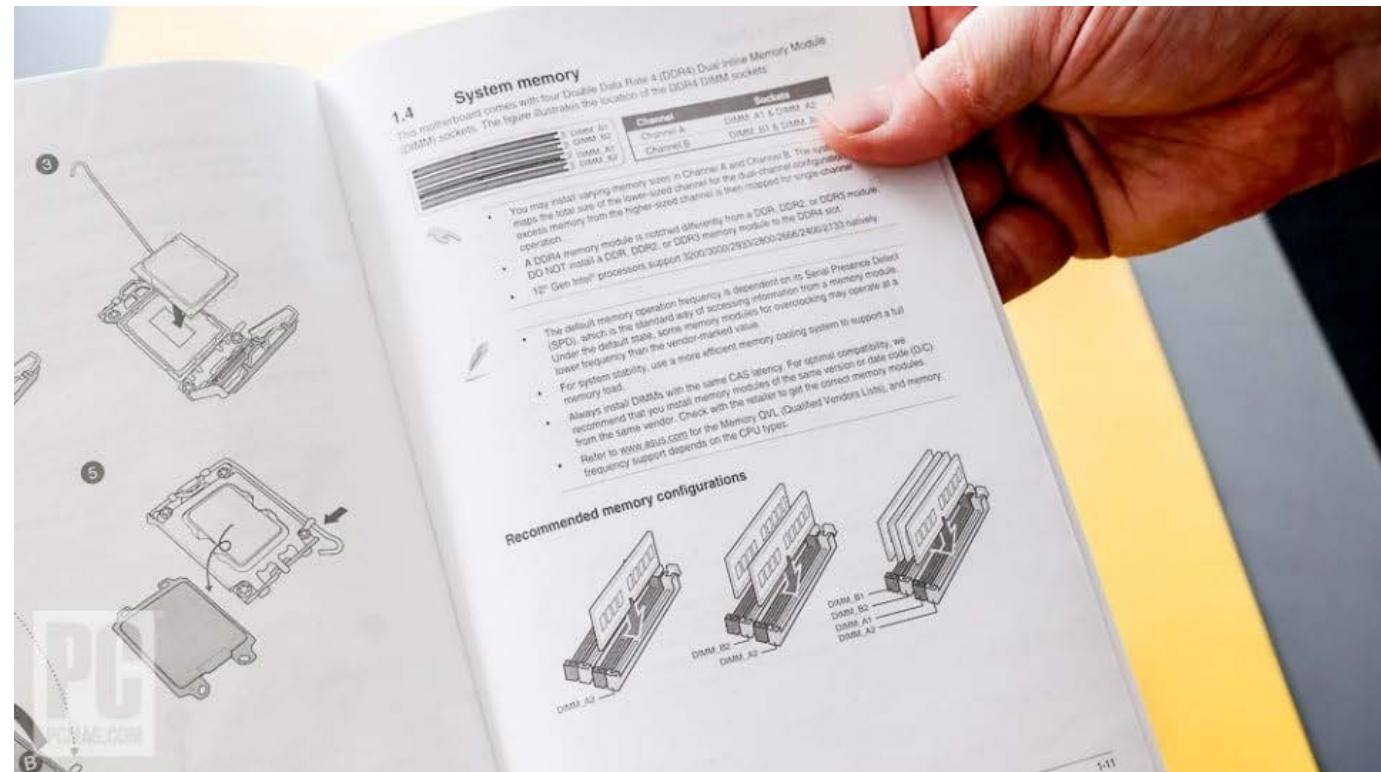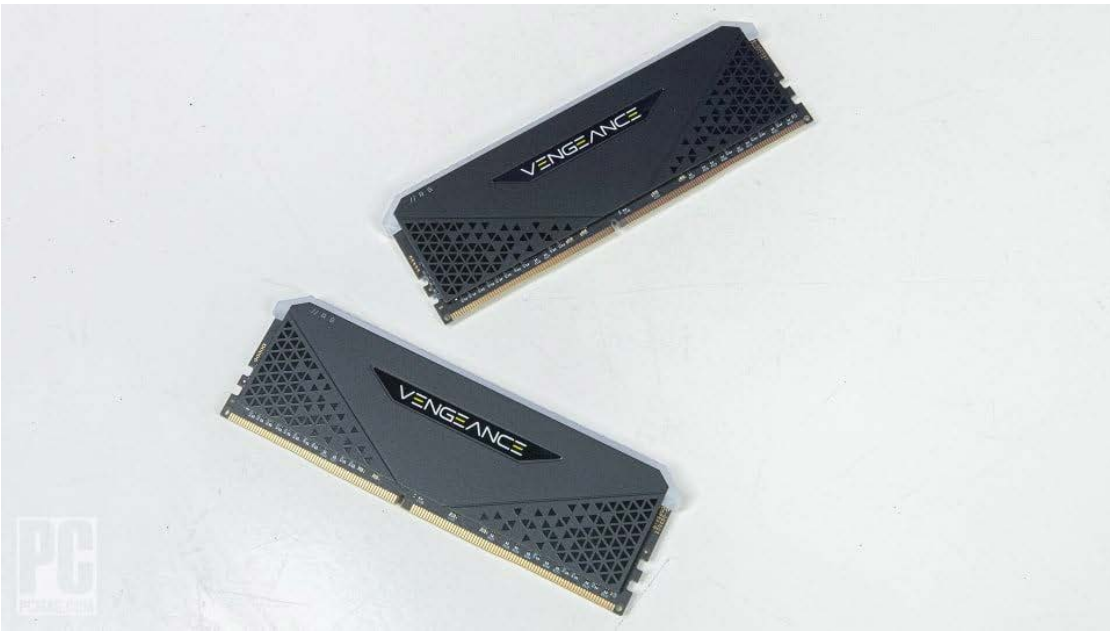



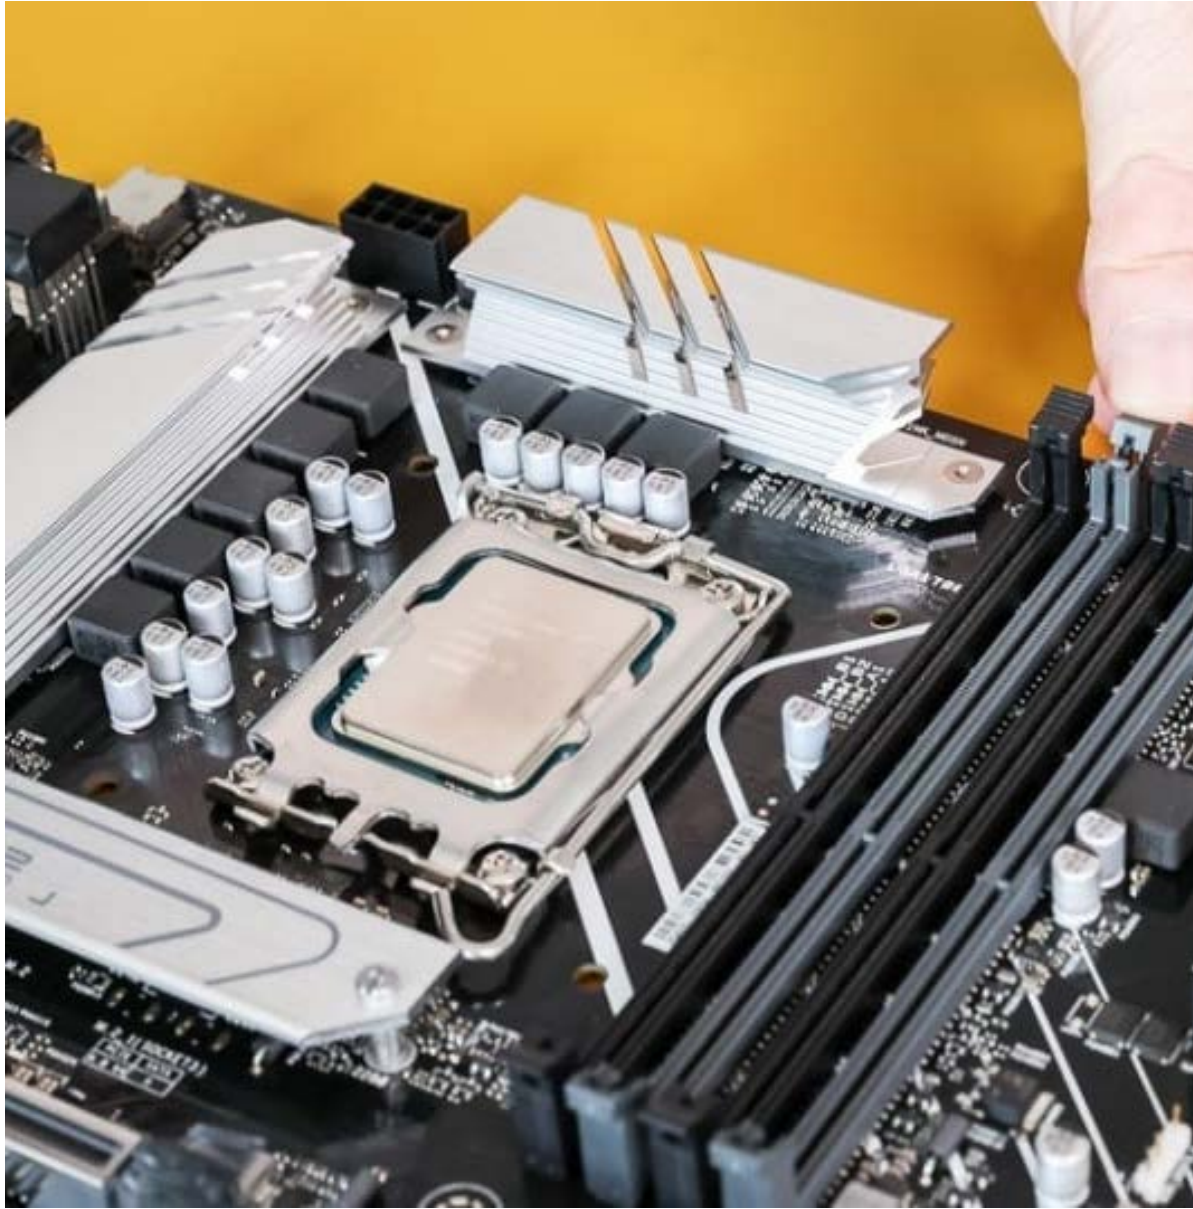




Instalare M2

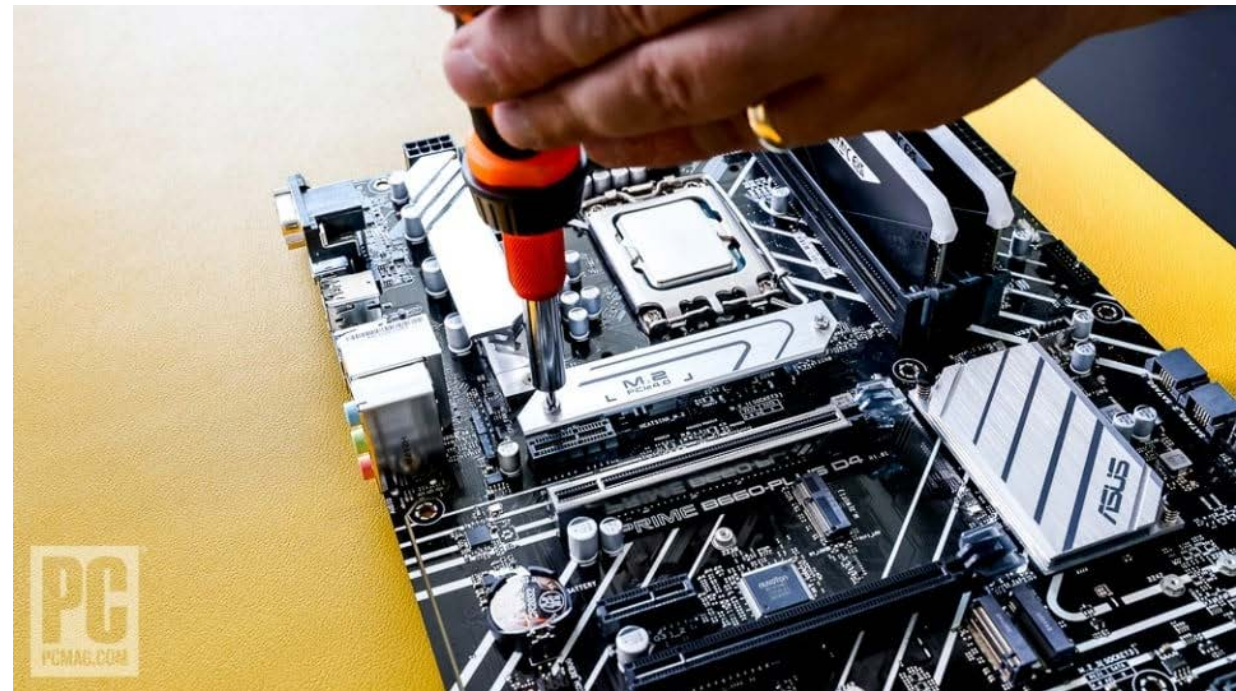


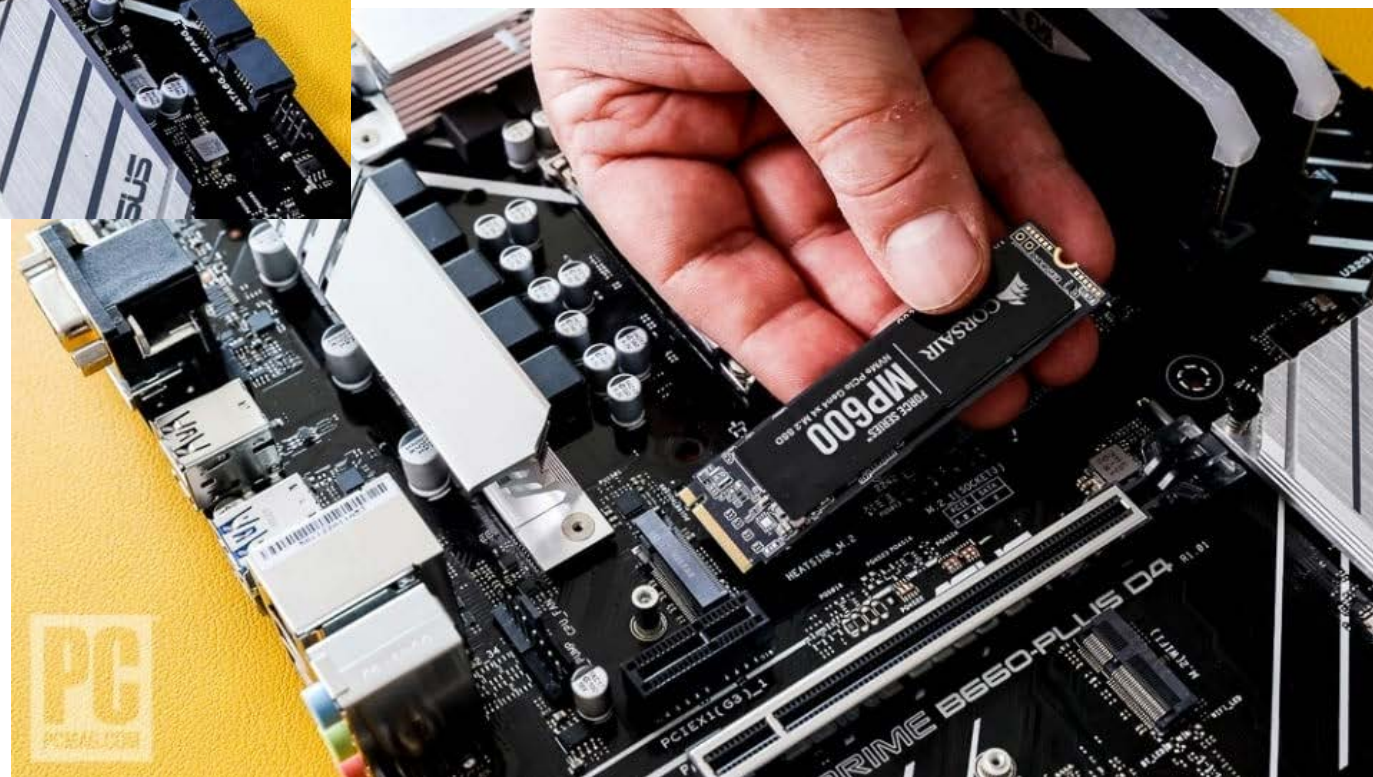

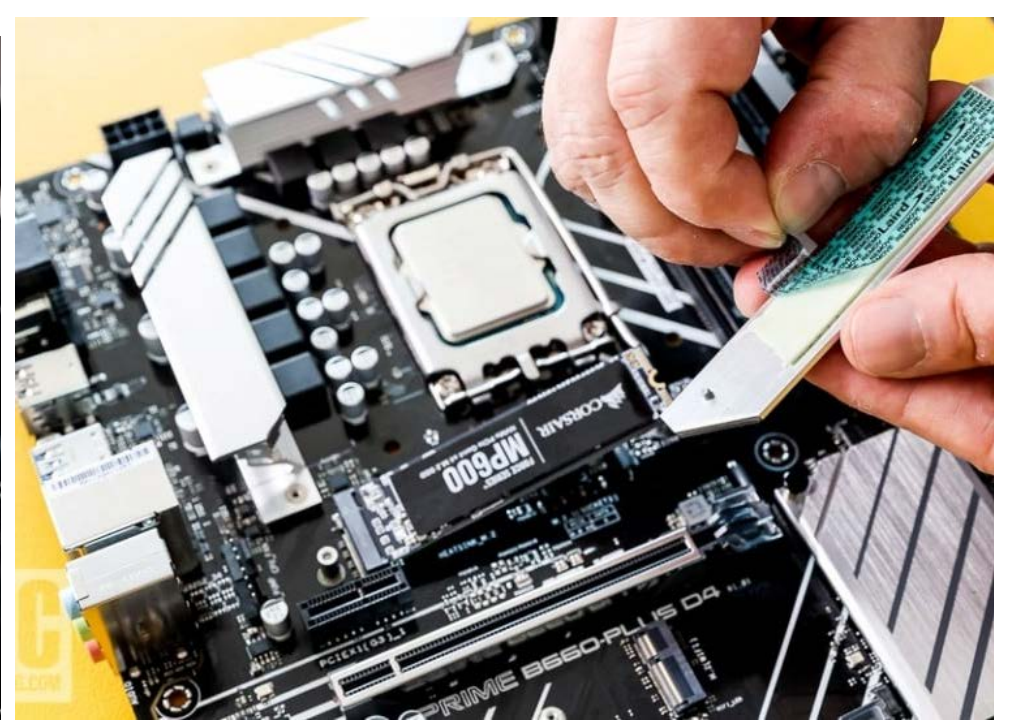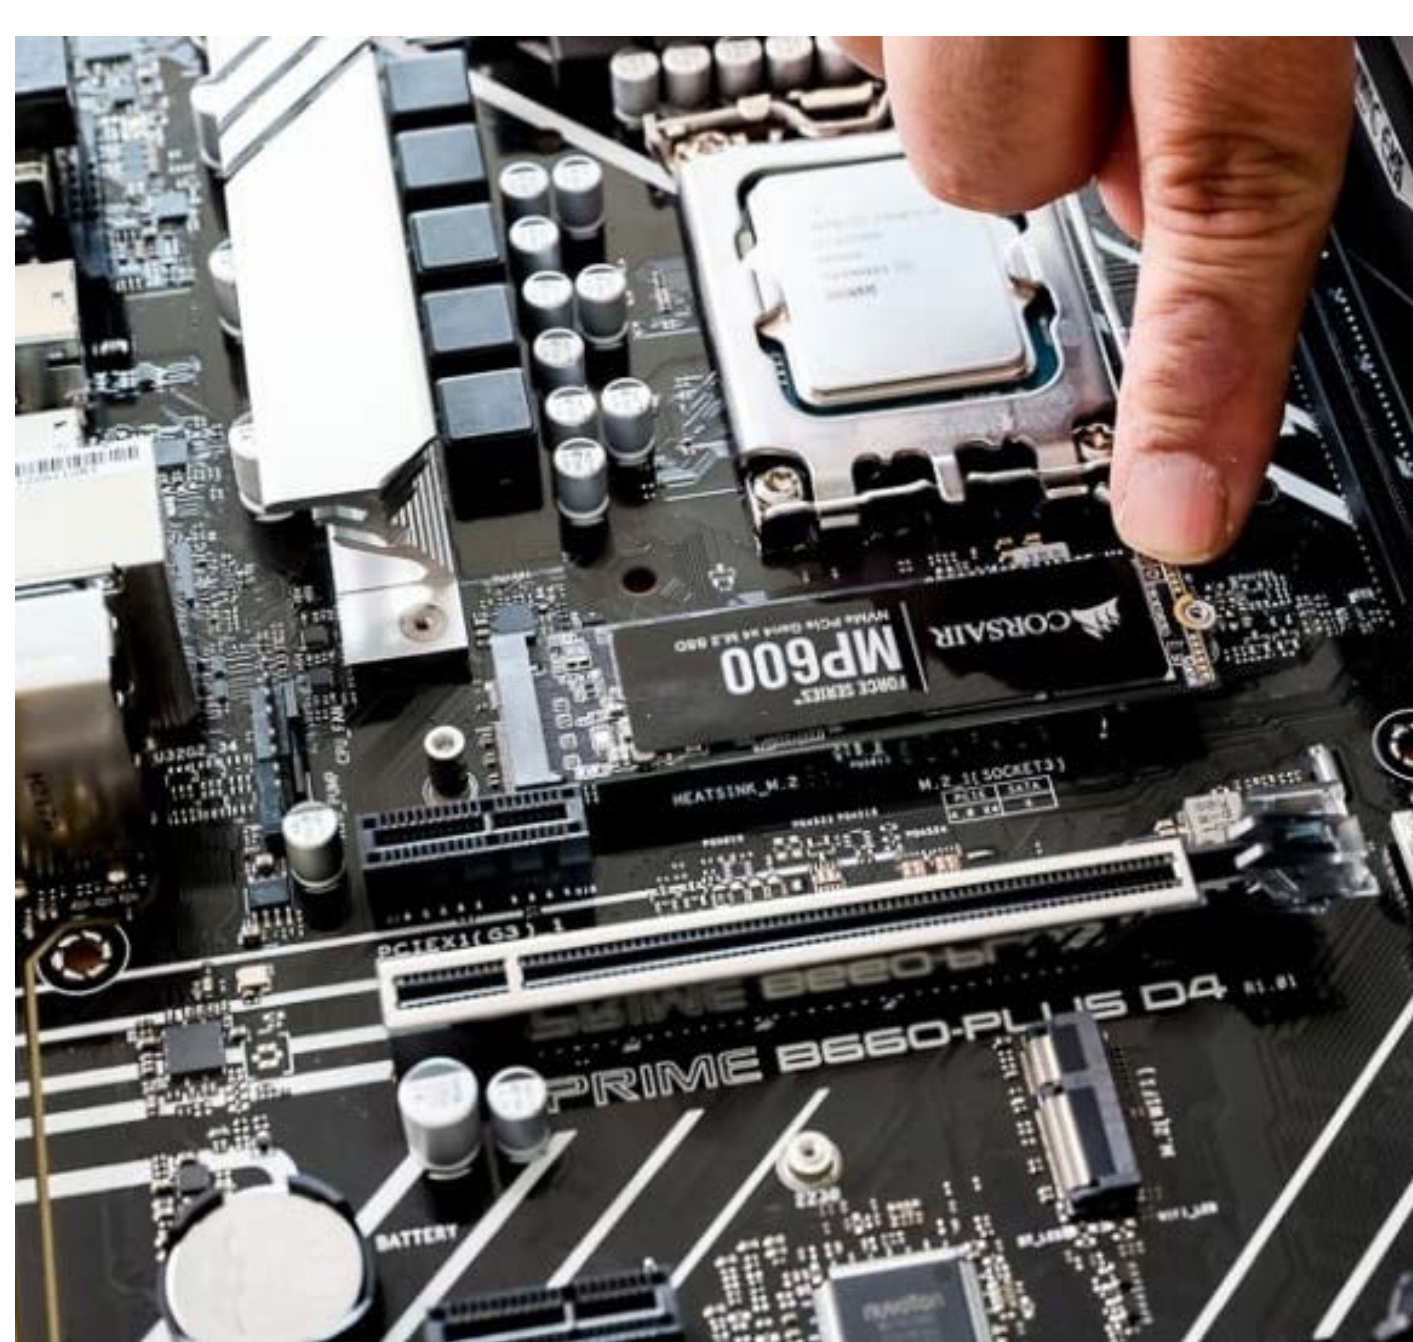

Instalare placă de bază în carcasă



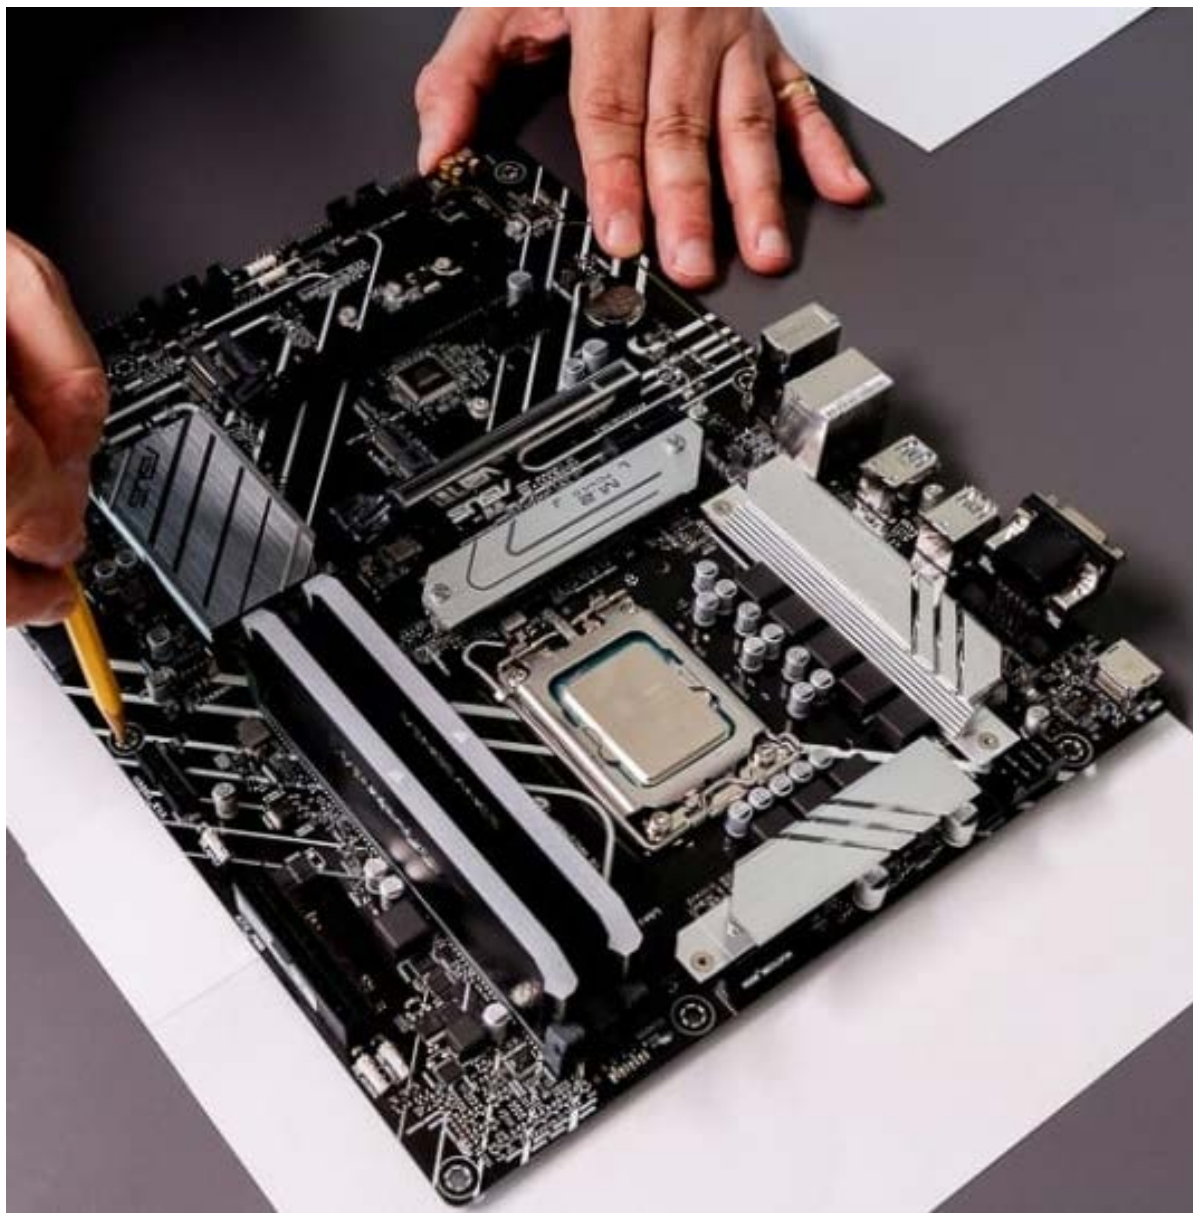





Conectare cabluri de pornire pc



TX power supply is switched
e to do so may cause severe

tension cable and the
the 12V connector is

n.

setup

CLRTC

Setup to re-

wo pins again to
tery.

COM

16. M.2 slot (Key E)
The M.2 slot (Key E) allows you to install an M.2 Wi-Fi module.
Wi-Fi module is sold separately.

17. S/PDIF Out header
This header is for an additional Sony/Philips Digital Interface (S/PDIF) port.
Connect the S/PDIF Out module cable to this header, then install the module to
a slot opening at the back of the system chassis.

18. System Panel header
This header supports several chassis-mounted functions.



- **System power LED (4-pin PLED)**
This 4-pin header is for the system power LED. Connect the chassis power LED cable to this header. The system power LED lights up when you turn on the system power, and blinks when the system is in sleep mode.
- **Hard disk drive activity LED (2-pin HDD_LED)**
This 2-pin header is for the HDD Activity LED. Connect the HDD Activity LED cable to this header. The HDD LED lights up or flashes when data is read from or written to the HDD.
- **System warning speaker (4-pin SPEAKER)**
This 4-pin header is for the chassis-mounted system warning speaker. The speaker allows you to hear system beeps and warnings.
- **ATX power button/soft-off button (2-pin PWRSW)**
This header is for the system power button. Pressing the power button turns the system on or puts the system in sleep or soft-off mode depending on the operating system settings. Pressing the power switch for more than four seconds while the system is ON turns the system OFF.
- **Reset button (2-pin RESET)**
This 2-pin header is for the chassis-mounted reset button for system reboot without turning off the system power.


SPDIF_OUT
+5V
SPDIF_OUT
GND


PANEL

PLED PWRSW SPEAKER

PLED PLED PWRSW
HDD_LED HDD_LED
SPEAKER SPEAKER
RESET RESET
GND GND

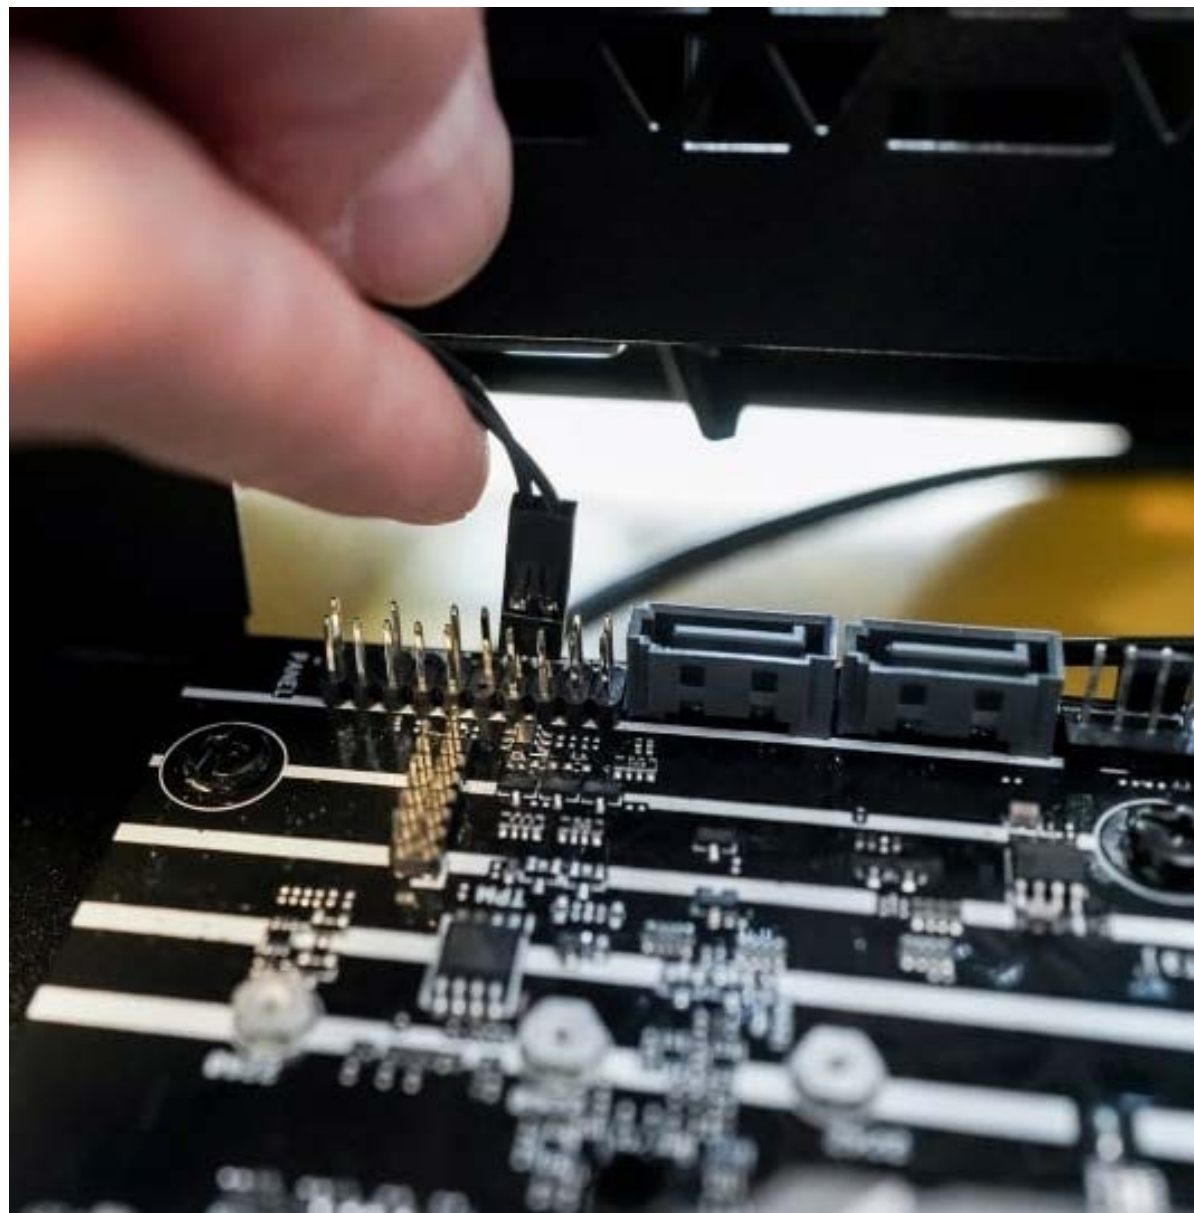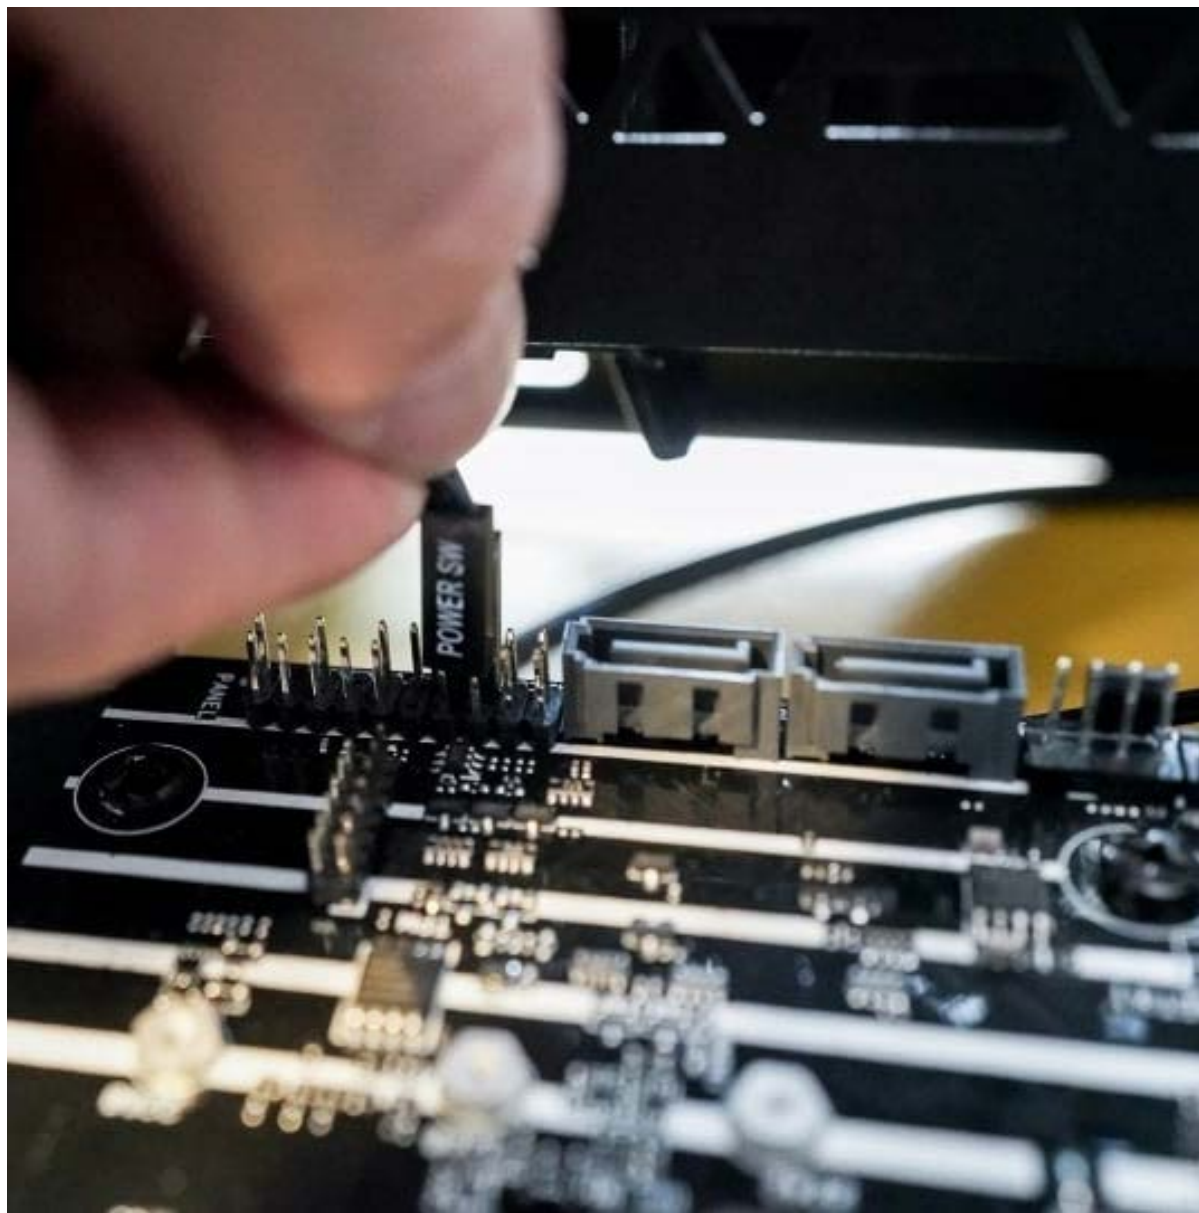

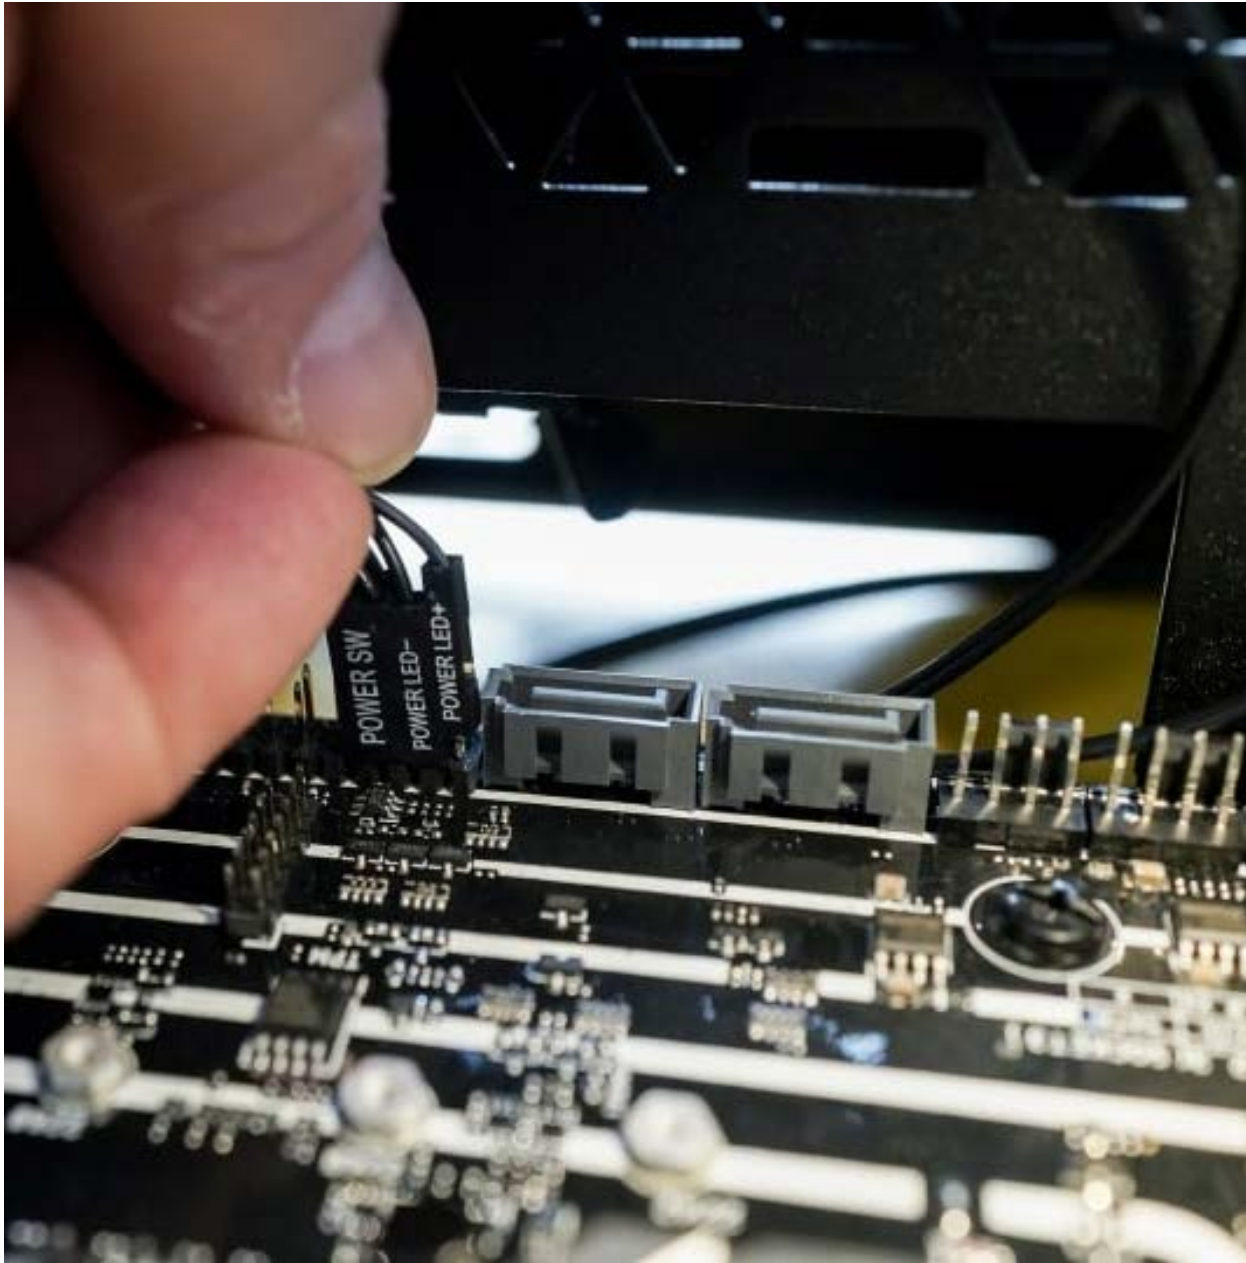


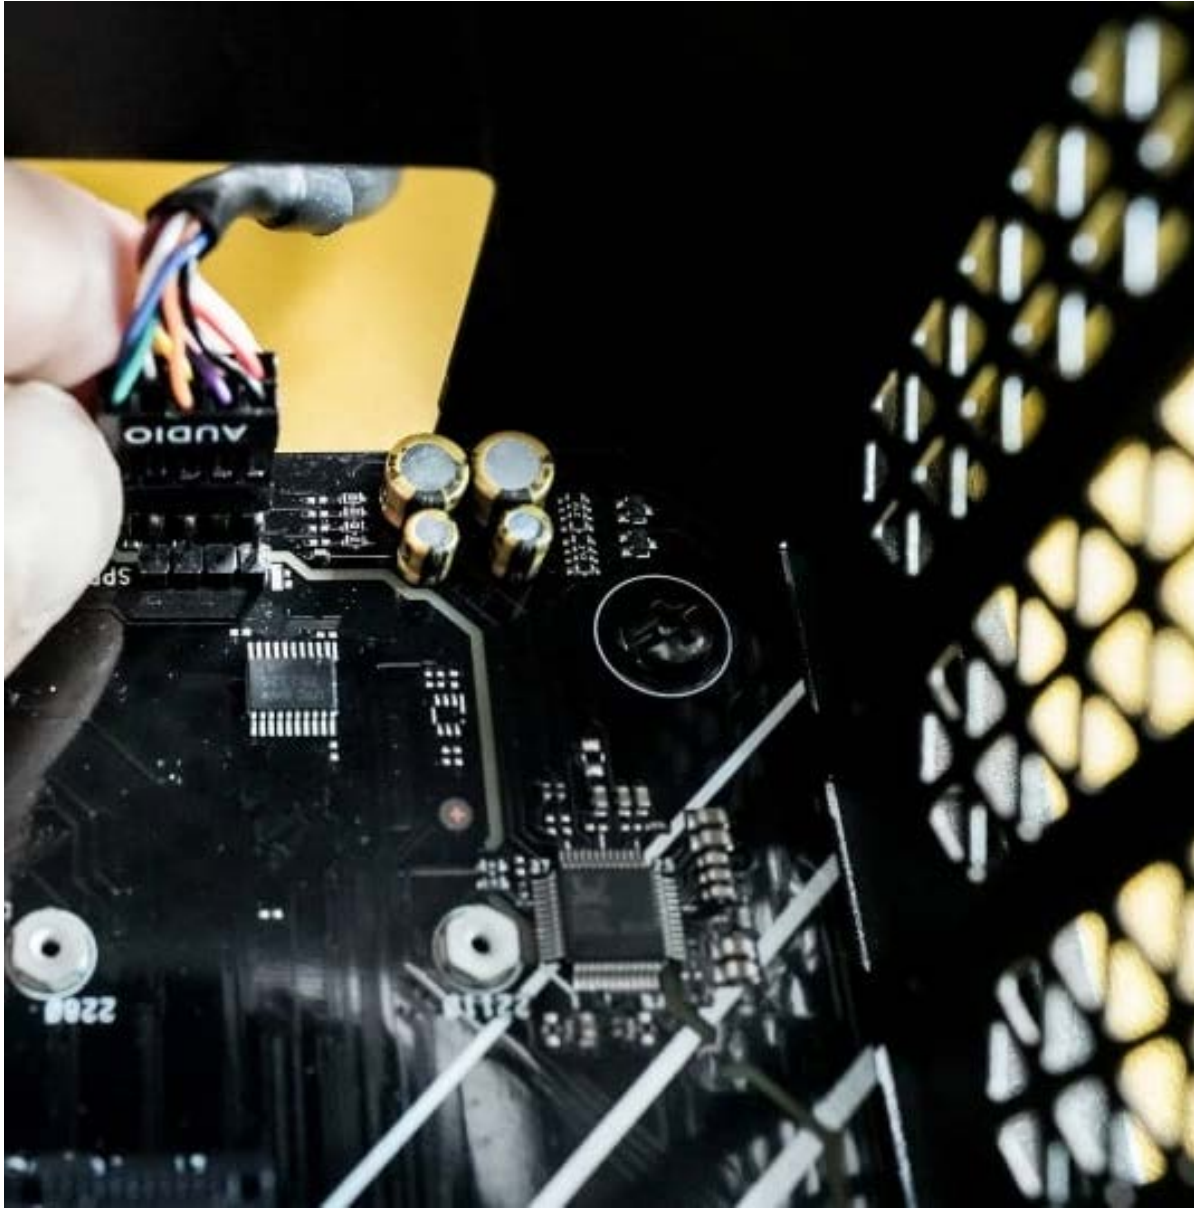

Instalare cooler procesor





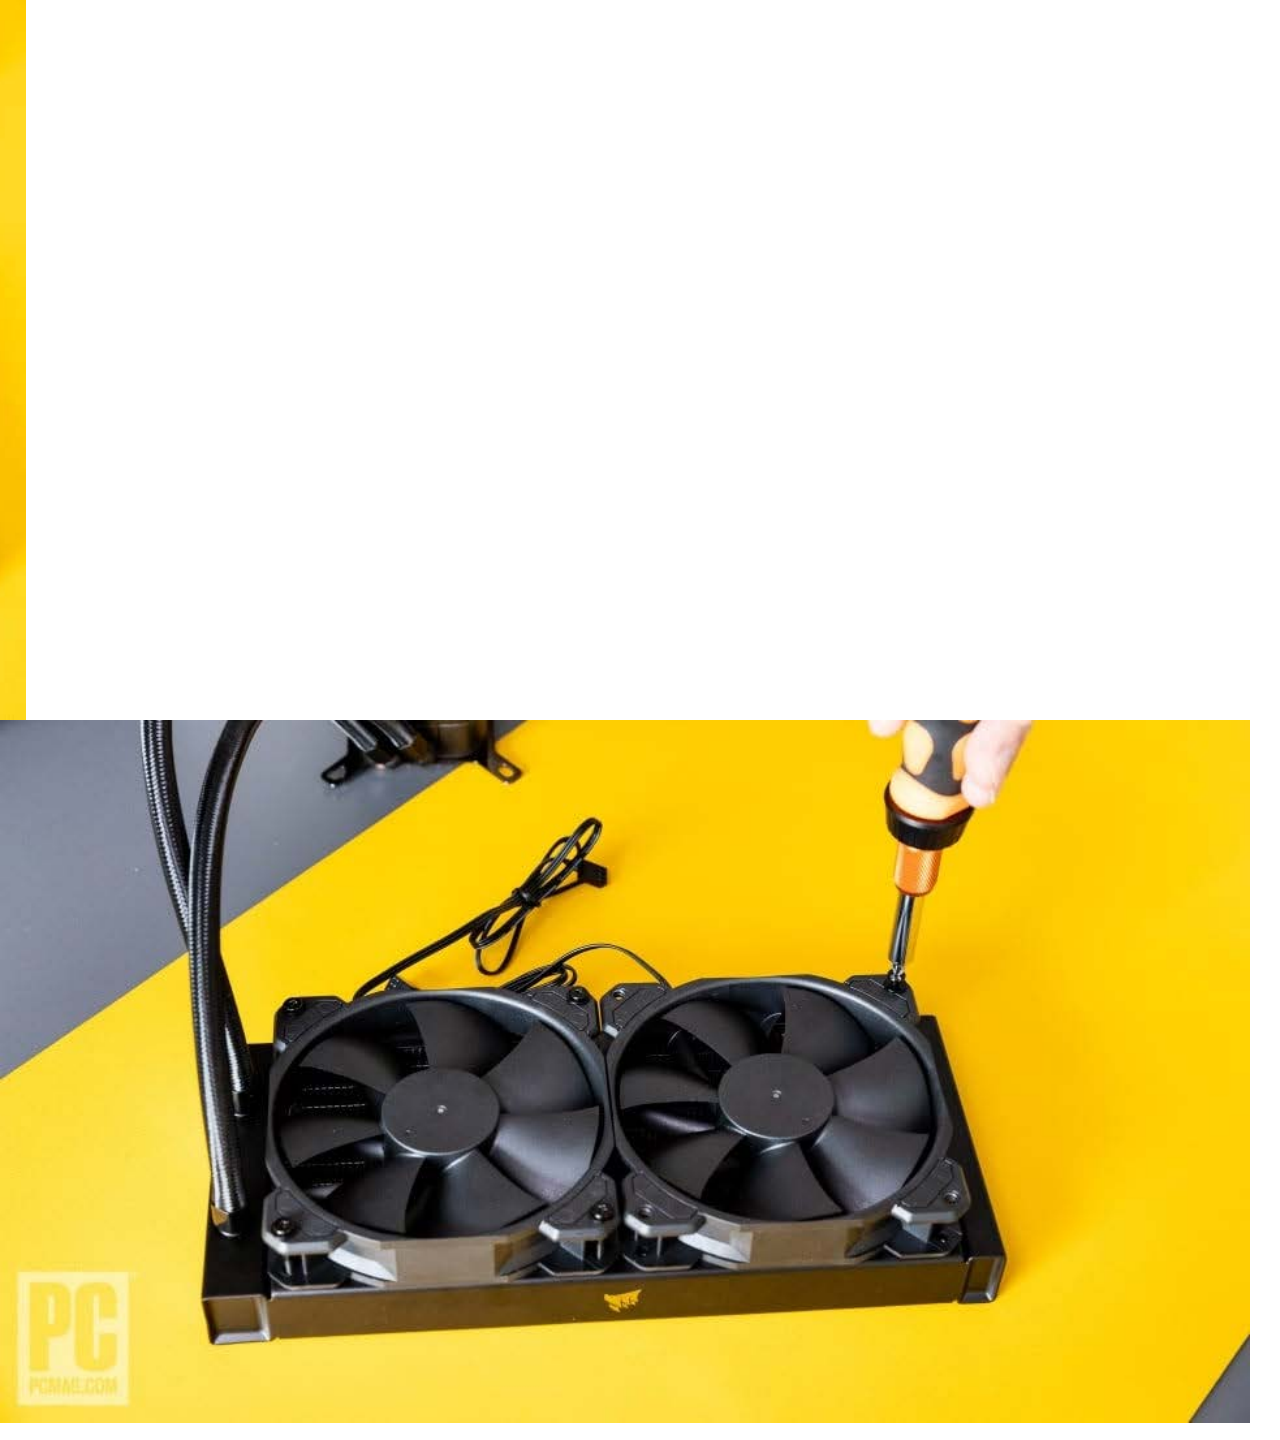









Instalare sursă





Instalare placa video

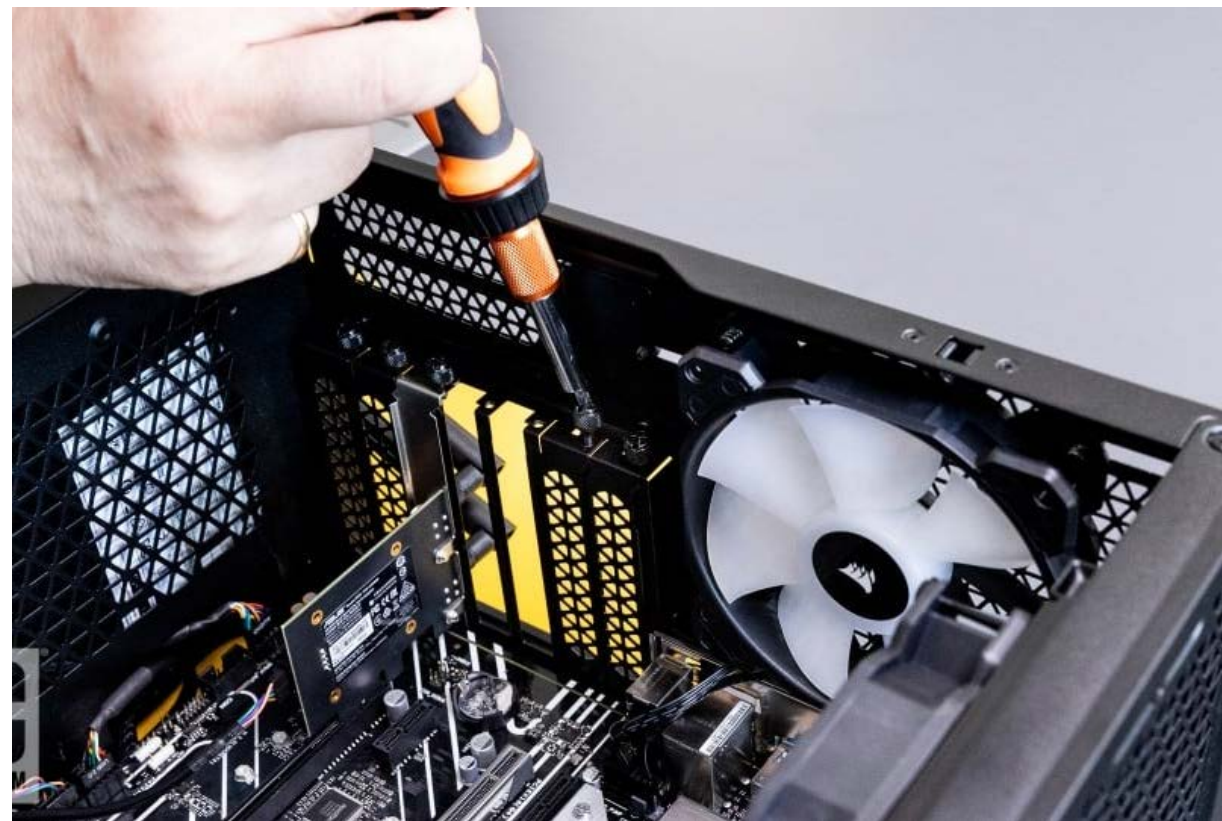

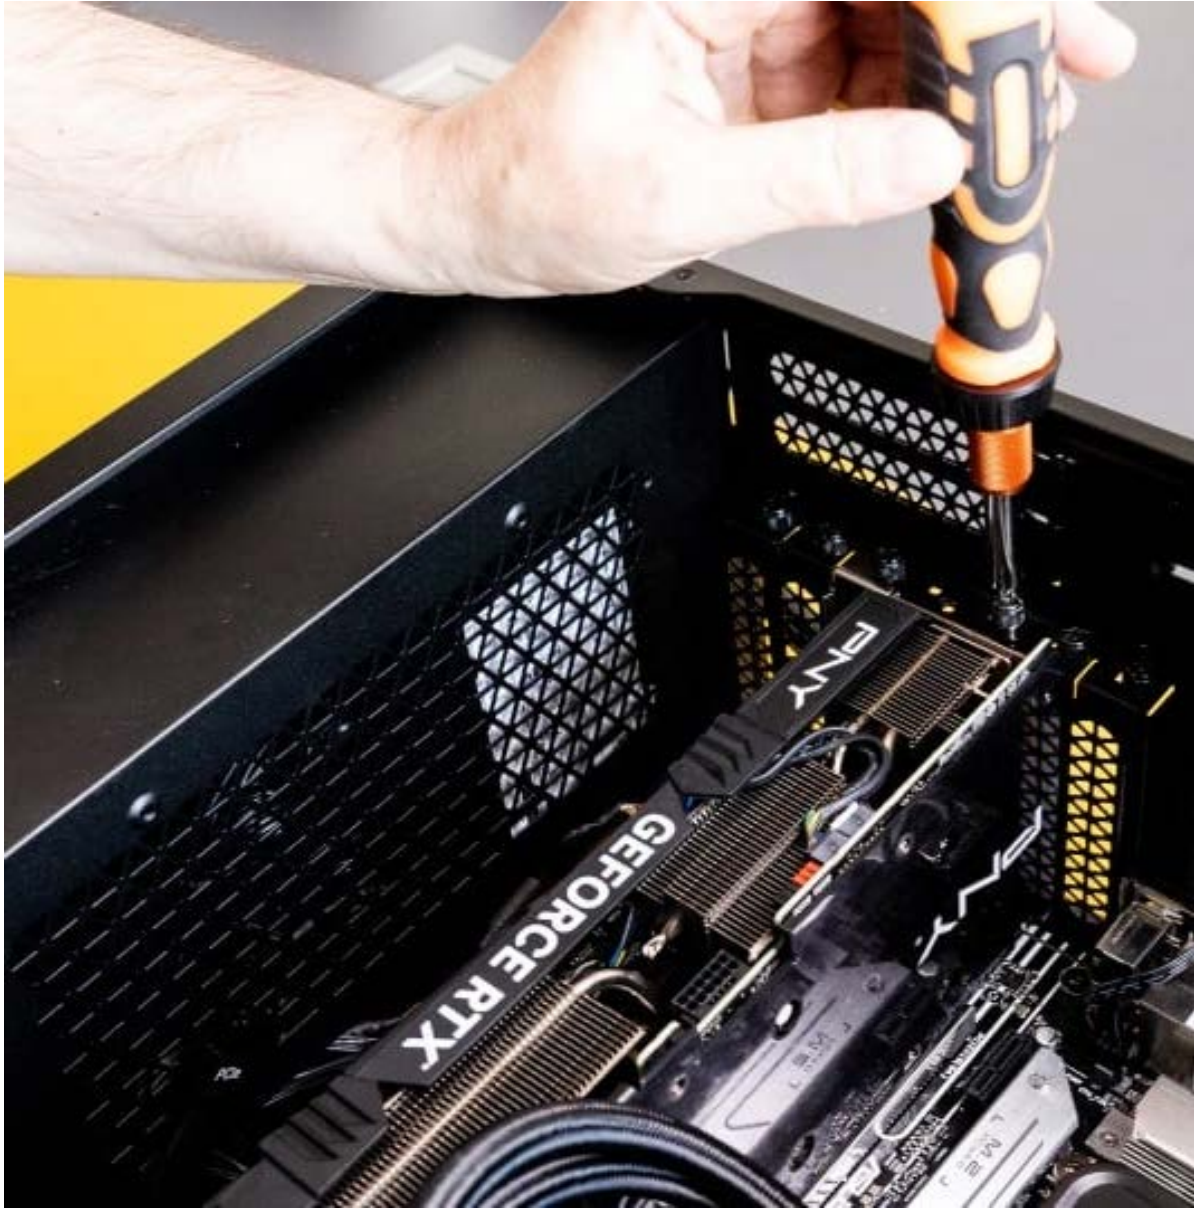



Cable management



