English

# NGATE

NOISE GATE · STUDIO WIGA




Owner's manual · v1.2.0

Ngate is a single-format pedal noise gate for guitar and bass. One big brushed-aluminium THRESHOLD knob, a LEARN button that measures your noise floor and sets the threshold for you, a SOFT/HARD switch, a BASS mode, OPEN/GATE LEDs and a footswitch. It kills hum, hiss and amp noise between phrases, without chopping the end of your notes.

## Overview




1 Threshold readout (dB). Shows LEARN and a progress bar while learning; the new value flashes when done.

2 LEARN button: 1.5 s noise-floor measurement (orange ring = progress). Click again to cancel.

3 Live input meter: orange dots = below threshold (muted), green = above (passes). White ring = current threshold.

4 THRESHOLD knob (brushed aluminium), −95 dB to 0 dB. The cap really turns (scratches and wear move with it, the machined reflections stay under the light). Double-click = −60 dB, mouse wheel = fine tuning.

5 SOFT / HARD mini toggle. Click the lever to flip it, or click the SOFT / HARD words.

6 OPEN LED (green): the signal passes.

7 BASS button: bass mode (orange ring when on).

8 GATE LED (orange): the gate is closed.

9 Footswitch: effect on / off. In bypass every light goes off.

10 Input jack (right side, female jack socket).

11 Output jack (left side, female jack socket).


## Setting the gate with LEARN

1. Plug in, set your amp sim / pedals as you will play, and turn the guitar volume fully up.
2. Mute the strings with your hand (do not play) and click the LEARN button (top right, under the readout).
3. For 1.5 s the readout shows LEARN with an orange progress bar, and an orange ring fills around the LEARN button.
4. Ngate sets the threshold just above the loudest noise it heard: +5 dB in HARD, +3 dB in SOFT. Mains hum (50/60 Hz) is ignored by the detector, so it never pushes the threshold up.
5. The status line shows the result, e.g. “Noise floor −70.0 dB → threshold −65.0 dB”. Fine-tune with the knob or the mouse wheel.

## SOFT or HARD?

**HARD** a real gate: opens in 0.3 ms, closes fast (15 ms guitar / 35 ms bass) down to full silence. Tight high-gain rhythm, metal chugs, djent stops.

**SOFT** a downward expander (1:3 below the threshold) with a slow release (180 ms guitar / 300 ms bass). The tail of the note fades out naturally: cleans, crunch, ambient playing.

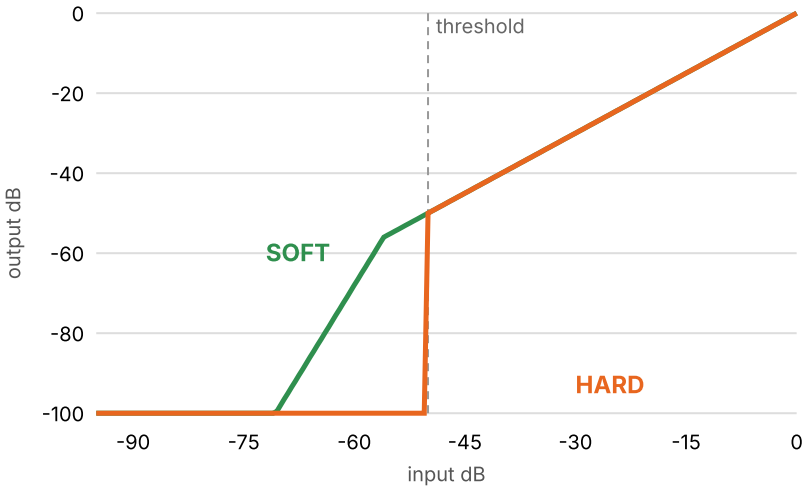


Output level against input level, threshold −50 dB. HARD drops to silence; SOFT slopes down.

Both modes use hysteresis (3 dB HARD, 6 dB SOFT) and a hold time, so a sustained note crossing the threshold does not stutter.

## BASS mode

Low notes have long cycles (41 Hz low E = 24 ms per cycle; 31 Hz low B = 32 ms). In BASS mode the detector listens down to 22 Hz instead of 75 Hz, and envelope and hold times are longer, so long bass notes are not chopped. In our tests a low E rang 1.6 s longer before closing than in guitar mode.

## Range (right-click menu)

What the closed gate leaves: Full mute (default), −40 dB (keeps a breath of the room) or −20 dB (gentle noise reduction). Saved in presets.

## Right-click menu

- Window size: Default (391 × 493, also the minimum), 75 %, 100 %. Drag the corner up to 150 %.
- Factory presets 1–10, user presets 1–9 (load / save).
- LEARN, Gate mode, Instrument, Range.
- MIDI map.

## MIDI

| | |
|---|---|
| CC 20 | Threshold (0 = −95 dB, 127 = 0 dB) |
| CC 21 | Soft / Hard (≥ 64 = Hard) |
| CC 22 | Guitar / Bass (≥ 64 = Bass) |
| CC 23 | LEARN (each press) |
| CC 24 | Footswitch (≥ 64 ON, < 64 OFF) |
| CC 25 | Footswitch toggle (each press) |
| Program Change 1–10 | Factory presets |

Every parameter can also be automated or MIDI-learned in the DAW.

## Factory presets

| Preset | Threshold | Mode | Instrument | Range |
|---|---|---|---|---|
| 1. Clean Single Coils | -66 dB | Soft | Guitar | Full |
| 2. Crunch Humbuckers | -58 dB | Soft | Guitar | Full |
| 3. High Gain Tight | -48 dB | Hard | Guitar | Full |
| 4. Metal Chug | -42 dB | Hard | Guitar | Full |
| 5. Djent Staccato | -36 dB | Hard | Guitar | Full |
| 6. Fuzz Tamer | -52 dB | Soft | Guitar | −40 dB |
| 7. Ambient Natural Decay | -74 dB | Soft | Guitar | −20 dB |
| 8. Bass Clean | -68 dB | Soft | Bass | Full |
| 9. Bass Drive | -55 dB | Hard | Bass | Full |
| 10. Studio Silence | -78 dB | Hard | Guitar | Full |

## In Reaper

Put Ngate first in the chain, before the other Studio Wiga plugins and before Genome: it removes the guitar's noise before it gets amplified. For very high gain, a second Ngate in HARD after the distortion (still before Genome) tightens the silences even more. Both stereo channels are always gated together.

## The pedal in action




Signal passing — green dots above the threshold, OPEN lit.




BASS + SOFT, gate closed — only the noise (orange) shows.




LEARN in progress — status line shows the measurement.




Bypass — everything goes dark.

Français

# NGATE

NOISE GATE · STUDIO WIGA




Mode d'emploi · v1.2.0

Ngate est un noise gate au format pédale simple, pour guitare et basse. Un gros potard THRESHOLD en aluminium brossé, un bouton LEARN qui mesure ton bruit de fond et règle le seuil à ta place, un switch SOFT/HARD, un mode BASS, des LED OPEN/GATE et un footswitch. Il coupe ronflement, souffle et bruit d'ampli entre les phrases, sans hacher la fin des notes.

## Vue d'ensemble




1 Afficheur du seuil (dB). Affiche LEARN et une barre de progression pendant la mesure ; la nouvelle valeur clignote ensuite.

2 Bouton LEARN : mesure du bruit de fond pendant 1,5 s (anneau orange = progression). Nouveau clic = annuler.

3 Vumètre d'entrée en direct : points orange = sous le seuil (coupé), verts = au-dessus (passe). Anneau blanc = seuil actuel.

4 Potard THRESHOLD (aluminium brossé), de −95 dB à 0 dB. Le chapeau tourne vraiment (rayures et usure suivent la rotation, les reflets d'usinage restent sous la lumière). Double-clic = −60 dB, molette = réglage fin.

5 Mini-inverseur SOFT / HARD. Clic sur le levier = bascule, clic sur SOFT ou HARD = choix direct.

6 LED OPEN (verte) : le signal passe.

7 Bouton BASS : mode basse (couronne orange quand il est actif).

8 LED GATE (orange) : le gate est fermé.

9 Footswitch : effet on / off. En bypass, tout s'éteint.

10 Embase jack d'entrée (à droite).

11 Embase jack de sortie (à gauche).


## Régler le gate avec LEARN

1. Branche-toi, règle ton simulateur / tes pédales comme pour jouer, volume de la guitare à fond.
2. Étouffe les cordes avec la main (sans jouer) et clique sur le bouton LEARN (en haut à droite, sous l'afficheur).
3. Pendant 1,5 s l'afficheur indique LEARN avec une barre orange, et un anneau orange se remplit autour du bouton LEARN.
4. Ngate place le seuil juste au-dessus du bruit le plus fort entendu : +5 dB en HARD, +3 dB en SOFT. Le ronflement secteur (50/60 Hz) est ignoré par le détecteur : il ne fait jamais monter le seuil.
5. La ligne d'état donne le résultat, par ex. « Noise floor −70.0 dB → threshold −65.0 dB ». Affine ensuite au potard ou à la molette.

## SOFT ou HARD ?

**HARD** un vrai gate : ouverture en 0,3 ms, fermeture rapide (15 ms guitare / 35 ms basse) jusqu'au silence. Rythmique high-gain serrée, chugs metal, arrêts djent.

**SOFT** un expandeur vers le bas (1:3 sous le seuil) avec une retombée lente (180 ms guitare / 300 ms basse). La fin de la note s'éteint naturellement : son clair, crunch, jeu ambient.

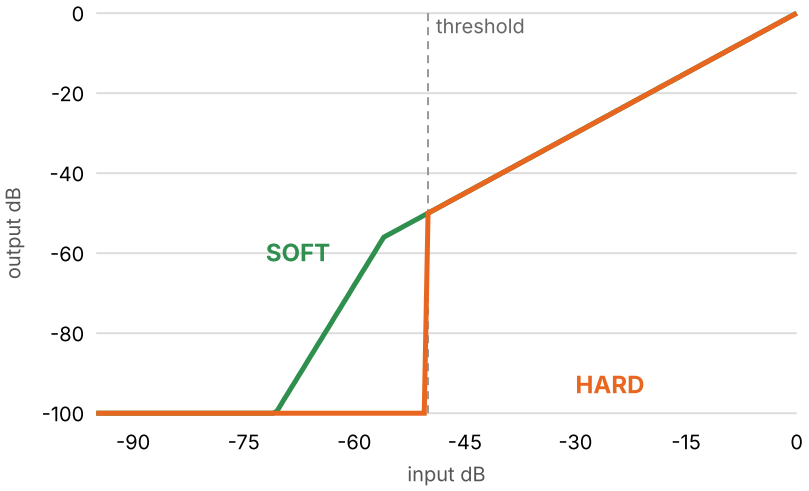


Niveau de sortie selon le niveau d'entrée, seuil à −50 dB. HARD tombe au silence ; SOFT descend en pente.

Les deux modes ont une hystérésis (3 dB en HARD, 6 dB en SOFT) et un temps de maintien : une note tenue qui passe autour du seuil ne « bégaie » pas.

## Mode BASS

Les notes graves ont des cycles longs (Mi grave 41 Hz = 24 ms par cycle ; Si grave 31 Hz = 32 ms). En mode BASS, le détecteur écoute jusqu'à 22 Hz au lieu de 75 Hz, avec une enveloppe et un maintien plus longs : les notes longues ne sont pas hachées. Dans nos tests, un Mi grave a tenu 1,6 s de plus avant fermeture qu'en mode guitare.

## Range (menu clic droit)

Ce que laisse le gate fermé : coupure totale (par défaut), −40 dB (garde un souffle de pièce) ou −20 dB (réduction de bruit douce). Enregistré dans les presets.

## Menu clic droit

- Window size : Default (391 × 493, c'est aussi le minimum), 75 %, 100 %. Coin de la fenêtre : jusqu'à 150 %.
- Presets d'usine 1 à 10, presets utilisateur 1 à 9 (charger / sauvegarder).
- LEARN, Gate mode, Instrument, Range.
- Table MIDI.

## MIDI

| | |
|---|---|
| CC 20 | Threshold (0 = −95 dB, 127 = 0 dB) |
| CC 21 | Soft / Hard (≥ 64 = Hard) |
| CC 22 | Guitare / Basse (≥ 64 = Basse) |
| CC 23 | LEARN (chaque appui) |
| CC 24 | Footswitch (≥ 64 ON, < 64 OFF) |
| CC 25 | Footswitch bascule (chaque appui) |
| Program Change 1–10 | Presets d'usine |

Tous les paramètres sont aussi automatisables et assignables en MIDI-learn dans le DAW.

## Presets d'usine

| Preset | Seuil | Mode | Instrument | Range |
|---|---|---|---|---|
| 1. Clean Single Coils | -66 dB | Soft | Guitar | Full |
| 2. Crunch Humbuckers | -58 dB | Soft | Guitar | Full |
| 3. High Gain Tight | -48 dB | Hard | Guitar | Full |
| 4. Metal Chug | -42 dB | Hard | Guitar | Full |
| 5. Djent Staccato | -36 dB | Hard | Guitar | Full |
| 6. Fuzz Tamer | -52 dB | Soft | Guitar | −40 dB |
| 7. Ambient Natural Decay | -74 dB | Soft | Guitar | −20 dB |
| 8. Bass Clean | -68 dB | Soft | Bass | Full |
| 9. Bass Drive | -55 dB | Hard | Bass | Full |
| 10. Studio Silence | -78 dB | Hard | Guitar | Full |

## Dans Reaper

Place Ngate en premier dans la chaîne, avant les autres plugins Studio Wiga et avant Genome : il coupe le bruit de la guitare avant qu'il soit amplifié. Pour un son très saturé, un second Ngate en HARD après la distorsion (toujours avant Genome) resserre encore les silences. Les deux voies stéréo sont toujours coupées ensemble.

## La pédale en action




Signal qui passe — points verts au-dessus du seuil, OPEN allumée.




BASS + SOFT, gate fermé — seul le bruit (orange) apparaît.




LEARN en cours — la ligne d'état affiche la mesure.




Bypass — tout s'éteint.